The Winnipeg Paint & Glass Co. Limited

WINNIPEG

Regina Saskatoon

GENERAL PAINT & HARDWARE CATALOG

32

Digitized by:

ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

www.apti.org

From the collection of:
Canadian
Centre for
Architecture

BLANK PAGE

EVER ATIT

Our General CATALOGUE

of

Paints, Enamels, Lacquers
Stains, Varnishes
Kalsomines, Tools
Window Glass
Plate Glass
Store Fronts
Mirrors, Burlaps
Builders' Hardware
Curling Stones
Roofing & Paper
Wall Board
Screen Doors
Paint—Household Brushes
Mantels, Grates, Tile
Built in features
Profitable Specialties, etc.

QUALITY GOODS

EFFICIENT SERVICE

PROMPT SHIPMENT

The Winnipeg Paint & Glass Co. Limited

REGINA WINNIPEG SASKATOON

To the Trade:

In placing this catalogue in your hands we feel confident that our lines of merchandise have been so displayed that familiarizing yourself with the catalogue will be to your benefit. All merchandise carried in our paint, sundry, glass and hardware departments is listed in detail, and prices, based on latest costs, will be found to be right. Information which cannot be embodied herein, will be given promptly on request.

PRICES :—

Prices are F. O. B. Winnipeg warehouse, and subject to change without notice.
On page 76 will be found a list of advances to show our prices F. O. B. Regina and F. O. B. Saskatoon.

MAIL ORDERS :—

Will be shipped if possible the day they are received and will be credited to our Salesmen.

SHIPPING POINTS :—

We carry complete stocks of all lines shown in this catalogue at Regina and Saskatoon. The prices F. O. B. our Regina and Saskatoon warehouses are our Winnipeg Prices plus freight, and dealers in these trading areas purchase from our Branches at no higher laid down cost than if ordered direct from us at Winnipeg, and secure the additional advantage of quicker shipment.

WHOLESALE ONLY :—

Dealers throughout Western Canada universally commend our well-known loyalty to legitimate trade channels.

SHIPMENT OF ORDERS :—

Your orders will be shipped as routed, if no routing instructions issued we will ship the cheapest or most convenient way. Our shipping responsibility ceases upon receipt of signature of Shipping Company.

TERMS :—

Lead, Linseed Oil, Turpentine and Nails Net Thirty Days, all other goods 2% thirty days; 60 days net to dealers of approved credit. If we have not had the pleasure of previous dealings with you, it will enable us to give your requirements more prompt service if you will enclose with first order a list of wholesalers from which you regularly buy and mention name of your bankers.

Unless otherwise arranged we cover shipments by Draft.

The Winnipeg Paint & Glass Co. Limited

INDEX

A

Acid, Muriatic 40
Adheso 37
Adjusters, Casement 237
Storm Sash 228
Alabastic 23
Alabastine 23
Alamo, Lock Set Design 171
Alasize 23
Albaqua 40
Alcohol 15
Alum 33
Aluminum Paint 12
Anchors, Lead 98
Andirons 121
Anti Freeze 40
Anvil Vises, Combination 250
Arsenate of Lead 34
Ash Dumps 124
Asphaltum 22
Awning Cord 234
Awning Pulleys 246
Axe Handles 154
Axe Wedges 258

B

Back Flap Hinges 218
Balances, Sash 234
Ball Friction Catches 256
Banana Oil 27
Base Knobs 242
Barn Paint, Durable 5
Peerless 4
Red School House 4
Barn Door, Binders 145
Gravity Catches ... 145
Hangers 144
Latches 209
Stay Rollers 144
Track 143
Barrel Bolts 233
Bars, Clothes Closet 87
Baskets, Electric Fire.... 125, 126
Portable Fire 111
Bathroom Cabinets 156, 157
Bathroom Fittings ... 130, 133, 215
Batteries 35
Beaverton Lockset Design 168
Beeswax 28
Bench Screws 258
Berkley Lockset Design... 174, 175
Binders, Barn Door 145
Blanks, Key 196
Boards, Glass 64
Paste 66
Wall 75
Bolts, Barrel 233
Bow Handled 232
Cane 232
Cellar Window 233
Chain 232
Extension Flush 231
Bolts, Flush 241
Foot 232, 233
Carriage 90
Half Round Surface ... 233
Machine 91
Pad 231
Square Spring 231, 233
Stove 91
Toggle 98
Power 233
Window Spring 228
Bon Ami 32
Bon Ton 28
Borax 33
Bottom Cane Bolts 232
Boxes, Letter 160
Mail 158
Box Corners 239
Boxwood Rules 155
Brackets, Glass Shelf 239
Hand Rail 239
Ladder 68
Shelf 235
Braces, Corner 235
Brasso 28
Bricks, Rubbing 33
Bronzes 26
Bronzing Liquid 18
Brooders, Chick 152
Brooms 56
Brushes, Artist 49, 50
Dusting 55
Flat Varnish... 41, 42, 43
Horse and Dandy 52
Kalsomine 46, 47
Miscellaneous 58
Paper Hangers 61
Radiator 48
Roofing 57
Sash and Wall 44
Scrub 53
Scrub and Nail 52
Shoe and Stove 54
Soft Hair 50, 51
Steel Wire 60
Stippling 45
Twisted Wire 59
Wall and Shingle Stain 45
Wall, Varnish 43
Window 47
White Wash 48
Brush-Nu 32
Buttons, Door 249
Half 249
Sash 249
Burlap 38
Butts, Ball Bearing 217
Broad Brass 224
Half Surface 217
Mortise Door 231
Narrow 219
Plain Steel 218
Spring 223
Wrought Brass 224

C

Cabin Door Hooks 226
Cabinets, Bathroom 156, 157
Cabinet Escutcheons 255
Cake, Meal 40
Cane Bolts 232
Can Openers 155
Card Holders 238
Carlton Lockset Design 170
Carpenters' Clamps 258
Carriage Bolts 90
Casement Adjusters 237
Fasteners 237
Casing Knives 266
Catsh Basin Covers 108
Catches, Ball Friction 256
Cupboard.... 240, 245, 256
Elbow 256
Friction Door 256
Screen Door 234
Kitchen Cabinet 256
Spring Door 256
Transom 230
Ceiling Hooks 227
Cellar Window Bolts 233
Cellar Window Sets 230
Cement Paint 6, 25
Centres Sash 236
Chain Bolts 232
Chain Door Fasteners 242
Chains, Sash 234
Transom 230
Chamois 34
Checks, Norton Door ... 200 to 203
Russwin 204, 205
Screen Door 203
Chemical Products 31
Chest Handles 249
Hinges 225
Locks 251
Chick Brooders 152
Chutes Coal 147
Clamps Carpenter's 258
Clothes Line 87
Quilting Frame 258
Perfection Steel Bar .. 258
Cleaner, Drain Pipe 31
Brush 32
Smoky City 32
Three Star 32
Clean-Out Doors 124
Cleats, Line 247
Cleo Lockset Design 167
Closers, Door 200, 205, 257
Screen Door 203
Cloth, Screen Wire 149
Clothes Line Clamps 87
Pulleys 247
Reels 137
Wire 247
Coat and Hat Hooks 226, 227
Coal Chutes 147
Coal Tar 27

INDEX - - Continued

Cocoa Mats 38
Colonial Lockset Design 164
Colors, Dry 14, 15
Fresco 23
in Japan 14
in Oil 14
Combination Anvil Vise 258
Door Sets 257
Communicators, Door 88
Comode Turns 256
Concretone Cement Paint 6
Floor Dressing 6
Sealing Liquid 6
Congoleum Rugs 38
Cord, Awning 234
Sash 234
Cords, Endless 236
Corner Braces 235
Irons, Flat 235
Corners, Box 239
Counter Scales 258
Covers, Catch Basin 108
Creolac Shingle Stain 11
Creolin 31
Creosote Oil 16
Creo-Sweep Sweeping Compound 31
Cupboard Catches ... 240, 245, 256
" " Friction ... 256
Latches 245
Locks 250
Turns 245
Curbs 118, 121, 123
Curling Stones 36
" Stone Accessories 36
Cutlery, Kitchen 137
Cutters, Food 138
Cutters, Glass 64
Cylinder Front Door
Locksets ..... 179 to 184
Locks 210
Rings 210

D

Dampers, Dome 124
Dead Locks, Rim 188
Decorator's Lead 13
White 23
Desk Hinges 224
Locks 253
Designs see Locksets 161
Devon Lockset Design 177
Dogs, Door 145
Door Buttons 249
Catches, Friction 256
Catches, Spring 256
dogs 145
Fastener Chains 242
Checks, Norton ....200 to 203
" Russwin.... 204, 205
Closers .....200 to 205 & 257
Holders 244, 257
Holders, Garage 242
Knobs 198, 199
Door Pulls 240, 241, 249
Rings, Trap 249
Door Springs 249
Stops 241, 242, 244
Doors, Clean-Out 124
Combination 73
Screen 73
Double Acting Butts 223
Dowel Pins 228
Drain Pipe Cleaner 31
Drawer Knobs 242, 250
Locks 253
Pulls 238, 254, 255
Drivers, Point 63
Dumb Waiters 148
Dumps, Ash 124
Durable Barn Paint 5
Floor Paint 6
House Paint 4
Porch Paint 5
Durex Products 37
Dusters, Painters 48

E

Elastica Floor Varnish 17
No. 1. 17
No. 2. 17
Cabinet 17
Elastic Oak Varnish 18
Elbow Catches 256
Electric Fire Baskets 125, 126
Enamel, Bath Tub 10
Gold and Silver 26
Golf Ball 10
Martins 10
Multi Use 9
Ornamental 20
Quickote 10
Rogers One Hour 9
Satinette 20
Senours Floor Enamel 6
Stove Pipe 10
Endless Cords 236
Escutcheons, Cabinet 255
Escutcheons, Key Plates..... 198
Excello 12
Expansion Shields 98
Extension Flush Bolts 231
Eyes, Padlock 249
Eyes, Screw 226

F

Fanlight Openers 236
Fasteners, Chain Door 242
Refrigerator 225
Sash 228
Felt, Rubbing 40
Fencing 136
Fenders ..... 118 to 121
Filler, Alabastic 23
" Wood 16
Fire Place Fittings .....110 to 124
Fire Places, Electric 125, 126
Fire Sets ..... 113 to 118
Fittings, Bathroom 130 to 133 & 215
Fixtures, Built In 72
Gable Door 145
Show Case..211, 212, 213
Flaxoap 34
Floor Enamel 6
Floor Hinges 214, 215
Floor Oil 15
Floor Varnish 12, 17
Flush Bolts 241
Flush Bolts, Extension 231
Folding Screen Hinges 224
Food Cutters 138
Foot Bolts 232, 233
Foot Scrapers 89
Forming Wire 89
French Door Bolts 233
Friction Catches, Ball 256
" Door Catches 256
" Hinges 230
Frosting, Glass 27

G

Gable Door Fixtures 145
Garage Door Holders 242
Latches 207
Locks 141
Sets 139, 141
Hinges 220, 221
Garden Tools 87
Gaskets, Refrigerator 222
Gate Hooks and Eyes 226
Gate Latches 208
Glass 71
Glass, Windolite 69
Glass Boards 64
Glass Cutters 64
" " Diamonds 64
Glass Frosting 27
Glass Knob Locksets 178
Pliers 63
Rules 64
Squares 64
Glazier Points 63
Glue 43
Glue, Bull Dog Grip 37
Glue, Flake and Sheet..... 37
Glue, Le Pages 39
Graining Tools 68
Grand Lockset Design 164
Graphite Paint 10
Grates, Coal and Wood 110

H

Half Buttons 249
Half Round Surface Bolts 233
Half Surface Butts 217
Haig Lockset Design 172
Hammer Handles 154
Hammers 257

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

INDEX - - Continued

Handles, Axe and Hammer ... 154
Chest 249
Lever 195
Store Door 206
Tray 256
Hand Rail Brackets 239
Screws 239
Hangers, Barn Door 144
Parlor Door 146
Sash Pull 230
Storm Sash 228
Hasps and Staples 248, 249
Hasps and Staples, Hinge..... 249
Hat and Coat Hooks 226, 227
Hi-Tex 25
Hinge Hasp and Staples 249
Hinges, Back Flap 218
Chest 225
Desk 224
Floor 214, 215
Folding Screen 224
Friction 230
Garage 220, 221
Kitchen Cabinet 224
Lavatory 213
Ornamental 216
Refrigerator 222
Screen Door 243
Screw Hook and Strap 220
Show Case 216
Single Acting 213
Strap ....., 159, 220
Tee 221
Warehouse 220
Hods, Coal 112
Hog Rings 258
Hog Ringers 258
Holders, Card 238
Door 244, 257
Garage Door 242
Label 238
Hooks and Eyes 226
Hall Rack 226
Hat & Coat 226, 227
Pull-Down 230
Sash Pull 230
Screw 226
Hot-house Pulleys 247
Hot Plates 96
Household Scales 258
House Numbers 160

I

Irons, Flat Corner 235

J

Japan, Black 19
Brown 19
H.P. 18
White 18
Jewel Wax 29
Juno Lockset Design 161

K

Kalcikill 34
Kalsomine, Alabastine 23
Deco. Tint 24
Key Blanks 196
Cutting Machine 148
Plate Escutcheon 198
Kick Plates 135
Kilstain 33
Kitchen Cabinet Hinges 224
Latches 256
Klensa 19
Knives, Casing 66
Paperhangers 67
Pocket 87
Putty 62
Knobs, Base 242
Door 198, 199
Drawer 242, 250
Knockers, Door 88

L

Label Holders and Pulls..... 238
Lacquerette 21
Lacquer Rogers 8
Ladder Brackets 68
Ladders, Extension 68
Step 68
Lamps, Edison Mazda 96
Lap Cement 22
Latches, Barn Door 209
Cupboard 245
Garage Door 207
Gate 208
Kitchen Cabinet 256
Mortise 193
Night ..... 185 to 187
Refrigerator 225
Latches, Rim 193
Screen Door..243, 249, 257
Secret Gate 208
Thumb 207
Lavoratory Fittings 212
Lead, Arsenate of 34
Compound 13
Decorators 13
Monarch 13
Red Seal 13
Lemon Oil 28
Le Pages Glue 39
Letter Boxes 160
Lever Handles 195
Lewis Regulators 234
Lifts, Sash 229
Line Cleats 247
Linsead Oil 13
Liquid, Bronzing 18
Luquid, Sealing 6
Lock Repairs 210
Locker Locks 252
Locks, Chest 251
Cupboard 250
Locks, Cylinder Front Door ... 189
" Office Door ... 189
Desk 253
Drawer 253
Front Door Bit Key.... 189
Garage Door 141
Locker 252
Mortise 191, 192
Mortise, Dead 194
Rim, ... 188
Rim Dead 188
Sliding Door 195
Store Door 190
Trunk 251
Wardrobe 252
Locksets,
Alamo Design 171
Beaverton Design 168
Berkley " 174, 175
Carlton " 170
Cleo. " 167
Colonial " 164
Cylinder Front Door ... 179, 180
Devon Design 177
Glass Knob Design 177
Grande " 164
Haig " 172
Juno " 161
Moderne " 163
Monica " 170
Nile " 177
Randolph " 169
Reco " 166
Regent " 165
Renown " 164
Rim " 178
Roxborough " 176
Sherwood " 171
Store Door " .. 179 to 184
Windsor " 162
Wipco " 173

M

Machine Bolts 91
Machine, Key Cutting 148
Mail Boxes 158
Mantels 109
Marbleite 12
Martin-Senour 100% Pure Paint 3
" " Varnishes 12
Marine Paint 12
Mats, Coco 38
Door 97
Meal Cake 40
Metal-Brite 32
Metal Polish, Bon-Ton 28
Brasso 28
Metal-Brite 32
Silvo 28
Middle Brass Butts 224
Mirror Plates 198
Mirrors 156

INDEX - - Continued

Mirrors, Bathroom 69
Framed 69
Moderne Lockset Design 163
Monarch Lead 13
Monica Lockset Design 170
Mops, Floor 57
O-Cedar 31
Mortise Door Bolts 231
Screen Door Latch Sets 257
Muralo Cement Paint 25

N

Nails 92, 93
Narrow Brass Butts 224
Netting, Poultry 152
Stucco 97
Night Latches .....185 to 187
Nile Lockset Design 177
Numbers, House 160

O

O-Cedar Polish 28
Offset Cupboard Hinges 224
Oil, Banana 27
Creosote 16
Floor 15
Lemon 28
Linseed 13
Shingle Stain 16
Oil Stain, Kleartone 19
Mission Tone 11
Oil, Three in One 29
Openers, Can 155
Fanlight 236
Skylight 236
Transom 236
Ornamental Hinges 216
Hinge Straps 159
Outfits, Garage Door ... 139 to 141

P

Pad Bolts 231
Padlock Eyes 249
Padlocks ..... 99 to 108
Paint, Aluminum 12
Concretone 6
Concretone Floor Dressing 6
Durable Barn 5
" Floor 6
" House 4
" Porch 5
Gold 12
Graphite 10
Iron Duke 5
Liquid Da-Lite 24
Marine 12
(Martin-Senour)
100% Pure) 3
Paint, Master Painter's Products 24
Muralo Cement 25
Neu-Glos 7
Neu-Tone 7
Peerless 4
" Barn 5
Red Schoolhouse 4
Rogers Touch-Up Black 8
Screen 10
Shingle 11
Standard Roof & Bridge 5
Tire 8
Water 10, 25
Paint and Varnish Remover 19, 40
Paper, Plain Building 74
Roofing 74
Tar 74
Panel Grills 88
Paperhangers Knives 67
Paris Green 34
Parlor Door Hangers 146
Parts, Lock 210
Paste, Adheso 37
Boards 66
Tables 65
Patching Wood 27
Peerless Paint 4
" Barn Paint 5
Perfection Steel Bar Clamps... 258
Pine Tar 27
Pins, Dowel 228
Pitch 27
Planks, Extension 67
Plaster of Paris 15
Plates, Electric 96
Kick 135
Mirror 198
Push and Pull 249
Pliers 84, 85
" Glass 63
Plumb Bobs 66
Point Drivers 63
Points, Glaziers 63
Poles, Sash Pull 230
Polish, Brasso 28
Nugget Shoe 28
Silvo 28
Simoniz 29
O-Cedar 28
Rogers Auto 8
" Furniture 8
Stove, Sta-on 32
Polishers, Floor 30
Poultry Netting 152
Supplies 152, 153
Primer, Galvanized Iron 10
Pudlo 39
Pulleys, All Kinds 246, 247
Sash 234
Pulls, Door 240, 241, 249
Drawer 238, 254, 255
Pumice 33
Push and Pull Name Plates.... 249
Putty 15
Putty, Water 16
Putty Knives 62

Q

Quilting Frame Clamps 258

R

Randolph Lockset Design 169
Rawl Plugs 98
Recesso Fittings 131
Reco Lockset Design 166
Red Seal Lead 13
Reels, Clothes Line 137
Refrigerator Fasteners 225
Gasket 222
Hinges 222
Regent Lockset Design 165
Regulators, Window 234
Remover, Paint & Varnish 19, 26, 40
Renown Lockset Design 164
Repairs, Lock 210
Resin 27
Residence Cylinder Locksets ..... 179 to 184
Rests, Shelf 239
Rim dead Locks 188
Rim Locksets 178
Rim Locks 188
Ringers, Hog 258
Rings, Cylinder 210
Hog 258
Trap door 249
Rods, Clothes Closet 87
Transom 236
Rogers Lacquer 8
" One Hour Enamel 9
" Tire Paint 8
" Touch-Up Black 8
Rollers, Barn Door Stay 144
Sash 228
Seam 66
Roof Paint 5
Products 22
Rope 89
Rottenstone 33
Roxborough Lockset Design .. 176
Rubbing Felt 40
Rules, Boxwood 155
Glass 64

S

Safety Hasps and Staples 248
Salamander 25
Sand Screen 137
Sash Balances 234
Buttons 249
Cord 234
Centres 236
Chains 234
Fasteners 228

INDEX - - Continued

Sash Lifts 229
Pull Poles 230
Pulleys 234
Pull Hangers 230
Pull Hooks 230
Pull Sockets 230
Rollers 228
Weights 234
Saw Sets 258
Vises 258
Scales, Counter 258
Household 258
Scrapers, Foot 89
Glass 67
Wall 62
Screen Door Catches 234
Checks 203
Hinges 243
Latches.. 243, 249, 257
Sets 243
Turnbuckles 234
Screen Doors 73
Screen Windows 149
Screen Wire Cloth 73
Screens, Fireplace 122, 124
Sand 137
Screw Drivers 152
Eyes 226
Hook & Strap Hinges... 220
Hooks 226
Pulleys 246
Screws ..... 94, & 95
Screws, Bench 258
Hand Rail 239
Stop Bead 229
Seal-tite 22
Secret Gate Latches 208
Semex 25
Sets, Cellar Window 239
Combination Door 257
Garage Door ..... 139 to 141
Screen Door 243
Storm Door 208
Saw 258
Shears 67
" Pruning 85
Shelf Brackets 235
Brackets, Glass 239
Rests 239
Shellac 16
Shellac Sticks 40
Sherwood Lockset Design 171
Shields, Expansion 98
Shingle Paint 11
Shingle Stain 11
Shingle Stain Oil 16
Show Case Fixtures.. 211, 212, 213
Hinges 216
Track 211
Side Pulleys 246
Silvo 28
Simoniz 29
Single Acting Butts 223
Size, Wall 39
Sizing 7, 23
Skylight Openers 236
Smalts 27
Smoky City Cleaner 32
Snips 83
Sockets, Sash Pull 230
Solder 97
Spark Guards 122, 123, 124
Spindles 197
Sponges 33
Spray, Cattle 31
Fly 31
Sprayers 34
Sprayide 34
Spring Bolts 231, 233
Spring Door Catches 256
Hinges 213
Springs, door 249
Lock 210
Squares, Glass 64
Stain, Acid 10
Dry 11
Oil 11, 19
Shingle 11
Staples and Hooks 248, 249
Staples, Wrought 249
Stay Rollers, Barn Door 144
Steel Wool 32
Stencils 7, 43
Step Ladders 68
Stock White 12
Stop Bead Screws 229
Stops, Door 241, 242, 244
Store Door Handles 206
" Locksets.... 179 to 184
Fronts 70
Storm Door Sets 208
Sash Adjusters 228
Sash Hangers 228
Stove Bolts 90
Polish 32
Straight Edges 65
Strap Hangers 159, 220
Strikes, Lock 210
Strip, Weather 134, 135
Stucco, Wire 97, 137
Supplies, Poultry 152, 153
Sweeping Compound 31

T

Tables, Paste 65
Tacks 89
Tee Hinges 221
Textured Wall Finishes 25
Thumb Latches 207
Turns 198
Ties, Hay Bale 97
Tile 127, 129
Toggle Bolts 98
Tools, Garden 87
Graining 67, 68
Stanley 150, 151
Tower Bolts 233
Track, Barn Door 143
Parlor Door 146
Show Case 211
Transfers 27
Transom Catches 230
Chains 230
Rods 236
Trap Door Rings 249
Tray Handles 256
Trimmers 65
Trunk Locks 251
Turnbuckles, Screen Door 234
Turns, Comode 256
Cupboard 245
Thumb 198
Turpentine 15

U

Undercoating, Enamel 20
Upright Pulleys 246

V

Flattine Cabinet 17
Varnish, Auto 19
Damar 19
Elastica Cabinet 17
" Floor 17
" No. 1 17
" No. 2 17
" Oak 18
Flattine Cabinet 17
Floor 12, 17
General Purpose 19
G.P. Seat 19
Kleartone Flat 18
Kwick Spar 17
Kwickwork 21
Linoleum 18
Oceana Spar 18
Martin-Senour 12
Stanvar 18
Varnish Stain 11, 21
Ventilating Window Bolts 228
Cises, Combination Anvil 258
" Saw 258

W

Wall Scrapers 62
Size 39
Wardrobe Hooks 227
Locks 252
Hinges 220
Waste, Cotton 33
Water Glass 33
Water Paints 24, 25, 40
Wax, Chan 30
Jewel Paste 29
" Liquid 29
Johnson's 30
Martin-Senour 30
Old English 30

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

INDEX - - Continued

Waxer, Floor 53
Weather Strip 134, 135
Wedges, Axe 258
Weights 234
Well Wheels 258
Wheels, Well 258
Window Regulators 234
Sets, Cellar Window .. 230
Spring Bolts 228
Ventilating Bolts 228
Wind-O-Lite 69
Windows, Screen 73
Windsor Lockset Design 162
Wipco " " 173
Wire, Annealed 89
Clothes Line 247
Hay Baling 97
Screen 149
Stove Pipe 97
Stucco 97
Wood Filler 16
Wood-Lac 11
Wrenches 86

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MARTIN-SENOUR 100% PURE PAINT

Guarantee

WE GUARANTEE THE MARTIN-SENOUR 100% PURE PAINT (except Inside White and a few dark shades that cannot be prepared from lead and zinc), to be made from pure white lead, pure oxide of zinc, with coloring matter in proportionate quantities necessary to make their respective shades and tints, with pure linseed oil and turpentine dryer, and to be entirely FREE from water, benzine, whiting and other adulterations, and SOLD SUBJECT TO CHEMICAL ANALYSIS.

The MARTIN-SENOUR Co. LIMITED

Why White Lead, Zinc and Linseed Oil Make the Best Paint

It is a well-known fact that, of all known White Paint Pigments, White Lead has the greatest body or hiding properties. Unfortunately it lacks almost every other essential that goes to make durable and efficient painting material. First, it lacks the properties of carrying the necessary amount of Oil to make it a durable and weather resisting Paint material and, second, it is not what might be termed a neutral pigment. By this is meant, that it is chemically active with Linseed Oil, and this chemical action begins from the time the Lead and Oil are put together, and continues after the Paint has been applied, gradually destroying the life of the Oil.

The proof of this chemical action may be observed on any painting Job done with Pure White Lead and Oil. Investigate this by rubbing your thumb over a painted surface exposed to the weather a short time, and you will see that it chalks — rubs off quite easily. These weaknesses of White Lead are overcome by the addition of a correct proportion of Zinc Oxide which absorbs 40% more Linseed Oil, thereby strengthening the film and overcoming chemical action. Pure Oxide of Zinc adds life and durability. Its whiteness, elasticity, spreading and oil-carrying capacity, when woven with White Lead and Linseed Oil by means of powerful grinding and mixing machinery, strengthens and reinforces the natural weakness in White Lead.

These two pigments — when incorporated with Linseed Oil produce a Paint that is not only 100% Pure, but also 100% efficient. This combination White Lead, Zinc, and Linseed Oil — forms into a leathery and elastic Paint film that stretches in summer, and contracts in winter without breaking. Any adulteration destroys this elasticity, weakens the resistance of extreme changes of temperature, and finally results in the Paint cracking and scaling

Directions for Using

STIR UP THE PAINT THOROUGHLY

If any pigment has settled in the bottom of the can, it can easily be mixed with a good sized paddle or stick.

PAINTED SURFACE

Scrape off all loose paint. Two coats are sufficient. Thin first coat in the proportion of one pint Turpentine to the gallon of paint. Do not thin the second coat. Brush the paint out well and allow four days between coats for drying.

PAINTING NEW LUMBER

See that the wood is perfectly dry; all knots and sappy spots well coated with Martin-Senour Orange Shellac before priming.

Prime with Martin-Senour 100% Pure Paint by adding one-quarter gallon Turpentine and one-quarter gallon Raw Linseed Oil to gallon of paint if the job is three coat work.

The succeeding coats should be applied just as it comes in the can.

Then putty all defects and nail holes before applying second coat. Three coats are essential to best results.

Do not paint on a wet, damp day, or after a rain, until the wood has thoroughly dried. Do not put the paint on thick. Thin coats wear better than heavy coats. Martin-Senour 100% Pure Paint, being a White Lead Paint, should be brushed out like Lead and Oil.

Covering Capacity

450 square feet to the gallon—two coats. Made in 32 Shades, Outside White, Inside White and Black

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Whites, Outside and Inside, per gal.	$7.30	$7.60	$7.90	$8.50	$9.70
Ordinary Colors, per gal.	6.70	7.00	7.30	7.90	9.10
No. 525 and 578, per gal.	8.00	8.30	8.60	9.20	10.40
No. 527	7.70	8.00	8.30	8.90	10.10
Inside Flat White	7.30	7.60	7.90	8.50	9.70

Price in 5-Gallon Cans, 10c. per gal. less than 1-gal. price.
Price in Barrels, 25c. per gal. less than 1-gal price.
Price in ½-Bbls., same price as bls.

No. of cans in full Case	6	12	24	48	96

Shipping Weight of 6-gal. Case, approximately 120 lbs.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MARTIN-SENOUR

DURABLE PAINT

Is a combination of White Lead, Zinc Oxide and Linseed Oil with the necessary coloring matter and properly thinned to produce a durable, rich gloss paint which excels lead and oil in durability and, when applied according to directions, gives entire satisfaction.

It is made in eighteen beautiful shades, also in white and black, and will give perfect satisfaction where a cheaper grade of paint is desired.

DURABLE PREPARED PAINT will cover approximately 325 square feet per gallon—two coats.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.
White, per gal.....	$5.90	$6.20	$6.50	$7.10
Colors, per gal.....	$5.50	$5.80	$6.10	$6.70
Colors, *852 *854	$6.20	$6.50	$6.80	$7.40

The Proof of Paint is on the House, Not in the Can

PEERLESS PAINT

Put up to meet a demand.

Procurable in shades, Also White.

Price List

1-gallon cans, per gal.....	$4.32
½-gallon cans, per gal.....	$4.62
¼-gallon cans, per gal.....	$4.92

RED SCHOOL-HOUSE PAINT

Red School House Paint is made of English Red Oxide, mixed in scientific proportions with Pure Linseed Oil and finely ground by the most modern machinery. During this process every particle becomes thoroughly incorporated with the oil, producing a Paint that is unsurpassed for painting Barns, Silos, Outbuildings, etc. It is a bright red that stays red, withstanding the ravages of the weather, and is good insurance for farm property. A pleasing color combination for Red School House Paint is 100% Pure Outside White. Covering capacity of Red School House is about 500 square feet, two coats to the gallon.

Directions. Stir contents of can thoroughly. When applying paint to surface it should be brushed in carefully. The lumber used for farm buildings is usually of a rough nature. More care should be taken in the brushing than when working on smooth lumber to the end that all portions of the surface will be protected with the paint. Before a second coat is applied see that nail holes, etc. are puttied. If thinning becomes necessary use a small quantity of Raw Linseed Oil for first coat.

Price List

Barrels, per gallon.....	$4.20
5 Gallons, per gallon.....	$4.50
1 Gallon, per gallon.....	$4.70
½ Gallon, per gallon.....	$5.00
¼ Gallon, per gallon.....	$5.30

PEERLESS BARN PAINT

Peerless Barn Paint is made in Red only and cannot be supplied in any other color. It is put up to fill a certain need for rough work.

Price List

Red only, 5 Gals., per gal.....	$2.60
Red only, 1 Gals., per gal.....	$2.80

All Prices Subject to Change Without Notice

MARTIN-SENOUR

IRON DUKE PAINT

Exclusively for Metal Surfaces

Is specially prepared to protect metal surfaces against corrosion, which is caused by dampness, acids, alkali, steam, heat, exposure and other rust producing agencies. Iron Duke Paint is prepared with specially treated oils which are non-porous and non-saponifable. This paint contains special preventive compounds, which prevents the formation of rust beneath the coating. It forms an elastic, impervious coating of high abraision-resisting qualities.

We know exactly the severe test o| 120° to 40° below zero.

This expansion and contraction is most exacting on a paint film, the continuous moisture every 24 hours in the day and the extreme abnormal heat and rasping winds are continuously fighting the film and break down its defence so that rust, corrosion and decay will soon show its effect. But when these enemies combine their forces against **Iron Duke,** they have found their superior. The film formed is too tough, it is too good and stands supreme as a staunch protector of the metal left under its care and protection.

Stocked in 12 Colors

Price List

	5 Gals.	1 Gals.
All Colors. Per gal.	**$6.40**	**$6.60**

Standard Roof and Bridge Paint

In point of durability and protective value, this paint is of a very high standard. It works easily, dries with a high gloss and has good covering qualities.

Its excellent durability and power to resist the elements, makes it a most valuable covering for roofs, barns, fences, sheds, freight cars, freight houses, grain elevators and all outbuildings, and it also will give excellent service when used on bridges and all classes of structural iron and steel work.

Covering Capacity

The covering capacity varies according to the nature of the surface over which it is to be applied, but providing the surface is in a fair condition, it is quite safe to figure that it will cover 500 square feet, two coats, to the gallon.

Standard Barn Roof and Bridge Paint is put up in all the standard sizes from barrels to quarter gallon cans.

Price List

	Bbls.	5 Gals.	1 Gals.	½ Gals.	¼ Gals.
Red, Black and Brown	**$8.70**	**$4.00**	**$4.20**	**$4.50**	**$4.80**
Grey, Slate, Green and Leads	**$4.20**	**$4.50**	**$4.70**	**$5.00**	**$5.30**

OUTSIDE PORCH PAINT

The porch or veranda floor is generally the first part of a building to show signs of decay. The reason for this is explainable by the fact that rain cannot run off so readily as from the side of the building and, unless the floor is in a good state of painting repair, the water finds its way to the stringers and sills. These, not being protected by paint will soon rot owing to the continual absorption of water.

By constantly keeping the porch floor and steps in good painting condition rot and disintegration will be prevented, and costly repair bills will be avoided. Martin-Senour Outside Porch Paint is specially prepared to withstand the hard usage to which porch floors are subjected to and also to stand the severe test of weather conditions.

Lead and Oil Paint is not satisfactory for Porch Floors. It will not dry with the same hard film as Martin-Senour Porch Paint and, therefore, cannot give the required protection.

Covering Capacity. One gallon of Outside Porch Paint will cover from 400 to 500 square feet.

Thinning is only necessary if the paint becomes thick from exposure to the air, and then, thin only with Spirits of Turpentine.

Made in four Lasting Colors.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal
Per gallon	**$6.60**	**$6.90**	**$7.20**	**$7.80**

DURABLE PORCH PAINT

A quart of paint will do an average porch floor and steps and will add years to the life of them.

Price List

	Per Gal
1-gallon cans	**$6.50**
½-gallon cans	**$6.80**
¼-gallon cans	**$7.10**
⅛-gallon cans	**$7.70**

DURABLE BARN PAINT

May be used with good results where a rough work paint for roofs, barns, bridges, fences, etc., is required.

	Bbls.	5 Gals.	1 Gals.	½ Gals.
Red, Black and Brown	**$3.00**	**$3.30**	**$3.50**	**$3.80**
Grey, Slate and Green	**$3.50**	**$3.80**	**$4.00**	**$4.30**

SENOUR'S
FLOOR ENAMEL

FOR INSIDE FLOORS ONLY

Martin Senour Floor Enamel is an entirely new and different coating for floors that is exceedingly tough and durable, sanitary and easily washable. It will not crack, peel or chip.

It will dry with a very high gloss, is of great durability, and will give lasting service.

It flows very freely under the brush, and levels itself to a smooth and even surface. With ordinary ventilation the floor can be painted one day and used the next. Martin-Senour Floor Enamel can be readily cleansed with cold or warm water. It is not advisable, however, to use soaps or soap powders which are of a strongly alkaline character, as these will be prejudicial to the Floor Enamel finish. We strongly advise cleansing the floor with cold or warm water only.

DIRECTIONS FOR USING

The Floor to be painted must be absolutely free from dirt, oil or grease. Before proceeding to paint, the floor should be scrubbed with warm water, being careful to allow ample time for the moisture to thoroughly dry out. If the floor is rough, we recommend going over it with sand-paper as a smooth well finished floor not only looks better, but will wear very much longer.

Do not under any circumstances add Linseed Oil. If the paint becomes thick from exposure, add only Spirits of Turpentine.

Covering Capacity

One gallon under ordinary conditions will cover about 350 to 400 square feet of surface, two coats.

Made in 13 shades.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.
All Colors. Per gal.	$6.60	$6.90	$7.20	$7.80

DURABLE PREPARED FLOOR PAINT

Price List

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.
Per Gallon	$6.50	$6.80	$7.10	$7.70

CONCRE-TONE

CONCRE-TONE is a colored liquid coating intended for damp-proofing and beautifying the exteriors and interiors of Concrete, Cement Block, Brick, and Stucco Buildings. It is especially designed to overcome the dull and monotonous Blue-Gray of Portland Cement and to give the surface a uniform and even color. It will prevent the disintegration of metal when same is used as a frame for stucco or for reinforcing.

We do not recommend a flat drying coating for exterior work, as its weather-resisting properties are very limited. **Concre-Tone** (exterior) will dry with a gloss after sufficient coats have been applied to stop the suction. Ordinarily on Concrete or Cement work that has not previously been coated, the first and second coats will dry without gloss; the third coat, however, will dry with a subdued lustre.

Aside from the decorative value of **Concre-Tone, the** damp-proofing of a concrete building that is used as a dwelling is almost imperative.

The painting of brick buildings is constantly growing in favor, and in many Canadian towns and cities owners take a great deal of pride in keeping their dwelling always in a state of painting repair.

Interior

Concre-Tone (Interior) dries with an artistic, dull, velvety, flat finish. It is unaffected by dampness, or gases, in manufacturing plants, and will not turn yellow in the absence of light.

Concre-Tone (White) is a strong reflector of light.

M. S. CONCRE-TONE FLOOR DRESSING

Concre-Tone Floor Dressing when applied to cement floors will bind the cement and render the surface as hard as a tile floor. Will absolutely stop all dusting off of cement floors, as it binds all of the fine particles of cement together. It can be washed and scrubbed with hot or cold water without injuring the finish.

M. S. SEALING LIQUID

seals the porous surface of concrete, preventing lime action and acting as a size on varnish work.

Concre-Tone is made in a large number of colors, and black, white and clear. When ordering, specify exterior or interior, and gloss or dull.

Adopting dark colors as a standard (as they cover most) an ordinary unpainted surface will require 1 gal. to cover 300 to 350 sq. ft. one coat. Light colors cover about 15% less. White about 20% less. Clear about 25% less.

PRICE LIST

	5 Gals.	1 Gal.	½ Gal.	¼ Gal.
Concretone, All Colors	$7.00	$7.20	$7.50	$7.80
Concretone Floor Dressing	6.50	6.70	7.00	7.30
Concretone Sealing Liquid	4.94	5.14	5.44	5.75

MARTIN-SENOUR NEU-TONE

An Oil Paint for Flat Interior Decoration

Neu-Tone is an oil paint without gloss. A sanitary, washable, flat finish for the interior decoration of homes, public buildings, hospitals, schools, churches, theatres, offices, etc.

Neu-Tone is easy to apply, works well under the brush, levels and flattens perfectly without a trace of laps or brush marks, producing a dull, flat finish, of a soft velvety effect, and with great depth of tone that is most pleasing and very restful to the eyes.

It forms a hard, non-porous, non-absorbent surface and does not rub or chalk off.

When a Neu-Toned wall becomes soiled, a soft sponge and lukewarm water will remove dirt, finger-marks, etc., renewing the finish to its original soft, clean and beautiful appearance.

Covering Capacity

On smooth surface plastered walls (not previously painted) will cover from 600 to 700 square feet per gallon —one coat.

On walls previously painted and woodwork, it will require about one gallon for each 800 square feet—one coat.

On wall-boards the covering capacity will vary in accordance with the particular kind of board used, smooth boards taking about one gallon for 700 square feet and rough boards one gallon for 500 to 600 square feet—one coat.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.
White, per gal........	**$6.20**	**$6.50**	**$6.80**	**$7.40**
Colors, per gal.........	**$6.00**	**$6.30**	**$6.60**	**$7.20**

M.-S. NEU-TONE FIRST COATER

A special sizing liquid to be used on surfaces before applying Neu-Tone Flat Wall Paint. Sizing is only necessary on plastered walls, cement, or concrete that have not been previously coated and over wall-paper or surfaces previously coated with Kalsomine. It prevents suction, seals up the pores of plaster and neutralizes alkali in the plaster.

Never use glue or gloss oil for sizing as it softens up under Neu-Tone and will result in a surface cracking, spotting or peeling.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.
Per gal...	**$4.60**	**$4.90**	**$5.20**	**$5.80**

MARTIN-SENOUR NEU-GLOS

A Medium Gloss Interior Enamel Finish

NEU-GLOS is a most practical, sanitary and economical finish for all interior work whether it be wall, woodwork, furniture or in fact any interior surface which it is desired to paint in a Medium-Gloss enamel finish.

It is ideally adapted for interior decoration of homes, schools, churches, hospitals, theatres, offices, etc. Can be used with equal satisfaction on surfaces of wood, plaster, wall board, cement, stucco, stone and metal.

NEU-GLOS is easily applied, works freely under the brush, flows out evenly and produces that beautiful medium-gloss finish that is so desired for interior decoration and so pleasing and restful to the eye. Made in delicate tints so necessary for successful color harmony it will be found possible to produce color combinations to suit all tastes.

NEU-GLOS is particularly adapted for the refinishing of furniture. The very fact of its medium-gloss finish makes it a suitable product for use on all kinds of furniture around the house.

Furniture finished with NEU-GLOS will always be admired for its beauty and durability.

NEU-GLOS Furniture can be improved in appearance by the use of transfers which are easily applied and can be procured from any Martin-Senour Dealer. Make your home cheerful with NEU-GLOS.

Directions for Using

In all cases where Neu-Glos is to be used, precaution must be taken to thoroughly remove all grease, dirt, etc., otherwise results cannot be expected to be satisfactory. If thinning becomes necessary use only a small quantity of Turpentine. Do not brush out Neu-Glos like an ordinary paint, but flow it on evenly as you apply an Enamel. Neu-Glos levels out to a perfectly smooth surface leaving no laps or brush marks.

SIZING

Do not use a cheap gloss oil, or glue size, as these soften up under Neu-Glos making it liable to crack and peel. Use Neu-Tone First Coater which is a specially prepared sizing for this purpose.

Price List

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.	1/32 Gal.
$6.70	**$7.00**	**$7.30**	**$7.90**	**$9.10**	**$11.50**

BLUE LABEL STENCILS

For Decorative Purposes with Neu-Tone and Neu-Glos

The designs in this line of stencils have been made to meet the prevailing demand for a class of decoration pleasing in effect and not too elaborate for ready application. While from an artistic standpoint and for durability they are second to none, they will be found insofar as practicability is concerned, way ahead of all others.

With Blue Label Stencils you can accomplish as much in one hour as you can accomplish in three hours with stencils from any other line, wherein the designs are so complicated and full of detail as to necessitate the use of two or more plates.

Patterns and Prices on Application

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ROGERS
THE MARK OF QUALITY

NEW METHOD BRUSHING LACQUER

Rogers New Method Brushing Lacquer is not paint, is not varnish, although it does the work of these most conveniently.

The lacquers you have come to know about as used on automobiles are, of course, so exceedingly quick drying that they can be applied only with spray equipment.

Rogers New Method BRUSHING Lacquer is a marvelous finish only recently made possible through the perfect blending of raw materials which cause the lacquer to dry slowly enough so that you can apply it with a brush as you have been accustomed to do with varnish and enamels. It's so easy to flow on that it makes painting real fun. Saves hours and even days of "tie-ups."

ROGERS NEW METHOD
BRUSHING LACQUER

If thinning is required use turpentine or benzine only.

Price List
ROGERS BRUSHING LACQUER

	1 Gal.	½ Gals.	¼ Gals.
Each	**$10.68**	**$5.42**	**$2.78**

	⅛ Gals.	1/16 Gals.	1/32 Gals.
	$1.54	**.92**	**.56**

TIRE PAINT

All tires ought to be painted to protect them from the changing climatic conditions of Canada; the summer with its intense heat and the winter with intense cold.

Painted tires will set up your car to good advantage. What looks worse than a well kept body and shabby looking tires.

ROGERS TIRE PAINT
ROGERS TOUCH UP BLACK

Display Carton containing six of each.....	**$8.64**
Refills .....Per Tin	**.72**

Touch up Black comes in ¼ pint Tins
Tire Paint in ½ pint Tins

ROGERS
THE MARK OF QUALITY

ROGERS AUTO POLISH

Because of its cleansing and polishing qualities, Rogers Auto Polish is recognized as a leader among owners. It is equally efficient on lacquer or enamel surfaces which makes it ideal for cleaning and polishing Auto bodies and fenders. Will remove Grease readily and restore original finish with maximum amount of effort.

Put up in 1 Gallons—16 oz. bottles 8 oz. bottles.

ROGERS AUTO POLISH

1 Gals.	**$8.30** each
8 oz. Bottles	**8.64** per Doz.
16 oz. Bottles	**14.40** per Doz.

ROGERS FURNITURE POLISH

A polish most suitable for interior surfaces. May be used with equal satisfaction on Pianos, Radios, Highly polished furniture, painted or enamelled woodwork. It is practically odorless and its cleansing properties make it most popular among housewives.

Put up in—12 ounce Bottles.

ROGERS FURNITURE POLISH

1 case (12—12 oz. Bottles)	**$7.20** Each
½ " (6— 6 oz. Bottles)	**3.60** "

TOUCH UP BLACK

Rogers Touch Up Black is the new type of finish that dries in a short time and wears like iron; it is especially adapted to "Touch up those bad spots" that invariably appear on a car, and if not immediately covered over with Touch Up Black, rusts and begins to chip off.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ROGERS
THE MARK OF QUALITY

ONE HOUR ENAMEL

IS THE latest addition to the Rogers family of products . . . new from every angle . . . speed . . flow . . . durability . . . ease of application . . . no objectionable odor . . . no special thinners required.

Rogers One Hour Enamel, the first enamel ever introduced that DRIES IN ONE HOUR. It has every advantage—18 colors that inspire you; easy flowing, no brush marks; suitable for practically any surface—(whether old or new)—and ONE HOUR DRYING.

HOW TO USE ROGERS ONE HOUR ENAMEL

Stir it well, with a clean, broad stick. A good brush will give you a smoother finish than a cheap, coarse brush. The Enamel will also go on easier and quicker with the result that one coat put on with a good brush will cover better and look better than two coats put on with a poor brush.

If the brush you have is not clean, wash it out with Turpentine or Benzine.

When you Enamel, use the brush rather full, laying the color on freely and easily. You will be delighted to find that very little brushing is required to produce a full, even finish with ROGERS ONE HOUR ENAMEL.

One or more coats of ROGERS ONE HOUR ENAMEL may be applied the same day providing about one hour is allowed between coats. Ventilating the room is not necessary, but will hasten the hardening of the finish.

18 Glorious Colors and Black and White. Use it for chairs, interior woodwork, breakfast sets, tables, the baby's crib, toys, metal ware, bric-a-brac, etc.

ROGERS ONE HOUR ENAMEL "DRIES IN ONE HOUR." If thinning is required, use turpentine only.

Price List

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.	1/32 Gal.
$8.10	**$4.20**	**$2.08**	**$1.22**	**.70**	**.40**

MULTI-USE OUTDOOR ENAMEL

The Product MULTI-USE OUTDOOR ENAMEL is designed specially for the purpose intended. It is a scientifically made product that will withstand successfully exposure to the elements, and still retain its lustre. It is easy brushing and flows out to a smooth, even film with a high gloss, providing a tough, durable finish that is elastic.

MULTI-USE OUTDOOR ENAMEL can be applied with either a Spray-Gun or Brush as desired.

Note While MULTI-USE OUTDOOR ENAMEL is recommended for outdoor surfaces on wood or metal, we do not suggest its use in place of Martin-Senour 100% Pure Paint for exterior house painting. A building that is constantly exposed to the elements in one position 24 hours a day, unlike articles that are changing position, requires a Linseed Oil Paint to withstand this severe test.

List of Surfaces

Automobiles
Trucks
Tractors
Bicycles
Motorcycles
Baby Carriages
Boats
Canoes
Yachts
Fire Escapes
Fire Hydrants
Alarm Boxes
Mail Boxes
Farm Implements
Wagons
Sleighs
Gas Engines
Gasoline Pumps
Ice Cream Tubs
Garbage Cans
Lawn Furniture
Piazza Chairs
Lawn Mowers
Garden Tools
Flower Pots
Store Fronts

How to Apply

Remove all grease and oil from the surface to be finished and make sure that it is clean and absolutely dry. If this precaution is not taken satisfactory results cannot be expected. Rub down the old coat with medium or fine sandpaper to remove all loose particles and dust off carefully.

Before using, stir the Enamel thoroughly from the bottom of the can so that the entire contents are of uniform consistency. Flow the Enamel on evenly but not too heavily, using a clean, soft bristle brush.

Range of Colors Careful selection of colors has made it possible to offer a range from which a selection can be made suitable for any particular article or surface. The colors are specially suited for exterior requirements—they are clear, bright and up-to-date.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.	1/32 Gal.
Each	**$9.04**	**$4.68**	**$2.42**	**$1.28**	**.72**	**.44**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MARTIN-SENOUR

QUICKOTE
FOUR HOUR ENAMEL

The trend of the present day in home decoration for Furniture and Woodwork is colors — bright colors that will harmonize with the draperies and other furnishings. The demand is for quality, speed and color. In all of these requirements Quickote is unexcelled. It is made of the very best ingredients possible to obtain, it will dry dust free in an hour, and hard in four, with a beautiful lustrous, enamel finish that is durable, wear-resistant and waterproof. It will not crack, chip or peel. Quickote is made in 18 popular colors used for interior and furniture decoration today.

Quickote has no effensive odor, it will not lift or dissolve the undercoats, it does not require special thinners. It is remarkable for its ease of application — brushes out like slow-drying enamels and shows no laps or brush marks.

Quickote dries quickly enough for all ordinary purposes, without sacrificing durability.

Price List

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.	1/32 Gal.
$8.90	**$4.60**	**$2.40**	**$1.30**	**$ .76**	**$ .42**

M. S. BATH TUB ENAMEL

A high grade long oil waterproof enamel. Made to stand the action of soap and alkali. Brushes freely, sets slowly, flowing and levelling to a porcelain-like finish.

Tinlets, per dozen **$6.72**

M. S. STOVEPIPE ENAMEL

Gives a jet black finish on stove pipes, grates and any surfaces subjected to heat.

Large, ½ pints. Per dozen..... **$4.62**
Small, ¼ pints. Per dozen..... **3.20**

M. S. GOLF BALL ENAMEL

A solid covering, pure white, tough and elastic enamel, that will withstand the abuse to which golf balls are subjected. One coat is all that is necessary to make the ball look as good as new.

Tinlets, per dozen **$8.40**

M. S. SCREEN PAINT

An enamel paint that will prevent screen wire cloth from rusting. One coat is all that is necessary, and it covers solid without clogging the mesh. Made in green, black and bottle green

¼ Gallon. Each **$1.68**
⅛ Gallon. Each ..... **.92**
1/16 Gallon. Each ..... **.54**

MARTIN'S DE LUXE ENAMEL

THE HIGHEST GRADE ENAMEL MADE IN WHITE AND COLORS

The superiority of Martin's White Enamel for interior and exterior work is acknowledged, its immaculate whiteness and porcelain-like surface being its outstanding features.

The product in colors are the delicate, artistic tones generally desired for interior decoration, and will be found to maintain this high standard.

In the finest residence, cottage, hotel or public building, the use of Martin's de Luxe Enamel will surpass any other enamel finish for excellence, durability and for sanitation.

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
Per Gal.	**$14.00**	**$14.30**	**$14.60**	**$15.20**	**$16.40**

M.S. GALVANIZED IRON PRIMER

There is no surface on which paint is so commonly found peeling as on galvanized iron. This peeling is positively prevented if the iron is given one coat of M.S. Galvanized Iron Primer. This primer makes a perfect bond with the metal and produces a surface to which succeeding coats will tenaciously adhere.

Price List

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.
Per Gallon	**$6.40**	**$6.70**	**$7.00**	**$7.60**

M.S. GRAPHITE PAINT

Made of pure amorphous graphite ground in pure linseed oil and mixed with the necessary dryers and thinners. A positive preservative and anti-corrosive for metal work of every description. Stocked in both liquid and paste form.

Price List—Liquid

	5 Gals.	1 Gals.
Per Gallon	**$5.60**	**$5.80**

Price List—Paste

	25-lb. Irons	12½-lb. Irons
Per Pound	**$ .24**	**$ .25**

All Prices Subject to Change Without Notice

MARTIN-SENOUR PURE LINSEED OIL SHINGLE PAINT

We know of no product in the paint business of which there are so many inferior grades placed on the market as Shingle Paint and in making Martin-Senour Pure Linseed Oil Shingle Paint the manufacturers have kept quality in view rather than price.

It is entirely a product of merit. The colors used for the tinting of this paint,are the highest grade obtainable and will be found to be practically permanent. The liquid is pure linseed oil (nothing else). This combination produces a stain that not alone makes an exceedingly decorative coating, but will protect the shingles, adding years to their life.

Made in 4 Greens, 3 Browns, 3 Reds, Black and Silver Gray.

Price List

	Bbls.	5 Gals.	1 Gal.
All Colors, per gal.....	**$4.20**	**$4.50**	**$4.70**

M.S. CREO-LAC SHINGLE STAIN

Creo-Lac is a combination of refined Creosote, Linseed Oil and pure coloring matter in such proportions as has been determined to give the very best results.

Creosote has become recognized as a good product for preventing fungus growth on shingles, and for this reason we employ it in the manufacture of CREO-LAC.

Price List

	Bdls.	5 gals.	1 gals.
Ordinary Colors	**$2.80**	**$3.10**	**$3.30**
Greens	**$3.20**	**$3.50**	**$3.70**

Directions for Using Shingle Stain

FOR NEW WORK

The most satisfactory results are obtained by first dipping the shingles before laying and then applying two good brush coats of the same shade after shingles are laid.

FOR OLD WORK

Apply two good coats taking care to brush stain in well and allowing ample time for drying between coats.

COVERING CAPACITY OF SHINGLE STAIN

1 Brush Coat—1 gallon covers 200 square feet.
2 Brush Coats—1 gallon covers 125 square feet.
Dipping—2 gallons for 1000 shingles.

Martin-Senour Pure Linseed Oil Shingle paint will cover from 20 to 25 per cent. more surface than is shown by this standard table.

M.S. WOOD-LAC VARNISH STAIN

A beautiful and durable finish for old and new floors, woodwork and furniture. Wood-lac is made from a high grade varnish, combined with permanent colors.

	1 Gal.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
Each—	$7.70	$4.00	$2.08	$1.12	$ .64
GROUND COLOR	**$7.20**	**$3.75**	**$1.95**	**$1.08**	**$ .60**

M. S. ORNAMENTAL VARNISH STAIN

A wonderful renovator for old furniture. One coat is all that is needed to brighten up any surface that has been previously varnished, but which requires refinishing.

	1 Gal.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
Each	**$5.30**	**$2.80**	**$1.48**	**$ .8[illegible]**	**$ .48**

M. S. OIL WOOD STAIN

Made from the finest selected pigments, finely ground and incorporated in a special liquid. They are easily applied and produce beautiful effects, bringing out the natural grain of the wood to its fullest.

	1 Gal.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
Each	**$5.30**	**$2.80**	**$1.48**	**$ .82**	**$ .48**

MISSION-TONE WOOD-DYE

A Pentrating Oil and Spirit Stain for Use on New Woods

MISSION-TONE WOOD-DYE

Is a penetrating stain—It is a combination of Spirit and Oil which strikes deep into the wood, thus bringing out all the beautiful markings produced by nature. The colors are all permanent: one gallon will cover about 600 square feet, one coat on soft wood, and 800 square feet on hard wood.

It particularly designed for use on new woods; in fact, its uses are restricted to woods that have not previously been coated with either Paint, Stain or Varnish. Where a coated surface is to be finished, it is always necessary to remove the old finish either by means of the blow-torch or paint and varnish remover, before it is practical to use "Mission-Tone."

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Ordinary Colors	**$7.12**	**$3.70**	**$1.94**	**$1.04**	**$ .60**
Mahogany	**$9.40**	**$4.86**	**$2.50**	**$1.32**	**$ .74**

Dry Stains

These stains are in a dry powder form, soluble in hot water or alcohol. One pound of stain requiring from 2 to 6 gallons of water or alcohol, depending on the strength of the stain and the depth of the shade required.

We carry complete stocks of many colors. Specify whether required soluble in spirit or soluble in water.

M.S. MARINE PAINT

Martin-Senou Marine Paint is made of materials that have proven through many years of constant experimenting to have given the very best results. It is suitable for all kinds of painting above the water line whether interior or exterior, and whether for fresh or salt water craft.

How to Use

This paint is prepared ready for use for one-coat work. Where two coats are to be applied, reduce with small quantity of turpentine for first coat only, apply second coat full body.

Do not paint in cold or frosty weather. See that surface is thoroughly dry and free from oil and grease. Scrape off all loose paint.

Made in a Large Variety of Colors

Price List

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.
Ordinary Colors	**$6.70**	**$7.00**	**$7.30**	**$7.90**
Bright Red	**$8.00**	**$8.30**	**$8.60**	**$9.20**
Yacht White	**$7.40**	**$7.70**	**$8.00**	**$8.60**

M. S. MARBLE-ITE FLOOR VARNISH

Unlike most floor varnishes, Marble-ite retains its hardness and never becomes brittle; consequently it will not mar or scratch white under the hardest kind of wear.

1 Gal.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
$8.80	**$9.20**	**$9.60**	**$10.60**	**$12.20**

M. S. FINEST INTERIOR FINISH

The best type of varnish for general interior woodwork where the very finest effect is required. This varnish is light in color, of good body, and dries with a hard, elastic surface that can be rubbed. Will dry in 24 hours under good drying conditions.

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
$9.10	**$9.50**	**$9.90**	**$10.90**	**$12.50**

MARTIN SENOUR VARNISHES

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Dull Finish	**$8.80**	**$9.20**	**$9.60**	**$10.60**	**$12.20**
Varnoleum	**8.80**	**9.20**	**9.60**	**10.60**	**12.20**
Cabinet Rubbing ...	**9.10**	**9.50**	**9.90**	**10.90**	**12.50**
Durable Outside Spar	**10.50**	**10.90**	**11.30**	**12.30**	**13.90**
Elastic Oak	**5.50**	**5.90**	**6.30**	**7.30**	**8.90**
Extra White Damar	**8.50**	**8.90**	**9.30**	**10.30**	**11.90**

EXCELLO INTERIOR

Flat Paste White

An intense white with wonderful hiding and covering qualities. Very smoothly ground. When thinned with Turpoline or Turps produces a splendid flat paint or enamel undercoating.

Price .... $22.50 per cwt.

25 lbs. in each pail.

EXCELLO EXTERIOR

A snow white zinc lithophone paste for exterior use. Covers more—hides more—lasts longer than lead. Non-Poisonous. A wonderful product.

Price .... $24.00 per cwt.

25 lbs. in each pail.

M. S. PAINTERS' STOCK WHITE

A heavy-bodied, semi-made paste, made of pure white lead, zinc oxide, bleached linseed oil and turpentine drier. Reduce with either oil or turpentine to produce a gloss or flat finish as desired. Mixes smoothly at once, without sediment, lumps or streakiness.

PRICE LIST

Bbls., per gallon	**$7.80**
5 gallons	**$8.10**
1 gallon	**$8.30**

M. S. ALUMINUM PAINT

Made from a pure high grade aluminum powder, combined with a special liquid that will withstand heat, remaining elastic, and imparting an untarnishable finish.

	1 Gal.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.	1/32 Gals.	1/64 Gals.
Each	**$11.70**	**$6.00**	**$3.04**	**$1.62**	**$ .86**	**$ .52**	**$ .30**

M. S. GOLD PAINT

A brilliant and extremely permanent ready mixed gold paint. The liquid used in this paint is unaffected by extreme heat, making this an extremely permanent coating for radiators, steam pipes, and other metal work, subjected to heat.

	1 Gal.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.	1/32 Gals.	1/64 Gals.
Each	**$18.20**	**$9.26**	**$4.70**	**$2.42**	**$1.28**	**$ .72**	**$ .40**

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

"MONARCH" PURE WHITE LEAD IN OIL

Government Standard

On account of the fineness of Monarch Lead it takes more oil in the grinding and also requires a greater amount of oil to reduce it to brushing consistency than ordinary lead. Monarch lead on account of its purity and fineness has excellent hiding power, works nicely under the brush and will cover more surface than other leads. We carry large stocks of this lead and fill orders from old and well aged stock.

Stocked in 25 and 12½-lb. irons.

Price List

MARKET

Special Price in Ton Lots, One Delivery

"DECORATOR'S PURE" WHITE LEAD IN OIL

Government Standard

Very white and finely ground in strictly pure refined linseed oil. Guaranteed to contain nothing but strictly carbonate of lead, ground with pure refined linseed oil.

Stocked in all Sizes

Price List

MARKET

Special Price in Ton Lots, One Delivery

COMPOUND WHITE LEAD

A composition of White Lead, Zinc and Filler; a popular compound for general use.

1 and 2 lb. tins. Per lb.	.33
5 lb. tins. Per lb.	.29

Martin-Senour Red Seal White Lead

A PURE, GOVERNMENT STANDARD WHITE LEAD

RED SEAL White Lead breaks up much easier than lead made under the pan dried process, thus saving considerable time and cost in labor. It is finer ground, is absolutely white, and is not stringy. The oil will not separate from the lead and there is no danger therefore of this lead going hard in the package.

RED SEAL White Lead, under any test, will be found smoother, easier working, and to have a greater covering capacity than any lead manufactured uuder the old process.

Stocked in all Sizes

Price List

MARKET

Special Price in Ton Lots, One Delivery

LINSEED OIL

When purchasing Linseed Oil from us you are assured of absolutely pure oil at best market prices.

Our Dealers' Handy Bottles are a convenient package for resale: attractively labelled.

Bbls and less, per bbl.....Prices on application

Raw or Boiled

No. 4 Bottles, per doz.	$6.00
No. 8 Bottles, per doz.	3.12
No. 16 Bottles, per doz.	1.40

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MARTIN SENOUR COLORS IN OIL
TRIPLE GROUND

Made from the choicest raw materials, finely ground in pure linseed oil. These goods meet with the highest approval of the master painter and decorator, as they are unexcellent in tinting strength, purity of tone and fineness of texture.

Put up net weight in one and five pound soldered top with slip cover can.

Color	
Lamp Black	.80 per lb.
Ivory Black	.80 " "
Drop Black	.60 " "
Lettering Black	.80 " "
Raw Umber	.60 " "
Burnt Umber	.60 " "
Raw Sienna	.60 " "
Burnt Sienna	.60 " "
Vandyke Brown	.70 " "
Japanese Brown	.76 " "
Deep Cerulean	.99 " "
Prussian Blue	1.80 " "
Ultra. Blue	1.20 " "
Chrome Green L.	.60 " "
Chrome Green M.	.60 " "
Chrome Green D.	.60 " "
Olive Lake	1.38 " "
Deep Olive	1.02 " "
Paris Green	1.22 " "
Imp. Green Light	.64 " "
Imp. Green Med.	.64 " "
Imp. Green Dark	.64 " "
Peacock Green	1.98 " "
Chrome Yellow L.	.88 " "
Chr. Yellow Med.	.88 " "
Chr. Yellow Dark	.88 " "
Chr. Yellow Or.	.88 " "
Indian Yellow	1.98 " "
Orange Lake	1.98 " "
Yellow Ochre	.48 " "
Golden Ochre	.44 " "
F. Yellow Ochre	.48 " "
Indian Red	.58 " "
Venetian Red English	.48 " "
Tuscan Red	.76 " "
Pre. Non-Fading Red	1.52 " "
Am. Vermilion	1.02 " "
Eng. Vermilion	3.34 " "
Red Lead	.48 " "
Rose Madder	1.26 " "
Dragon Red	1.50 " "
Sign Writers' Red	1.40 " "
Rose Lake English	.90 " "
Turkey Red	.98 " "
Permanent Crim. Lake	1.26 " "
Zinc White	.40 " "

DRY COLORS
High Grade Only
GERMANTOWN
BEAR LAMP BLACK

On the market for generations, Germantown Bear is the recognized standard Lamp Black.

	50-lb. Cartons	Less
1 lb. pkgs., Per lb.	$ .48	$ .50
½ lb. pkgs., Per lb.	.62	.64
¼ lb. pkgs. Per lb.	.78	.80

DROP BLACK

Per lb.	$ .34	$ .40

	Bbls. Per lb.	100 lbs. Per lb.	Less Per lb.
BLUES—			
Ultramarine	$ .26	$ .28	$ .30
Italian	1.14	1.16	1.17
Cobalt	.92	.94	.95
Prussian	1.32	1.34	1.35
BROWNS—			
Vandyke	.26	.28	.29
Raw Sienna Italian	.26	.28	.29
Burnt Italian Sienna	.26	.28	.29
Raw Sienna	.12	.14	.15
Burnt Sienna	.12	.14	.15
Raw Umber	.12	.14	.15
Burnt Umber	.12	.14	.15
Burnt Turkey Umber	.23	.25	.26
GREENS—			
Brunswick	.24	.26	.27
French Imperial	.34	.36	.39
LAKES—			
Rose Lake			1.20
LEADS—			
Genuine Red	.22	.24	.27
Genuine White	.26½	.28½	.32
MINERALS—			
Genuine Orange	.24½	.26½	.30
Litharge	.21	.23	.26
PINKS—			
Rose	.46	.48	.49
REDS—			
American Venetian	.09	.11	.12
Indian No. 1	.13	.15	.16
WHITES—			
Silver	.10	.12	.14
WHITINGS—			
English Gilders	.06	.08	.09
YELLOWS—			
No. 1 Chrome	.28	.30	.31
VERMILION—			
American	.46	.48	.49

DRY COLORS CONTINUED ON NEXT PAGE.

COLORS IN JAPAN

On enquiry, we will forward particulars of Japan colors. For coach and automobile work

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DRY COLORS

High Grade Only

OCHRES—	Bbls. Per lb.	100 lbs. Per lb.	Less Per lb.
American Yellow	.10	.12	.13
French Spruce	.12	.14	.15
Golden	.18	.20	.21
White	.13	.15	.16
OXIDES—			
Can. Red	.10	.12	.13
Venetian Red	.09	.11	.12
No. 1 Purple	.15	.17	.18
Red Schoolhouse Red	.16	.18	.19

PLASTER PARIS

	Bbls.	100 Lbs.	Less
Hammerbrand, 320-lb. Gr. Bbls., per bbl.	$14.50		
Hammerbrand, 320-lb. Gr. Bbls., per lb.		.06	.07

DENTAL PLASTER

Hammerbrand, 320-lb. Gr. Bbls., per bbl.	$16.50
Hammerbrand, 160-lb. Gr. Bbls., per bbl.	$10.00
Hammerbrand, per lb.	.08

MORTAR COLORS

Black Double Strength, per cwt.	$21.20
Red Double Strength, per cwt.	16.20
Chocolate, per cwt.	$24.00
Buff, per cwt.	16.20
Brown, per cwt.	16.20

TURPENTINE

We stock only pure spirits of gum turpentine. Bottles are neatly and attractively labelled.

Bbls. and less quantities, per gal.	Prices on application
¼ Gal. Bottles, per doz.	$7.26
⅛ Gal. Bottles, per doz.	$3.76
1/16 Gal. Bottles, per doz.	$2.00

TURPENTINE SUBSTITUTE

A low priced reducer for cheap grades of paints and stains.

Bbls., per gal.	$ .74
Less quantities, per gal.	.80

METHYLATED SPIRITS AND WOOD ALCOHOL

In ordering advise us if you wish these spirits for cutting and reducing shellac varnish, or for other purposes, and we will see you are supplied with the grade most suitable for your requirements.

Drums, per gal.	$2.20
Less Quantities, per gal.	$2.40
¼ Gal. Bottles, per doz.	$8.64
⅛ Gal. Bottles, per doz.	$4.50
1/16 Gal. Bottles, per doz.	$2.40

GLAZIERS' PUTTY

We specialize in Glaziers' Putty which is manufactured for us to our own specifications, "up-to-a-standard," not "down-to-a price." Quality considered, our Putty is the cheapest on the market.

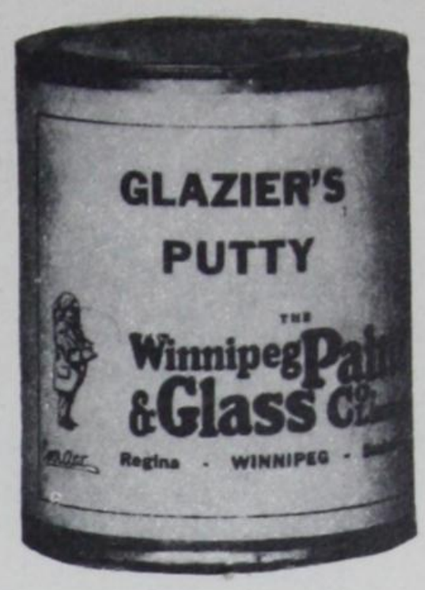

PRICE LIST

Bbls., per 100 lbs.	$8.20
100 lb. Irons, per 100 lbs.	$8.70
25 lb. Irons, per 100 lbs.	$9.20
12½ lb. Irons, per 100 lbs.	$12.00
5 lb. Tins, per 100 lbs.	$13.00
1 lb. Tins each	.18

PURE LINSEED OIL PUTTY

Our Pure Linseed Oil Putty is made from English Whiting, white lead and pure linseed oil. It positively will not discolor any paint applied over it. We make it a point to carry only limited stocks of putty, assuring you of fresh putty which will work nicely and not require a lot of mixing.

PRICE LIST–

Bbls., per 100 lbs.	$10.20
100 lb. Irons, per 100 lbs.	$10.70
25 lb. Irons, per 100 lbs.	$11.20
12½ lb. Irons, per 100 lbs.	$14.00
5 lb. Tins, per 100 lbs.	$15.00
1 lb. Tins each	.20

DUSTLESS FLOOR OIL

A high grade oil dressing for soft or hardwood floors. It brings out the grain of the wood and produces a beautiful finish. Especially adapted for use on home, school, church, store and public building floors, subject to hard wear. Absolutely eliminates all floor dust troubles.

DUSTLESS FLOOR OIL is easy to apply either with a soft cloth, mop or floor oiler. For best results we recommend using our Universal Floor Oiler for this purpose.

PRICE LIST

Bbls.	per gal.	$1.00
5 gallons (can included)	each	6.00
1 gallon (can included)	each	1.50

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SHINGLE STAIN OILS

CREO-LAC OIL

This is the same oil as is used as the thinner in our Creo-lac Shingle Stain, compounded from Linseed Oil, Creosote and dryer. To those who prefer making their own stain, this liquid and pure oil colors (or lamp black for a black stain) will produce a stain that will stand up for years.

Barrel Lots, per gallon..... $ 1.40
Less Quantities, per gallon..... 1.60

Containers Extra.

CREOSOTE OIL

We handle only Cresote of a refined grade and suggest that for a thinner shingle stain you beware of other than Creosote.

Barrel Lots, per gallon..... ~~$ 1.20~~
Less Quantity, per gallon..... 1.40

M.-S. PASTE WOOD FILLER

For filling all open grained hardwoods this article is one of the best on the market. Stocked in light, dark, golden oak, etc.

Special shades made to order.

PRICE LIST

		25 lb.	12½ lb.	5 lb.	1 lb.
Natural	per lb.				
Walnut or Dark Wood	"				
Mahogany	"				
Golden Oak	"	.32	.34	.36	.50
Mahogany N.	"				
Antique Oak	"				
Ebony	"				

M.-S. LIGHT LIQUID FILLER

When properly applied, this filler produces a more desirable undercoating for varnish on interior finishing than a coat of ordinary shellac.

PRICE LIST

1 gallon. Per gal. $4.60
½ gallon. Per gal. 4.90
¼ gallon. Per gal. 5.20
⅛ gallon. Per gal. 5.80
1 16 gallon. Per gal. 7.00

ACID STAIN

We can supply acid stains to order. Prices and shade cards on request.

REFINED SHELLAC

We use only the best grades of shellac gums and shellac spirits in the manufacture of our Orange and White Shellac.

Is a four-pound cut and for most purposes will stand considerable reducing.

One gallons and half-gallons put up in stone jugs, smaller sizes are put up in wide-mouthed bottles.

PRICE LIST

		White	Orange
1 gallon jugs	Each	$6.00	$5.50
½ gallon jugs	Each	$3.10	$2.86
¼ gallon bottles	Each	$1.60	$1.58
⅛ gallon bottles	Each	.92	.88
1/16 gallon bottles	Each	.54	.52
1/32 gallon bottles	Each	.36	.34

SHELLAC MIDGETS

The white and orange in the midget size is our regular grade of shellac, simply put up in these small sizes.

PRICE LIST

White, 2-oz. bottles..... per dozen $3.00
Orange, 2-oz. bottles..... per dozen 3.00

BOWLING ALLEY SHELLAC

Bowling Alley Shellac is manufactured from a bone dry white gum shellac and special spirit, and will withstand the severe wear to which shellac is subjected on bowling alleys.

PRICE LIST

1 gallon $8.90

DRY GUM SHELLAC

PRICE LIST

Bone Dry, Bleached White
Superfine Orange } ..... Market Price

RIM AND GASKET SHELLAC

Specially made for the purpose the name suggestsand it is absolutely "a good sticker." In 2-oz. bottles with swab for applying.

Per dozen $3.60

HOUSTON'S ROCK HARD WATER PUTTY

FILLS UP THE CRACKS— DRIES HARD AS ROCK

For filling open cracks, joints, holes and crevices on wood, iron or stone surfaces; especially adapted for use of Painters, Hardwood Finishers and Woodworkers. Floors can be finished the same day the filling is done.

PRICE LIST

1-lb. Carton, each ..... $ .48

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

INTERNATIONAL VARNISH — TRADE ELASTICA MARK. — PRODUCTS

"ELASTICA" FLOOR VARNISH

The Perfect Floor Finish

A very tough, elastic varnish, made especially for floors of public buildings or private houses. It possesses in the highest degree the qualities necessary for a good floor finish.

Does not scratch or show heel marks, is impervious to water, and will stand more and harder use than any other floor finish. Works easily, dries dust free in four to six hours, hardens over night and can be rubbed. On grained, painted or old floors, linoleum or oil cloth, one coat is sufficient. Remove all grease and dirt from floors before applying. Reduce with turpentine when necessary.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal
Each	**$8.70**	**$4.54**	**$2.46**	**$1.40**	**.76**

"ELASTICA" No. 1 VARNISH

For All Architectural Exterior Work

For finishing front doors and all woodwork exposed to the weather, where greatest durability is requisite. Dries free from dust in eight to ten hours. Hardens sufficiently in about five days to admit of being rubbed. Possesses the maximum elasticity attainable in any varnish. Produces a beautiful lustre over natural, painted or grained woods, and may be rubbed with pumice stone and oil to produce an egg shell finish. **Does not mar, scratch white, or spot. Resists atmospheric influences better than any other varnish, is waterproof, and unaffected by hot or cold water.**

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$10.46**	**$5.50**	**$2.90**	**$1.60**	**.84**

"ELASTICA" No. 2 VARNISH

For Finest Interior Work

Extreme paleness and durability are the distinguishing features of this varnish. It works with surprising freedom, covers the maximum surface area, and produces a brilliant, permant gloss finish. Dries free from dust in from four to six hours. May be rubbed in from three to four days to produce an egg shell finish. Especially recommended and intended for finishing finest woodwork in residences, apartments, bank, office and hotel buildings.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$9.64**	**$5.04**	**$2.64**	**$1.46**	**.76**

KWICK-SPAR

Four Hour VARNISH

To meet the demand for a Quick Drying Varnish where time is essential, we have developed Kwick-Spar, which meets the requirements for a tough waterproof film that stands remarkable wear.

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$8.70**	**$4.54**	**$2.46**	**$1.40**	**.76**

"Flattine" Cabinet Finish

This varnish is an improved form of flat or dull drying varnish. Under no circumstances will any of the ingredients settle. It contains no wax or pigment, and dries with a beautiful, velvety eggshell or dull surface, resulting in a tough waterproof finish. It is not recommended for exterior work.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$8.70**	**$4.54**	**$2.46**	**$1.40**	**.76**

"ELASTICA" CABINET FINISH

For Rubbed and Polished Effect

This Varnish is the highest quality that can be produced from the purest and best adapted materials, by the employment of scientific methods of manufacture. It produces a beautiful finish of great durability. Dries free from dust in four hours and can be rubbed within three days, and given a brilliant piano polish, if desired.

Elastica Cabinet Finish does not sweat or gloss up after rubbing, as is the case with most high grade architectural varnishes.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$8.70**	**$4.54**	**$2.46**	**$1.40**	**.76**

I.V. "Oceana" Spar Varnish

FOR BOAT USES

Oceana Spar excels all other finishes or varnishes on the market for use on steamships, yachts, boats, canoes, spars, etc., effectually resisting the action of both fresh and salt water. Does not mar, scratch white, or spot. Resists atmospheric influences better than any other varnish, is waterproof, and unaffected by hot or cold water.

For finishing all woodwork exposed to the weather where greatest durability is requisite. Dries free from dust in eight to ten hours. Hardens sufficiently in about five days to admit of being rubbed. Possesses the maximum elasticity attainable in any varnish.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$10.46**	**$5.50**	**$2.90**	**$1.60**	**$ .90**

I.V. "Elastic Oak" Varnish

INTERIOR

This varnish is suitable for use on general interior work. It is especially recommended for wainscoting, furniture and grained wood. Works freely and dries quickly with a high gloss.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$6.82**	**$3.54**	**$1.84**	**$1.08**	**$ .64**

I.V. "Linoleum" Varnish

I.V. Linoleum Varnish is of the same grade as Elastic Floor and is simply a shade lighter in body, so as to give as pale a varnish as possible for use on linoleum.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$8.58**	**$4.50**	**$2.40**	**$1.34**	**$ .72**

I.V. White Japan Dryer

A white dryer intended for all light colored paints. It is not as strong as Palest White Liquid Dryer, but is similar in other respects.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$5.04**	**$2.66**	**$1.46**	**$ .90**	**$ .52**

I.V. Housepainters' Japan

A brown Japan dryer for mixing with paints and linseed oil which combines readily without curdling. Is strong and reliable. Especially adapted for general use of house painters.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$4.68**	**$2.48**	**$1.40**	**$ .90**	**$ .52**

I.V. BRONZING LIQUID

The best bronzing liquid made, has wonderful covering power; bronze will cover more and cover better. Has a very lustrous finish. Just the article for a high-grade, durable job. This is absolutely the highest grade of bronzing liquid it is possible to manufacture. Used largely by painters for high-class work.

Price List

1 gallon. Each	**$4.54**
½ gallon. Each	**$2.52**
¼ gallon. Each	**$1.40**
⅛ gallon. Each	**.84**
1/16 gallon. Each	**.52**

"Kleartone" Flat Varnish

FOR RUBBED EFFECT

For use where a rubbed effect is desired, without the labor and cost of rubbing. Is used over natural or stained woods, and produces a finish closely resembling a gloss varnish, rubbed. Particularly recommended for use over mahogany or mahogany stained woods, as it does not cloud same. Kleartone Flat Varnish will produce an exceptionally good finish, it is unaffected by water, and, unlike most flat varnishes, does not contain wax or pigment. It does not need stirring and is exceptionally tough and elastic.

Price List

	1 Gal.	½ Gal.	¼ Gal	⅛ Gal.	1/16 Gal.
Each	**$8.96**	**$4.68**	**$2.52**	**$1.46**	**$ .76**

"Stanvar"

WAX LIKE WOOD FINISH

Stanvar is a patented product and is unlike anything on the market.

This product is not a varnish, but an oil finish for use in place of wax. Stanvar, a wax-like wood finish, is superior to wax for wood finishing, inasmuch as it comes in liquid form and is easily applied with a cloth. It requires no polishing with a weighted brush, and produces a beautiful, wax-like finish. It does not have the dangerous slipperiness which is so evident on floors that are waxed, and is not affected by water as is wax.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$8.70**	**$4.54**	**$2.46**	**$1.40**	**$ .76**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

I.V. VARNISH SPECIALTIES
G. P. SEAT FINISH

As the name implies, G.P. Seat Finish is especially made for seats, church pews, etc., where an absolutely flint hard finish that will not crack or allow clothing to stick to it is required.

Price List

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
Each	**$8.70**	**$4.54**	**$2.46**	**$1.40**	**$ .96**

I.V. EXTRA BATAVIA DAMAR

An absolutely colorless varnish for varnishing over wallpaper, etc.

Price List

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.	1/16 Gals.
Each	**$9.54**	**$4.86**	**$2.52**	**$1.40**	**$ .76**

AUTOMOBILE VARNISHES

Each individual varnish listed here has been developed through a varnish making experience of over seventy years by thorough study and painstaking care, to make that product the best that could be made for the purpose.

Descriptive price list mailed on request:

Price List

	1 Gals.	½ Gals.	¼ Gals.	⅛ Gals.
Special Finishing Body	**$12.38**	**$6.46**	**$3.36**	**$1.76**
Finest Durable Body...	**$13.62**	**$7.06**	**$3.66**	**$1.98**
No. 1 Quick Rubbing...	**$10.18**	**$5.32**	**$2.74**	**$1.50**
Pale Quick Rubbing....	**$12.38**	**$6.46**	**$3.36**	**$1.76**

GENERAL PURPOSE VARNISH

A high grade finish, good for all interior upright work.

PRICE LIST

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$5.50**	**$2.96**	**$1.60**	**$ .90**	**$ .60**

W. P. & G. H.P. BROWN JAPAN

A Japan dryer for mixing with paints and linseed oil which combines readily without curdling. Is strong and reliable. Especially adapted for general use of house painters.

PRICE LIST

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
$4.00	**$2.16**	**$1.16**	**$ .66**	**$ .40**

W. P. & G. BEST BLACK JAPAN

This is used where it is desired to produce a baking enamel effect with air-drying goods. Has a brilliant jet black finish.

PRICE LIST

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
$2.70	**$1.50**	**.82**	**.48**	**.32**

I.V. "KLEARTONE" OIL STAINS

Kleartone Oil Stains are labor-saving stains, requiring only one brushing operation. They penetrate as deeply as acid stains; but unlike acid stains, do not require that the wood be sponged first nor sandpapered after staining.

Kleartone Oil Stains are absolutely uniform in shade, and non-fading

Made on a high-grade pigment base, they overcome the trouble of bleeding found in analine stains. Stocked in a large range of colors.

Handsome finished wood slats showing the actual results to be obtained by the use of "Kleartone" Oil Stains on different woods supplied on request.

Covering capacity 700 to 800 square feet per gallon—one coat.

Price List

1 Gallon Can. Each	**$6.30**
½ Gallon Can. Each	**$3.36**
¼ Gallon Can. Each	**$1.90**
⅛ Gallon Can. Each	**$1.08**
1/16 Gallon Can. Each	**.58**

I.V. "KLENSA"
Paint and Varnish Remover

Klensa Paint and Varnish Remover is a fast cutting, slow drying remover, with wonderful solvent power for rapidly removing varnish, paint, enamel, etc.

A REMOVER that cuts rapidly. Converts varnish into a non-sticky, watery jelly. Remains "WET" and workable for several hours after application.

Cleans from the surfaces freely, without "tackiness."

Does not discolor wood or lift the grain. Requires no knife scraping for varnish removing.

Requires no wash—just wipe it off dry and refinish.

Cuts varnish instantly; also saves three-quarters of the work of cleaning.

Stickiness or gumminess of varnish changed to a watery sludge, easily removed.

Price List

1 Gallon Cans. Per gal	**$5.40**
½ Gallon Cans. Per gal	**$3.16**
¼ Gallon Cans. Per gal	**$1.66**
⅛ Gallon Cans. Per gal	**.90**
1/16 Gallon Cans. Per gal	**.54**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Satinette

ENAMEL

Satinette Enamel has a world wide reputation due to the complete satisfaction its use has given on all classes of work. Satinette Enamel, whether it be used on a cottage, city or country residence, mansion, palatial hotel, public building, steamship, yacht, or on furniture, imparts the utmost air of refinement and comfort. It is an old reliable product and is conspicuously beautiful and enduring.

The Cost The expense of decorating is principally labor and the discriminating buyer should not let the price per gallon influence his selection of enamel.

The applied cost of Satinette Enamel is but little in excess of cheap enamels. Cheap enamels give cheap effects; the durability and covering capacity being sacrificed to price, resulting in a wasted expenditure of labor which is false economy.

Satinette Enamel lasts indefinitely and is the cheapest in the long run when beauty of finish and length of wear are considered.

The Enamel SATINETTE ENAMEL produces a surface like choice china; smooth, hard, extremely durable and washable. Satinette gives character to a home, adding emphasis to its architectural beauty and its economy in use makes it available for every grade of work from the modest to the sumptuous.

Satinette Enamel can be used on all kinds of surfaces; Woodwork, Metal, Cement, Concrete, Stucco, Keene's Cement, Plaster, Brick or Stone.

Satinette Enamel meets every demand of modern hygiene for a sanitary surface that is hard, non-porous, washable and durable.

Occasional washing with pure soap and water keeps the surface clean and sanitary and *does not harm the enamel.*

Colors

For interiors only.—Made in Gloss or Egg Shell.

Gloss filled unless otherwise specified.

Covering capacity of 900 to 1000 square feet per gallon one coat.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.	1/32 Gal.
	$15.12	$7.90	$4.12	$2.22	$1.22	.72

I.V. ORNAMENTAL ENAMEL

A high grade enamel intended for use on Iron Bedsteads. Bath Tubs, Flower Pots, Picture Moulding and all articles of household furniture, and for all such purposes where an artizan's product is not required.

Stocked in white and a large number of colors, in gloss only.

Price List

1 gallon. Each	$10.48
½ gallon. Each	$5.38
¼ gallon. Each	$2.78
⅛ gallon. Each	$1.52
1/16 gallon. Each	.90
1/32 gallon. Each	.52

"SATINETTE" ENAMEL UNDERCOATING

For use on Woodwork as Undercoats, on work to be finished with Satinette Enamel. Its covering capacity is remarkable, it flows out with surprising freedom, and produces a satin-like surface, which requires only light sand-papering.

It dries quickly, hard and tough, and does not show brush marks. Satinette Undercoat is much superior to white lead in oil, as it will not affect the succeeding enamel coats. The success of an enamel finish depends upon the preparation of the foundation surface.

Covering capacity 400 square feet to the gallon, two coats.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	$10.54	$5.56	$2.98	$1.60	$ .90

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

I.V. "LACQUERET" VARNISH STAIN

Lacqueret Varnish Stain, stains and varnishes in one sweep of the brush. without showing streaks or brush marks, and flows on with remarkable ease. If an article of furniture or a piece of woodwork is worth doing over at all, it is always worth a coat or two of Genuine Lacqueret. Then one has the certainty of a lasting as well as a pleasing result.

The way it withstands downright abusive treatment has made it the favored varnish stain for all household purposes where endurance is the prime essential.

Made in 8 colors, Gloss Black, Gloss White and Clear.

BLACK LACQUERET Gloss or Flat as desired should be used for refinishing iron fences, wire screens, registers, furnace pipes, and other metal fixtures around the house.

WHITE LACQUERET Gloss or Flat as desired restores many things to their original whiteness, such as picture frames, bath tubs, bedsteads, etc. Clear Lacquerette does not darken the surface over which it is applied. It should be used therefore on all lustreless surfaces which are otherwise in good repair.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.	1/32 Gal.
Colors	**$7.76**	**$4.04**	**$2.16**	**$1.22**	**$ .72**	**$ .38**

I..V "LACQUERET" GROUND COLOR

On old finished floors, and where it is desired to change the shade, apply one or two coats of Lacqueret Ground Color, after which apply Lacqueret of the desired shade.

Price List

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
Each	**$7.76**	**$4.04**	**$2.16**	**$1.22**	**.72**

I.V. "LACQUERET" GRAINING SURFACER

We also sell Lacqueret Graining Surfacer in liquid form. Put up in ½-pint, 1-pint and ¼-gallon bottles. This surfacer is used over Ground Color where a grained finish is desired. After Ground Color is thoroughly dry, apply a coat of Graining Surfacer, and immediately after applying same, run over the surface with a graining tool or graining comb to obtain the effect desired. Allow Graining Surfacer to dry three or four hours and apply Lacqueret of the desired shade. When dry, apply one or two coats Elastica Floor Finish as a protection to the graining and Lacqueret.

STOCKED IN LIGHT AND DARK

Price List

¼ gallons. Each	**$1.08**
⅛ gallons. Each	**.64**
1/16 gallons. Each	**.46**

KWICKWORK (TRADE MARK)

I.V. AUTO FINISHES

A Fast Selling Specialty—Every Auto Owner a Prospect

KWICKWORK AUTO ENAMELS

These enamels make it possible to refinish a car in a highly satisfactory manner without unnecessary delay. One coat is sufficient. It can be applied one day and the car used the next. Its use requires no expert knowledge, simply brush it on; it gives a smooth, glossy surface, and will not show brush marks or laps.

Kwickwork Auto Enamels are exceedingly economical—a little goes a long way—only from one quart to a half-gallon required for the average car. They are ready for use, easy to apply and made to wear, and while particularly made for refinishing Auto Bodies, are most satisfactory for vehicles of all kinds, the appearance of which it is desirable to improve.

Made in Black, White and 12 popular colors.
Color Card sent on request.

Price List

	¼ Gals.	⅛ Gals.	1/16 Gals.
Ordinary Colors. Each	**$3.24**	**$1.72**	**$1.06**
Maroon and Red. Each	**$4.12**	**$2.16**	**$1.22**

KWICKWORK AUTO FINISHING VARNISH

When the finish on car is not scratched or marred, but has become dull through usage, this hard-drying, clear varnish of unusual durability, especially made for use on bodies and under parts of automobiles, will restore the original lustre and beauty. Its resistance to weather, mud, dust, dirt, snow, rain and frequent washing is remarkable.

Price List

	¼ Gals.	⅛ Gals.	1/16 Gals.
Each	**$3.02**	**$1.64**	**.90**

KWICKWORK LEATHER TOP ENAMEL

A black finish intended for renewing and preserving all kinds of imitation leather automobile tops and side curtains, especially enclosed car tops. It is not intended for mohair or other uncoated fabrics, nor for upholstery. This is an oil preparation and is therefore very elastic and durable. Dries in twenty-four hours.

Price List

	¼ Gals.	⅛ Gals.	1 16 Gals.
Black. Each	**$2.52**	**$1.40**	**.84**

KWICKWORK AUTO SEAT DRESSING (BLACK)

This is a spirit preparation which gives a black, satin-like, waterproof finish to leather seats and upholstery, as well as leather articles of all kinds. It is easily applied, dries without stickiness in fifteen minutes, and will not fade, rub off nor crack, but leaves the material soft and pliable.

Price List

	¼ Gals.	⅛ Gals.	1/16 Gals.
Black. Each	**$2.40**	**$1.36**	**.78**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MURRAY MADE

Everything for the ROOF

FIBREGUM :

A plastic fibre cement applied with trowel. Effective for all-round roof repairs, caulking seams, and filling joints in wood, metal, brick and stone structures; caulking window and door frames and cementing roll roofing. This material will not crack or dry out, and 75 lbs. spread ¼" thick covers 100 square feet. Available in following containers :

Barrels, approx. 600 lbs.	.16	per lb.
Half Barrels, approx. 300 lbs.	.16	" "
100 Pound Tubs	.18	" "
25 Pound Tubs	.22	" "
5 lb. Cans	.30	" "
1 lb. Cans	.40	" "

LIQUIGUM :

A liquid fibre cement applied with brush. A waterproof, weather-proof fibrous coating equally effective on concrete, brick work, tin, galvanized iron, prepared roofing and any surface exposed to the weather. It contains a large quantity of slow-drying oils which permit expansion and contraction under all weather conditions, and therefore will not peel, crack, or become brittle. Weight per gallon, 14 lbs. One Gallon covers 100 square feet. Available in following containers :

Barrels, approx. 40 gallons	1.50	per gal.
Half Barrels, approx. 25 gallons..	1.50	" "
5 Gallon Cans	1.90	" "
1 Gallon Cans	2.20	" "

ROOFING CEMENT :

A liquid cement without fibre, applied with brush. For patching and re-surfacing leaky roofs. This makes an effective and economical protective coating for any exposed surface. Weight, 14 lbs. per gallon, covering 100 square feet. Available in following containers :

Drums, approx. 40 gallons	1.20	per gal.
Half Drums, approx. 25 gallons	1.20	" "
5 Gallon Cans	1.80	" "
1 Gallon Cans	1.90	" "
1 Pint Cans (cases of 24)	3.80	per doz.

MURCO FOUNDATION COATING :

A Coal Tar Product for waterproofing foundation walls, applied cold with roofer's brush or spray gun. It is vastly superior to any asphalt product for waterproofing. It penetrates readily into the pores of stone, brick or concrete, bonding perfectly with the surface, and is thoroughly resistant to alkaline soil conditions. Will not crack or peel under the impact of stones. One gallon covers 80 to 100 square feet, weight 14 lbs. per gallon. Available in following containers :

Drums, 40 gallons, approx.....	2.00	gal.
Half Drums, 25 gals. approx.....	2.00	"
5 Gallon Cans	2.30	"
1 Gallon Cans	2.60	"

SEAL-TITE

LIQUID ASBESTOS FIBRE ROOF COATING

Is a heavy bodied coating containing sufficient asbestos fibre to bind it and prevent running. A brush coat on metal or ready roofing will make a leaky roof waterproof and add years of life.

	10 Bbls.	5 Gals.	1 Gal.
Per Gal.	$2.00	$2.20	$2.30	$2.60

PLASTIC ASBESTOS FIBRE ROOF CEMENT

Made in paste form, being a combination of Asphaltum and Asbestos. Can be laid on any type of composition or metal roof without disturbing the old covering.

	Bbls.	100 Lbs.	55 Lbs.	12 Lbs.	6 Lbs.
Per Pound	$ .20	$ .22	$ .24	$ .24	$ .30

FOUNDATION COATING

An Alkali resisting coating for the water proofing of cement and stone basement walls.

Bbls	½ Bbls.	5 Gals.	1 Gals.
$2.00	$2.10	$2.30	$2.60

CAULKING MATERIAL

An Asphalt base black paste, for application around door and window frames, making an air tight joint between the frame and the brick or stone. Applied with a gun supplied for the purpose; with orders for barrels or more the gun is supplied gratis.

	5 Gals.	1 Gals.
Per Gallon	$3.40	$3.60

LAP CEMENT

For Laying Rubber Roofing

	1 Gals.	Pints
Per Dozen	$26.40	$3.80

W. P. & G. ASPHALTUM

This is a jet black material suitable for use on all kinds of iron work. Dries quickly with a high gloss. Can also be reduced in body and used as a stain.

PRICE LIST

1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1/16 Gal.
$2.90	$1.56	$ .90	$ .50	$ .34

All Prices Subject to Change Without Notice

THE WINNIPEG PAINT AND GLASS COMPANY

MEDIUM

Kraft Wrapping Paper

STOCKED IN

12″ 15″ 18″ 20″ 24″ 30″ 36″

PRICE - MARKET

This sheet is a sample of 25 lbs. basis.

Basis signifies the weight equivalent to one ream (480 sheets) of 24 x 36 paper.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ALABASTINE
The Permanent Wall Coating

It is used successfully over—

Plaster
Paint
Steel
Paper Board
Gyproc and other Wall Boards

Dry, rough Boards
Hewn logs, if dry
Burlap, if flat
Canvas, if flat
Cotton, if flat
Old wall paper, if dry and flat

Healthful and Sanitary

ALABASTINE makes a room sweet and wholesome. The walls cannot turn sour or become sticky. **ALABASTINE** dries firm and hard to a flat, luminous finish that is free from pores and cannot harbor germs or bacteria. It is a determined, constant foe to the diseases that sometimes lurk in damp wall paper or in old walls that smell sour and remain damp from decomposed glue, fermented flour paste or old kalsomines.

ALABASTINE applied to ceilings and walls that have been prepared properly, brushes on freely, sets slowly and dries out uniformly, and will not rub off, crack or peel.

ALABASTINE is the recognized interior wall finish, due to the fact that it mixes readily in hot or cold water, and is easy to apply.

ALABASTINE is sanitary, and unlike wall papers, there is no pulp or paste in the **ALABASTINE** to decay and become infested with germs.

All surfaces to be coated should be gone over and all damages such as nail holes and cracks filled up level with "Alabastic Crack Filler."

ASK FOR COPIES OF COLOR CARDS, DECORATORS' AID BOOKLETS, ETC.

Price List

	White	Tints
Cases (20 5-lb. pkgs.), cwt.	$19.20	$19.20
Cases (40 2½-lb. pkgs.), cwt.	20.70	20.70
Kegs (100 lbs.), cwt.	16.30	17.30
Bbls. (300 lbs.), cwt.	15.00	16.00

ALABASTIC FILLER
For Repairing Interior Wall Surfaces

In Alabastic Filler the set is controlled to the required extent to facilitate manipulation during application and to insure uniform drying without shrinkage. It dries out hard and firm, becoming an integral part of the wall itself, and provides an ideal foundation for whatever form of decoration that is to follow. It absolutely will not shrink, crack, crumble or develop other imperfections common to Plaster of Paris and less effective materials generally used for patching purposes.

Ready for use by adding cold water.

Stocked in 1 and 5-lb. pkgs.

Price List

5-lb. pkg., per lb.	$ .15
1-lb. pkg., per lb.	.20

DECORATORS' WHITE

We carry a stock of this material put in 50 lb. bags. For industrial and painters' use only.

Price ..... $14.40 Cwt.

ALASIZE

FOR SIZING WALLS

Unequalled for sizing, and as a primer or first coater on all interior surfaces of plaster, wood, burlap, canvas, etc., to be decorated or covered with kalsomine, flat paint, varnish, wall paper, etc.

STOPS SUCTION, NEUTRALIZES LIME, KILLS STAINS SALTPETRE AND EFFLORESCENCE

Gives kalsomine the proper tooth to make it grip, and makes it work smoothly and stay put.

Gives flat paint a uniform matt surface to flow easily and adhere.

Gives wall paper a firmer ground, makes it stick, and by neutralizing the action of lime prevents fading.

Price List

Stocked in 1 and 5-lb. pkgs.

5-lb. pkgs., per lb.	$ .56
1-lb. pkgs., per lb.	.68

ALABASTINE FRESCO COLORS

Put up in 1-lb. packages, they are especially adapted to fresco and scenic work, posters, show cards, and for all purposes where a brilliant opaque water color is desired, or for coloring a prepared white base.

PRICE LIST

P		
Y. M. E.	per lb.	$ .52
A.	per lb.	.68
D. F. R. O.	per lb.	.42
C.	per lb.	1.34
S.	per lb.	.82
G.	per lb.	.68
B.	per lb.	.68
N.	per lb.	.68

Color Card, showing above shades, on request.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MASTER PAINTER PRODUCTS

A group of products manufactured and highly recommended by the Martin-Senour Co. Ltd., in soliciting painters' trade. They are produced to meet the exacting requirements of the master painter, who on first trial will quickly recognize high quality, with economy, in their use.

M. P. Products are most suitable for finishing or refinishing such institutions as—churches, schools, hospitals or apartment blocks and office buildings. Also such industrial plants as dairies, creameries, bakeries, breweries, etc.

Master painters will be especially interested in these finishes when larger painting contracts are secured.

Commencing with Wall Primer and Sealer, which primes and seals new walls under the one treatment, the surface may be built up to produce a Flat or Semi-Gloss finish. Very often only two coats are required for desired results. (One of Wall Primer and Sealer and one of finishing coat). Stippled effects are produced with the use of Stippling white.

The full line of Master Painter Products include :—

Wall Primer and Sealer
Wall Finish Flat
Wall Semi-Flat
Wall Semi-Gloss
Stippling White
Glazing Liquid
Porcelain Enamel Undercoat
Porcelain Enamel
Quick Gloss
M. P. Special Floor Varnish
M. P. Durable Interior Varnish
M. P. Special Spar Varnish
M. P. Satin Finish Varnish
M. P. Four Hour Floor Varnish

AQUA-LITE

A PASTE PAINT IN OIL
"Mix it with Water"

Aqua-Lite is a Japan bound washable flat paint for interior and exterior use, giving a smooth and absolutely flat finish

Aqua-Lite may be used in the home on walls and ceiling with entire satisfaction. When used in warehouses, factories, on wood, brick, cement or stucco it gives excellent results.

For outside use, Aqua-Lite should be reduced with Aqua-Lite Thinner in order to assure proper waterproofing qualities.

A strong recommendation for Aqua-Lite is in the fact that it may be applied on surfaces that are not entirely free from moisture, such as, new plaster and concrete walls. Ordinary Oil paints applied to damp surfaces cause trouble. Aqua-Lite is therefore the product to specify when such conditions are prevalent.

Here are six other star features that should prove strong talking points in offering Aqua-Lite to the architect, contractor or building owner :—

1. LEAD FREE AND NON-POISONOUS.
2. SANITARY AND WASHABLE.
3. FOR INSIDE AND OUTSIDE WORK.
4. FREE WORKING AND HOLDS A WET EDGE.
5. EFFECTIVE AS A PRIMER OR FILLER.
6. CAN BE VARNISHED.

PRICES

25 lb. Drums	.31 per lb	
Thinner	5 Gals	1 Gals.
Per Gal.	2.20	2.40

LIQUID DA-LITE

A pure white, interior mill white, giving the effect of an enamel finish It can be applied on wood, plaster, iron. brick or concrete.

I. V. LIQUID DA-LITE GLOSS

A superior inside gloss enamel, with exceptional covering or hiding power. While this product was originally intended for the interior walls of factories, schools, warehouses, offices and industrial plants of all kinds, it has now found a ready sale as a general household enamel.

	1 Gal.	½ Gal.	¼ Gal.	⅛ Gal.	1-16 Gal.
Each	$7.80	$4.10	$2.10	$1.10	.70

I. V. LIQUID DA-LITE EGGSHELL

Has the same qualities as Liquid Da-Lite Gloss, but dries with an eggshell finish; very desirable for walls of kitchens, bathrooms and hospitals, as it makes a more sanitary finish than flat, yet has not the high lustre which is objectionable in some rooms.

1 Gallon $7.80

I. V. LIQUID DA-LITE FLAT

A superior flat white paint, that excels in whiteness. spreading and hiding, and is exceedingly durable. An ideal undercoat for Liquid Da-Lite Gloss, or two coats of the flat produce a perfect flat finish.

1 Gallon $7.30

NEW PROCESS
DECOTINT

A SANITARY WALL FINISH FOR USE WITH HOT OR COLD WATER

Decotint is an ideal wall coating for the decoration of all interiors. It gives that soft, velvety, water-color effect so essential to refined surroundings, and can be applied on plaster walls, wood, or any of the various wall boards.

It is manufactured from selected materials, scientifically compounded in dry powder form, so that it only requires mixing with ordinary hot or cold water to prepare it for immediate use.

Decotint is milled in white, attractive tints and rich, deep colors, all of which are intermixable, so that any desired shade may be produced.

It is adaptable to the individual decorative requirements of any class of building and harmonizes perfectly with any style of furnishings.

Painters who have been accustomed to using cold water mixtures should use this product in a thicker consistency, as it jells while being mixed, whereas the hot water goods do not jell until the mixture is cold.

Decotint should stand 30 minutes after mixing before using. Do not use ice-cold water as it will chill the Decotint and prevent best results.

To secure best results we recommend the use of hot water, as it dissolves in hot water more readily than cold water.

DECOTINT—F.O.B. Winnipeg

	2½ lbs.	5 lbs.	100 lbs.	Bbls. (300 lbs.)
Tints Cwt.	$21.00	$20.00	$18.00	$16.00
White ...	$20.00	$19.00	$17.00	$15.00

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

HI-TEX

HI-TEX is the outcome of an exhaustive study of Textural Finish problems, supplemented by innumerable experiments, followed by practical working tests. In offering the finished product to the Trade we are confident that it embodies all the essentials that go to make a good practical decorative medium, and at a cost well within the limitations of the average purse.

HI-TEX is ideal for all types of construction—for fine residences and public buildings because of its quality and beauty—for modest homes and cottages because of its economy and ease of application.

HI-TEX may be applied over plaster, wall board, concrete, wood or any solid surface, and affords an unlimited range of decorative effects in both texture and color.

HI-TEX is manufactured in dry powder form and simply requires mixing with ordinary cold water to prepare it for immediate use. It may be readily tinted any color desired during the mixing operation.

The mixture is then spread evenly over the wall surface with a brush and manipulated with brush, sponge or other suitable implement in order to develop the textured and relief effects desired.

A copy of our direction folder giving full and complete instructions for using Hi-Tex is enclosed in every container.

Price 50 lb. Sacks	**.38**	**per lb.**
4 lb. Pkgs.	**.44**	**" "**

SEMEX

SEMEX Water Paint is especially designed for painting surfaces of semi-enclosed buildings and other structures not fully exposed to the elements.

Open-ended sheds, roofed freight depots, passenger platforms, shipping platforms, light and air shafts, shelters, wagon sheds, grandstands, amusement pavilions, and many other types of partly enclosed buildings where the painted surfaces have some little degree of protection from the weather, lend themselves readily to the use of SEMEX.

SEMEX has good light-reflecting properties, keeps lighting bills down, and helps to maintain clean and sanitary surroundings. It is an excellent fire retardant, affording a fair measure of protection against the spread of fire.

Price 100 lb. Sacks ..... $20.00 Cwt.

MURALO CEMENT PAINT

Muralo Cement Paint is based on the cement principle. White Portland Cement, the principal ingredient, is the ideal basic material for a protective coating that will bond perfectly with the surface on which applied. The addition of chemical compounds provides the necessary waterproofing and binding properties. All colors employed are permanent, lime-proof and light-proof.

Uses: Muralo Cement Paint is especially designed for painting concrete, cement, stucco, brick, unglazed tile, cinder block, stone, sand finished plaster and other unpainted porous masonry wall surfaces, outside and inside, all types of buildings.

Coverage: Six pounds of Muralo Cement Paint mixed to proper consistency makes one gallon of paint that will cover 150 square feet, where surface conditions are ideal. On very rough or extremely porous surfaces, the coverage will be less.

	100 lb. Kegs	Less
White	.28	.32
Green No. 77	.44	.48
Other Colors	.30	.34

SALAMANDER

Interior Cold Water Paint

In Salamander Cold Water Paint we have succeeded in perfecting a high grade snow-white paint suitable for coating all interior surfaces where light-reflecting, fire-retarding and sanitary surfaces are essential factors. It is manufactured in dry powder form, under improved processes that make possible the economic production of a Cold Water Paint to meet industrial requirements. Ready for immediate use when mixed with cold water, and may be applied with brush or spraying machine.

Particularly adaptable for painting the interiors of factories, warehouses and all types of buildings where the cost of oil paint is usually considered prohibitive. It may be applied to wood, brick, stone, concrete, and other cement surfaces that are in clean, dry condition.

Salamander Cold Water Paint is made in White only and packed in well-coopered 100-pound kegs and 400-pound barrels.

Price 400 lb. Bbls.	**$12.00 Cwt.**
100 lb. Sacks	**12.00 Cwt.**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BRONZE POWDERS

High Grade only for every class of work. Special care is taken in the importing of our Bronzes to insure high quality.

GOLD BRONZE

For various purposes where a bronze finish is required; not recommended for outside work. We carry the very best obtainable.

Price List

Gold Bronze, 1-lb. tins	**$1.50**
Gold Bronze, ½-lb. tins	**$1.70**
Gold Bronze, 1-oz. papers	**$2.50**
Pale Gold Lining Bronze, 1-oz. papers	**$8.00**

ALUMINUM BRONZE

Price List

	Per lb.
Aluminum Bronze (Pure Metal Leaf) 1-lb. tins	**$1.50**
Aluminum Bronze (Pure Metal Leaf), ½-lb. tins	**$1.70**

SHEFFIELD GOLD & SILVER BRONZE ENAMEL

We Give Free

With a 2 dozen carton of Ready-mixed gold or silver Enamel, the handiest all-steel, self-selling and stock keeping hanger that can also be stood on counter (beautifully lacquered and decorated). Is a **Real Silent Salesman.**

	Man.	Sask.
15c (1 oz. bot.,, brush included), list	**$2.40** doz.	**$2.60** doz.
25c (2 oz. bot., brush included), list	**$4.00** doz.	**$4.30** doz.

GOLD AND ALUMINUM LEAF

We wish to call your attention to our complete line of gold and metal leaf. They are the very best grades on the market, and we guarantee their quality.

Put up in packs of twenty books.

Price List

	Per Package	Per Book
Loose	**$20.20**	**$1.20**
Transfer	**$20.80**	**$1.36**
English Transfer	**$27.00**	**$1.50**
Aluminum	**$4.50**	**.40**

SHEFFIELD

BRONZE POWDER ASSORTMENT

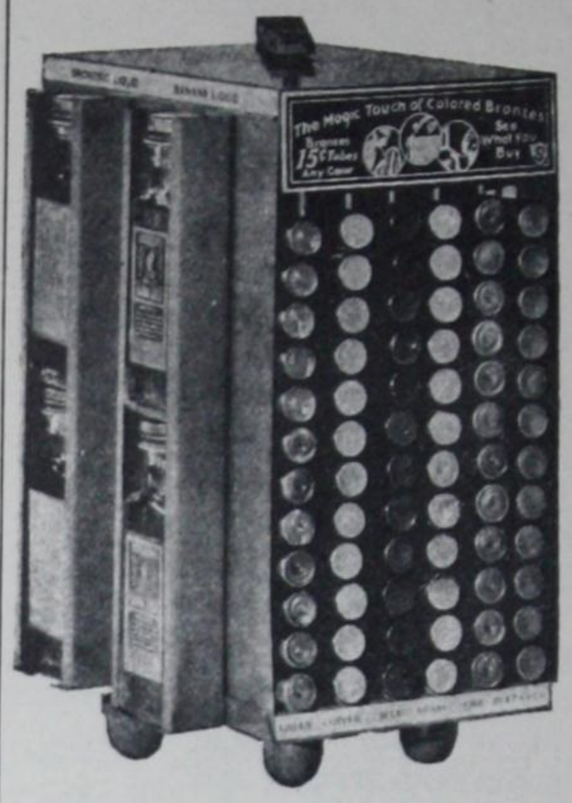

In Large Glass Tubes

That Plainly Show the

Color and Quality of

Their Contents

	price complete. Man.	Sask.
6 tubes Brass		
6 tubes Fire		
6 tubes Copper		
6 tubes Green		
6 tubes Blue		
12 tubes Palegold		
12 tubes Deepgold		
12 tubes Aluminum		
24 (2 oz. bottles) Banana Liquid		
24 (2 oz. bottles) Bronzing Liquid	**$22.80**	**$27.30**

REFILLS

Bronze Powder Refills (any color)	**$2.40**	**$2.50**
Bronzing or Banana Liquid Refills	**$2.40**	**$3.36**

SEE WHAT YOU BUY!

You can now do away with ounce papers and let people see!

4 oz. - Packed 2 dozen in nested carton

8 oz. - Packed 1 dozen in nested carton

SHEFFIELD

PAINT and VARNISH REMOVER

WE GIVE YOU!

With every 2 dozen carton handiest all-steel, hanger that can also be stood on counter

	Man.	Sask.
15c (4 ounce bottle)	**$2.40**	**$2.60**
25c (8 ounce bottle	**$4.00**	**$4.20**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SHEFFIELD
"SLIDE-OFF WATER"
Complete Transfer Sets
"IN WATER-PROOF OILS"

Two envelopes of each of 33 patterns and four of the card table sets.

	Man.	Sask.
Complete Asst. each	$19.80	$20.00
Refills— Per dozen	3.60	3.60

SHEFFIELD
Patching WOOD

Is a super-modern **processed wood**, soft, pliable, and applied like putty.

Patching-Wood is ready for instant use- and hardens quickly into wood.

	Man.	Sask.
¼ lb. Cans	$5.04 doz.	$5.04 doz.
Jumbo Tubes	4.00 "	4.00 "
Pound Cans	14.40 "	14.40 "

SAPOLIN GLASS FROSTING

A specially prepared liquid for obscuring any kind of glass, such as church and school windows, cabinet door lights, etc., giving an appearance similar to sand blasting. 1 dozen in display carton.

Tinlets, per doz.	$6.00
½ Pint Size, per doz.	$9.30

SMALTS

For sign painting and other decorative work, giving the appearance of a sanded surface. In Midnight Black, Chrome Green, Medium Maroon and Dark Blue.

50-lb. Boxes. Per lb.	$ .30
Less, per lb.	.34

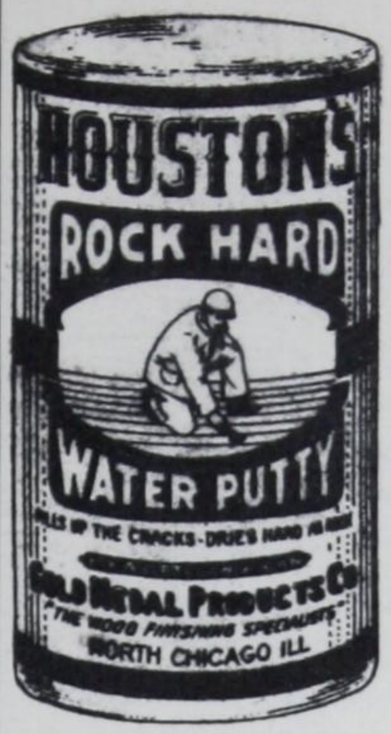

HOUSTON'S ROCK-HARD WATER PUTTY

In powder form, it is merely added to cold water and mixed to the consistency of ordinary window putty before being applied. Rock hard when allowed to dry, it will not shrink or crumble. It resists swelling, and can be stained, varnished or painted. It will adhere permanently to cracks in wood, cement, plaster, composition, stone and similar materials.

Sizes and Prices

Size of Package lbs.	No. in Case	Weight of Case, lbs.	Per lbs.
1	100	125	.48
5	20	125	.46

COAL TAR AND PINE TAR

(Containers Included in Price)

	Pine Tar	Coal Tar
Bbls., per gal.	$1.42	
Bbl., each		$24.42
5 Gallons, per gal.	1.82	1.42
1 Gallon, per gal.	1.92	1.62
½ Gallon, per doz.	12.48	11.52
¼ Gallon. Per doz.	6.50	6.66
⅛ Gallon. Per doz.	3.80	4.24
1/16 Gallon. Per doz.	2.30	3.02

PITCH

Roofing Pitch, bbls., per cwt.	$3.28
Boat Pine Pitch, per cwt.	18.00

Banana Oil

Very pale and suited especially as a bronzing liquid for exterior work, or for bronzing on paper, such as mats for pictures, etc.

1 gallon	each	$8.00
½ gallon	each	$4.50
¼ gallon	each	$2.50
⅛ gallon	each	$1.30
1/16 gallon	per dozen	$8.40

RESIN

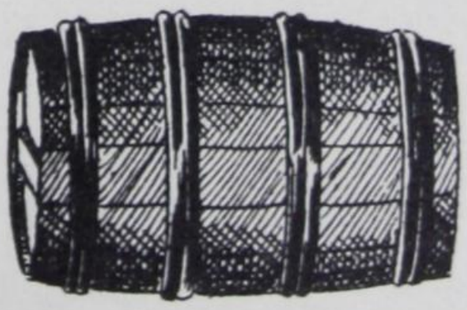

Used by the trade for soldering joints, also as a flux.

Per lb., . - - - - .24

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

O-Cedar Polish

O-CEDAR Polish—A pure oil polish containing no acids nor driers, for cleaning and polishing furniture, woodwork, etc., and for re-treating any polish mop. For polishing furniture best results are obtained when it is used on a damp cloth followed by polishing with a dry one.

SIZE	Packed per Case	Weight per Case	Dealer Cost Doz.
4-oz. O-C. Polish	3 doz.	27 lbs.	$ 4.00
12-oz. O-C. Polish	3 doz.	59 lbs.	8.00
Quarts (40-oz.) O-C. Polish	1 doz.	34 lbs.	24.00
½ Gallons (80-oz.) O-C. Polish	½ doz.	31 lbs.	40.00
Gallons (160-oz.) O-C. Polish	½ doz.	62 lbs.	56.00
5 Gallons (800-oz.) O-C. Polish	1 only	54 lbs.	264.00

LEMON POLISHING OIL

For use on high grade furniture, pianos, phonographs, etc. Scented with essence of lemon, making it very pleasing to use.

Price List

6-oz. bottles, per doz.		$2.40
12-oz. bottles per doz.		3.90
Gal.	Each	$2.60

NUGGET SHOE POLISH

Nugget softens and preserves the leather, gives a brilliant lasting shine and makes shoes waterproof.

Made and stocked in the following colors.

BLACK
WHITE
DARK BROWN

MIDDLE BROWN
TAN
TONY RED

PRICE LIST

Per doz. (1 doz. in box) $2.50

BON TON METAL POLISH

A cream metal polish constantly in solution, polishes quickly, less labor. Contains no acid or injurious chemicals. Retains its brilliancy.

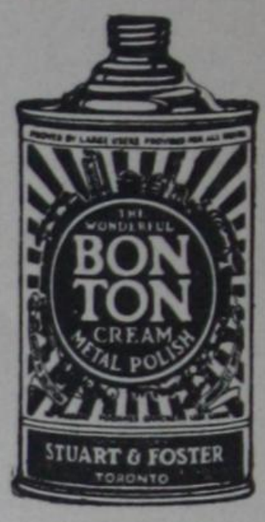

PRICE LIST

1 gallon	Per doz.	$33.60
½ gallon	Per doz.	20.16
¼ gallon	Per doz.	11.42
⅛ gallon	Per doz.	7.06
1/16 gallon	Per doz.	4.70
1/32 gallon	Per doz.	3.00

"SILVO" SILVER POLISH

Especially prepared for cleaning and polishing gold, silver, plated ware or other metals that require a brilliant lustre.

PRICE LIST

	No. 3	No. 6
Per dozen	$2.70	$4.50

"BRASSO" METAL POLISH

For cleaning and polishing metal, brass, copper, nickel, zinc, tin, etc. Contains no injurious chemicals.

PRICE LIST

No. 3	No. 6	No. 12	No. 24
Per doz.			
$2.80	$4.80	$10.40	$22.00

BEESWAX

Commercial Grade, 1-lb. cakes, per lb.	$ .80
Commercial Grade, 1-oz. cakes, per lb.	1.00

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

THREE-IN-ONE OIL

Lubricates and prevents rust; will not corrode or gum. An excellent household article for softening and preserving razor strops and various kinds of leather goods and for oiling sewing machines, guns, etc.

Price List

	Doz.
3½ oz.—3 in 1 Oil, Handy Cans with spout	$5.00
1 oz.—3 in 1 Oil, small bottles	$2.50
3 oz.—3 in 1 Oil, large bottles	$5.00

SIMONIZ "KLEENER"

Lacquer Finishes can be kept more beautiful and lustrous by Simonizing than any other method.

The Kleener removes almost every kind of a stain and discoloration and restores permanently the lustre.

PRICE LIST

Per Doz. Tins **$14.40**

SIMON'S "SIMONIZ"

The trade name "Simoniz" and the process of Simonizing has become famous throughout the world and in all climes by the wonderful results actually produced through their use under all conditions of service.

After using Kleener, the surface is ready for an application of Simoniz which imparts a dustproof, dry and beautiful surface that protects and keeps the finish new and bright for years. Simoniz makes dusting easy; nothing sticks to it—just wipe off the Simoniz surface with a dust-cloth and it always looks new.

Per doz. Tins **$14.40**

ROGERS LIQUID POLISH

See page 8 for particulars of this wonderful polish.

THE FOUR JEWELS

Jewel Wax Polish

For Floors, Furniture, Woodwork, Linoleum, Leather Goods and Automobiles

The best wax on the market, regardless of price. It is guaranteed to be absolutely satisfactory.

1 lb., 2 lb. and 5 lb. tins.

Per lb. ..... .60

Jewel Liquid Wax

For Polishing Hardwood Floors, Furniture ,Linoleum, Interior Woodwork and Automobiles

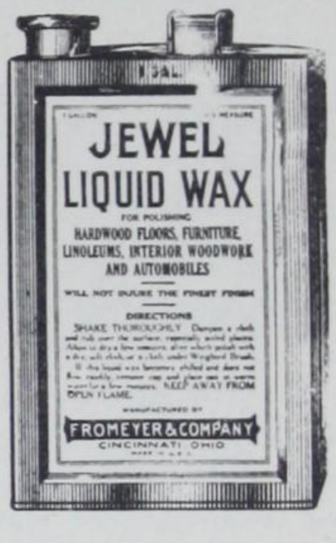

Liquid wax is steadily growing in popularity. Jewel liquid is up to the high standard held so long by Jewel in paste form.

1 gal.	Each		$5.20
¼ gal.	Each		1.70
⅛ gal.	Each		1.00

Jewel Floor Cleaner

For Cleaning and Polishing Waxed, Varnished or Shellaced Floors, Linoleum, Battleship Linoleum and Cork Carpet

Will not injure the fine finish, nor will it remove any of the wax, but **it does take off the dirt.** Prevents heel marks and scratches from showing, and doubles the life of the finish. It does not contain a drop of oil and therefore cannot discolor the wood or hurt the linoleum.

1 gal.	Each		$5.20
¼ gal.	Each		$1.70
⅛ gal.	Each		$1.00

Jewel Powdered Wax

For Dance Floors. Sprinkle lightly and evenly over the floor and the feet of the dancer puts on the polish.

1 lb. tins. Per lb. **$1.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MARTIN SENOUR
PREPARED WAX

THE PERFECT WAX FINISH

M-S Prepared Wax will give an excellent polished finish, and can be used on the finest furniture without injury to the surface. Made purposely for use on floors, woodwork, furniture, automobile bodies, leather goods, linoleums and on any surface where a wax finish is desired.

M-S Prepared Wax does not collect dust, will not scratch and water cannot spoil any surface over which it is applied. Besides producing a perfect polish, it fully protects and preserves all surfaces on which it is used.

Surfaces polished with *M-S Prepared Wax* will not show finger marks, nor is it slippery when used on floors. Dries as hard as a varnish film with wonderful lasting qualities.

In lots of 100 lbs.	.52 per lb.
In lots of 50 lbs.	.56 per lb.
In lots of 25 lbs.	.60 per lb.
Less	.70 per lb.

BOYLE'S OLD ENGLISH WAX

A floor wax of the very highest quality. Nationally advertised and sold with a guarantee. Compounded from the best materials for finishing hardwood floors, making them smooth, but not slippery, and bringing out the natural grain of the wood.

1 2 4 and 8 lb.

Price $1.14 $1.06 $1.00 $1.00 Per lb.

CHAN

Chan Polishing Wax is made by the makers of O'Cedar products. A very hard wax which possesses universal lasting qualities when used on hardwood floors, linoleum, furniture, automobiles, etc. To be used on any wax surface.

	½ lb.	1 lb.
PRICE	$6.40	$12.00 Per doz

JOHNSON'S PREPARED WAX

Made from hard expensive wax, covers a large surface, and gives satisfaction wherever used.

1 and 2-lb. Tins, per lb..... **$1.20**

4 and 8-lb. Tins, per lb..... **$1.10**

JOHNSON'S LIQUID WAX

For Furniture, Floors and Linoleum

¼-Gal. Bottles, each..... **$1.70**

O-Cedar Mops

Nos. 6, 7, 8 and 9

Frame for Nos. 6, 7, 8 and 9

SIZE	Packed per Case	Weight per Case	Cost Doz.
No. 3 O-C. Polish Mop	1 doz.	31 lbs.	$24.00
Triangular Rivetted Steel Centre with 54-inch Handle.			
No. 6 O-C. Dusting Mop	1 doz.	22 lbs.	$12.00
Triangular Slip-on Removable with 54-inch Handle.			
Extra Pads for Slip-on Mop No. 6			$8.00
No. 7 O-C. Polish Mop	1 doz.	24 lbs.	$12.00
Triangular Slip-on Removable with 54-inch Handle.			
Extra Pads for Slip-on Mop No. 7			$8.00
No. 8 O-C. Dusting Mop	1 doz.	26 lbs.	$16.00
Triangular Slip-on Removable with 54-inch Handle.			
Extra Pads for Slip-on Mop No. 8			$12.00
No 9 O-C. Polish Mop	1 doz.	30 lbs.	$16.00
Triangular Slip-on Removable with 54-inch Handle.			
Extra Pads for Slip-on Mop No. 9			$12.00
No. 12 O-C. Dusting Mop	1 doz.	28 lbs.	$24.00
Oblong Rivetted Steel Centre with 54-inch Handle.			
No. 15 O-C. Polish Mop	1 doz.	26 lbs.	$12.00
Triangular Rivetted Steel Centre with 54-inch handle.			
O-C. Mop Handles, 54-inch, weight per doz., 11 lbs.			$4.00

WAXWING. FLOOR POLISHER

No.	Size	Length Out Inches	List Price
15 lb.	5½×9	⅞	Doz. $51.84
25 lb.	5½×9	⅞	Doz. $67.40
Brushes Only provided separately			Doz. $14.40

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

O-Cedar Spray

Instant Death to Insects!

Hand Sprayer

A THREE PURPOSE Insecticide kills Flies and other Insects instantly. Deodorizes. Disinfects.

Large ..... $8.00 Doz.
Small ..... $2.50 Doz.

Sold in Imperial Measure—True Canadian Value

O-CEDAR FOR MOTHS
A Canadian Product

SIZE	Packed per Case	Weight per Case	Doz.
½ Pints (10 oz.) Cans or Bottles	2 doz. Cans Bottles	18 lbs. 28 lbs.	$6.70
Pints (20 oz.) Cans or Bottles	1 doz. Cans Bottles	16 lbs. 24 lbs.	10.08
Quarts (40 oz.) Cans	1 doz. Cans	30 lbs.	16.80
Gallons (160 oz.) Cans	½ doz. Cans	58 lbs.	53.76 Each
5 Gallons (800 oz.)	1 only Can	54 lbs.	19.60 Gal.
30 Gallon Drum (Imp. Measure) (No refund on drums)	Drum	500 lbs.	3.64

CHANNELL'S CATTLE SPRAY
Repels—Soothes—Heals

SIZE	Packed per Case	Weight per Case	
1 Imperial Gallon (160 oz.)	6	62 lbs.	$25.20 Doz.
Half-Barrel or Barrel Approx. 30 and 47 Imp. Gals.			1.70 Gal.

A guaranteed repellant, stainless, will not taint milk or mat the hair and has a pleasant odor.

CREOLIN

A Powerful Disinfectant, Deodorant, Germicide, Purifier and Cleanser.

Creolin, diluted, is harmless to the user, non-corrosive to metals, and is a splendid cleanser. A few drops in the toilet prevents unpleasant odors. Purifies and disinfects Poultry Houses, Stables, Pig Pens and Kennels. Invaluable for Sores and Skin Diseases, and as a wash for Wounds, Cuts and Bruises.

Creolin—	per doz.
7-oz. bottles	$2.70
12-oz. bottles	$3.30
Quart Bottles	$8.30
Gal.	$2.50 Ea

Creo-Sweep Compound

70-lb. drums, each	$4.06
200-lb. drums, each	$7.48
50-lb. drums, each	$3.02
100-lb. drums, each	$4.90
150-lb. drums, each	$6.00
5-lb. tins, dozen	$6.66

Made from thoroughly screened materials and colored a deep green. Creolin used as a disinfectant and deodorant. Lightweight drums prevent soaking or leakage from container.

CHEMICO
DEODORIZER

PERFUMES THE HOME
KILLS BAD ODORS
KEEPS MOTHS AWAY

Price,

Complete with Container

PRICE $4.00 Per dozen

CAR-BOL
SOLIDIFIED *Non Poisonous Non Corrosive*

Sanitary Closet Chemical
and
Household Disinfectant

PRICE $9.00
Per doz.

6 Times Stronger than Carbolic Acid

FLUSH - KLENE

Flush-Klene does one thing only but does it well :

Cleans Toilet Bowls

PRICE $4.80
per doz.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

SHEFFIELD

THREE STAR ★★★ FLOOR CLEANER

Like a flash "Three Star' cleans and bleaches.

One Pound size list price **$4.00** dz.

4 Ounces size list price **12.00** "

BRUSH-NU

RESTORES OLD PAINT BRUSHES

Brush-Nu is a product in powder form which when dissolved in water makes a solution that puts new life into old paint, varnish, shellac and enamel brushes.

PRICE LIST

Midget (2½-oz. net.) Packages, per doz..... **2.20**

SMOKY CITY

Thoroughly cleans wall paper, fresco, calcimine, flat paints, window shades, leaving the surface fresh and bright. Mixed ready for use. Will not fade or stain the most delicate colors.

Smoky City—Weight per doz.

14 lbs., - per doz. **$4.50**

Packed 3 dozen in a case.

BON AMI

BON-AMI

Hasn't Scratched Yet

Cakes, per dozen	**$3.00**
Powder, per dozen	**$3.40**

STOVE POLISH

Produces the maximum amount of shine with the minimum amount of labor. A highly heat-resisting polish. **Will not freeze.** 5½ ounce panel bottles.

Staon Liquid Stove Polish— - - **per dozen** $4.00

The special heat-resisting qualities of Staon recommend it to all who wish quality with cheapness.

Staon Stove Paste— - - **per dozen** $3.00

SUNRAY STEEL WOOL

CLEANS POTS - PANS - ALUMINUM - SINKS - STOVES - GLASSWARE

Especially Manufactured for the Housewife

HOUSEHOLD PACKAGE

Standard Size

Furnished in Grades No. 00, No. 0, No. 1, No. 2, No. 3 or assorted.

Packed in cartons, twelve to the attractive coun-ter display container.

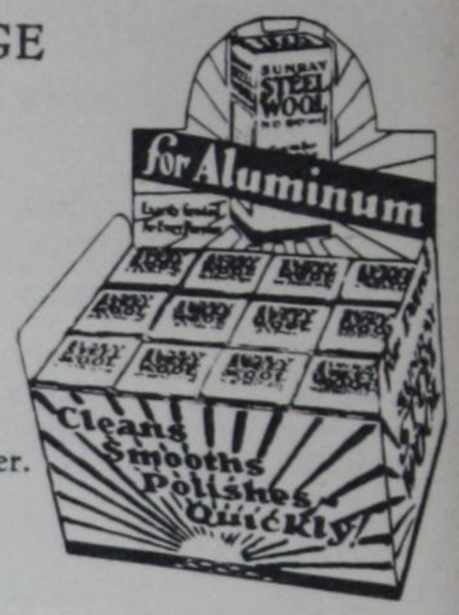

$1.20 per doz.

SUNRAY STEEL WOOL—POUND PACKAGES

GRADE	PRICE
000 Extra Fine	**$1.20**
00 Very Fine	**.86**
0 Fine	**.54**
1 Medium	**.50**
2 Med. Coarse	**.50**
3 Coarse	**.48**

SUNRAY CLEANSER

Each carton of SUNRAY CLEANSER contains six steel wool pads and a cake of soap, especially adapted for cleaning and polishing aluminum ware.

Packed one gross to the shipping case. Weight twenty-seven pounds.

$3.00 per doz.

METAL-BRITE

Liquid Metal Polish

A liquid preparation for cleaning and polishing brass and other polished metals. By repeated tests and comparisons Metal-Brite has proved to polish more quickly and easily, requiring but little rubbing. Will not harden in the package and will keep in perfect condition in any climate.

No. 4	No. 3	No. 2	¼ Gals.	1 Gals.
$3.70	**$5.60**	**$8.40**	**$1.60 ea.**	**$5.20 ea.**
Doz.	Doz.	Doz.		

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SPONGES

Nassau Sheepswool

This is a rather light colored sponge, similar to the Cuba Sponge, It makes a very fine sponge for fine, highly finished surfaces

Nassau Velvet Sponge

As a general utility sponge there is nothing that surpasses the Velvet, because in price it is between the Sheepswool and the Yellow, and for wearing qualities it exceeds the Yellow and in some cases, answers the purpose of a Sheepswool.

Sheepswool,	**6 to 8 Market**	**8 to 10 Market**
Velvet	**6 to 8 Market**	**8 to 10 Market**

PUMICE STONE

	Less	Bbl.
F.F. Very fine, powdered. Per lb.....	$ .16	$ .15
F. Fine, powdered. Per lb.....	.17	.16
O. Medium, powdered. Per lb.....	.17	.16
½ Quick Cutting, powdered. Per lb...	.17	.16
1 Coarse Cutting, powdered. Per lb.	.17	.16
1½ Very Coarse, powdered. Per lb...	.17	.16
Best Grade Lump. Per lb.....	.26	.28

PUMICE RUBBING BRICK

Rubbing down paint and varnish, walls, or any rough surface. An excellent household article for removing ink and other stains from hands.

Eureka. Per lb..... .60

BORAX

Lump and Powdered, per lb..... $ .18

ALUM

Lump ..... $ .28

RELIANCE WATER GLASS

Water Glass is the surest, safest, and best known medium for preserving eggs.

1 lb. cans, 3 doz. to case, per doz.	$2.00
2 lb. cans, 2 " " "	$3.00

CHAMOIS SKINS

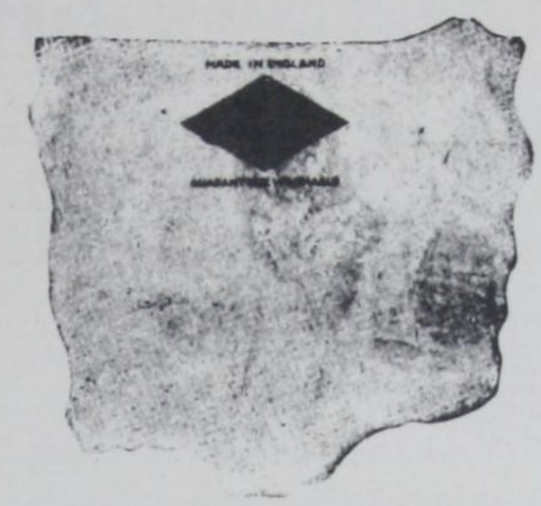

English water tanned skins for many household uses. Unexcelled for window cleaning, polishing silverware and washing automobile bodies.

	Per Doz.
No. 1, 14"x15".....	$12.00
No. 3, 21"x22".....	30.00
No. 6, 24"x25".....	40.00
No. 8, 26"x27".....	46.00

COTTON WASTE

Best Grade. Per lb..... .46

ROTTENSTONE

Powdered ..... $ .40

"GOLDEX" DRAIN PIPE CLEANER

12 oz. tins (1 doz. to shipping carton)..... $4.20 doz.

FLAXOAP

Flaxoap is an absolutely pure linseed oil soap made from cold pressed linseed oil and potash. Contains no animal fat whatever, no free caustic alkali, consequently can be used on the finest finishes without fear of injury. It is especially suited for cleaning automobiles; also floors, woodwork, furniture, etc. Owing to the fact that pure linseed oil is the life of all paints and varnishes, Flaxoap is the best cleaner of all painted and varnished surfaces. It will be found most excellent for cleaning windows, mirrors and cut glass. Does not chap the hands but leaves them soft and pliable.

5 Lbs. 10 Lbs. 25 Lbs. 50 Lbs. Bbls.
Market price at time of purchase.

KILSTAIN

KILLS ALL STAINS IN PLASTER

Applied to stains with brush when boiling hot. Penetrates and neutralizes the stain so that tinting can be done immediately without waiting until the plaster dries. Will not injure the brush.

PRICE LIST

Per dozen $9.80

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Dry Powdered Arsenate of Lead

Containing from 30%-33% arsenic oxide thoroughly in combination with Lead and less than 1% water soluble arsenic. This means that it has maximum killing power, speedy action and unquestionable effectiveness in controlling leaf-eating and chewing insects, and due to its low percentage of water soluble arsenic, there is no danger of burning the foliage. Its unusual adhesiveness is another point in its favor.

The cheaper grades of arsenate of lead are very much coarser in texture and do not readily mix with water. There is always the danger of coarse unmixed portions of the cheap arsenates working their way through nozzle of the spray instead of mixing in the water, consequently small particles or lumps strike the fruit and remain there, which might cause dangerous poisoning.

Prices on Application.

Paris Green (Bergers)

Berger's Pure English Paris Green has by years of use proven its quality. It has become the standard Paris Green the world over. It is light and fluffy, insuring good suspension in the spray tank and thorough covering of the foliage; contains approximately 56% arsenious oxide and less water soluble arsenic than is allowed by the Law. It is the safest and most effective Paris Green on the market to-day. There is no substitute for Bergers Pure Paris Green.

It is put up in the following sized packages.

½ lb. Tins	½ lb. Pkts.	1 lb. Pkts.	1 lb. Tins		
100 lbs. in Case	100 lbs. in Case	100 lbs. in Case	100 lbs. in Case	Drums 25 lbs.	Drums 50 lbs.

(Arsenate of Calcium)
KALCIKILL

Sometimes called **ARSENATE OF LIME**

Kalcikill is an insecticide which is used in connection with Lime Sulphur or Bordeaux Mixture for Spraying purposes. It is made from Arsenate of Calcium, and is a very valuable insecticide. Owing to the nature of this material it makes a better mixture than Arsenate of Lead when combined with Lime Sulphur or Bordeux Mixture.

It does not discolor or thrown down a precipitate and is in dry powdered form, and for this reason, and also for its splendid covering and adhesive qualities, it is a very economical spray.

Owing to it being in dry form it means that no expense is encountered as far as freight is concerned, on water, which is largely found in all paste insecticides.

Cartons ½ lbs.	Cartons 1 lb.	Drums 5 lbs.	Drums 25 lbs.	Drums 50 lbs.	Bbls 100 lbs.

USE THE SPRAY *and* DOUBLE THE CROP

SPRAYIDE (Dry)
COMBINATION SPRAY

WHAT IS IT : WHAT IT WILL DO

A combination Insecticide, Fungicide, and Plant Tonic for Garden and Orchard.

It is a combination of Arsenate of Lime and Bordeaux Mixture in a dry powdered form.

Arsenate of Lime is known to all growers of fruits and vegetables as the one and only insecticide that will successfully combate leaf-eating insects, with the least danger of " burning ".

Bordeaux Mixture, when combined with Arsenate of Lime is a blight preventative and controller of fungus diseases.

In "Sprayide" we offer to the grower a combination of both Arsenate of Lime and Bordeaux Mixture. It is in dry powdered form, and therefore produces a perfectly fresh mixture when prepared for use by the grower. Paste insecticides which contain copper lose effectiveness when allowed to stand for some time before being used. This is because the copper gradually loses activity. The result is that it takes more of the paste material to do a given piece of work than would be the case if "Sprayide" was used.

½ lb. Cartons	1 lb. Cartons	5 lb. Cartons	25 lb. Drums	50 lb. Drums	100 lb. Bbls.

Prices on Application.

G-V No. 1
Continuous Variable Sprayer

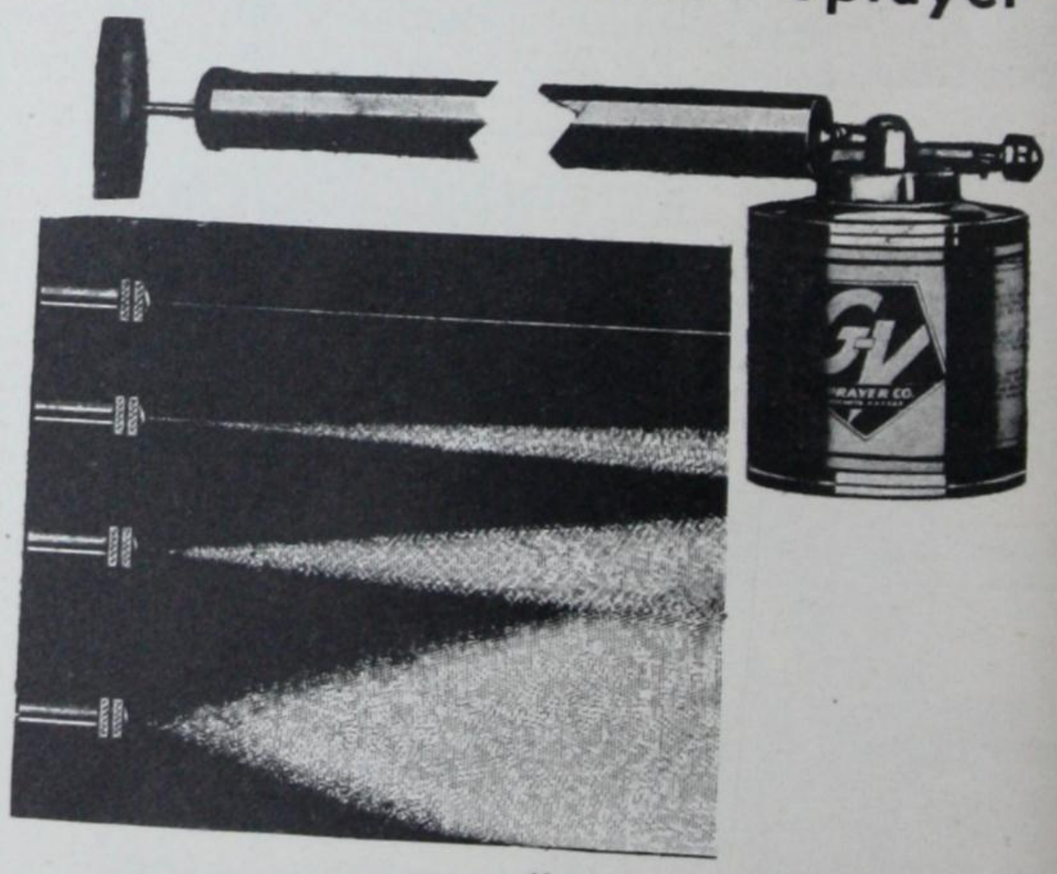

unexcelled for handling of insecticides, disinfectants, deodorants, moth-proofing solutions, penetrating oils, etc. Their large capacity also makes them popular for outdoor spraying of lawns, gardens, shrubbery, etc., as well as for use in barns and poultry houses.

Their continuous spray is quickly varied from a solid stream to a fine penetrating mist by simply turning the nozzle with the fingers. Every sprayer is thoroughly inspected, and tested under pressure.

No. 1 G-V Sprayer, per dozen **$26.40**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

GLOBELITE BATTERIES

Group	BATTERY TYPE	Dealers' Prices F.O.B. Warehouse Winnipeg, Regina, Moose Jaw, Saskatoon, Calgary, Edmonton, Lethbridge	No. Plates Per Cell	Type of Plate	A.H. Cap. at 5 Amp. Rate
1	6-B-11M Globelite	$17.00	11	Heavy	88
	6-X-13M Globelite	$15.90	13	Standard	86
	*6-H-13M Globelite	$19.50	13	Oversize	94
	ARC Type 11	$13.50	11	Standard	70
	ARC Type 13	$15.00	13	Standard	86

*This is a Special 13 Plate Oversize Battery for Ford, Chevrolet, and all Light Cars.

All Batteries in above Group 1 are available in either finger hole, ledge or Standard Ford A containers. Specify when ordering. Finger hole type will be sent if not otherwise specified. For 6 cylinder, 1929, 30, 31 Chevrolet order reversed terminals.

2	CLIMAX 11	$10.50	11	Light	65
	CLIMAX 13	$11.50	13	Light	77
	PREMIER 15	$15.90	15	Light	90

All Batteries in above Group 2 are available only in Universal stub handle containers. Will fit practically all light cars. For 6 cylinder 1929, 30, 31 Chevrolet order reversed terminals.

3	6-B-13M Globelite	$19.90	13	Heavy	106
	6-X-15M Globelite	$19.90	15	Standard	106
	6-D-13M Globelite	$23.90	13	Oversize	117
	ARC Type 15	$18.90	15	Standard	106
	CLIMAX 15	$15.90	15	Light	95
4	12-B-7M Globelite	$25.20	7	Heavy	42
	12-D-7M Globelite	$30.30	7	Oversize	55
5	6-B-15M Globelite	$26.00	15	Heavy	130
	6-D-15M Globelite	$27.90	15	Oversize	142
6	6-D-17M Globelite	$31.90	17	Oversize	166
7	6-B-19R Globelite	$35.90	19	Heavy	170

The truth about replacement batteries. The statement is sometimes made that the battery in an automobile or truck should not be replaced with any other make than with which it was originally equipped.

There is positively no truth in this statement, as any battery of equal capacity as built by Globelite will do the work as well **AND IN A MAJORITY OF CASES BETTER.**

Thousands of Globelite batteries sold as replacements each year should be sufficient proof that there is no better battery than Globelite. It does the work as good **OR BETTER** on any and all makes of cars.

All types of

Farm Lighting Batteries & Parts

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Curling Stones and Accessories

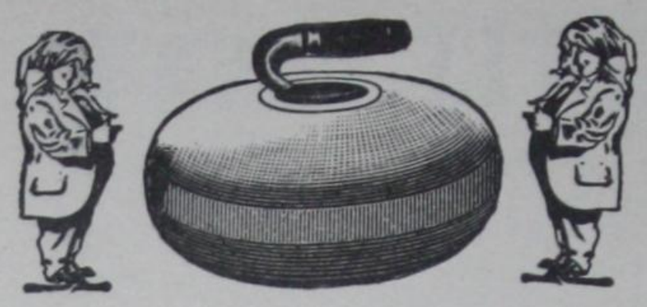

KAY'S EXCELSIOR

Manufactured by Andrew Kay & Co.

Our Kay's Excelsior Curling Stones have been designed and are manufactured to fill the demand for a stone specially adapted to the ice of the Western Provinces. The shape of the stone is such that it has no tendency to rock or roll when thrown up the ice, the weight being evenly distributed in such a way as to give the running surface sufficient grip to hold whatever turn may be given.

RED HONE **BLUE HONE**

Curling Stones are perfect in every way; the pairs are matched in color, weight and running surface and are exceptionally well finished.

Stocked in all weights—36 to 44 lbs.

Each pair is well finished and carefully matched in weight, color and running surface.

Stocked in all weight—36 to 44 lbs.

Price

Fitted with Black Grips, complete. Per pair	**$79.00**
Fitted with White or Colored Grips, complete. Per pair	**$83.00**

Accessories

Handles, complete with Goose Neck and Black Grips	Pair	**$14.00**
Handles, complete with Goose Neck and White Grips	Pair	**$20.00**
Grips, complete with Black Inserts	Pair	**$6.00**
Grips, complete with White Inserts	Pair	**$5.00**
Goose Necks	Pair	**$10.00**
Black Inserts	Pair	**$3.00**
White Inserts	Pair	**$6.50**
Grip Bolt Only	Pair	**.90**
Grip Bolts with Caps	Pair	**$3.00**
Stone Bolts	Pair	**$1.50**
Small Leather Washers	Pair	**.80**
Large Leather Washers, plain	Pair	**$1.80**
Large Leather Washers, with name in gold.	Pair	**$4.50**

We carry inserts in various colors. Colored inserts, grips or handles are the same price as white.

Curling Stone Boxes

PRICE LIST

PINE—Painted, hardwood runners, strong and well made. Each **$15.00**

We are the Largest Dealers of Curling Stones in the World.

in the World.

CURLING BROOMS

The Keystone Curling Broom with Patent Stapled Metal Band is being recognized as the most satisfactory Curling Broom on the Canadian market and the demand is increasing year by year.

The use of the metal band provides strength without materially increasing the weight.

Stapled metal band makes the head of the broom absolutely solid, and the handle being securely fastened to the metal band makes it impossible for the handle to loosen from the head of the broom.

This process of manufacture adds to the cost but in a curling broom, as in most other articles, the best is the cheapest in the end.

Only large selected white basswood handles are used. The toughest corn procurable is used and none but the most competent mechanics are employed in making Keystone Curling Brooms.

Price

Keystone Brooms. Per doz..... **$21.00**

GOOSE NECK

GRIPS



HANDLE

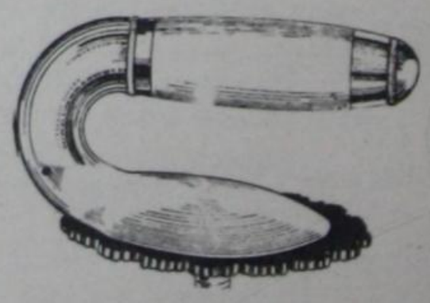

The Best Curlers Use Kay's Excelsior Curling Stones and Keystone Curling Brooms.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

"DUREX"

Coated Abrasive Paper and Cloth Products

for the

Wood - Metal - Automobile Trades

Household Packages

Size 4½ in. x 5 in.
Each package contains 20 sheets assorted fine to coarse for general use.

Per dozen packages..... **$1.90**

Sand Paper

Sheets 8¼ in. x 10½ in., Best Grade

	Quire	Ream
000, 00, 0 .....each	$ .46	$7.50
½ .....each	.48	8.00
1 .....each	.54	9.00
1½ .....each	.62	10.20
2 .....each	.70	11.50
2½ .....each	.78	13.00
3 (coarsest) .....each	.88	14.70

We also carry in stock the following Durex Products :

GARNET PAPER	"HYDRO-GARNET" PAPER
GARNET CLOTH	POUNCING PAPER
GARNET COMBINATION	ABRASIVE PAPER
"DUREXALO" PAPER	EMERY POLISHING PAPER
"DUREXALO" CLOTH	EMERY CLOTH
"DUREXALO" COMBINATION	CROCUS CLOTH
"DUREXITE" CLOTH	DISC CEMENT
"DUREXSIL" PAPER	SCOTCH MASKING TAPE
"HYDRO-DUREXSIL" PAPER	

Catalogue will be mailed on request.

FLAKE AND SHEET GLUES

DRY GLUES

We carry only the best grades of Flake and Sheet Glues for Cabinet Work, Kalsomining, etc.

	Sacks	Less
No. 1 White Flake, per lb.	$ .40	$ .46
Ground Sizing, per lb.	.32	.36
Hardware Sheet, per lb.	.32	.36
Medal Brown Sheet, per lb.	.46	.50

"ADHESO" DRY PASTE

For the Work Room, Factory, School, Home and Office.

"Adheso" is the perfect dry paste powder as it is easily made into a strong cheap paste by simply adding cold water, and can be made thin or thick to suit any purpose.

"Adheso" has many uses, being particularly adapted for Paper Hanging, Label Work. Map Mounting and Paper work of all kinds.

"Adheso" is ideal for Paper Hanging, as it is smooth, slides readily, but once stuck stays stuck. It will not discolor or injure the most delicate or sensitive paper. It is the right paste for Burlap and Linoleum.

"Adheso" is a necessity in every printing plant.

Packed in 1 and 2 lb. Cartons (3 dozen in a case), 5 lb., and 100 lb. Bags and 230 lb. Barrels.

Adheso—1 lb. Cartons, -	per doz.	**$3.90**
Adheso—2 lb. Cartons, -	per doz.	**$7.40**
Adheso—5 lb. Bags, -	per lb.	**.25**
Adheso—100 lb. Bags, -	per lb.	**.22**
Adheso—230 lb. Barrels, -	per lb.	**.22**

BULL DOG GRIP WOOD CEMENT

Bulldog Grip Wood Cement, a casein Glue made from casein (the white part of milk) has proven its strength the world over. It comes in powder form, sweet and clean and remaining so, in use, makes conditions in the glue room ideal.

It is mixed cold and used cold, eliminating the costly heating. Merely dissolve the powder in cold water. With a little stirring it is ready for the day's work in half an hour.

Bulldog Grip Wood Cement is applied with a brush, on any job, in the same manner as ordinary glue. It is adaptable to any and all makes of spreading machines. Inasmuch as it is not in the least affected by weather conditions it can be used on cold stock in winter and is not affected by cooling draughts in the summer months. Rooms may be left open and no hot cauls are required making glue room conditions always ideal.

Put up in 35-lb. pails and 1-lb. pkgs.

Price List

35-lb. pails, per lb.	$ .60
1-lb. pkg., per lb.	.70

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CONGOLEUM

Gold Seal ART-RUGS

CONGOLEUM GOLD SEAL GUARANTEE
SATISFACTION GUARANTEED OR YOUR MONEY BACK
REMOVE SEAL WITH DAMP CLOTH

Modern in Safety. Congoleum Gold Seal Rugs never slip or slide about . . . never kick up or curl at edges or corners.

Modern in Durability. The exclusive **Multicote Process** of manufacture builds in a maximum of wear and ruggedness.

ART RUGS

All Patterns supplied in the following sizes:

Feet	Each	Approx. Wg't. lbs.
9 x 3	**$4.40**	12
9 x 4½	**$6.60**	19
9 x 6	**$8.80**	24
9 x 7½	**$11.00**	30
9 x 9	**$13.80**	35
9 x 10½	**$15.50**	40
9 x 12	**$17.60**	45
9 x 13½	**$20.00**	52
9 x 15	**$22.00**	57

MATS

These attractive patterns are also supplied in Small Mats, for use under the kitchen sink and other places that are subjected to unusually hard wear.

Sizes and prices as follows:

Feet	Each	Approx. W'gt. lbs.
1½ x 3	**$ .66**	4
3 x 3	**$1.50**	7
3 x 4½	**$2.16**	9
3 x 6	**$2.70**	11

COCOA

MATS

Number	Size	List price per dozen 953	954	955
0	12 x 20 inches	....	**$13.20**	
1	14 x 24 inches	**$14.30**	**17.06**	**$23.10**
2	16 x 27 inches	**$19.04**	**22.88**	**30.80**
3	18 x 30 inches	**$23.76**	**28.60**	**38.50**
4	20 x 33 inches	....	**34.54**	**46.20**
5	22 x 36 inches	....	**42.90**	**57.20**
6	24 x 39 inches	....	**52.80**	**68.20**
7	26 x 42 inches	....	....	**80.30**
8	28 x 45 inches	....	....	**95.70**
9	30 x 48 inches	....	....	**111.10**
10	36 x 60 inches	....	....	**168.30**
11	36 x 72 inches	....	....	**202.40**

OIL COATED DRAB BURLAP

This is supplied with a coat of drab color oil paint, and is intended for the further painting of a finish coat the color desired.

Oil Coated Drab Burlap is the commonly used Burlap where dyed is not used, as it may be finished so easily.

Stocked in 36-in., 45-in., 54-in., widths.

Price List

Per Square Yard—Approximately 30 Lin. Yards per Roll

	Full Rolls	Cut Rolls
Per square yard	**$ .54**	**$ .58**

All widths same price per square yard.

DYED BURLAP

Dyed Burlap is adapted for use on any kind of wall surface; over plastered walls, prepared wall boards or plain lumber. It is not necessary to specially prepare the surface in any way—simply apply a good grade of paste to the Burlap and hang in position.

Dyed Burlap has a backing which causes it when pasted to adhere firmly to the wall. It is shrunk in the manufacture and will not shrink on the wall. Dyed with the most permanent colors possible to produce, which together with a high grade of jute (Burlap) makes a permanent and durable decorative material not surpassed at any price.

Colors: Green, Red, Brown

Widths: 36 ins.

Price List

Per Square Yard—Approximately 35 Lin. Yards per Roll

	Full Rolls	Cut Rolls
Per square yard	**$ .90**	**$ 1.00**

Both widths same price per square yard.
All colors same price.

Blue Diamond Wall Size

Blue Diamond Wall Size effectually overcomes adverse wall conditions and at the same time corrects other wall "ailments" which if permitted to continue would detract from the appearance of the finished work. Mixes with cold water.
1 lb. Packages.....per lb. **$ .60**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BRANTFORD ALL-AROUND GLUE

Granulated
The High-Grade Glue in the Convenient Package

An excellent glue for sizing; also for ordinary household use.

Price List

	Per lb.
1-lb. pkgs.	$ .50
½-lb. pkgs.	.60
¼-lb. pkgs.	.70

LE PAGE'S LIQUID GLUE

For wood, glass, iron, leather, paper, cloth, ivory, marble and metals. Tested and proved 1600 lbs. to the square inch.

1 oz. Tubes, per dozen	$8.50
1 oz. Bottles, per dozen	$8.50
½ gill Tins, per dozen	$5.20
1 gill Tins, per dozen	$7.00
½ pint Tins, per dozen	$10.50
1 pint Tins, per dozen	$17.70
1 quart Tins, per dozen	$31.92
½ gallon Tins, per dozen	$50.00
1 gal.. Tins, . per doz....	$95.70
Le Page's Gripspreader Per doz	$1.66

No. 25

Le Page's Gripspreader

No. 27

'PUDLO'
BRAND
CEMENT WATERPROOFING POWDER

"PUDLO" BRAND POWDER

Is an integral waterproofer for all cement and concrete work. It has remarkable **water-repellent,** lubricating and densifying properties, converting the cement into an absolutely impermeable matrix. "Pudlo" must not be confused with inert or chemical fillers and lubricators which have no inherent water-resistant properties.

WHAT THE POWDER DOES

When this waterproofing powder is included in the usual cement mortar or in concrete, in the proportions indicated in next column, it absolutely prevents the penetration of water, moisture, frost, mineral oils, etc.

REMEDYING DAMP WALLS AND FLOORS, LEAKING TANKS, ETC.

The powder is mixed with the cement before the sand or other aggregates are added; the proportions of the waterproofer to the cement are, therefore, definite. This avoids the danger of improper dilution or omission or the variation in the proportion of the waterproofer which almost always occurs when this is added to the gauging water.

For the cure of damp walls and floors, waterproofed cement is completely satisfactory. It is applied in a plastic state to form a jointless and impermeable covering to any surface, however irregular. It adheres so tenaciously to concrete, brick or stone walls that it cannot be forced off, even by the pressure of flood water. (See Specifications C and D in next column.)

"Pudlo" Waterproofer is easy to use and requires no extra labour. Simple directions and measuring cup are sent with each package. Being in dry powder form, it is cheaper to pack and to ship. The waterproofed cement becomes a part of the structure and adds to its strength. Many waterproofing materials do not contribute to the strength, but require complicated and expensive construction to support them against water pressure, and to protect them against injury.

PRICE LIST

Kegs (75 lbs. each).....per lb. **.54**

Information on any particular job gladly given.

The Cheapest and Only Way to Waterproof Cement and Concrete Work—Used all Over the World.

Ask for the Handbook of Cement Waterproofing—post free

"DURA-STONE" SURFACE HARDENER

(Formerly "Hard-N-Tyte")

—A chemical after-treatment for cement surfaces to prevent dusting, making them resistant to the action of oils, lactic acid, etc. Surfaces so treated are very dense and hard and give much longer wear.

Price 50 lb. Packages, **.90** per lb.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

40 BELOW

The supreme Anti-Freeze. Non-evaporating, odorless, lasts all season and longer. Harmless to paint or lacquer, non-corrosive, non-inflammable.

Per Gal. **$3.90**

POLAR LIQUID ANTI-FREEZE

A glycerine, alcohol and water anti-freeze, guaranteed to give satisfaction in the severest weather.

Per Gal. in 1 gal. cans **$2.40**
Per Gal in 5 gal. cans **2.20**

SHELLAC STICKS

All blemishes, holes or other imperfections of any kind can be filled in with these cements to absolutely defy detection, as these cements are made to match all of the most commonly used woods. When filled and the spot carefully sanded to even the surface proceed in the usual manner of finishing and polishing.

These sticks of colored shellac will not soften under sandpaper and can be rubbed and polished without cracking or crumbling. They can be applied with an electric soldering iron or with a palette knife heated in an alcohol flame. A candle, gas flame, match or an oil lamp will soot up and discolor the cement.

1A—Old Ivory
2—Light Oak
5—Medium Oak
25—Medium Mahogany
4—Light Mahogany
12—Transparent
13—Light Transparent
38—Extra Dark Mahogany
20—Medium Walnut
21—Light Walnut
22—Dark Walnut
40—Circassian Walnut

Price Doz. **$6.00**

RUBBING FELT

This is a high grade, white Mexican Felt, made especially for rubbing and polishing;

Price, per lb..... **$5.50**

SHERWIN-WILLIAMS

Linseed Meal and Cake

LINSEED Oil Cake or Meal is crushed Flaxseed, from which all the oil but from six to eight per cent. has been pressed. It is sold either in the form of Oil Cake Ground (or Meal), or Oil Cake Unground. The Ground or Meal is the cake ground into fine particles and is the most used for feeding. Cake is sometimes preferred, owing to it being a little cheaper in price, but it is generally ground by the farmers themselves on small grist mills before it is fed to the cattle.

Splendid Feed for Horses

Price on application

S-W Linseed Meal Best for Hogs

LINGERWETT
Paint and Varnish Remover

"Lingerwett" Paint and Varnish Remover is a fast cutting, slow drying remover, with wonderful solvent power for rapidly removing varnish, paint, enamel, etc.

A remover that cuts rapidly. Converts varnish into a non-sticky, watery jelly. Remains "wet" and workable for several hours after application.

Does not discolor wood or lift the grain. Requires no knife scraping for varnish removing.

PRICE LIST

1 Gal.	½ Gal.	¼ Gal	⅛ Gal.	1/16 Gal.
$6.00	**$3.24**	**$1.80**	**$1.02**	**$ .66**

"ALBAQUA"

Manufactured by
GYPSUM, LIME and ALABASTINE, CANADA, LIMITED
Winnipeg

A Scientifically Prepared
LIME WHITEWASH

Sanitary--Deodorant--"Won't Rub Off"

"ALBAQUA" safeguards the health of both human beings and animals, prevents disease germs from locating and keeps walls and buildings sweet and sanitary.

"Dries Pure White – Overnight"

"ALBAQUA" is a *pure white* Scientifically Prepared Whitewash, *sold in package form*, easy to mix and unequalled for

PANTRYS — HEN HOUSES
BASEMENTS — HOG HOUSES
ATTICS — CATTLE PENS
WOODSHEDS — BARNS and all
GARAGES — Outbuildings

"Easy to Apply – Quick to Dry"

"ALBAQUA" is much easier to mix and apply than ordinary whitewash and will *NOT* rub off. **Sold in 5-lb. and 10-lb. Packages; also in 200-lb. Barrels.**

Barrels,	Each	**$16.20**
10-lb.	Each	**$1.04**
5-lb.	Each	**.64**

MURIATIC ACID

Used as a soldering flux on tin and galvanised iron.

	1 Gals.	¼ Gals.	⅛ Gals.
Price Each	**$3.90**	**$1.30**	**.76**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Simms BRUSHES White-Band

EVERY ITEM LISTED IN OUR BRUSH SECTION IS CARRIED IN STOCK AND IS PLANNED TO FILL A PARTICULAR NEED, CHOSEN BY US ON THE BASIS OF OUR LONG AND SUCCESSFUL EXPERIENCE IN THIS BUSINESS. PRICES WILL BE FOUND RIGHT, AND THE SELECTION COMPLETE.

FLAT VARNISH AND LINERS

CHEAP AND MEDIUM PRICED BRUSHES—SET IN RUBBER

THE PATRICIA LINE

315 LARK. (PATRICIA.)

Very First Grade Black Bristle. Nickelled Ferrule. Green Polished Handles with White Band. One of the Patricia Line. Especially recommended for quick drying enamels, small painting jobs around the house.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1¾	1	Doz. **$4.76**
1½	2	1	Doz. **$6.34**
2	2¼	1	Doz. **$8.92**
2½	2¼	1	Doz. **$10.80**
3	2½	1	Doz. **$14.12**

270 WREN.

(MACHINE CHISELLED)

Black Bristles. Tin Ferrules. Beaver tail. Lacquered handles. Best looking low priced brush on the market.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1¾	1	Doz. **$3.74**
1½	1¾	1	Doz. **$4.66**
2	2	1	Doz. **$6.48**
2½	2⅛	1	Doz. **$8.30**
3			Doz. **$10.36**

283 STAR ASSORTMENT.

Small useful brush in attractive Display Box. Blue, Red, Yellow Lacquer Handles.

Contains

3 doz. 1 inch
2 doz. 1½ inch } **$12.52**
1 doz. 2 inch

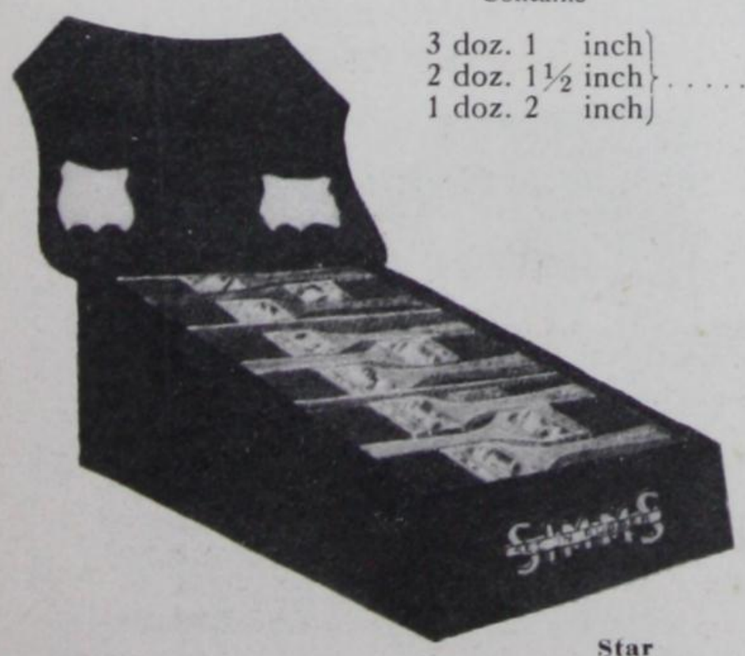

Star Assortment

THE ARTIZAN LINE

250 CROW.

Black Bristles. Tin Ferrule. Yellow Lacquered Handle. One of our best sellers. Used for small painting jobs.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 7/16	1	Doz. **$1.72**
1½	1 9/16	1	Doz. **$2.30**
2	1¾	1	Doz. **$2.76**
2½	1⅞	1	Doz. **$4.32**

240 MARTIN.

(MACHINE CHISELLED)

Black Bristle. Tin Ferrule. Red Polished Handle. Our Best selling low priced Brush.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 11/16	1	Doz. **$2.30**
1½	1 13/16	1	Doz. **$3.00**
2	2	1	Doz. **$4.20**
2½	2	1	Doz. **$5.82**

Assorted on Cards:

⅙ dozen 1 inch
⅓ dozen 1½ inch
⅓ dozen 2 inch
⅙ dozen 2½ inch } Per Card . . . **$4.78**

Cards packed 6 in box.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FLAT VARNISH BRUSHES

301 BLACK CUTTERS. EXTRA LONG CHISEL.

Very High Grade Black Bristles. Nickelled Ferrule. Natural Polished Handle. Made especially for sign painters' work on canvas. Chisel long and sharp for cutting in.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 7/8	1	Doz. $8.64
1 1/2	2 1/16	1	Doz. $10.08
2	2 1/4	1	Doz. $12.96

321 BLACKHAWK. (PATRICIA.)

Black Bristles. Nickelled Ferrules. Green Polished Beaver Tail Handles with White Band. A very high grade medium priced all round utility line of fine appearance. Especially recommended for furniture varnish, interior woodwork, etc.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 3/4	1	Doz. $5.48
1 1/2	2	1	Doz. $6.92
2	2 1/4	1	Doz. $9.50
2 1/2	2 1/2	1	Doz. $12.10
3	2 3/4	1	Doz. $17.28

323 STARLING. (PATRICIA.) (FLOWING.)

Best Black Bristles. Nickelled Ferrule. Green Polished Beaver Tail Handle with White Band. Especially recommended for varnishing floors or other heavy work. A big seller.

Size	Length Out Inches	No. Dozen in Box	List Price
1	2	1/2	Doz. $6.48
1 1/2	2 1/4	1/2	Doz. $9.50
2	2 1/2	1/2	Doz. $12.96
2 1/2	2 3/4	1/2	Doz. $17.28
3	3	1/2	Doz. $24.20

No. 885. Patricia Board

One-twelfth dozen each.

2" Lark Varnish No. 315
2" Blackhawk Varnish No. 321
2½" Starling Varnish No. 323

360 BLACK EAGLE. (ARTIZAN.) HALF OVAL. (FLOWING.)

Highest Quality Specially Flagged Brisde, Nickelled Ferrules. Black Ebony Handle with Band or Artizan Style. This brush is one of our very finest brushes. Being partially oval the extra thickness at the centre prevents fish tailing. Holds a high place with the Master Painter

Size	Length Out Inches	No. Dozen in Box	List Price
1 1/2	2 5/16	1/2	Doz. $16.12
2	2 1/2	1/2	Doz. $19.44
2 1/2	2 11/16	1/2	Doz. $25.92
3	2 7/8	1/2	Doz. $33.12

317 JUNIOR LAC.

Selected Soft Black Mixed Bristles, specially prepared for use in Lacquer. Nickelled Ferrule. Red Lacquered Handle. Black Tip and White Band. Medium Priced.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 5/8	1	Doz. $6.74
1 1/2	1 3/4	1	Doz. $8.30

303 SWIFT RADIATOR.



Black Bristles. Long Plain Handle. Nickelled Ferrule
A thin brush for painting radiators.

Size	Length Out Inches	No. Dozen in Box	List Price
1 1/2	1 7/8	1	Doz. $6.92
2	2	1	Doz. $7.92

295 TOKIO LINE.

Black Bristles. Nickelled Ferrule. Plain Long Handle. This style rapidly replacing old style sash tool.

Size	Length Out Inches	No. Dozen in Box	List Price
1	2	1	Doz. $6.22
1 1/2	2 1/4	1	Doz. $8.30
2	2 1/4	1	Doz. $10.36

298 CONDOR LINE. (ARTIZAN.)

Highest Grade Black Bristles, Nickelled Ferrule. Black Ebony Handle with White band or Artizan style. A heavier and better brush than No. 295.

Size	Length Out Inches	No. Dozen in Box	List Price
10 or 1	2 1/8	1	Doz. $9.34
20 or 1 1/2	2 5/16	1	Doz. $11.40
30 or 2	2 1/2	1	Doz. $15.56

325 ALBATROSS. (ARTIZAN.) (FLOWING.)

Highest Quality Black Bristle. Nickelled Ferrule. Black Handle with White Band or Artizan Style.

A perfect brush in every way. A professional painter's tool. No higher grade brush can be made.

Size	Length Out Inches	No. Dozen in Box	List Price
1 1/2	2 1/2	1/2	Doz. $10.94
2	2 3/4	1/2	Doz. $13.82
2 1/2	3	1/2	Doz. $20.74
3	3 1/4	1/2	Doz. $30.24

FLAT VARNISH

370 SUPER KOREA. (ARTIZAN.)

Highest Grade Stiff Black Bristles. Nickelled Ferrule. Artizan Finished Beaver Tail Handle. This brush is made with a stiffer grade of bristles than the ordinary brush. Used by master painters for heavy enamel work, etc.

Size	Length Out Inches	No. Dozen in Box	List Price
1 1/2	2 3/4	1/2	Doz. $12.96
2	3	1/2	Doz. 18.72
2 1/2	3 1/4	1/2	Doz. 25.20
3	3 1/2	1/2	Doz. 35.28
3 1/2	3 3/4	1/2	Doz. 51.48

326 BLACK COACH. (FLOWING.)

Highest Grade Specially Treated Black Bristle. Nickelled Ferrules. Black Ebony Handle with White Band. The square cornered or Thumb style brush so popular with coach and car varnishers.

Size	Length Out Inches	No. Dozen in Box	List Price
1	2	1/2	Doz. $ 8.36
1 1/2	2 1/4	1/2	Doz. 11.52
2	2 7/16	1/2	Doz. 14.98
2 1/2	2 5/8	1/2	Doz. 20.16
3	2 7/8	1/2	Doz. 25.92

GLUE,

44 BRANT GLUE. FLAT

Stiff Grey Bristle. Galvanized Ferrule. Plain Handle.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 7/8	1	$ 8.64
1 1/2	2 1/16	1	10.94
2	2 1/4	1	15.56

46 KINGFISHER GLUE. FLAT

Grey Bristles. Galvanized Ferrule. Wall Brush Style.

An extra stiff brush for heavy work in glue or creosote.

Size	Length Out Inches	No. Dozen in Box	List Price
3	3	1/2	Doz. 32.26
3 1/2	3	1/2	Doz. 35.28

48 ORIOLE GLUE. ROUND.

Highest Grade Stiff Grey Russian Bristles. Galvanized Steel Ferrule. Natural Handle.

Size	Diameter	Length Out Inches	No. Dozen in Box	
60	1 7/16	2 1/2	1	$22.76
80	1 11/16	2 7/8	1/2	35.28
100	1 15/16	3 1/4	1/2	49.82

OVAL VARNISH

217 SKYLARK CHISELLED OVAL VARNISH.

Black Bristles. Compressed Steel Ferrule. Green Polished Handles with White Band.

Size	Diameter	Length Out Inches	No. Dozen in Box	List Price
1	9/16	2 1/8	1	Doz. $13.40
2	1 11/16	2 5/16	1	Doz. 15.12
3	1 13/16	2 1/2	1	Doz. 17.00
4	2	2 11/16	1/2	Doz. 20.16
5	2 3/16	2 13/16	1/2	Doz. 23.04
6	2 5/16	3	1/2	Doz. 27.94

224 MIKADO OVAL CHISELLED. VARNISH.

Highest Grade Black Bristles. Nickelled Steel Ferrule. Green Polished Handles with White Band. Best medium priced brush we make. Splendid seller.

Size	Diameter	Length Out Inches	No. Dozen in Box	List Price
4	2	3	1/2	Doz. $22.46
5	2 1/16	3 1/8	1/2	Doz. 24.76
6	2 1/8	3 1/4	1/2	Doz. 29.38
7	2 3/16	3 1/2	1/2	Doz. 34.56
8	2 5/16	3 3/4	1/2	Doz. 40.32
9	2 3/8	4	1/2	Doz. 48.96
10	2 7/16	4 1/4	1/2	Doz. 56.16

226 HAWK OVAL. (ARTIZAN). VARNISH.

Highest Grade Black Bristles. Nickelled Seamless Ferrule. Black Ebony Handle with White Band or Artizan Style. A good medium priced brush for the Master Painter.

Size	Diameter	Length Out Inches	No. Dozen in Box	List Price
6	2 1/16	3 3/8	1/2	Doz. $30.24
7	2 1/8	3 5/8	1/2	Doz. 34.56
8	2 3/16	3 3/4	1/2	Doz. 41.76
9	2 1/4	4	1/2	Doz. 50.40
10	2 5/16	4 1/4	1/2	Doz. 56.16
11	2 3/8	4 1/2	1/2	Doz. 64.80
12	2 7/16	4 3/4	1/2	Doz. 77.76
13	2 7/16	4 3/4	1/2	Doz. 83.52

STENCIL

50 O. K. STENCIL.

Black Bristles. Nickelled Steel Ferrule. Natural Polished Handle. Packed one dozen in box.

Size	Ferrule Diameter	Length Out Inches	List Price
3	15/16	1 1/4	Doz. $10.36
5	1 1/16	1 3/8	Doz. 11.52
7	1 1/4	1 1/2	Doz. 13.54
9	1 1/2	1 5/8	Doz. 15.12
11	1 3/4	1 3/4	Doz. 18.72
13	2	1 7/8	Doz. 23.04

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SASH AND WALL

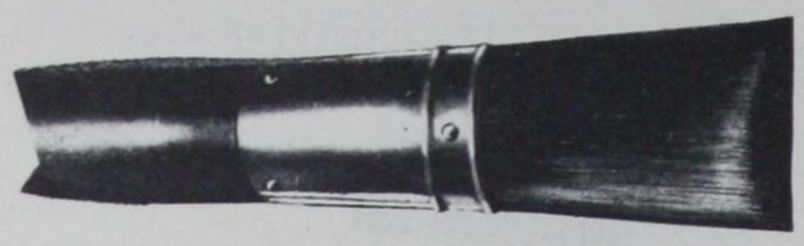

392 ONYX SASH.

Black Bristle. Nickelled Ferrule.
A good quality sash tool for ordinary work and our best seller.
Sizes 1, 2, 4, 6 Green Handle with White Band.
Sizes 8, 10, 12 Black Ebony Handle with White Band

Size	Length Out Inches	No. Dozen in Box	List Price
1	1 1/4	1	Doz. **$2.70**
2	1 3/8	1	Doz. **$3.12**
4	1 5/8	1	Doz. **$3.58**
6	1 7/8	1	Doz. **$5.06**
8	2 1/8	1	Doz. **$6.92**
10	2 3/8	1	Doz. **$8.88**
12	2 5/8	1	Doz. **$12.90**
Assortment 1-10			**$3.68**

298 CONDOR LINE. (ARTIZAN.)

Highest Grade Black Bristles. Nickelled Ferrule.
Black Ebony Handle with White band or Artizan style.
A heavier and better brush than No. 295.

Size	Length Out Inches	No. Dozen in Box	List Price
10 or 1	2 1/8	1	Doz. **$9.34**
20 or 1 1/2	2 5/16	1	Doz. **$11.40**
30 or 2	2 1/2	1	Doz. **$15.56**

439 THRUSH WALL PAINT.

Black Bristles. Nickelled Ferrule.
Red Polished Handle.
This brush is a fine appearing cheap brush. Often used for a cheap varnish brush.

Size	Length Out Inches	No. Dozen in Box	List Price
2 1/2	2	1/2	Doz. **$6.92**
3	2 1/4	1/2	Doz. **$8.64**
3 1/2	2 1/2	1/2	Doz. **$10.36**
4	2 3/4	1/2	Doz. **$12.78**

433 LINNET WALL PAINT.

Black Bristles Outside. Black Mixed Middle.
Nickelled Ferrules. Natural Polished Handles.
A large appearing brush. Used mostly in stains, whitewashes and other light liquids.

Size	Length Out Inches	No. Dozen in Box	List Price
2 1/2	2 11/16	1/2	Doz. **$9.50**
3	2 7/8	1/2	Doz. **$11.52**
3 1/2	3 1/16	1/2	Doz. **$13.82**
4	3 3/16	1/2	Doz. **$18.00**

437 COMET WALL ASSORTMENT.

Contains

1/3 doz. 2 1/2 Thrush
1/3 doz. 3 Teal
1/3 doz. 3 Brant

List Price Per Box **$12.24**

SASH & WALL

441 TEAL WALL PAINT. (PATRICIA.)

Good Quality Black Bristles. Nickelled Ferrule.
Green Polished Handle with White Band.

One of our best selling cheap wall brushes. Specially recommended for floors or for small outside work.

Size	Length Out Inches	No. Dozen in Box	List Price
2 1/2	2 1/4	1/2	Doz. **$ 8.92**
3	2 1/2	1/2	Doz. **$10.94**
3 1/2	2 3/4	1/2	Doz. **$14.12**
4	3	1/2	Doz. **$17.28**
4 1/2	3	1/2	Doz. **$20.16**
5	3 1/4	1/2	Doz. **$25.12**
6	3 1/4	1/2	Doz. **$31.68**

457 KOREA WALL PAINT.

Slightly better quality than No. 441. Same general appearance.

Size	Length Out Inches	No. Dozen in Box	List Price
2 1/2	2 1/2	1/2	Doz. **$10.36**
3	2 3/4	1/2	Doz. **$13.82**
3 1/2	3	1/2	Doz. **$17.28**
4	3 1/4	1/2	Doz. **$24.20**
4 1/2	3 1/2	1/2	Doz. **$32.84**
5	3 1/2	1/2	Doz. **$37.44**

458 BRANT WALL PAINT. CHISELLED. (PATRICIA.)

Fine Quality Black Bristles. Nickelled Ferrule.
Green Polished Handle with White Band.
Our best selling medium priced wall brush especially recommended for use on walls, ceilings, etc.

Size	Length Out Inches	No. Dozen in Box	List Price
2 1/2	2 3/4	1/2	Doz. **$12.68**
3	3	1/2	Doz. **$16.42**
3 1/2	3 1/4	1/2	Doz. **$21.60**
4	3 1/2	1/2	Doz. **$27.64**
4 1/2	3 3/4	1/2	Doz. **$38.60**
5	3 3/4	1/2	Doz. **$46.08**
6	4	1/2	Doz. **$60.48**

464 JACKDAW WALL PAINT. (PATRICIA.)

Best Quality Black Bristles. Nickelled Ferrule.
Green Polished Beaver Tail Handle with White Band.
This is another of our Patricia line, recommended as the right brush for the householder to buy for outside painting.

Size	Length Out Inches	No. Dozen in Box	List Price
3	3 1/4	1/2	Doz. **$23.04**
3 1/2	3 1/2	1/2	Doz. **$30.24**
4	3 3/4	1/2	Doz. **$38.88**
4 1/2	4	1/2	Doz. **$48.96**

465 NYANZA WALL PAINT. (ARTIZAN. (CHISELLED.)

Extra Quality Black Bristle. Nickelled Ferrule.
Black Ebony Handle with White Band.
A very full, stiff, elastic brush, easily broken in as it is chiselled. A favorite brush with the best workmen.

Size	Length Out Inches	No. Dozen in Box	List Price
3	3 1/2	1/2	Doz. **$30.24**
3 1/2	3 3/4	1/2	Doz. **$39.74**
4	4	1/2	Doz. **$48.96**
4 1/2	4 1/4	1/2	Doz. **$60.48**

WALL PAINT AND SHINGLE STAIN

598 PETREL. DUTCH STYLE WALL PAINT.

The construction of this brush enables the user to cover a large surface very quickly. Suitable for either inside or outside work. Used extensively by contractors, where speed is essential. Packed individually. 2 lbs. each.

No.		Length Out Inches	List Price
1	Black Bristle	4½	Doz. **$100.80**
2	Grey Bristle	4½	Doz. **120.96**

525 BLACKHAWK WALL PAINT. CHISELLED. (ARTIZAN.)

Best Quality Bristles. Nickelled Ferrule. Black Ebony Finished Handle. White Band. A long, full, well-balanced brush for the Master Painter. Will give splendid service.

Size	Length Out Inches	No. Dozen in Box	List Price
3	3¾	½	Doz. **$30.82**
3½	4	½	Doz. **38.02**
4	4¼	½	Doz. **48.68**
4½	4½	½	Doz. **56.16**

532 BLACK EAGLE. (ARTIZAN.) CHISELLED. STUCCO WALL.

Best Quality Bristles. Non-corrosive Ferrules. Black Ebony Finished Handle. White Band. A much larger brush than 525. A heavy brush of exceptional quality, suitable for painting large surfaces. No. 4½ is very often used for kalsomining cornices and small areas inaccessible to a large brush.

Size	Length Out Inches	No. Dozen in Box	List Price
3	4	½	Doz. **$38.02**
3½	4¼	½	Doz. **49.54**
4	4½	½	Doz. **60.76**
4½	4½	½	Doz. **71.14**

534 CONDOR STUCCO WALL. CHISELLED.

Same general appearance as 532 but with Black Ebony handles. Slightly longer and heavier.

Size	Length Out Inches	No. Dozen in Box	List Price
3½	4½	½	**Doz. $54.72**
4	4¾	½	**Doz. 69.12**
4½	4¾	½	**Doz. 77.76**
5	4¾	½	**Doz. 87.26**

560 BLACKBIRD. STUCCO WALL PAINT.

Extra High Quality Stiff Black Bristles. Leather Bound. Preferred by many painters on account of its light weight, due to its construction. Very popular with the Maritime and Western painters.

Size	Length Out Inches	No. Dozen in Box	List Price
4	4 9/16	½	Doz. **$90.72**

568 JUNCO SHINGLE STAIN.

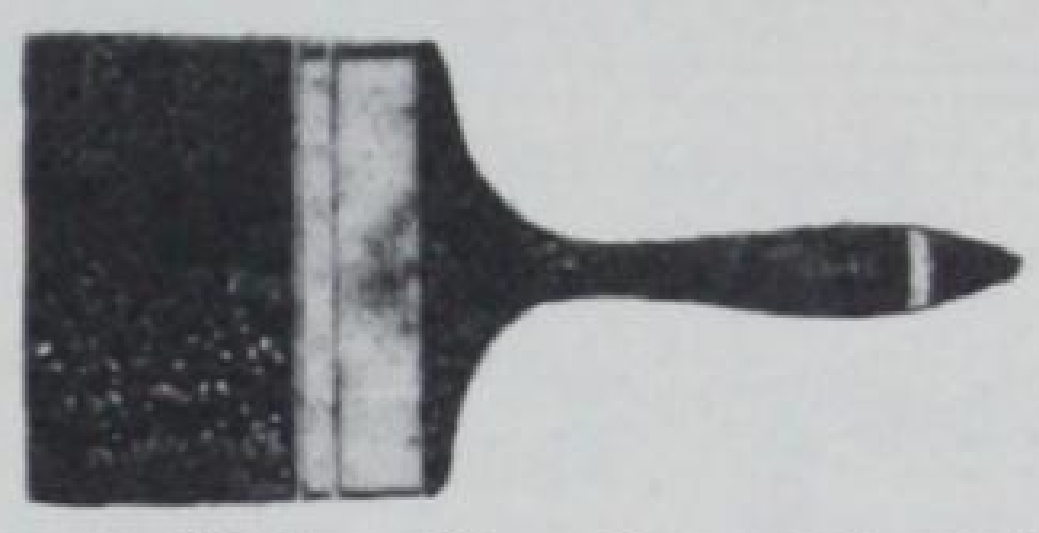

Wall Brush Style. New Grey Mixed Stock. Designed especially for use in light stains. Often used for a cheap whitewash brush.

Size	Length Out Inches	No. Dozen in Box	List Price
4	3 3/16	½	Doz. **$18.14**
5	3 3/16	½	Doz. **$21.60**

569 PLOVER SHINGLE STAIN.

Wall Brush Style. Grey Russian Bristles. Natural Polished Handle.

Size	Length Out Inches	No. Dozen in Box	List Price
4	4		Doz. **$43.20**
4½	4		Doz. **$47.52**
5	4	½	Doz. **$51.84**
6	4	½	Doz. **$61.92**

160 STIPPLING. (SET IN LEAD)

Block 5 x 5 inches. Reversible Handle.

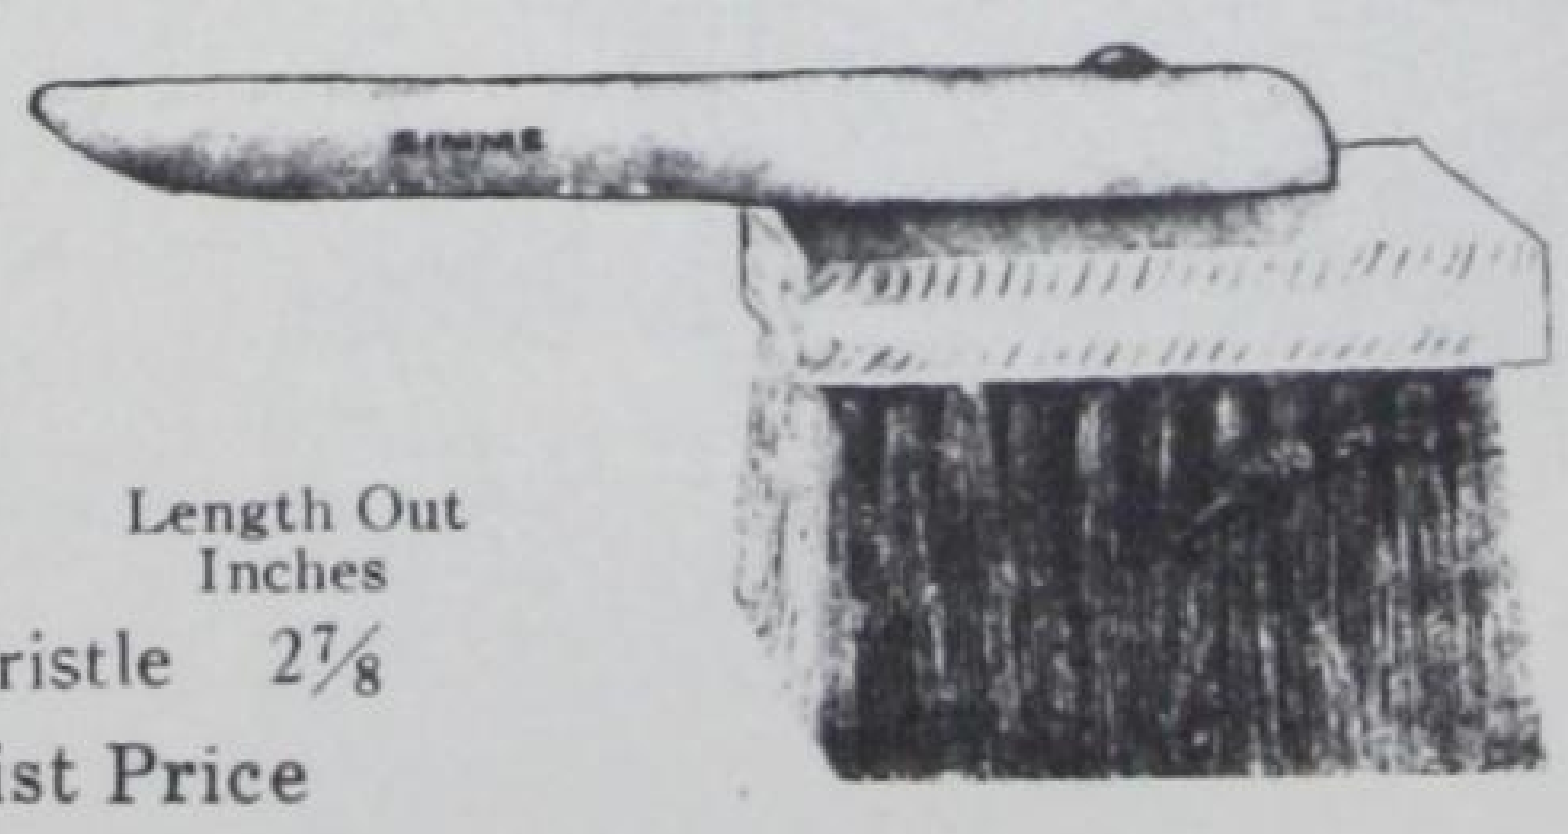

No.	Stock	Length Out Inches
2	Grey Bristle	2⅞

List Price
Doz. **$77.76**

162 STIPPLING.

Block 6 x 6 inches. Reversible Handle.

No.	Stock	Length Out Inches	
3	Grey Bristle	2⅞	Doz. **$103.68**

165 STIPPLING. (WIRE DRAWN)

Extra Stiff Russian Bristles. Varnished Blocks. Individual Cartons.

No.	Size	Length Out Inches	List Price
10	7 x 3½	3⅛	Doz. **$88.12**
20	8 x 3¾	3⅛	Doz. **$103.68**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

HANDLED WHITEWASH or KALSOMINE BRUSHES

610 CANARY.

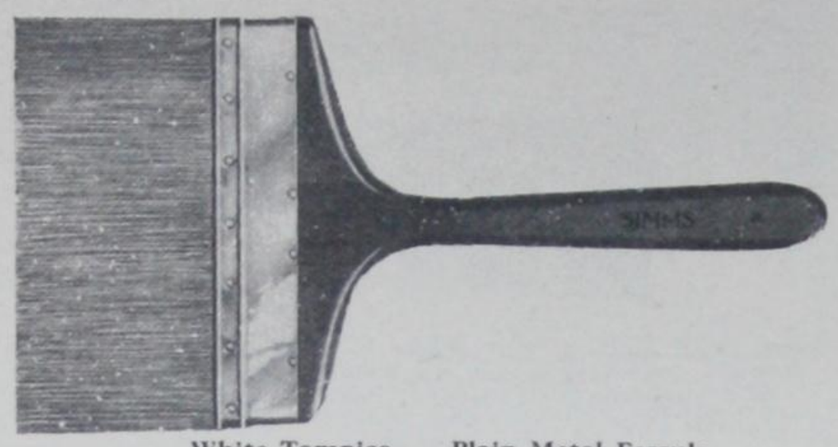

White Tampico. Plain Metal Ferrule.
Hardwood Handle.
The cheapest handled whitewash on the market.
Machine made. One half-dozen wired together.

Size	Length Out Inches	List Price
7	2¾	Doz. $ $6.20

653 Bristle Tinting.

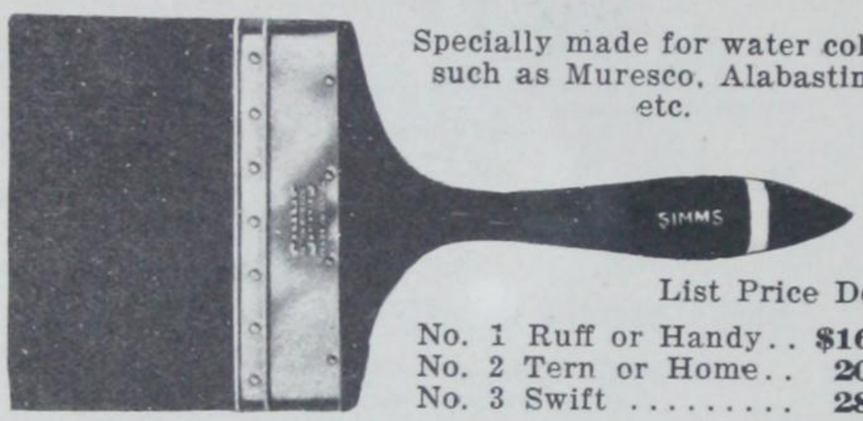

Specially made for water colors such as Muresco, Alabastine, etc.

List Price Doz.

No. 1 Ruff or Handy..	$16.58
No. 2 Tern or Home..	20.16
No. 3 Swift	28.80

612 CROWN.

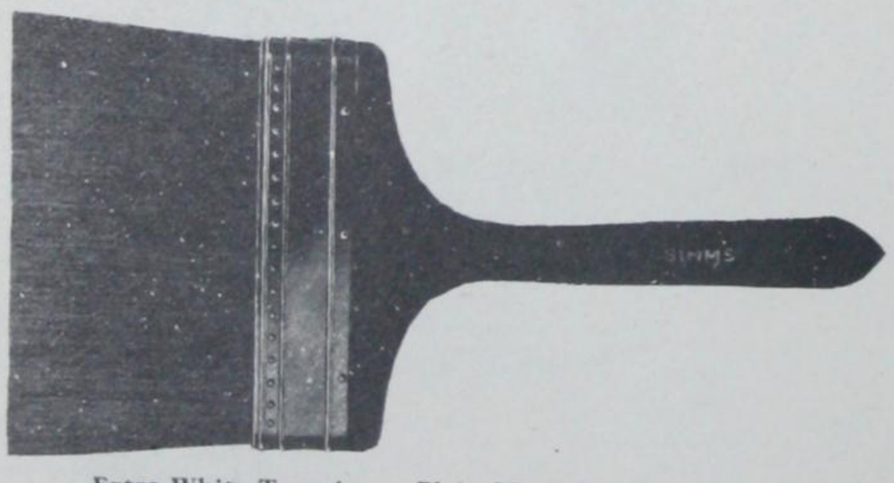

Extra White Tampico. Plain Metal Ferrule.
Yellow Waxed Handle.
One-half dozen in box.

Size	Length Out Inches	List Price
7	3	Doz. $10.36

627 ACTO.

(SET IN PITCH)

Extra White Outside. Soft Tampico Middle.
Tin Ferrules. Natural Polished Handles.
One-half dozen in box.

Size	Length Out Inches	List Price
7	3½	Doz. $14.40

628 IDEAL.

(SET IN PITCH)

White Horsehair and Tampico Outside. Soft Tampico Middle. Nickelled Ferrules. Natural Polished Handles.
One-half dozen in box.

Size	Length Out Inches	List Price
7	4¼	Doz. $17.28

635 ZULU.

(SET IN RUBBER)

Black Bristles. Nickelled Ferrules.
Green Polished Handles.
One-quarter dozen in box.

Size	Length Out Inches	List Price
7	2¾	Doz. $28.80

638 NUBIAN.

(SET IN RUBBER)

Green Polished Handles. Better than 635.
Pure Black Bristle.
One-quarter dozen in box.

Size	Length Out Inches	List Price
7	3¼	Doz. $32.26

639 OSPREY.

(SET IN RUBBER)

Same as 638 only little heavier and longer.
One-quarter dozen in box.

Size	Length Out Inches	List Price
7	3¾	Doz. $47.52

640 EBONY.

(SET IN RUBBER)

Pure Black Bristles. Nickelled Ferrules.
Green Polished Handles.
Popular all over Canada as an efficient household brush.
One-quarter dozen in box.

Size	Length Out Inches	List Price
7	4	Doz. $54.72

645 KOREAN.

(SET IN RUBBER)

Best Black Bristles. Non-corrosive Ferrule.
Black Ebony Handle with White Band.
A big seller.
One-quarter dozen in box.

Size	Length Out Inches	Weight Lbs.	List Price
7	4¼	19	$64.80
8	4¼	21	$80 .06

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WHITEWASH OR KALSOMINE BRUSHES

648 HAWK.
(SET IN RUBBER)

Same general description as 645, only a heavier brush.

Size	Length Out Inches	List Price
7	4¾	Doz. **$92.16**

649A XX BLACKHAWK.
(SET IN RUBBER.)

Long Black Bristles. Black Ebony Handle.
White Band.
A big seller.
One-quarter dozen in box.

Size	Length Out Inches	List Price
7	5	Doz. **$110.02**

651 XXX ONYX. (ARTIZAN.)
(SET IN RUBBER.)
Very highest grade stiff Black Bristles.
Black Artizan Handle.
A favorite with the professional kalsominers.
One-sixth dozen in box.

Size	Length Out Inches	List Price
7	5¼	Doz. **$129.60**
8	5¼	Doz. **$155.52**

651A XXXX ONYX.

Size	Length Out Inches	List Price
7	5¼	Doz. **$172.80**

700 ATLAS.
(SET IN PITCH)
DUTCH

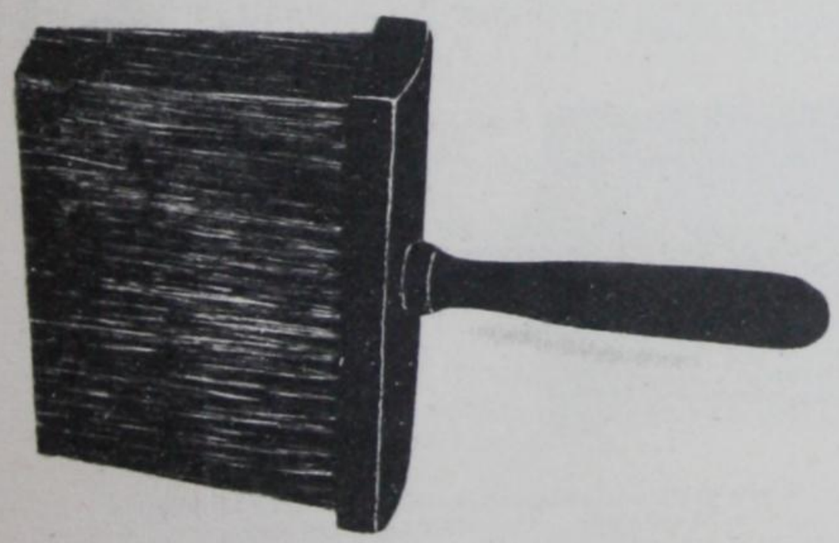

Grey Russian Bristles. Light Weight Construction.

No.	Size	Length Out Inches	List Price
7	7½ x 3	5	....Doz. **$165.88**
9	7½ x 3	5⅜	....Doz. **$186.62**

680 SUPER WALL. KALSOMINE OR WHITEWASH.
Brass and Leather Bound. Natural Polished Handle.
Black Bristles. Light in weight.
Used in corners and places inaccessible with a large brush.
One-half dozen in box.

No.	Width Inches	Length Out	List Price
117	6	5	Doz. **$149.76**

DUTCH KALSOMINE.
Will carry more than double the colour of our ordinary kalsomine and although somewhat heavier a great time saver. You should call your customers' attention to these brushes. Packed individually.

699 PARTRIDGE.
(SET IN RUBBER)

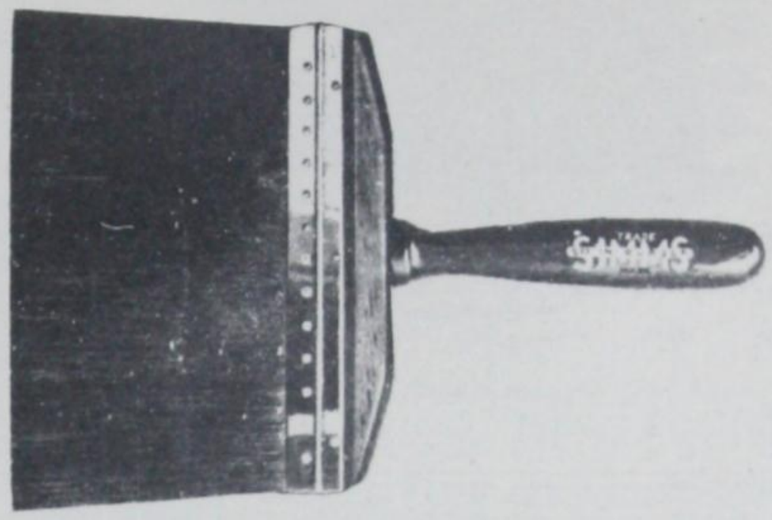

Grey Russian Bristles. Strong Construction.

Size	Length Out Inches	List Price
7 x 2¼	4 3/16	Doz. **$158.40**

702 GROUSE.
(SET IN RUBBER)

Size	Length Out Inches	List Price
7¼ x 2½	4⅜	Doz. **$169.92**

704 KINGFISHER.
(SET IN RUBBER)

Size	Length Out Inches	List Price
7¼ x 2½	4¾	Doz. **$199.40**

706 GREY EAGLE.
(SET IN RUBBER)

Size	Length Out Inches	List Price
7¼ x 2½	5⅛	Doz. **$227.52**

765 HEAD WHITEWASH. GEM.
(MACHINE MADE)

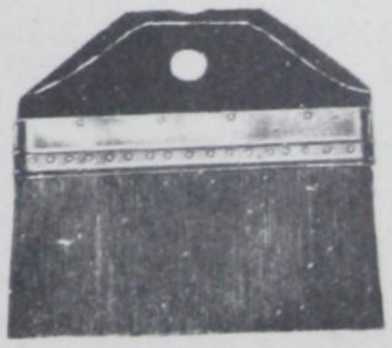

Soft Tampico. Metal Ferrule.
Yellow Blocks.

Size	Length Out Inches	No. Dozen in Box	List Price
7	3	½	Doz. **$12.38**

778 IDEAL.
(SET IN PITCH)
White Bristles Outside. Tampico Middle. Red Polished Block. Plain Tin Ferrule.

Size	Length Out Inches	No. Dozen in Box	List Price
7	3	½	Doz. **$15.84**

790 ONYX.
(SET IN RUBBER)
Black Bristles. Red Polished Blocks.
Nickelled Ferrule.
One of our biggest sellers.

No.	Width	Length Out Inches	No. Dozen in Box	List Price
3	7	2¾	½	Doz. **$31.68**

All Prices Subject to Change Without Notice

HEAD WHITEWASH.

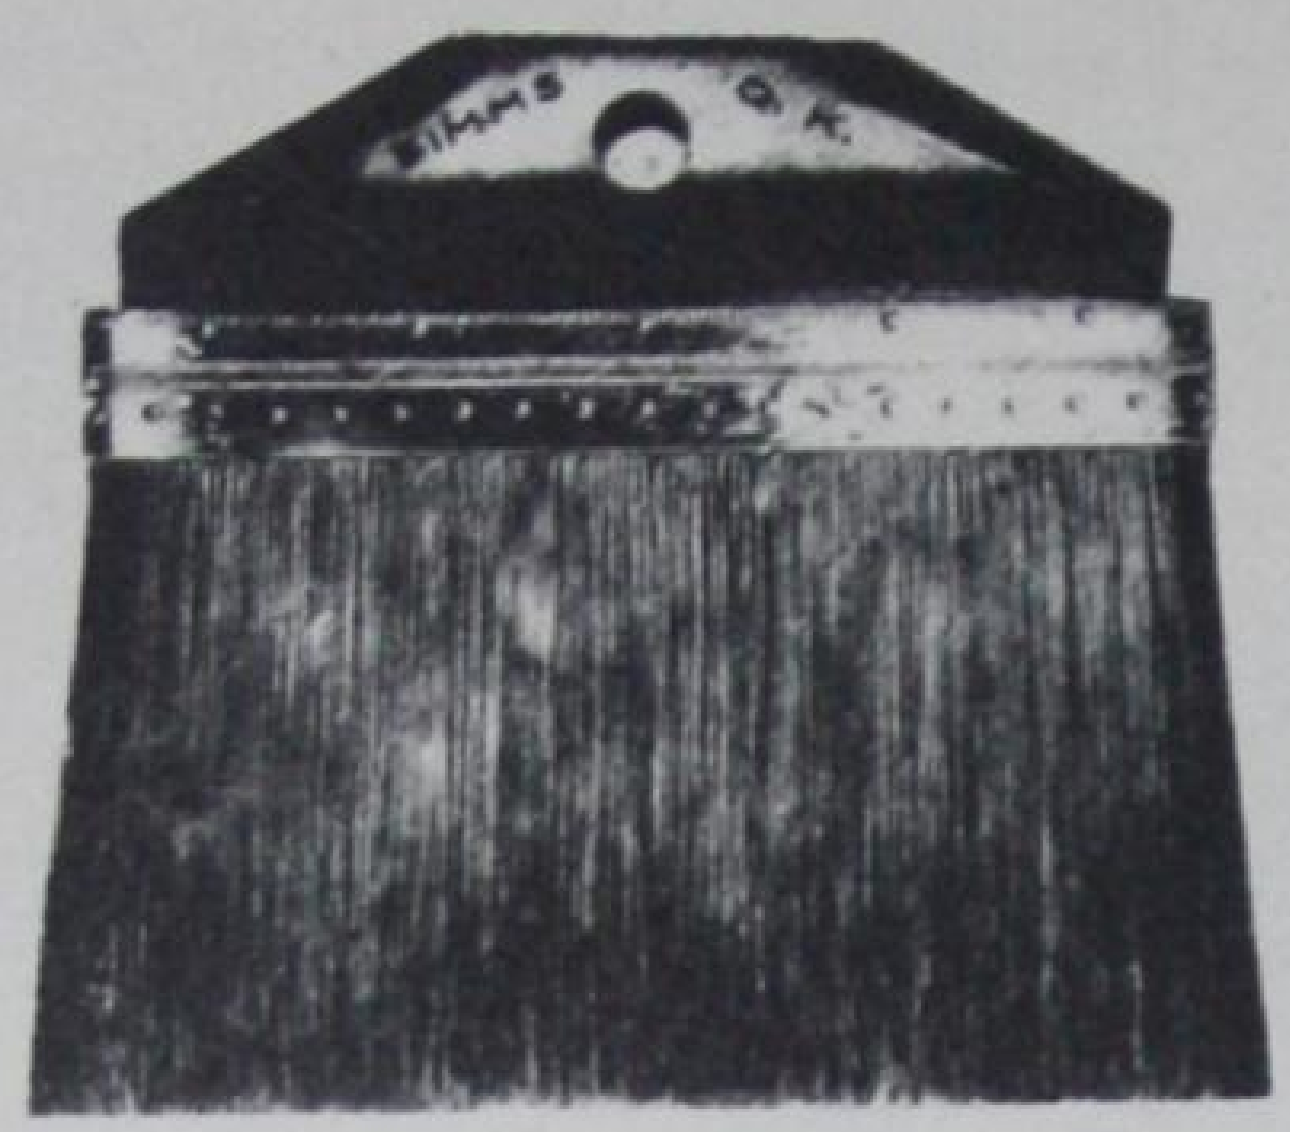

800 NUBIAN.
(SET IN RUBBER)

Better grade than 790. A brush much used by the semi-professional.

No.	Size	Length Out Inches	No. Dozen in Box	List Price
18	7½	3¼	½	Doz $ **60.48**
20	8	3⅝	½	Doz. **87.84**
24	8½	4¼	½	Doz. **129.60**

809 BLACKHAWK.
(SET IN RUBBER)

Stiff Black Bristles.
Very popular with the Maritime Painters.
A large bulky brush.

No.	Width	Length Out Inches	List Price
18	9	5	Doz **$230.40**
19	9½	5 3/16	Doz. **250.56**
20	9½	5 3/16	Doz. **273.60**

740 QUEBEC SQUARE WHITEWASH.
Solid Back. Wire Staples. Packed Loose.

No.	Size	Length Out Inches	List Price
5	8⅛ x 3⅜	2	Doz. **$6.92**

720 BILL POSTER.
All Aluminum Head with Interchangeable Knots ofGrey Bristle which can be bought separately forreplacement.

No.		Length Out	List Price
E-431	Grey Bristle	5	Doz. **$233.28**

715 GROUSE PASTE.
Stiff Grey Mixed Bristles. Non-corrosive Ferrule. Natural Polished Handles. One-half dozen in box.

Size	Length Out Inches	List Price
7	3 13/16	Doz. **$71.42**

716 O. K. PASTE.
Stiff Grey Bristles. Non-corrosive Ferrule. Natural Polished Handle. One-half dozen in carton.

Size	Length Out Inches	List Price
7	4	Doz **$93.60**

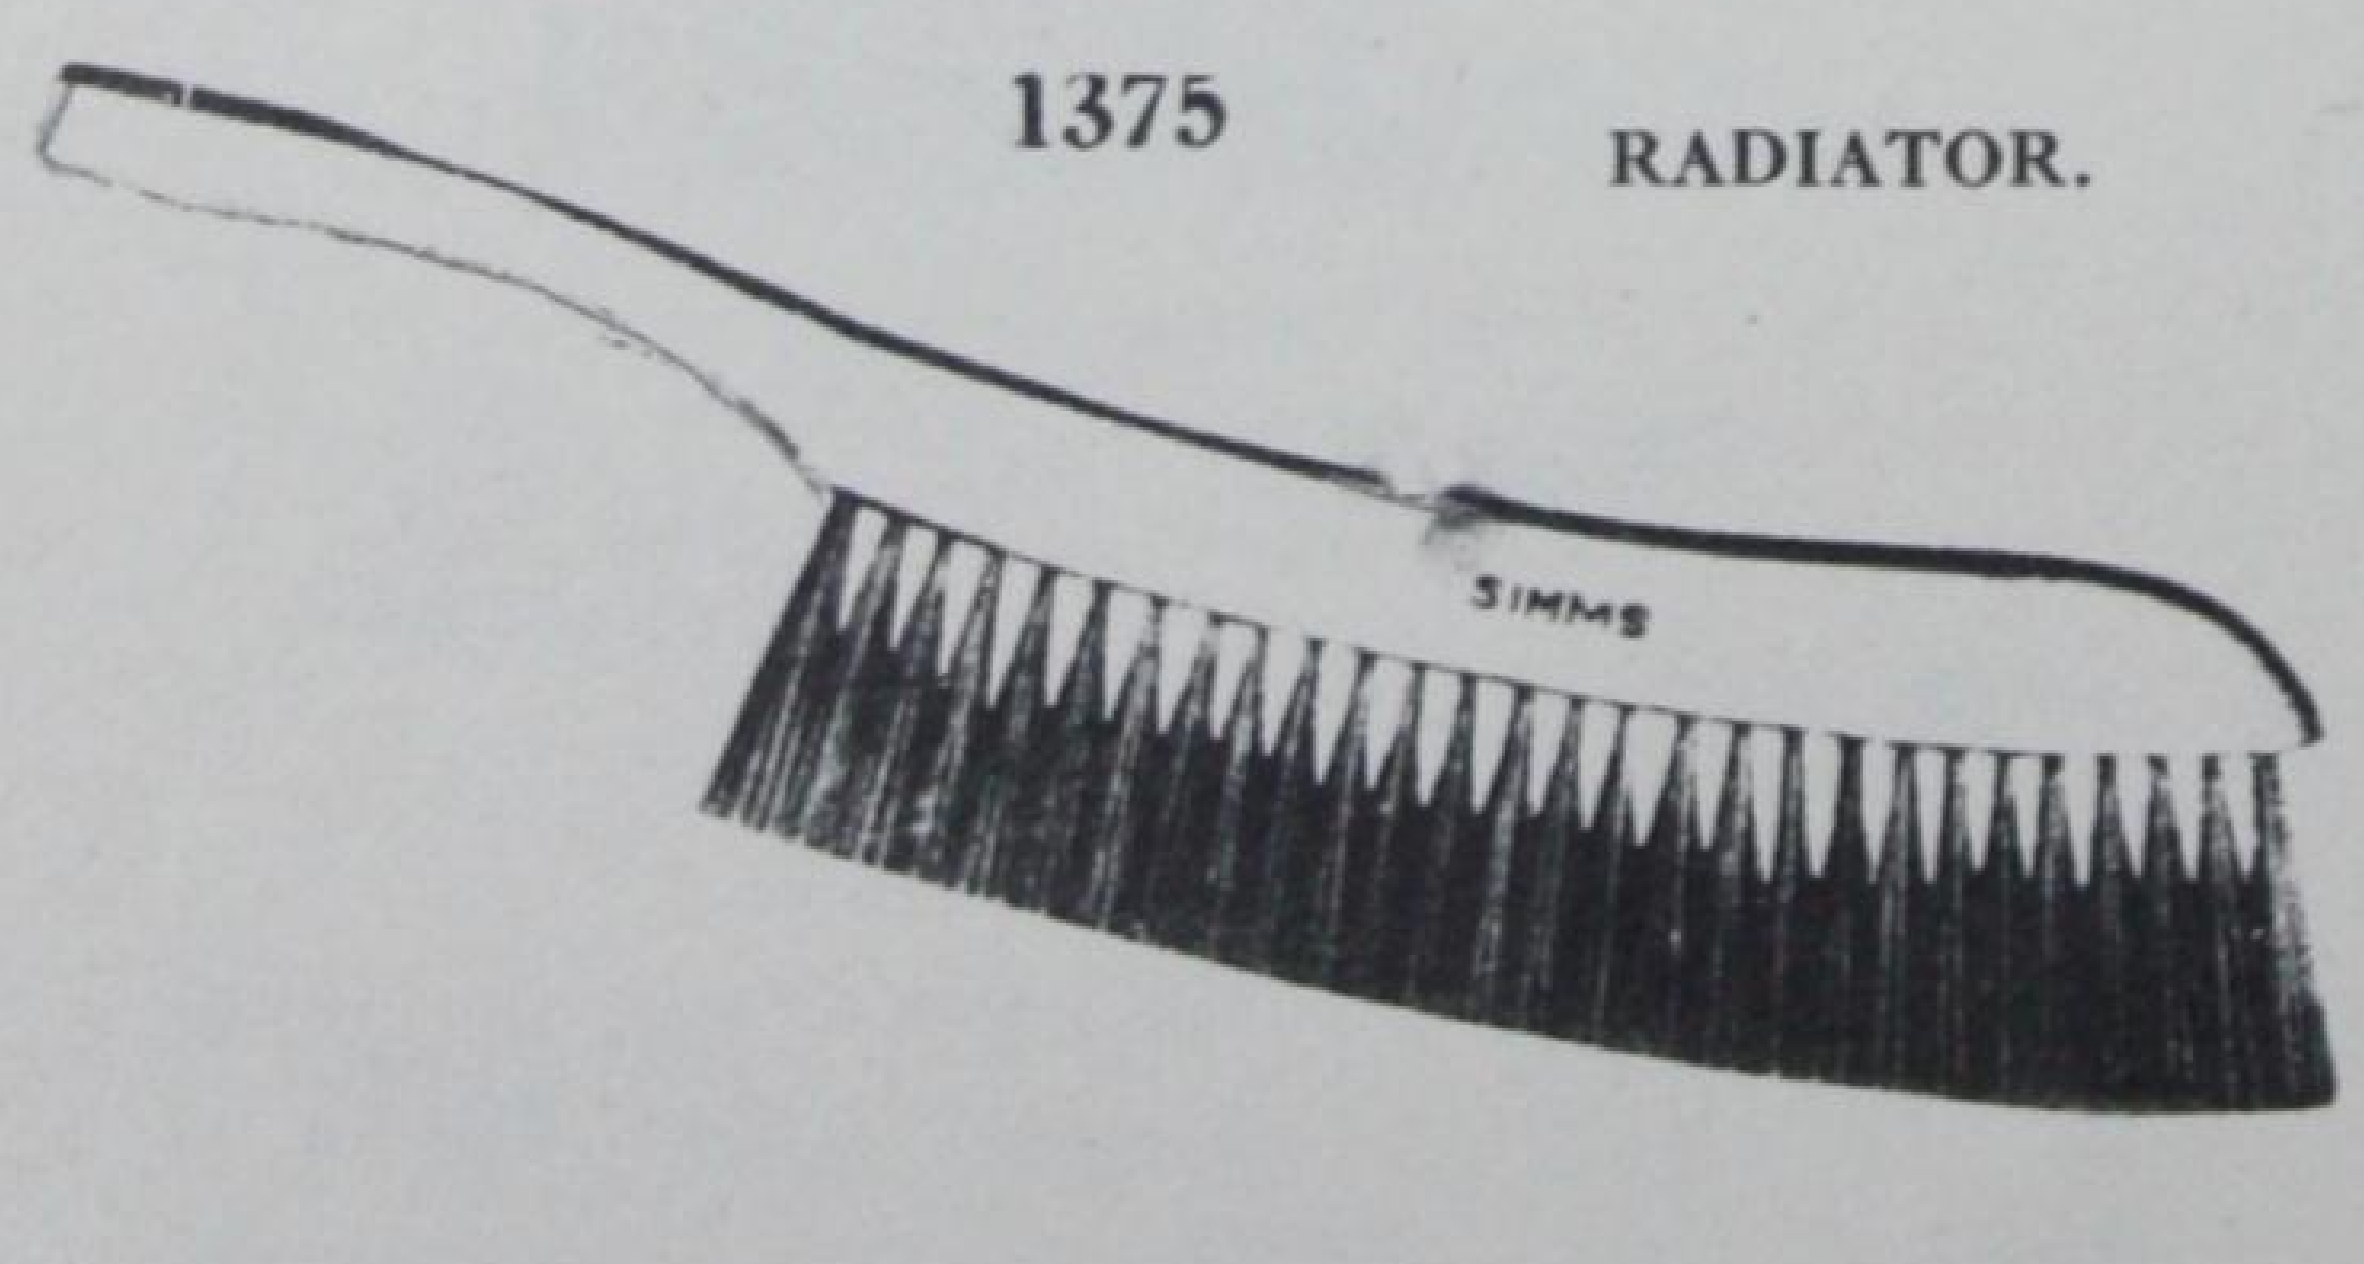

1375 RADIATOR.

Varnished Hardwood Handles 33 inches long. A thin long handled brush for cleaning radiators, steam or hot water pipes and dusting in out-of-the-way places. Packed loose.

No.	Stock	List Price
2	Pure Black Horse Hair	Doz. **$11 .52**

PAINTERS' DUSTERS

61 LINNET. ROUND.
(MACHINE MADE)

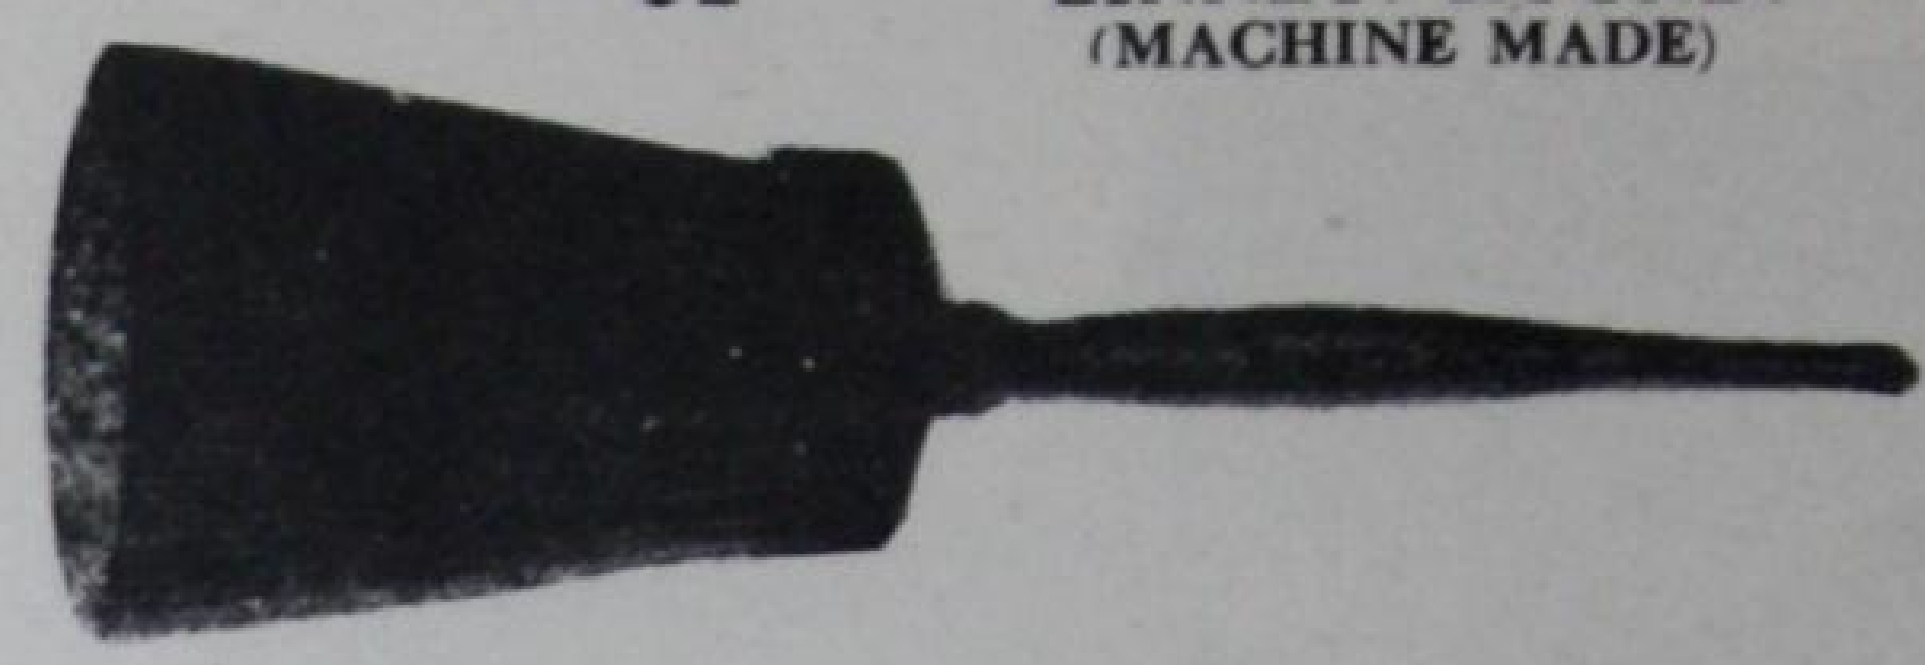

Black Horse Hair Outside. Black Tampico Middle. Red Polished Handle.

No.	Diameter Block	Length Out Inches	List Price
5	2½	3	Doz. **$11.24**

60 HUB. ROUND.
(SET IN PITCH)

Black Bristles and Horsehair Outside, Grey Middle. Red Polished Handle. A good low priced duster. One-half dozen in box.

No.	Diameter Block	Length Out Inches	List Price
5	2½	3⅝	Doz. **$18.62**

62 ONYX. ROUND
(SET IN PITCH)

All Black Bristles and Horsehair. Red Polished Handles. Packed one-half dozen in box.

No.	Diameter Block	Length Out Inches	List Price
5	2½	3⅝	Doz. **$25.92**

70 BLACKBIRD. ROUND.
(SET IN PITCH)

Best Black Bristles Throughout. Red Polished Handles. Packed one-half dozen in box.

No.	Diameter Block	Length Out Inches	List Price
6	2½	4	Doz. **$33.12**

72 STARLING. ROUND.
Best Black Bristles

No.	Diameter Block	Length Out Inches	List Price
17	2½	4¾	Doz. **$46.08**

74 CYCLO. OVAL.
(WIRE DRAWN)

Natural Polished Blocks. Size 3½ x 2⅛. One-half dozen in box.

No.		Length Out Inches	List Price
20	Black Bristles	3½	Doz. **$33.12**
30	Grey Middle White Outside	3¾	Doz. **40.32**
40	All White Bristle	3¾	Doz. **46.08**

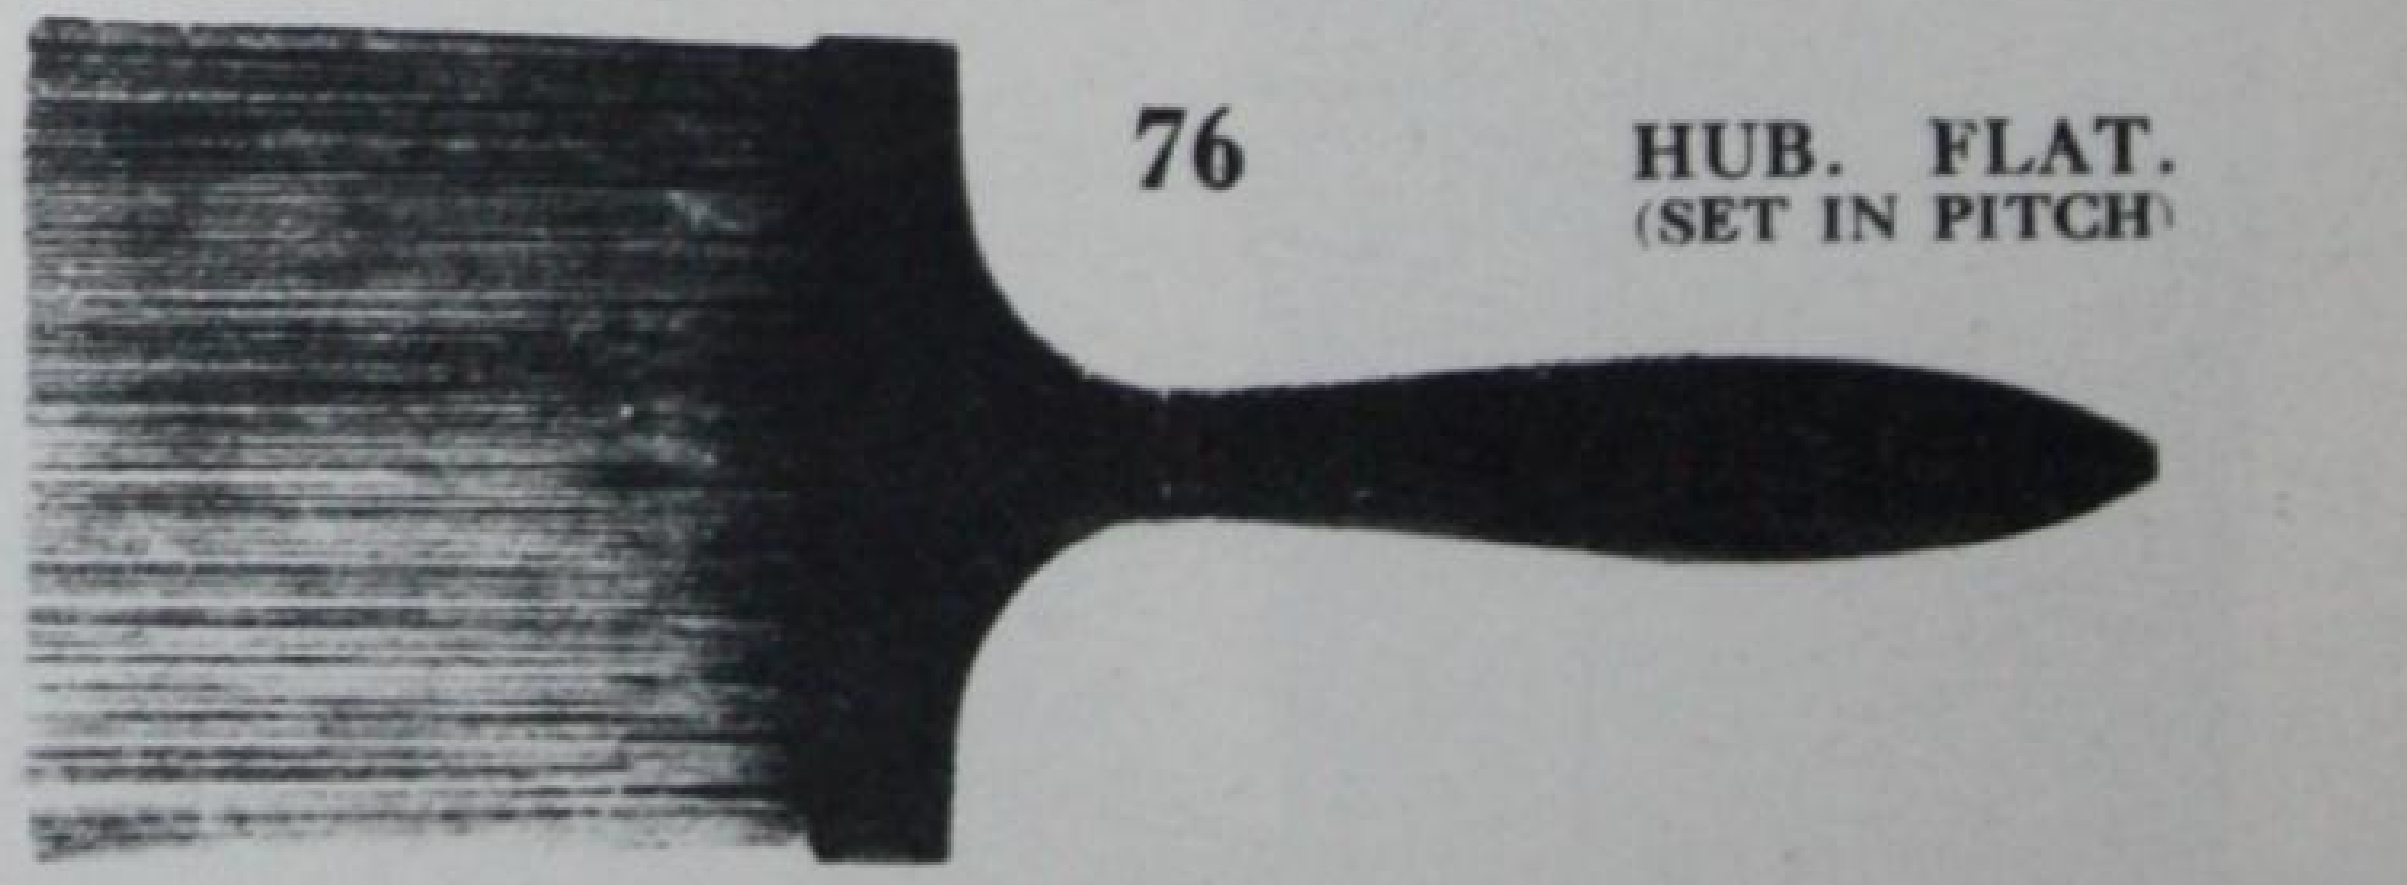

76 HUB. FLAT.
(SET IN PITCH)

Black Bristle and Horsehair Outside. Grey Middle Red Blocks. One-half dozen in box.

No.	Size	Length Out Inches	List Price
44	4¼ x 1⅛	3⅝	Doz. **$20.74**

78 ONYX. FLAT.
(SET IN PITCH)

Black Bristles and Horsehair. Red Polisned Blocks

No.	Size	Length Out Inches	List Price
44	4¼ x 1⅛	3⅝	Doz. **$26.20**

81 KINGFISHER. FLAT.
(SET IN PITCH)

Highest Grade Grey Russian Bristles. Red Handle. One-half dozen in Box.

No	Size	Length Out Inches	List Price
45	4¼ x 1⅛	4	Doz. **$38.88**

ARTIST, LETTERING, STRIPING, LACQUERING, SIGN PAINTER and FRESCO BRUSHES

815 ONYX FLAT ARTIST. (CHISELLED.)

Black Bristles. Nickelled Ferrule. Red Polished Handle.

Size	Length Out Inches	No. Dozen in Box	List Price
1/4	1	1	Doz. **$3.60**
1/2	1 1/4	1	Doz. **$4.32**
3/4	1 1/2	1	Doz. **$5.62**
1	1 3/4	1	Doz. **$8.50**

819 EXTRA FLAT ARTIST.

EXTRA LONG CHISEL

White Bristles. Red Polished Handle.

Size	List Price	Size	List Price	Size	List Price	Size	List Price
1/4	**$4.32**	1/2	**$5.48**	3/4	**$7.48**	1	**$11.80**

821 VERTICAL LINERS. (FLAT.)

White French Bristles. Plain Handle.

Size	List Price	Size	List Price	Size	List Price
1/2	**$10.36**	3/4	**$11.40**	1	**$12.44**

840 SUPER C. H. LETTERING.

(IN QUILLS)

Hair 3/4 to 1 1/2 inches. Green Silk and Silver Bound.

No.	List Price	No.	List Price	No.	List Price	No.	List Price
1	**$1.16**	3	**$1.58**	5	**$2.16**	7	**$2.60**
2	**$1.30**	4	**$1.88**	6	**$2.30**	8	**$2.88**

Assorted 1 to 8.... **$2.02** .....

845 OX HAIR LETTERING.

(IN QUILLS)

Hair 3/4 to 1 3/4 inches long.

No.	List Price	No.	List Price	No.	List Price	No.	List Price
1	**$1.44**	3	**$2.30**	5	**$3.02**	7	**$3.88**
2	**$1.88**	4	**$2.60**	6	**$3.46**	8	**$4.32**

Assorted:

1/6 dozen 1, 2, 3, 4
1/12 dozen 5,6, 7, 8 .... **$2.88**

850 RED SABLE LETTERING.

No.	List Price	No.	List Price	No.	List Price	No.	List Price
1	**$2.30**	3	**$5.76**	5	**$12.38**	7	**$17.56**
2	**$4.04**	4	**$8.36**	6	**$13.82**	8	**$20.74**

Assortment same as 845.. **$10.66**

CAMEL HAIR STRIPING.

(IN QUILLS)

855

Hair 1 3/4 to 2 inches long.

No.	List Price	No.	List Price
1	**$1.16**	5	**$2.30**
2	**$1.44**	6	**$2.60**
3	**$1.72**	7	**$2.88**
4	**$2.02**	8	**$3.46**

Assortment same as 845.... **$2.16**

859 OX HAIR STRIPING.

(IN QUILLS)

No.	List Price	No.	List Price	No..	List Price	No.	List Price
1	**$1.44**	3	**$2.30**	5	**$3.82**	7	**$4.46**
2	**$1.88**	4	**$2.74**	6	**$3.88**	8	**$5.18**

Assortment same as 845 **$3.16**

825 BRISTLE MARKING. (ROUND.)

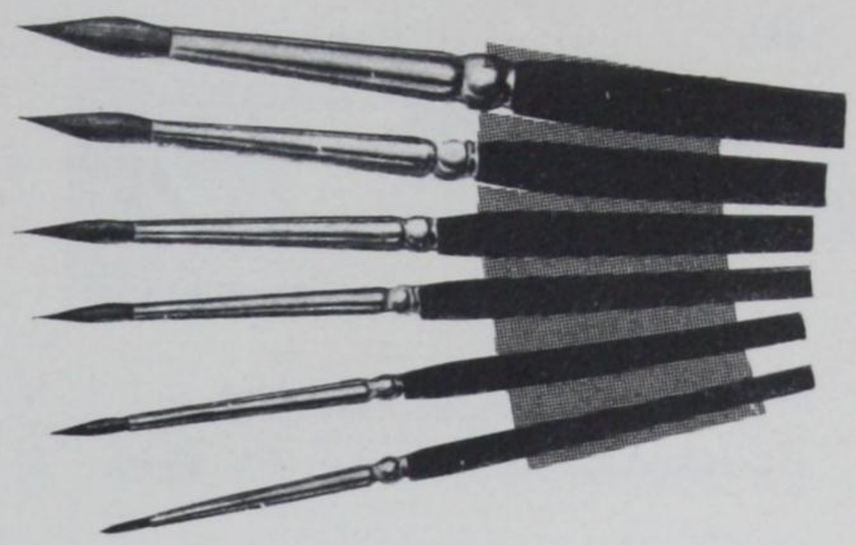

White Bristles. Long Handle.

No.	List Price	No.	List Price	No.	List Price
1	**.96**	3	**$1.16**	5	**$1.36**
2	**$1.04**	4	**$1.24**	6	**$1.46**

Assorted 1 to 6 contains:

1/4 dozen 1 and 2
1/6 dozen 3 and 4
1/12 dozen 5 and 6 ..... **$1.20**

827 FRENCH BRISTLE ARTIST. (ROUND.)

No.	List Price	No.	List Price
6	**$1.88**	10	**$2.40**
8	**2.08**	12	**2.80**

Assorted 2 to 12

1/4 dozen 2 and 4
1/6 dozen 6 and 8
1/12 dozen 10 and 12 .... **$2.08**

830 RED SABLE ARTIST. (ROUND.)

Pure Red Sable.

No.	List Price	No.	List Price	No.	List Price	No.	List Price
1	**$2.44**	4	**$3.16**	7	**$4.04**	10	**$5.18**
2	**$2.74**	5	**$3.32**	8	**$4.32**	11	**$5.76**
3	**$2.88**	6	**$3.60**	9	**$4.60**	12	**$6.34**

Assorted 1 to 12 contains 1/12 eacn size. **$4.04**

842 ALBATROSS C. H. LETTERING.

Metal Ferrule: Black Polished Handles.

No.	List Price	No.	List Price	No.	List Price
2	**$2.74**	6	**$3.74**	10	**$5.18**
4	**$3.32**	8	**$4.18**	12	**$6.34**

Assorted contains:

1/4 dozen 2 and 4
1/6 dozen 6 and 8
1/12 dozen 10 and 12 ..... **$4.18**

844 RED SABLE LETTERING.

Metal Ferrule. Black Polished Handles.

No.	List Price	No.	List Price	No.	List Price	No.	List Price
2	**$3.74**	4	**$6.54**	6	**$10.80**	8	**$15.86**
10	**$23.82**	12	**$29.04**	14	**$34.74**		

843 CAMEL HAIR ARTIST.

	List Price
2 dozen assorted on cards. Per Card...	**$1.46**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ARTIST, LETTERING, STRIPING, LACQUERING, SIGN PAINTER AND FRESCO BRUSHES

866 SWORD STRIPERS.

No.	List Price	No.	List Price	No.	List Price	No.	List Price
0	**$10.94**	1	**$12.10**	2	**$13.24**	3	**$14.40**

868 CAMEL HAIR GILDERS TIPS.

	List Price
4½ inches wide. For laying gold leaf . . .	**$5.76**

872 GOAT HAIR LACQUERING. (ROUND.)

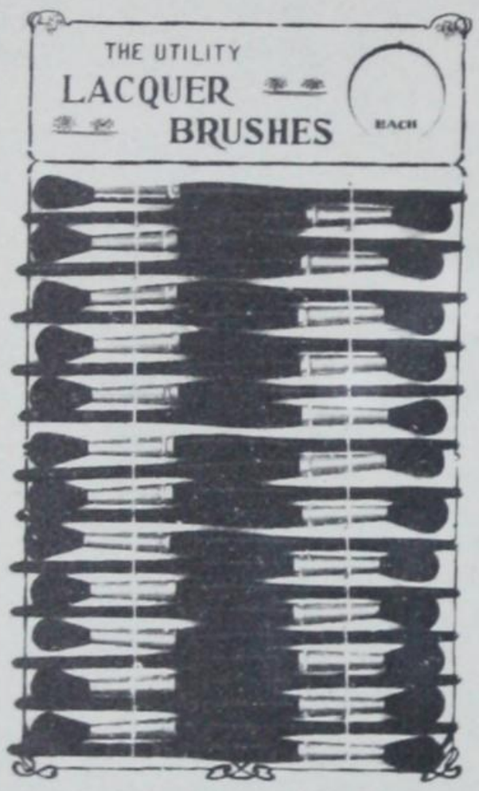

	List Price
2 dozen on cards. Per Card	**$4.04**

877 OX HAIR SIGN WRITERS. (SET IN RUBBER)

Size	Length Out Inches	Wgt. Lbs.	List Price	Size	Length Out Inches	Wgt. Lbs.	List Price
¼	⅞	¼	**$9.50**	¾	1 1/16	½	**$20.74**
½	15/16	¼	**$16.70**	1	1 3/16	¾	**$25.92**

879 ONE STROKE OX. (SET IN RUBBER)

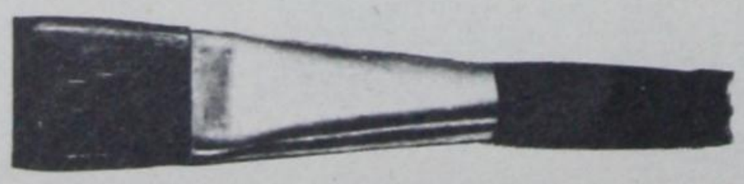

For lettering on Price Cards, etc.

Size	Length Out Inches	Wgt. Lbs.	List Price	Size	Length Out Inches	Wgt. Lbs.	List Price
¼	¾	¼	**$7.20**	¾	1	½	**$13.54**
½	⅞	¼	**$9.50**	1	1¼	¾	**$17.56**

SOFT HAIR BRUSHES

882 HUMMER BRONZING. (PATRICIA.)

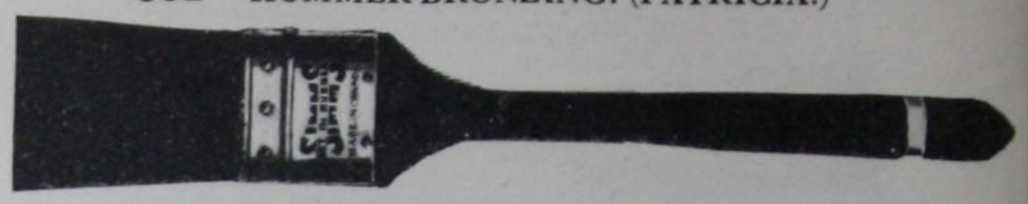

Made of specially prepared Goat Hair. Long Green Handles with White Band. Nickelled Ferrules. Especially recommended for bronzing radiators, pipes, etc.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1¼	1	Doz. **$9.80**
1½	1 7/16	1	Doz. **$11.80**
2	1 5/8	1	Doz. **$16.70**

900 GOAT HAIR MOTTLING. CHISELLED.

Brown Goat. Nickelled Ferrule. Green Polished Handles with White Band.
A good low priced brush for applying Lacquers, Japans, etc.

Size	Length Out Inches	No. Dozen in Box	List Price
½	15/16	1	Doz. **$8.50**
1	1 1/8	1	Doz. **$8.50**
1½	1 3/16	1	Doz. **$11.24**
2	1¼	1	Doz. **$14.12**

917 CONDOR CAMEL HAIR COLOR. CHISELLED.

Fine Grade Kazan Hair. Nickelled Ferrules. Polished Green Handles with White Band.

Size	Length Out Inches	No. Dozen in Box	List Price
½	15/16	1	Doz. **$14.40**
1	1 1/8	1	Doz. **$15.26**
1½	1 3/16	1	Doz. **$18.72**
2	1 5/16	1	Doz. **$26.64**
2½	1 7/16	1	Doz. **$34.84**
3	1 9/16	1	Doz. **$49.24**

918 ORIOLE CAMEL HAIR COLOR.

Green Polished Handles with White Band. Nickelled Ferrules.

Made for the Master Painter. The heaviest Camel Hair brush on the Market. No better brush can be made.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1¼	1	Doz. **$24.76**
1½	1⅜	1	Doz. **$31.10**
2	1½	1	Doz. **$38.30**
2½	1 5/8	1	Doz. **$49.82**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SOFT HAIR BRUSHES

938 XX ORIOLE FITCH FLOWING.

Green Handles with White Band. Nickelled Ferrules. Made of finest Grade Prime Eastern Black Skunk Hair. Generally used in the furniture varnishing or lacquering trade or in other work when light varnish is used.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1½	1	Doz. **$16.12**
1½	1⅝	1	Doz. **17.88**
2	1¾	1	Doz. **21.88**
2½	1⅞	1	Doz. **29.96**
3	2	1	Doz. **36.28**

953 XX ORIOLE OX FLOWING.

Green Handles with White Band. Nickelled Ferrules
All Pure European Ox Hair of Finest Quality.
This brush is an unusual combination of softness and elasticity. Preferred by many painters to the Badger Hair.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1⅜	1	Doz. **$28.22**
1½	1⅝	1	Doz. **48.10**
2	1¾	1	Doz. **64.80**
2½	1⅞	1	Doz. **91.88**

941 AUTO FINISH FLOWING. (PATRICIA.)

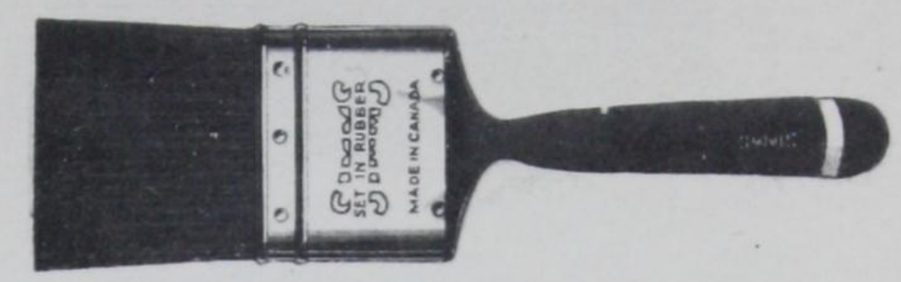

A flowing style brush designed especially for the amateur car painter.
Silver Grey Bristles. Green Handle with White Band.

Size	Length Out Inches	List Price
1½	1¾	Doz. **$9.22**
2	1⅞	Doz. **$12 .24**

945 XX ORIOLE BADGER FLOWING.

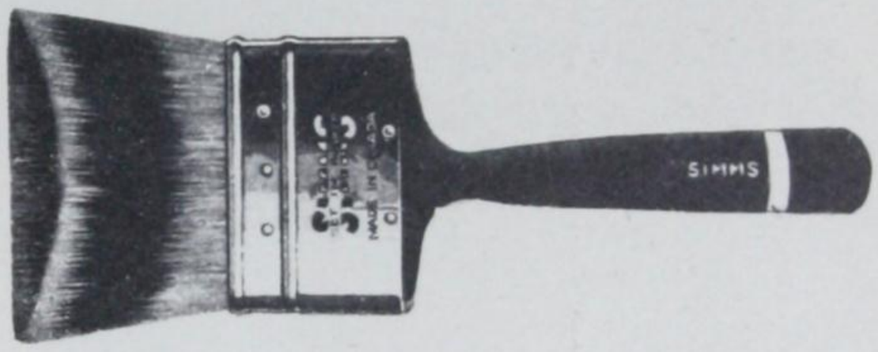

Green Handles with White Band. Nickelled Ferrules.
The Finest Badger Flowing Made. Used by professional automobile, piano and furniture finishers where only high class work is found.

Size	Length Out Inches	No. Dozen in Box	List Price
1	1½	1	Doz. **$42.04**
1½	1⅝	1	Doz. **55.00**
2	1¾	1	Doz. **86.40**
2½	1⅞	1	Doz. **124.42**

HORSE AND DANDY BRUSHES

1055 HORSE BRUSHES. FLAT FACE.

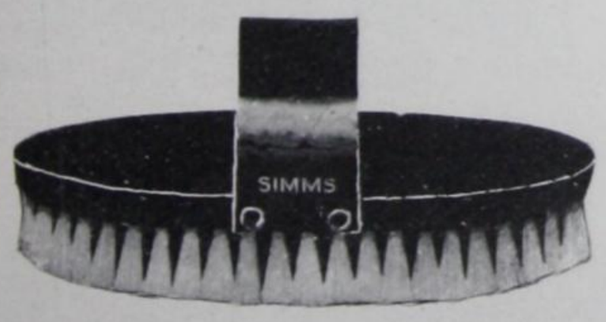

Polished Hardwood Backs. Fancy Leather Strap.
Packed one-half dozen in package.

No.	Kind of Stock	Length Out Inches	List Price
2	Grey Fibre	¾	Doz. **$7.20**

1056 HORSE BRUSHES. OVAL FACE.

Polished Hardwood Backs. Fancy Leather Strap.
A very popular brush.
Packed one-half dozen in package.

No.	Kind of Stock	Length Out Inches	List Price
500	Union Fibre	1½ outside	Doz. **$9.50**

1073 DANDY BRUSHES. FLAT FACE.

Polished Hardwood Back.
One-half dozen in package.

No.	Kind of Stock	Size	Length Out Inches	List Price
9	Union Fibre	9 x 2⅜	1½	Doz. **$6.92**
19	Bassine	9 x 2⅜	1½	Doz. **$6.34**

1075 DANDY BRUSHES. OVAL FACE.

Polished Hardwood Backs.
One-half dozen in package.

No.	Kind of Stock	Size	Length Out Inches	List Price
10	Union Fibre	9 x 2⅜	1¾	Doz. **$7.34**
20	Indian Fibre	9 x 2⅜	1¾	Doz. **$6.62**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

HORSE, DANDY, STREET AND STABLE SWEEPING

1105 DANDY BRUSHES. HIGH GRADE.

Highly Polished Hardwood Concaved Backs with embossed leather side pieces. Oval Face.

A high class brush in every way. Put up in packages of one-half dozen. Each brush in individual carton.

Name	Stock	Size of Block	Length Out Inches	List Price
Navajo	Union Fibre	9½ x 2⅝	1⅞	Doz. **$13.96**

NOTE.—When ordering with side leathers add 100 to the regular number; thus 119 will mean 19 with side leathers. Extra for side leathers:

Embossed Leather . . . . . .

1116 BASS AND CANE SWEEPING.

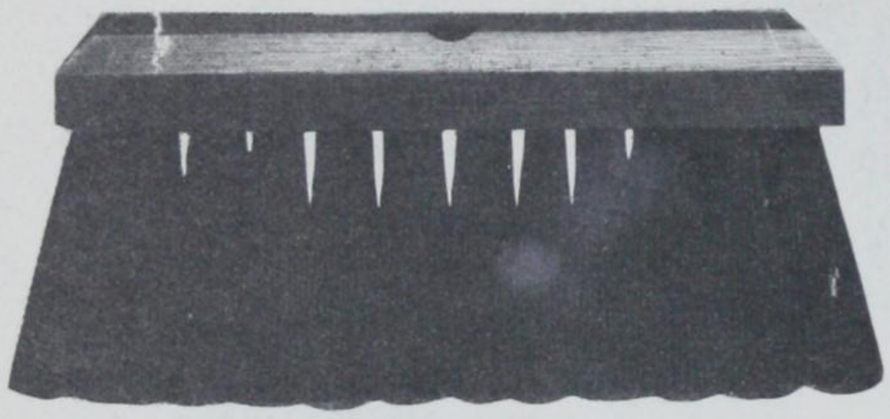

Bass Outside. Cane Middle. Plain Blocks. Handles Included. One-half dozen in crate.

Size	Rows	Length Out Inches	List Price
12	4	5	Doz. **$14.98**
14	4	5	Doz. **$18.00**
16	4	6	Doz. **$20.16**

1121 BASS SWEEPING.

One-half dozen in crate.

Size	Rows	Length Out Inches	List Price
12	4	4½	Doz. **$14.98**
14	5	5	Doz. **$18.00**
16	5	6	Doz. **$20.16**

1122 BASS SWEEPING.

Plain Hardwood Block.

A light very full brush with long medium stiff stock. Packed one-half dozen in crate.

No.	Size Block	Rows	Length Out Inches	List Price
6	12	5	5	Doz. **$19.72**

1125 RATTAN SWEEPING.

Wire Drawn. Plain Hardwood Blocks, with Reinforced Ends.

Principally used for street sweeping.

No.	Size	Rows	Length Out Inches	List Price
4	16	4	12	Doz. **$48.24**

1126 EXTRA HANDLES.

54 x 1⅛ inch Hardwood with Ends Tapered to fit Blocks.

	List Price
Per dozen	**$3.82**

SCRUB, NAIL, and SINK BRUSHES

1108 NAIL.

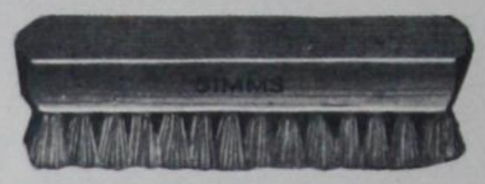

One dozen in package.

No.	Stock	Shape	Finish	List Price
10	White Fibre	Oblong	Plain	Doz. **.98**
2	White Fibre	Oblong	Plain	Doz. **$2.08**
5	White Fibre	Oval	Buffed	Doz. **$3.62**

1112 (Old 1050) CLOTH.

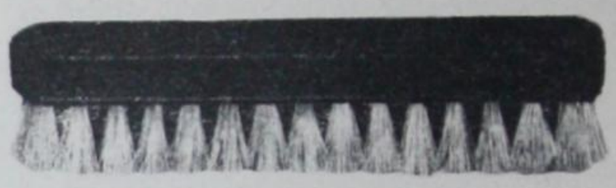

A Cheap, Serviceable Brush. One dozen in package.

No.	Stock	Finish	List Price
0	Black Centre White Outside	Buffed	Doz. **$4.60**

1135 SQUARE END SCRUBBING.

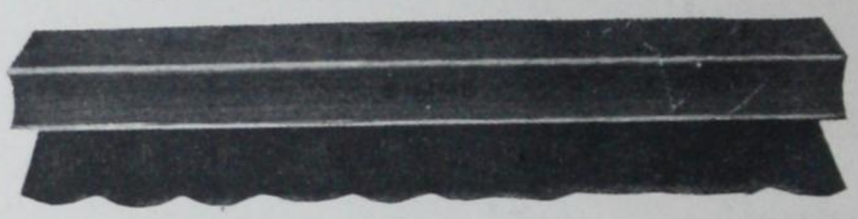

Tied ½ dozen in bundles

Name	Stock	Rows	List Price
Incas	Indian Fibre	4	Doz. **$2.74**

1138 POINTED END SCRUBBING.

A new Pointed End Scrub. One-half dozen in package.

No.	Stock	List Price
11	Union Fibre	Doz. **$2.88**
12	Indian Fibre	Doz. **$2.74**
13	White Fibre	Doz. **$2.88**

1148 GRIP PATTERN SCRUBBING.

This style of block is preferred by many as the shape fits the hand.

One-half dozen in package.

No.		
45	. . . . . Doz.	**$3.84**
46	. . . . . Doz.	**4.90**
151	. . . . . Doz.	**5.62**
473	. . . . . Doz.	**3.84**
174	. . . . . Doz.	**3.60**

SCRUB, BRUSHES

1140 WING SCRUBBING.

One-half dozen in package.

No.	Stock	List Price
21	Union Fibre	Doz. **$4.76**
22	Indian Fibre	Doz. **$4.46**
23	White Fibre	Doz. **$4.76**

1151 SOLID RAISED ENDS WITH LONG HEAVY TAIL

Name	Stock	Finish	List Price
Acorn	Brown & White	Polished	Doz. **$6.76**

1162 HIGH GRADE SCRUBBING.

Polished Oval Blocks. Used principally by janitors.
One-half dozen in package.

No.	Stock	List Price
250	Union Fibre	Doz. **$7.64**

1166 LAUNDRY SCRUBBING.

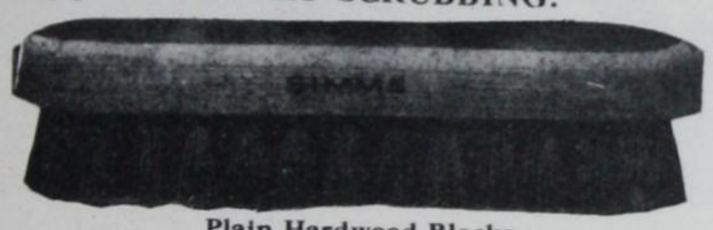

Plain Hardwood Blocks.
One-half dozen in package.

No.	Stock	Size	List Price
7	Union Fibre	6	Doz. **$2.88**
8	Indian Fibre	6	Doz. **$2.74**

1150 STAR SCRUB ASSORTMENT.
(IN CARTON)

Assortment contains:
1½ doz. No. 13 White Tampico
1 doz. No. 45 Indian Fibre
½ doz. No. 21 Union Fibre

List Price **$10.52**

1170 TABLE SCRUBBING

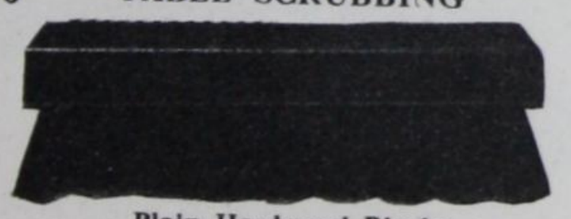

Plain Hardwood Blocks.
One dozen in package.

No.	Stock	Size	List Price
60	White Fibre	5⅝ x 2 3/16	Doz. **$2.50**
80	Indian Fibre	5⅝ x 2 3/16	Doz. **$2.50**

1172 HUB SINK.

One-half dozen in package.

Weight Lbs.	List Price
4	Doz. **$3.82**

1175 HANDY HOUSE

Plain Hardwood Blocks.
One-half dozen in package.

Stock	Length Out Inches	List Price
White Fibre	5/8	Doz. **$3.16**

FLOOR POLISHERS

1190 WAXWING FLOOR POLISHER.

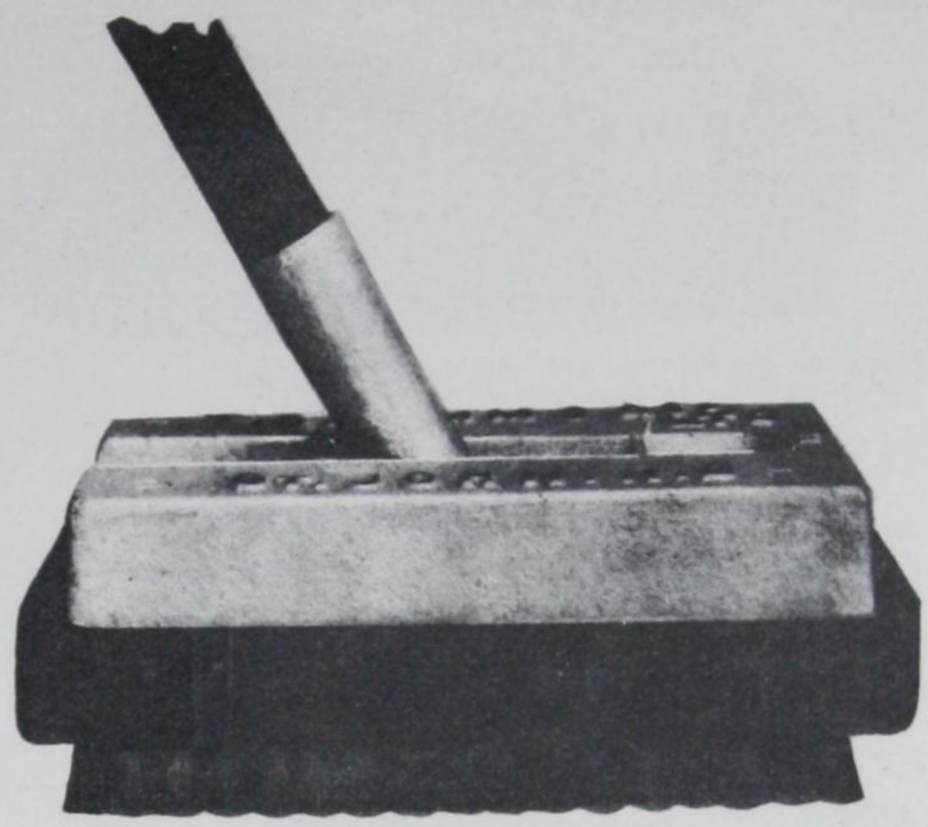

No.	Size	Length Out Inches	List Price
10 lb.	5½ x 9	⅞	Doz. **$44.64**
15 lb.	5½ x 9	⅞	Doz. **$51.84**
25 lb.	5½ x 9	⅞	Doz. **$67.40**

Brushes Only provided separately.... **$14.40**

B. B. WAXER-POLISHER

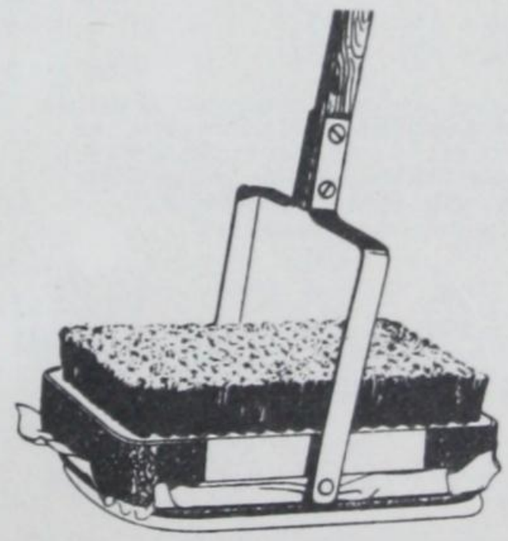

In waxing with the B.B. Waxer Polisher the Wax is forced through the cloth on to the floor in a thin uniform coating. Lumps and streaks being impossible; a perfectly waxed floor is always obtained. A good sturdy brush for polishing will quickly bring up the high polish on floors. Well protected by bumpers. Quite easy for a woman to operate.

Price List

B.B. Waxer Polisher. Each..... **$6.50**

1180 DECK SCRUBBING.

Packed Loose.

No.	Stock	Finish	Weight Lbs.	List Price
4	White Fibre with Rubber Strip		21½	Doz. **$10.52**
	Handles Extra.....			Doz. **$3.82**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SHOE AND STOVE BRUSHES

SHOE BRUSHES

1195 HANDLED SHOE.

Hardwood Blocks. No. 308, 310, packed one-half dozen in paper package, balance one-half dozen in cardboard box.

No.	Stock	Size	Finish	List Price
308	Black Fibre	6½ x 2¼	Plain	Doz. **$4.76**
310	Black Fibre	7 x 2⅝	Plain	Doz. **$5.04**
320	Black Fibre	7 x 2⅝	Polished Red Hdles	Doz. **$6.20**
325	Blk. Bristle	7 x 2⅝	Polished Red Hdles	Doz. **$8.06**

1205 SHOE POLISHING

Designed for those who want a good, inexpensive brush for household use.

No.	Stock	Size	Length Out	List Price
140	Grey	7⅜ x 2¾	1⅛	Doz. **$17.00**
142	Black	7⅜ x 2¾	1⅛	Doz. **$17.00**

1206 SHOE POLISHING.

Designed especially for the Shoe Shine trade. Made of pure bristle, wire drawn throughout.

No.	Stock	Size	Length Out	List Price
55	Grey	8 x 2¾	1⅝	Doz. **$41.48**
57	White	8 x 2¾	1⅝	Doz. **$41.48**

1210 COMBINATION SHOE CLEANER.

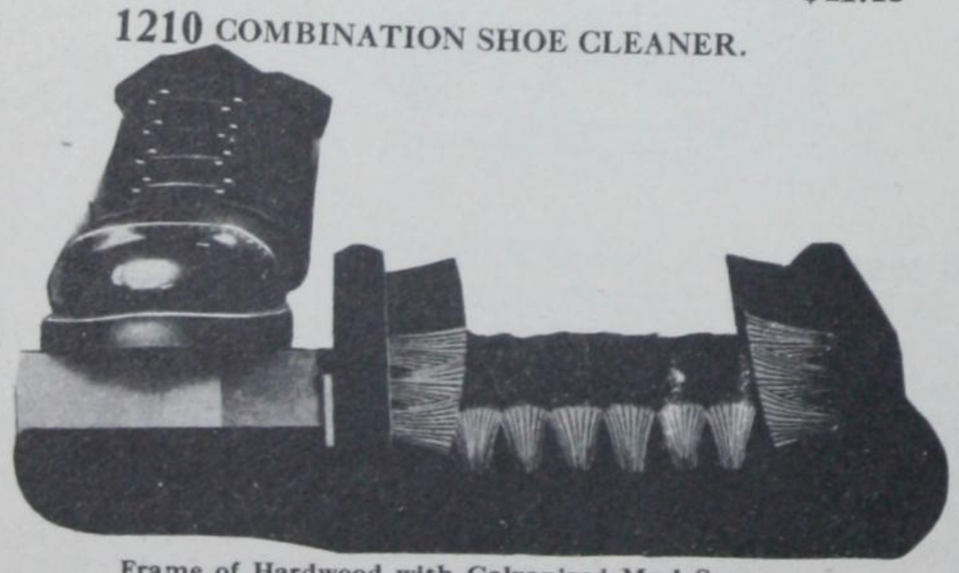

Frame of Hardwood with Galvanized Mud Scraper. Brush made of high grade Stiff Union Fibre, with screws to fasten down. Packed in individual cartons. Every householder should have one.

List Price
Doz. **$20.74**

1212 SHOE DAUBERS.

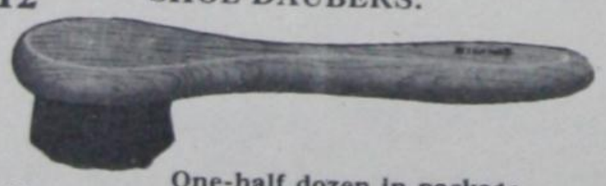

One-half dozen in package.

No.	Stock	List Price
1	Black Fibre	Doz. **$2.74**

1214 SHOE DAUBER.

Heavy Dauber for shoe shine trade. Curved Handle.

No.	Stock	List Price
C-231	Grey Bristle	Doz. **$8.64**

STOVE BRUSHES

1220 STRAIGHT STOVE.

Plain Finish
Wrapped one-half dozen in paper package.

No.	Stock	Size	List Price
0	Black Fibre	9¼ x 2½	Doz. **$4.18**

1228 CURVED STOVE.

Double Wings. Hardwood Blocks. Packed one-half dozen in cardboard boxes. No. 22 Plain Finish. No. 23 Varnished with Red Handles.

No.	Stock	Size Block	List Price
22	Black Fibre	9¾ x 2½	Doz. **$6.34**
23	Black Fibre	9¾ x 2½	Doz. **$7.20**

1230 CURVED. POINTED.

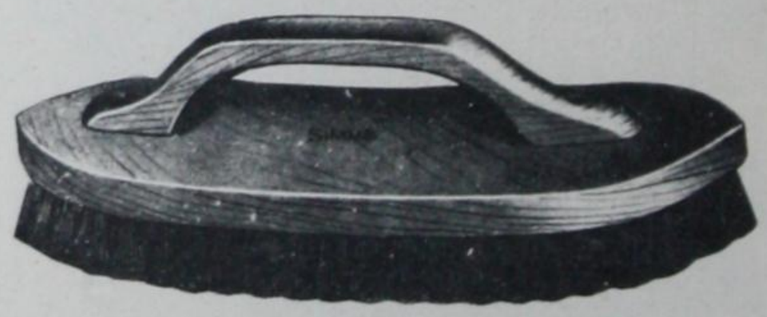

Without Wings. Plain Blocks. One-half dozen in package.

No.	Stock	Size	List Price
10	Grey	9½ x 2¼	Doz. **$5.18**
12	Black	9½ x 2¼	Doz. **$5.18**

1232 STOVE DAUBERS.

Packed Loose.

No.	Stock	List Price
0	Black Fibre	Doz. **$2.02**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BARBERS COUNTER AND MILL, DUSTERS

1325 BARBER'S NECK.

Made of fine White Horsehair. Polished Handles.
Packed one-half dozen in box. Wire Drawn.

No.	Length Out	Diameter	List Price
3	3¾	2	Doz. **$25.92**

1335 C. M. DUSTING.

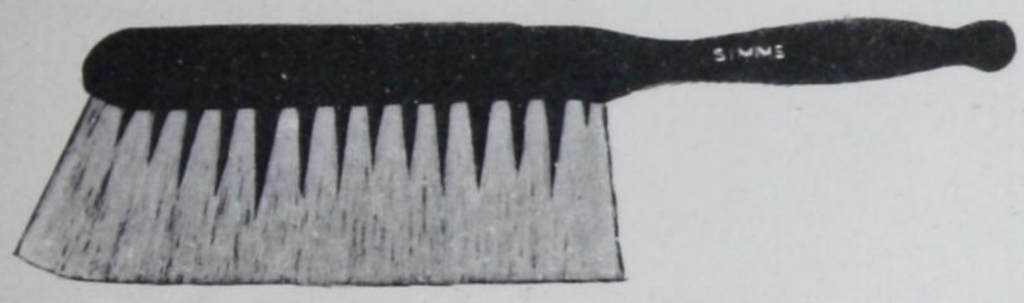

Wire Stapled. White Fibre Outside. Grey Middle.
Red Polished Blocks.
Cheap duster for around stores, etc.
Packed one-half dozen in box.

No.	Size	List Price
1	7	Doz. **$10 .80**
2	8	Doz. **$12.82**

1338 HUB DUSTING.

(SET IN PITCH)
Black Bristle Outside. Grey Fibre Middle.
Red Polished Blocks.
Used for dusting bannisters, etc.
Packed one-half dozen in box.

No.	Size	List Price
2	8	Doz. **$21.32**

1340 ACTO DUSTING.

(SET IN PITCH)
Black Bristle Outside. Grey Middle. Red Polished Blocks. Better grade than 1338.

No.	Size	List Price
2	8	Doz. **$22.90**
3	9	Doz. **$28.08**

1345 RAILWAY DUSTING.

Black Bristles and Hair Mixture. Red Polished Blocks.
Packed one-half dozen in box.

No.	Size	List Price
18	9	Doz. **$36.28**

1343 TERN DUSTING.

(SET IN PITCH)
All Black Chinese Bristles.

No.	Finish	List Price
1	Red	Doz. **$23.90**
2	Yellow	Doz. **$23.90**
3	Blue	Doz. **$23.90**

1360 NEW ENGLISH STYLE DUSTING.

(SET IN PITCH)

Celluloid Lacquered Blocks 11¼ inches long. Has a new style bulky end where the wear comes. A very high grade brush in every respect and a line we strongly recommend. Made in three grades.

Packed one-half dozen in box.

Name	Stock	Finish	List Price
Thrush	Black Mixture	Natural	Doz. **$21.32**
Brant	Black Bristle Outside Grey Middle	Red	Doz. **$24.84**
Eagle	White Bristle Outside Black Bristle Middle	Green	Doz. **$26.50**

1362 DUSTING.

Wire Stapled. These numbers are a group of cheap and medium priced brushes that will give good honest service for the money expended.
Wrapped in one-half dozen packages.

Name	Stock	Size	Finish	List Price
Hawk	Black Fibre	7	Plain	Doz. **$6.48**
Tycoon	Blk. Mixture	8	Red	Doz. **$12.96**
Onyx	Black Hair	8	Red	Doz. **$17.28**

1370 MILL DUSTING.

A Pure Bristle, Long Handled Duster, pitch set. Especially useful around machinery.

No.	Stock	List Price
430	Grey or Black	Doz. **$11.80**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FLOOR SWEEPING

1400 GEM.
(MACHINE MADE)

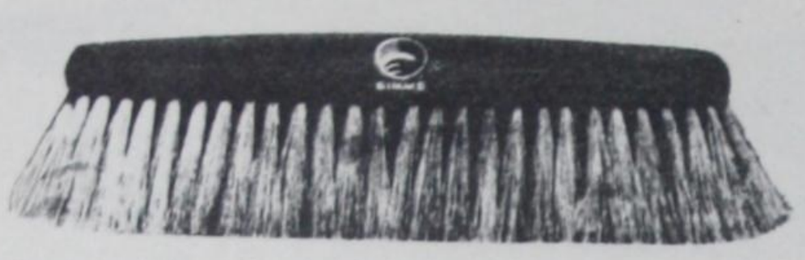

All Grey Mixed Fibre. Natural Polished Blocks.
This broom has a large sale. For ordinary use.

Size	Length Out Inches	List Price
12	2 7/8	Doz. **$20.44**
14	2 7/8	Doz. **$23.62**
16	2 7/8	Doz. **$28.80**

1404 BOBOLINK.
(MACHINE MADE)

Black Horsehair. Blue Lacquered Blocks.
The cheapest hair broom we make and a big seller.

Size	Length Out Inches	List Price
12	2 5/8	Doz. **$28.80**
14	2 5/8	Doz. **$32.26**
16	2 5/8	Doz. **$38.30**

1388 CYCLO.
(SET IN PITCH)

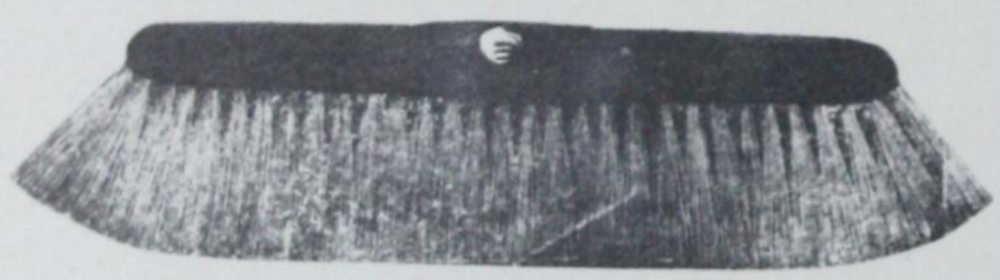

Black Horsehair Outside, Grey Mixed Middle.
Red Polished Blocks.

Size	Length Out Inches	List Price
12	3	Doz. **$34.56**
14	3 3/16	Doz. **41.48**
16	3 3/8	Doz. **47.24**
18	3 9/16	Doz. **53.28**
24	3 9/16	Doz. **69.40**

1390 PETREL.
(SET IN PITCH)

Black Bristles Outside. Grey Mixed Middle.
Yellow Polished Blocks.

Size	Length Out Inches	List Price
14	3 3/16	Doz. **$51.84**
16	3 3/8	Doz. **61.20**
18	3 9/16	Doz. **72.58**
24	3 9/16	Doz. **91.30**

1394 EBONY
(SET IN PITCH.)

Black Bristle. Yellow Polished Blocks. An exceptional good broom for schools, hospitals, etc.

Size	Length Out Inches	List Price
12	3	Doz. **$59.04**
14	3 3/16	Doz. **67.68**
16	3 3/8	Doz. **87.84**
18	3 9/16	Doz. **106.56**
24	3 5/8	Doz. **146.88**

1389 CURLEW.
(SET IN PITCH)

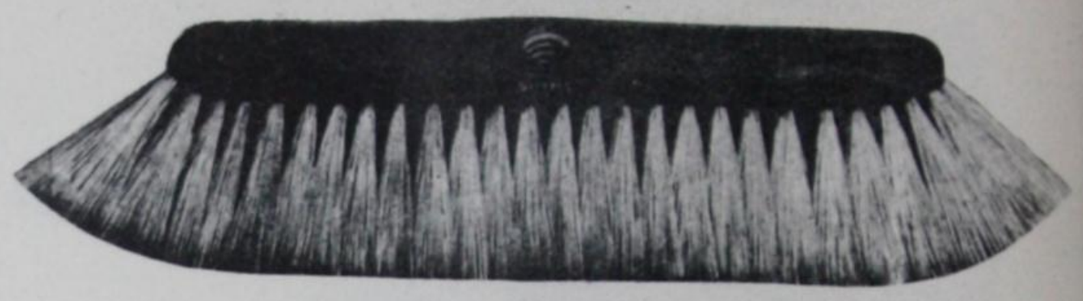

An English style extreme flare broom. A really high class broom. White Bristle casing. Grey Bristle and Horsehair Middle. Yellow Polished Blocks.

Size	Length Out Inches	List Price
14	3 1/4	Doz. **$64.22**
16	3 1/4	Doz. **74.88**
18	3 1/4	Doz. **84.96**
24	3 1/4	Doz. **114.04**

1398 PHEASANT.
(SET IN PITCH)

Highest Quality Grey Russian Bristles. Yellow Polished Blocks. An extra stiff heavy broom of highest quality. Bought principally for bowling alleys, schools, institutions, etc.

Size	Length Out Inches	List Price
14	3 9/16	Doz. **$96.48**
16	3 3/4	Doz. **122.40**
18	3 3/4	Doz. **139.96**
24	3 3/4	Doz. **186.62**

1403 ONYX.
(MACHINE MADE)

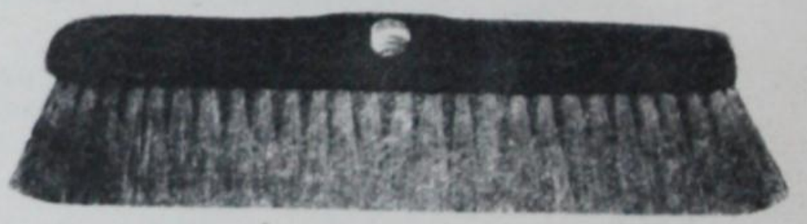

Highest Grade Black Horsehair.
Red Lacquered Blocks.
A good all round broom and one of our best sellers.

Size	Length Out Inches	List Price
12	2 5/8	Doz. **$40.32**
14	2 5/8	Doz. **46.08**
16	2 5/8	Doz. **53.56**
18	2 5/8	Doz. **61.92**
24	2 5/8	Doz. **82.08**
36	2 5/8	Doz. **123.84**

1408 SPECIAL JANITORS.

Special Stiff Middle. Black Horse Hair Outside.

Size	Length Out Inches	List Price
14	3 1/2 & 3	Doz. **$43.48**
16	3 1/2 & 3	Doz. **47.80**
18	3 1/2 & 3	Doz. **53.86**
24	3 1/2 & 3	Doz. **77.76**

1412 EXTRA HANDLES.
Finished in Natural or Red.

Inch	List Price
54	Doz. **$5.18**
60	Doz. **$5.76**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FLOOR MOPS, WINDOW, HEARTH, DISH MOPS, ROOFING.

1421 SCRUB MOP.

Fine Cotton Twine. Plain Hardwood Block with new Construction. Made to fit any standard screw thread handle.

	List Price
Scrub Mop	Doz. **$6.48**
Handle Extra	Doz. **$2.60**
Complete	Doz. **$9.08**

1422 DISH MOPS.

Fine Cotton Yarn. 15-20 Plain Hardwood Handles. 174 Green, Yellow, Blue Lacquered Handles.

Size	Handle Inches	Swab Inches	List Price
15	10½	4	Doz. **$1.72**
20	10½	4½	Doz. **$2.40**

L174 DISH MOPS.

Asst. Colored Handles. List Price Doz. **$2.30**

1423 STANDARD FLOOR OR YACHT MOPS.

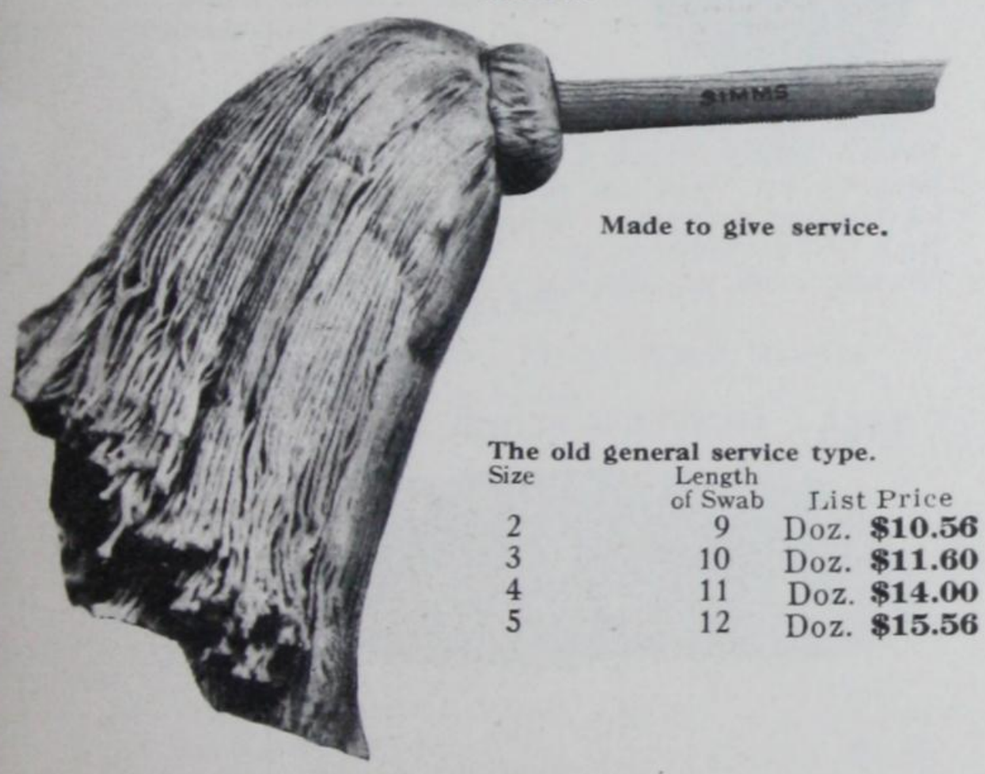

Made to give service.

The old general service type.

Size	Length of Swab	List Price
2	9	Doz. **$10.56**
3	10	Doz. **$11.60**
4	11	Doz. **$14.00**
5	12	Doz. **$15.56**

1424 HOME.

A good serviceable brush but lighter than 1423.

No.	Length of Swab	List Price
2	8	Doz. **$5.38**
3	9	Doz. **$6.02**
4	10	Doz. **$6.94**
5	10½	Doz. **$7.98**
6	11	Doz. **$8.92**

1440 LONG HANDLED TAR.

Grey Fibre. Four Feet Handles.

Diameter	Length Out Inches	List Price
1¾	31¼	Doz. **$10.36**

1425 ROUND WINDOW

One and Three are Wire Drawn, others Machine Made.

No.	Stock	Diameter	Length Out Inches	List Price
8	Grey Fibre	4¼	2⅞	Doz. **$ 7.20**
5	Grey Horsehair	4¼	2⅝	Doz. **$20.74**
4	Grey Horsehair	4¼	2⅞	Doz. **$25.92**
3	Black Bristle Outside, Grey Middle	4	2½	Doz. **$46.66**
1	Grey Bristle and Horsehair	4½	3	Doz. **$67.40**

1426 HANDLES FOR WINDOW AND WHITEWASH.

8 Feet x 1⅛ Hardwood. Tapered at One End.

List Price ..... Doz. **$6.34**

1428 OBLONG WINDOW.

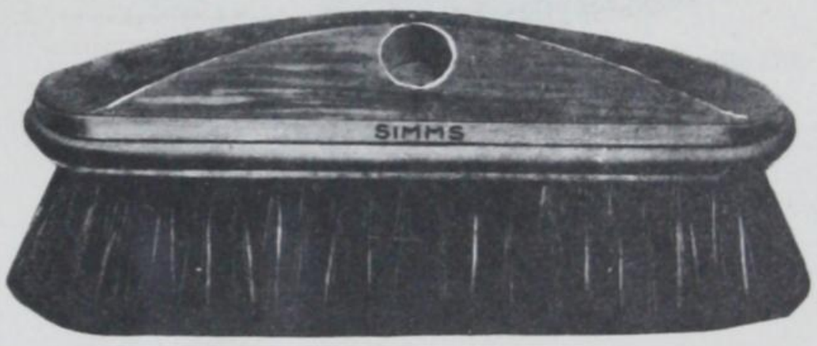

No.	Stock	Size	Length Out Inches	List Price
15	Grey Fibre	8½ x 2½	2½	Doz. **$11.38**
20	Grey Hair	8½ x 2½	2½	Doz. **$20.16**

1430 CAR WASHERS.

Black Horsehair. Natural Polished Blocks. Wire Drawn

No.		Length Out Inches	List Price
344	With Bands	1¾	Doz. **$38.30**
344	Without Bands	1¾	Doz. **$36.28**

1442 JUNCO ROOFING.

(MACHINE MADE)

Grey Fibre.

Solid Hardwood Backs.

Knot	List Price
2	Doz. **$8.50**
3	Doz. **$10.94**

1443 WREN ROOFING.

Round Wire Ferrule. Grey Fibre. Plain Wood. Blocks.

Knot	Length Inches	List Price
3	3¼	Doz. **$25.92**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SEAM, BRICK LINERS, SANITARY, MOULDERS DUST, MILK BOTTLE, SEPARATOR

1450 HUB SEAM. (WIRE DRAWN)

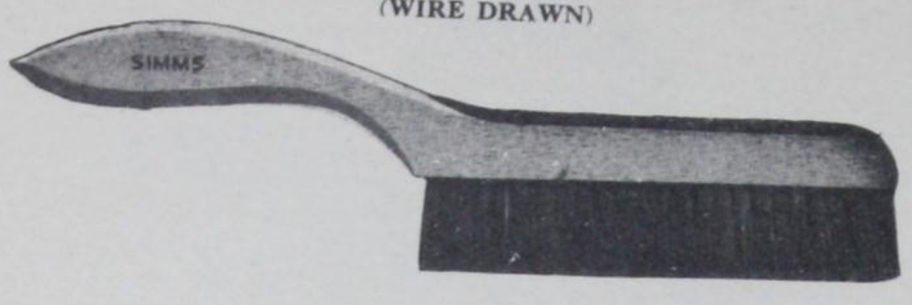

Grey Bristle and Tampico Mixed.
One dozen in package.

Size	Length Out Inches	List Price
6	1⅛	Doz. **$6.48**

1452 BRICK LINERS.

List Price
Doz. **$5.18**

1455 MILK BOTTLE.

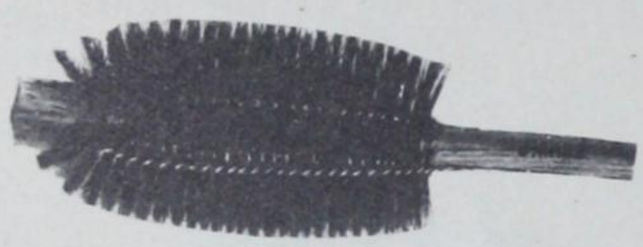

Black Bristles, Reinforced Ends.

Made of the best Black Bristle with long Wood Handle. Reinforced end to get into bottom corners. Used for cleaning milk bottles, glasses, pitchers, coffee and teapots, fruit jars, etc. A great labor saver.

List Price
Doz. **$6.48**

1458 SEPARATOR.

No.	Size	List Price	No.	Size	List Price
81	½	**$1.72**	85	2	**$2.16**
82	1	**$1.72**			
83	1¼ to ¾	**$1.72**	145	Wood	**$4.18**
84	1½	**$1.72**			

Boxed Assortment.
½ dozen each 81, 82, 83, 84, 85; ¼ dozen 145.....Per Box..... **$6.20**

1460 SANITARY. (SOLID BACK)

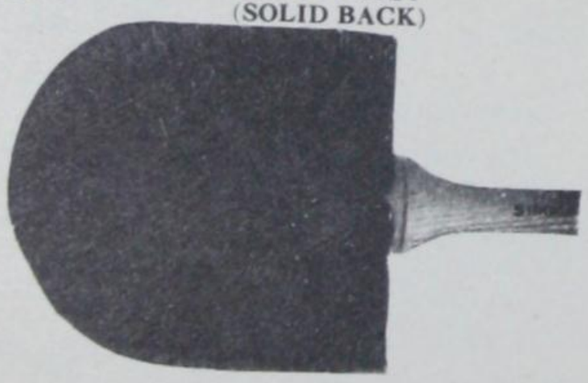

No.	Length Out Inches	List Price
2	4½	Doz. **$9.94**

1492 MOULDERS' DUST. (WIRE DRAWN)

Black Horsehair.

No.	Length Out Inches	List Price
3	2¾	Doz. **$31.10**

1620 RADIATOR BRUSH.

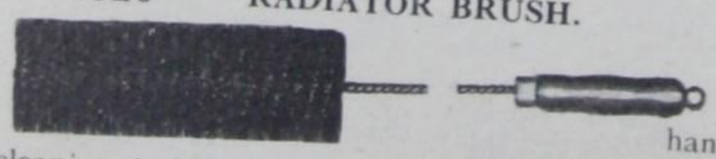

List Price
Doz. **$12.38**

For cleaning inside grooves of the radiator. 36-inch handle

1560 TWINE FLOOR DUSTER.

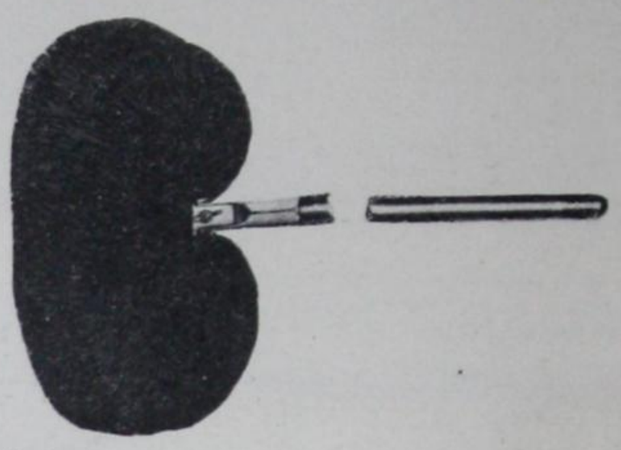

Made of specially treated Cotton Yarn. 54-inch handle adjusted to wire frame Used on the best highly polished floors. Wash in lukewarm soapy water.

List Price
Doz. **$23.76**

1570 UNIVERSAL DUSTER.

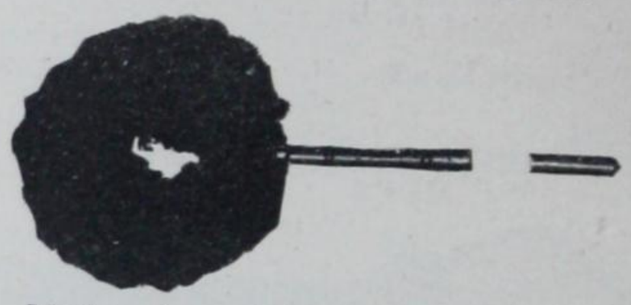

Made of specially treated Cotton Yarn. 12-inch Ebony Finished Handle with ring to hang up by. Will not show the dust. Used for dusting furniture, walls, stair banisters, back of the radiator, etc. When in need of cleaning, wash in lukewarm water and soap.

List Price
Doz. **$17.86**

1565 DUSTLESS FLOOR MOP.

Made of specially treated Cotton Yarn. Twisted in non-rustable wire fastened on a 10-inch block. 54-inch adjustable handle.

List Price
Doz. **$32.12**

1640 GRAY WALL SWEEP.

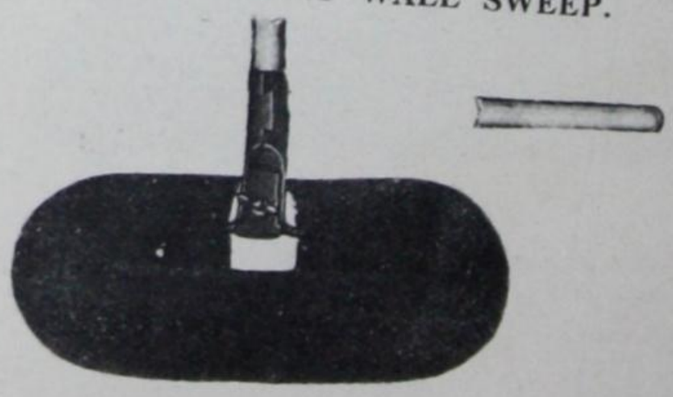

Made of the finest soft Grey Horse Hair. 70-inch adjustable Polished Handle. This brush will not injure the finest wall, nor will it leave any lint or smutches. It is specially adapted for ceilings, cornices, plate rails, etc.

List Price
Doz. **$36.86**

TWISTED WIRE BRUSHES

L152 SANITARY.

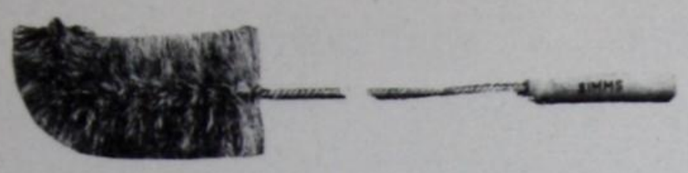

Made of Union Fibre, twisted in non-rusting wire. Curved end. Wood handle.

List Price **$4.18** Doz.

L172 SANITARY.



List Price **$6.76** Doz.

1655 SANITARY

List Price **$10.36** Doz.

L159 NAIL.

Made of pure White Bristles. White lacquered handle. 7¼ inches over-all. A well-finished brush.

List Price **$3.32** Doz.

L160 CLOTH

Made of Stiff Grey Fibre. Black Handle A good serviceable brush.

List Price **$4.18** Doz.

L161 CLOTH

Made of very best Black Stiff Bristle, which will not hurt the finest nap of any cloth. Nile Green Lacquer Enamelled Handle.

List Price **$4.32**

L162 VEGETABLE.



Made of Union Fibre. Nile Green Lacquer Handle. A brush for which there is a big demand. In addition to being especially adapted to cleaning vegetables, it is an ideal handy brush around the sink.

List Price **$2.02** Doz.

L175 MILK BOTTLE.



Made of Stiff Pure White Bristles. Twisted in wire fitted on a 15-inch wood handle.

List Price **$4.18** Doz.

1690 BABY'S BOTTLE BRUSH.



Made of Fine French Bristle, twisted in pliable non-rusting wire. Can be bent to any shape to clean the inside of the baby's bottle.

List Price **$2.16** Doz.

L176 SINGLE AUTO SPOKE.

Made of best White Fibre, strongly twisted in rust-resisting wire, and attached to handle to "stayput". Brass ferrule. Reaches those hard-to-get-at places of auto wheels.

List Price **$7.78** Doz.

L177 DOUBLE AUTO SPOKE.

Similar to L-176 in construction but has double quick action in cleaning. Fills a much-needed want among car washing tools.

List Price **$10.36** Doz.

196 HOT WATER BOILER

For Cleaning soot and scale off heating coils of hot water or steam boilers.

1¼	Complete with handle	**$17.56** Doz.
1¼	Brushes only	**9.36** Doz.
1¾	Complete with handle	**18.72** Doz.
1¾	Brushes only	**10.36** Doz.

198 HOT AIR FURNACE

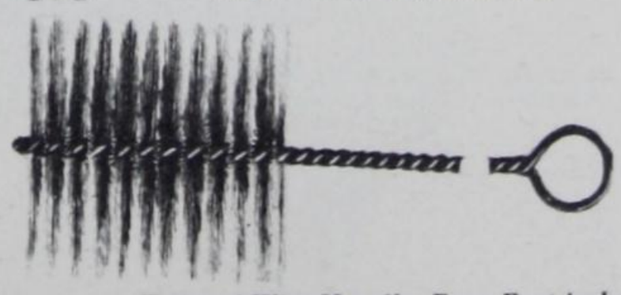

Twisted Wire Handle, Four Feet in Length.

Diameter	Stock	
4	Steel Wire	**$3.74**

195 ROUND WIRE TUBE

Size	List Price	Size	List Price	Size	List Price
1¼	**$8.50**	2¼	**$8.50**	3¼	**$8.92**
1½	**$8.50**	2½	**$8.50**	3½	**$9.08**
1¾	**$8.50**	2¾	**$8.50**	3¾	**$9.22**
2	**$8.50**	3	**$8.50**	4	**$9.50**

STEEL WIRE BRUSHES

177 PAINTERS' WIRE SCRUB

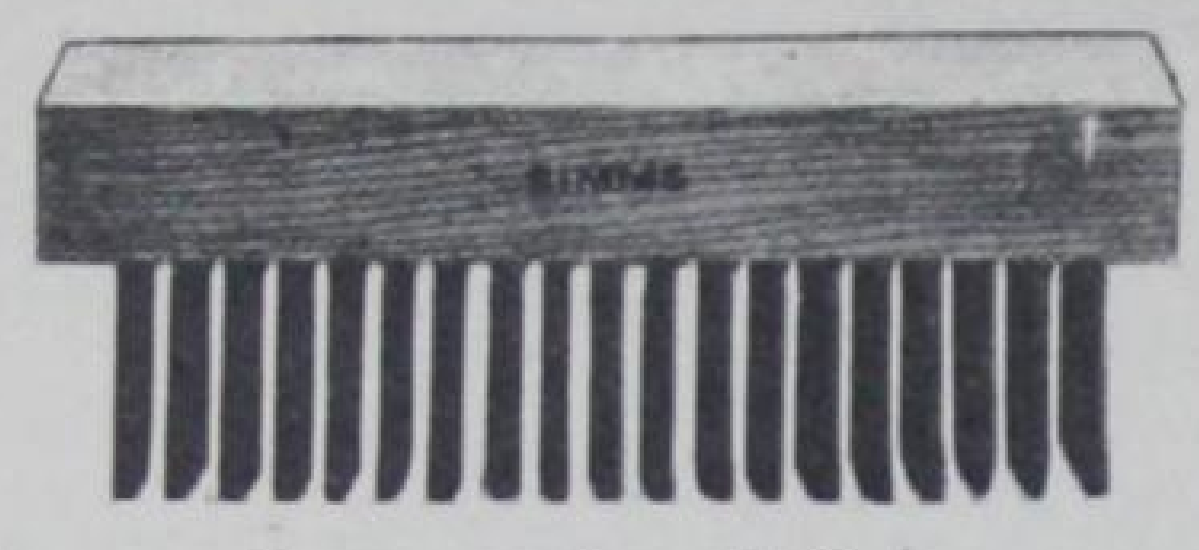

Size	Rows	Length Out Inches		List Price
5″ x 2″	5	1⅝	Doz.	**$4.32**

178 ROUND WIRE (FLAT)

Fine Steel Wire, Plain Hardwood Blocks. For use on wood, iron or stone, chiefly on wood. One-half dozen in package.

Size	Rows	Length Out Inches		List Price
7¼x2$\frac{5}{16}$	6 x 19	1⅝	Doz.	**$7.78**

179 ROUND WIRE (CURVED)

Fine Steel Wire, Plain Hardwood Blocks. For use on wood, iron or stone.

Size	Rows	Length Out Inches		List Price
7¼x2¾	9 x 22	1⅛	Doz.	**$10 .36**

181 SHOE HANDLE SCRATCH

Specially Tempered Round Wire, Plain Blocks. A brush for working in corners and out-of-the-way places inaccessible to the larger types. One dozen in package.

Width	Length Out Inches		List Price
2 Row	1¼	Doz.	**$4.60**
3 Row	1¼	Doz.	**$5.76**
4 Row	1¼	Doz.	**$7.92**

182 LONG HANDLE SCRATCH

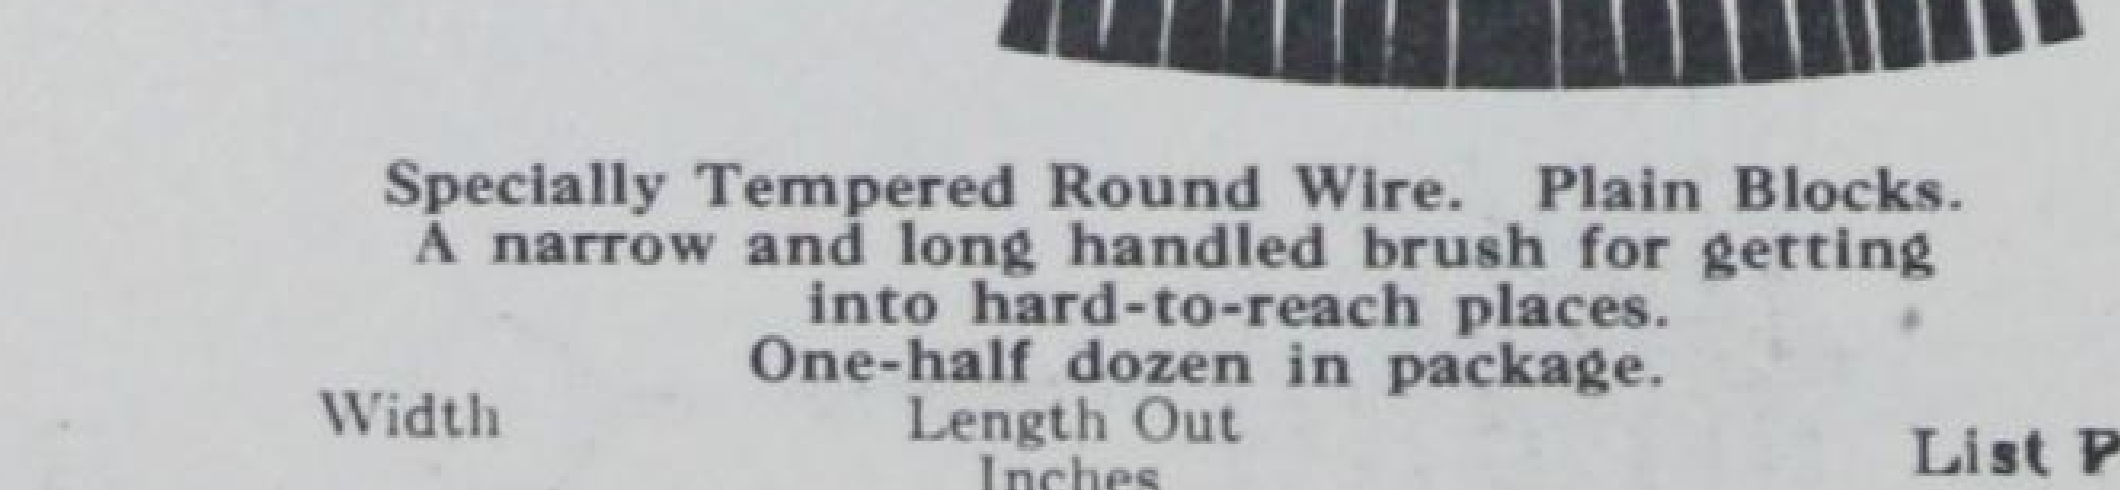

Specially Tempered Round Wire. Plain Blocks. A narrow and long handled brush for getting into hard-to-reach places. One-half dozen in package.

Width	Length Out Inches		List Price
3 Row	1⅛	Doz.	**$4.76**
4 Row	1⅛	Doz.	**$7.20**

187 ASSORTMENT

Contains

Contains	List Price
¼ doz of 178, 177 ⅙ doz of 179, 182 x 3 Row & 181 x 3 Row	**$7.06**

183 WIRE DUSTERS

Fine Tempered Steel Wire. Plain Blocks.

No.	Size	Length Out Inches		List Price
1	2½ x 1¼	2½	Doz.	**$6.20**

172 WIRE CASTING

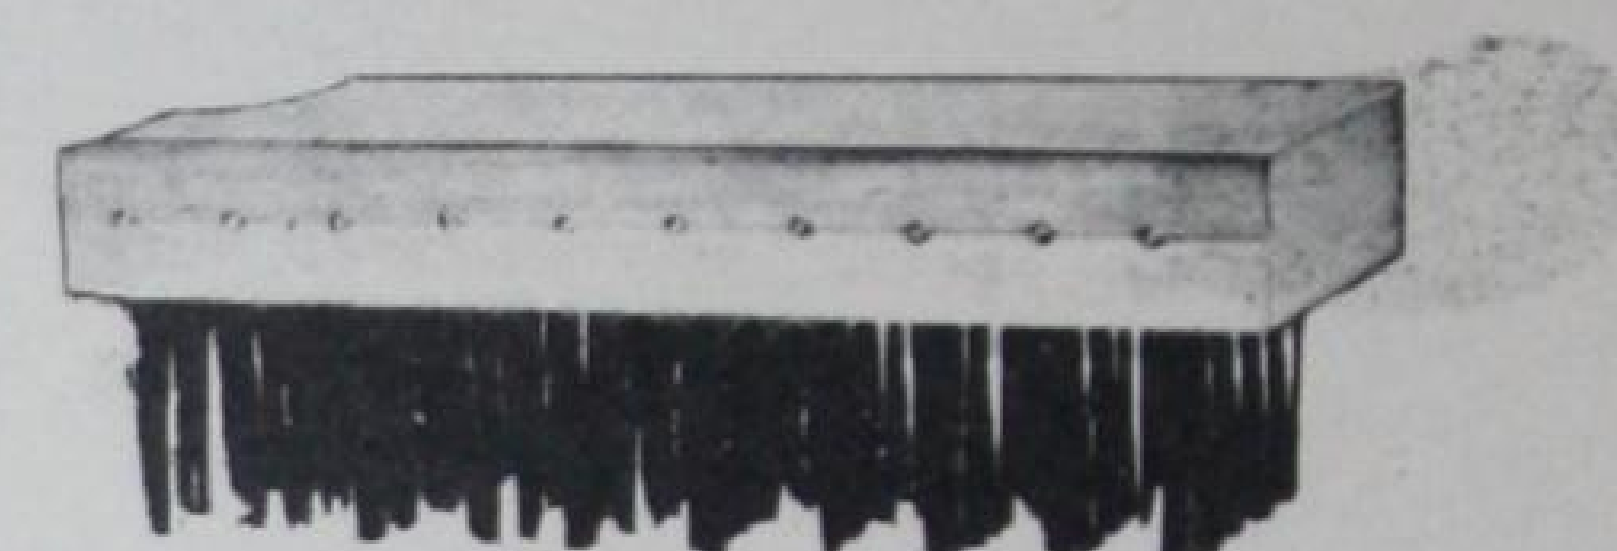

Flat Steel Wire. Hardwood Blocks. Packed Loose.

No.	Size	Rows	Length Out Inches		List Price
3	7½ x 2¾	5 x 10	3	Doz.	**$10.36**
5	7½ x 2¾	5 x 10	5	Doz.	**$11.24**

175 FLAT WIRE SCRUB

Flat Wire, Plain Hardwood Blocks. Suitable for use on metal and stone and not on wood. Packed loose.

Size	Rows	Length Out Inches		List Price
7½x2¾	5 x 10	1½	Doz.	**$8.36**

190 BUTCHERS' BLOCK

(FLAT WIRE)

Rows	Length Out Inches		List Price
5 x 10	1¼	Doz.	**$8.36**

193 JUMBO BUTCHERS' BLOCK

(FLAT WIRE)

Heavy Hardwood Block, Curved Handle on Back. One-half dozen in package.

Size	Rows	Length Out Inches		List Price
9x3⅝x1	12 x 8	1¼	Doz.	**$17.56**

168 STANDARD WIRE BROOM

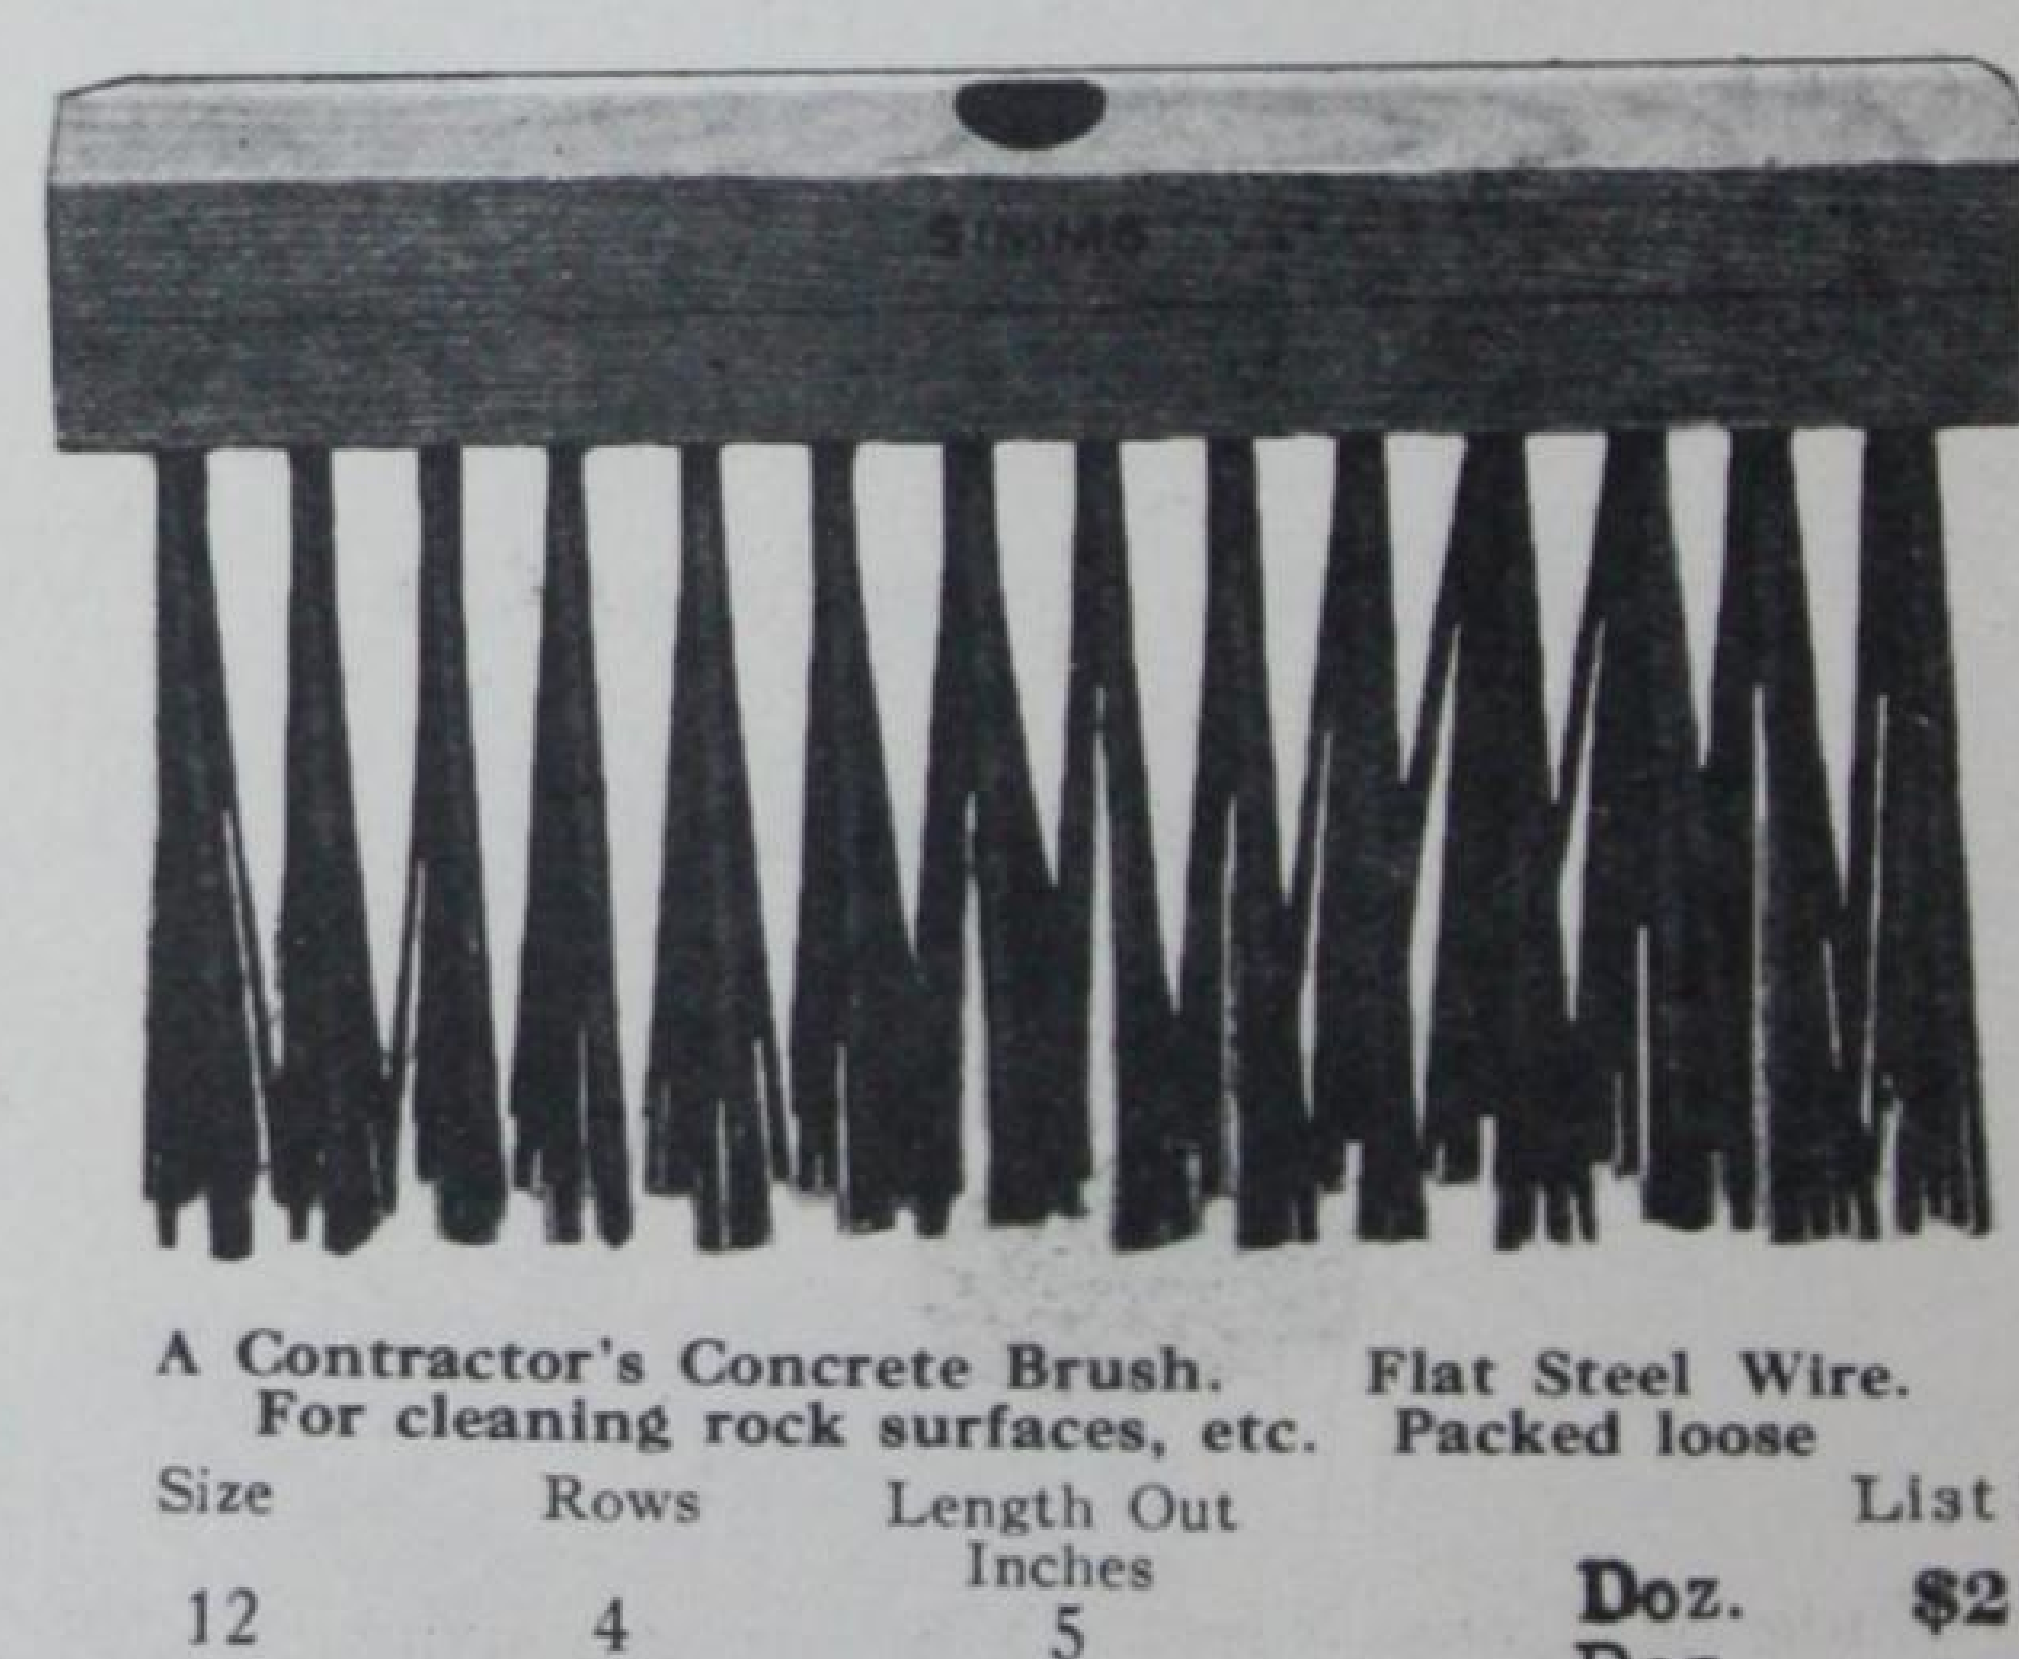

A Contractor's Concrete Brush. Flat Steel Wire. For cleaning rock surfaces, etc. Packed loose

Size	Rows	Length Out Inches		List Price
12	4	5	Doz.	**$20.74**
14	4	5	Doz.	**$23.62**

170 ACME WIRE BROOM

Barn or Asphalt Sweeping. Made with flared ends, Packed loose.

Size	Size of Sweep	Length Out Inches		List Price
12	15 ins.	5	Doz.	**$33.12**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PAPER HANGERS and LATHER BRUSHES

100 PAPERHANGERS
LEADER.
(MACHINE MADE)

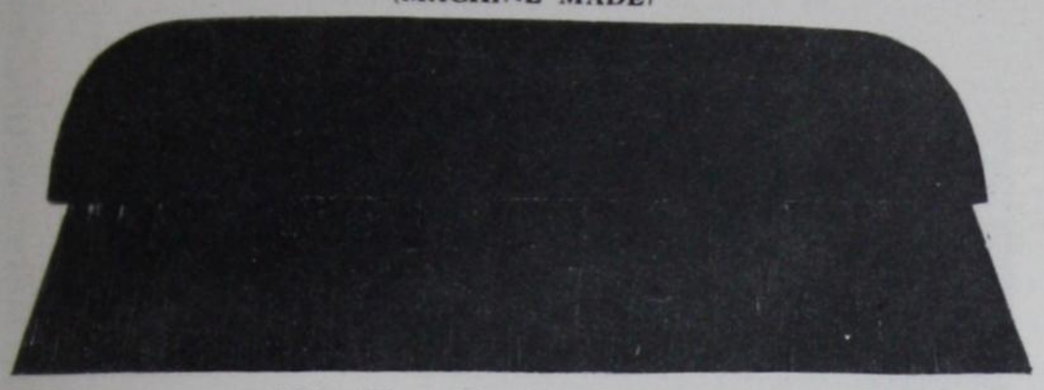

White Fibre. Two-Rows. Plain Finish.
One-half dozen in package.

Size	Length Out Inches	List Price
10	2 1/8	Doz. $4.90

102 JET.
(SET IN PITCH)
Stiff Black Bristles. Two Rows.
Yellow Varnished Blocks.
One-half dozen in box.

Size	Length Out Inches	List Price
10	1 7/8	Doz. $17.28

104 NUBIAN.
(MACHINE MADE)
Black Horsehair. Two Rows.
Yellow Varnished Blocks.
One-half dozen in box.

Size	Length Out Inches	List Price
10	2	Doz. $14.40

106 ACTO.
(WIRE DRAWN)
Grey Bristles. Two Rows.
Yellow Varnished Blocks. One-half dozen in package.

Size	Length Out Inches	List Price
10	2 1/4	Doz. $28.22
12	2 1/4	Doz. 32.26

138 TEAL.
(SET IN RUBBER)

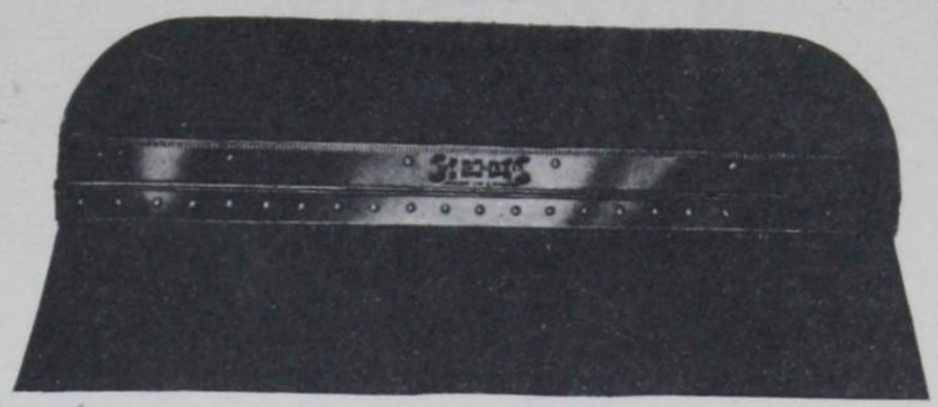

Stiff Black Bristles. Metal Ferrule. Natural Polished Blocks. A good medium priced brush.
One-half dozen in box.

Size	Length Out Inches	List Price
10	2 5/8	Doz. $43.20
12	2 5/8	Doz. $50.88

137 STARLING.
(SET IN RUBBER)
Stiff Black Bristles. Metal Ferrule.
Natural Polished Blocks.
One-half dozen in box.

Size	Length Out Inches	List Price
10	2 5/8	Doz. $61.92

139 ALBATROSS.
(SET IN RUBBER)
Same Style as 138 only a much heavier brush.
One-half dozen in a box.

Size	Length Out Inches	List Price
10	3 1/2	Doz. $93.60
12	3 1/2	Doz. $115.20

140 BLACKHAWK.
(SET IN RUBBER)
Same general appearance as 138 only
Extra Stiff Bristles.
One-half dozen in box.

Size	Length Out Inches	List Price
12	2 3/8	Doz. $86.40

Every hair used in the making of these brushes is sterilized in a steam sterilizer, under an alternate vacuum and heavy steam pressure, which absolutely insures the complete destruction of any germ life.

In another catalogue we list a complete line of Lather Brushes, retailing at from 50 cents to $25.00 each. It will be mailed you anywhere on request.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Glaziers Supplies

PUTTY KNIVES

Best English make, forged steel blades.

Rosewood handle, metal bolster, brass rivets.

PRICE LIST

	Per Doz.
No. 1 —Square stiff blade, 1 5/16x4 in.	**$10.00**
No. 1E—Square elastic blade, 1 5/16x4 in.	**10.00**
No. 6 —Square stiff blade, 2x4 in.	**12.00**
No. 6E—Square Elastic blade, 2x4 in.	**12.00**

Rosewood handle, metal bolster, brass rivets.

PRICE LIST

	Per Doz.
No. 2 —Skew stiff blade, 1 5/16x4 in.	**$10.00**
No. 2E—Skew elastic blade, 1 5/16x4 in.	**9.00**

Beechwood handles, through tang.

PRICE LIST

	Per Doz.
No. 4 —Spear stiff blade, 1¼x4 in.	**$6.00**
No. 4E—Spear elastic blade, 1¼x4 in.	**6.00**

Tempered blade, stained handle.

PRICE LIST

	Per Doz.
No. 0 —Square blade, 1¼x3½ in.	**$5.00**
No. 00—Square blade, 1⅛x3½ in.	**3.00**

FOR THE PROFESSIONAL USER

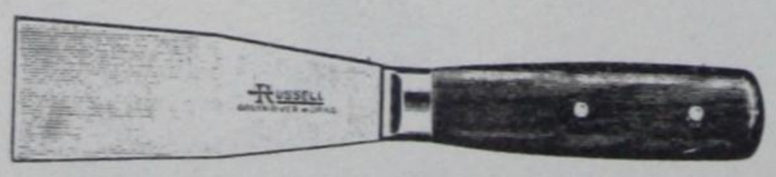

A companion tool to 530E Wall Scraper. Ruggedly constructed to render service. Large Comfortable Cocobolo Handle. Perfectly balanced.

No. 1540—Blade 3⅝x1 5/16 in, elastic, doz. **$12.00**

WALL SCRAPERS

Best English make, forged steel blade.

Rosewood handle, square or skew blade.

PRICE LIST

	Per Doz.
No. 7—Blade 3 in. wide, stiff	**$14.40**
No. 7—Blade 3½ in. wide, stiff	**16.80**
No. 7—Blade 4 in. wide, stiff	**19.20**
No. 7E—Blade 3 in. wide, elastic	**14.40**
No. 7E—Blade 3½ in. wide, elastic	**16.80**
No. 7E—Blade 4 in. wide, elastic	**19.20**

Specify Square or Skew Blade for Above. Both carried in stock.

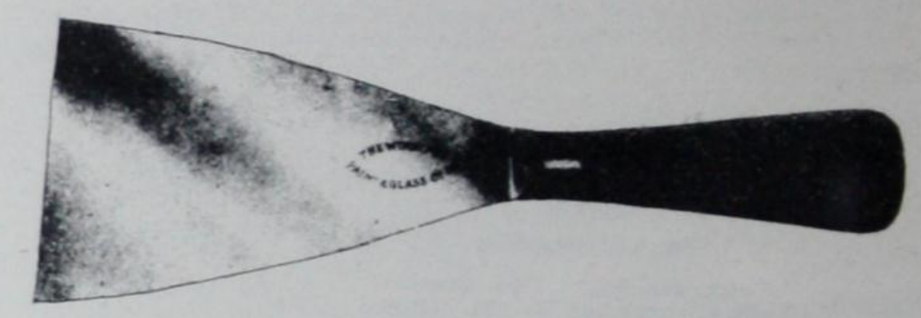

Cocoa handle, brass ferrule, square or skew blade.

PRICE LIST

	Per Doz.
No. 6—Blade 3 in. wide, stiff	**$15.60**
No. 6—Blade 3½ in. wide, stiff	**16.80**
No. 6—Blade 4 in. wide, stiff	**19.20**
No. 6E—Blade 3 in. wide, elastic	**15.60**
No. 6E—Blade 3½ in. wide, elastic	**16.80**
No. 6E—Blade 4 in. wide, elastic	**19.20**

Specify Square or Skew Blade, Both Carried in Stock.

FOR THE PROFESSIONAL USER

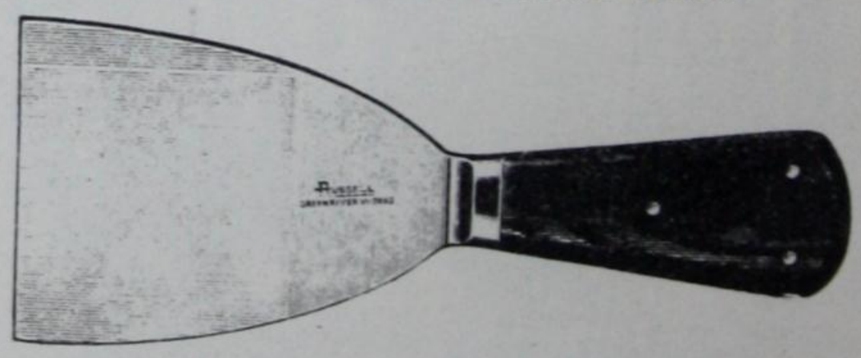

Full Forged with Metal Lock Bolster, Cocobolo Handle.

This knife is especially designed for the professional painter. Made from heavy gauge high grade steel with large handle, it is built for service and gives it.

PRICE LIST

No. 530E—Blade 3½ in. wide, square, elastic ..... **per doz. $24.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

GLAZIERS' SUPPLIES

Triangle Glaziers' Points

No. 000 No. 00 No. 0

Also carried in Size No. 3, one size smaller than No. 0. Stocked in half-pound packages.

Price List

Per doz. packages **$2.10**

Diamond Glaziers' Points

Steel or Zinc

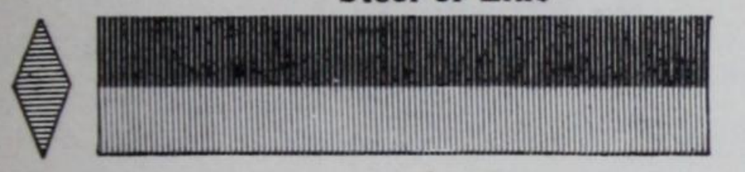

Steel points are manufactured by an improved process from tempered steel which is many times stronger than zinc. They are treated against corrosion, and will stand up to be driven into the hardest wood. Their use renders the troublesome "redrawing" operation unnecessary.

We also handle Pure Zinc Points for the benefit of those who still desire them. These are cut from special hard rolled stock.

Length of Points: ⅜ ins.

No. 1 Size: 5000 Points to a package; 9 packages to a box.

Price List

1 Package (5,000 each), per pkg..... **$1.40**
1 Box (9 Pkgs.), (5,000 each), per pkg..... **$1.20**

TRIANGLE POINTS **No. 20** IN COUNTER DISPLAY STAND

Instead of passing out Triangle Points in wasteful loose quantities it pays better to display "Red Devil" Points in attractive 5c packages. This new idea substitutes sure profit for a sure loss. Each 5c package contains a new brass plated Point Setter, "Gadget", which makes it possible to drive points with an ordinary hammer. Packed Zinc Coated,, Size No. 2, unless otherwise ordered.

There are 12 packages in the Counter Container. 5 Gross of 5c packages in a Case; Weight 90 lbs.

Price per doz. **$1.10**

Diamond Point Driver

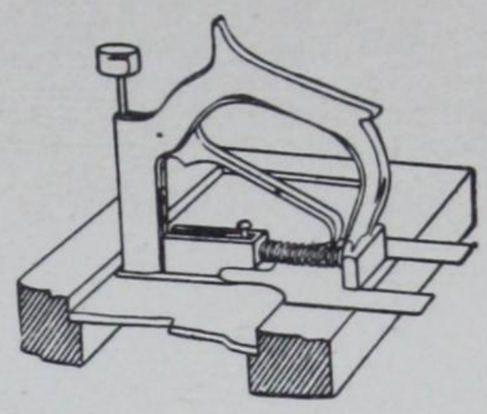

A great time saver for anyone doing considerable glazing. Fits the hand, pulls easily, but hits hard. Parts strictly interchangeable.

A real tool, rugged in strength, neat in appearance.

Special Driver

Our Special Driver is equipped with an ingenious Framers' Nose Plate and Special Drive Plate which permit Points to be driven over rough or yielding surfaces and allow the Driver to function perfectly when tilted as shown in illustration.

For the Framer this is an indispensable tool for rapidly and firmly setting backs in picture frames, mirrors, etc., of any size.

For the Glazier it is an equally indispensable tool for setting panes of any shape or size. Particularly serviceable for glass smaller than 6 ins.

Price List

No. 1. **Red Devil** each **$9.30**
No. 1. Special, each **$7.80**

Glass Pliers

Hand forged, teeth in the jaws.

7-in., Each **$4.00**

Hacking Knives

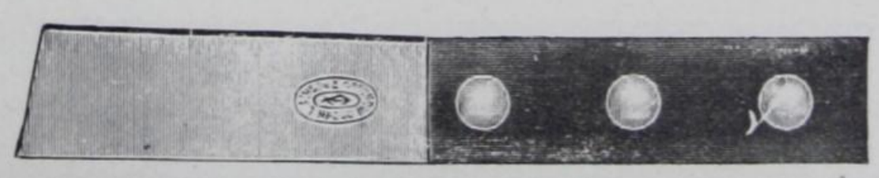

For cutting out hard set putty when reglazing old sash. A strong steel tool with heavy leather grip.

No. 14—Heavy 4 inch FORGED blade. Leather handle. Three steel lock rivets. Best quality.

Per doz. **$25.20**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

GLASS BOARDS

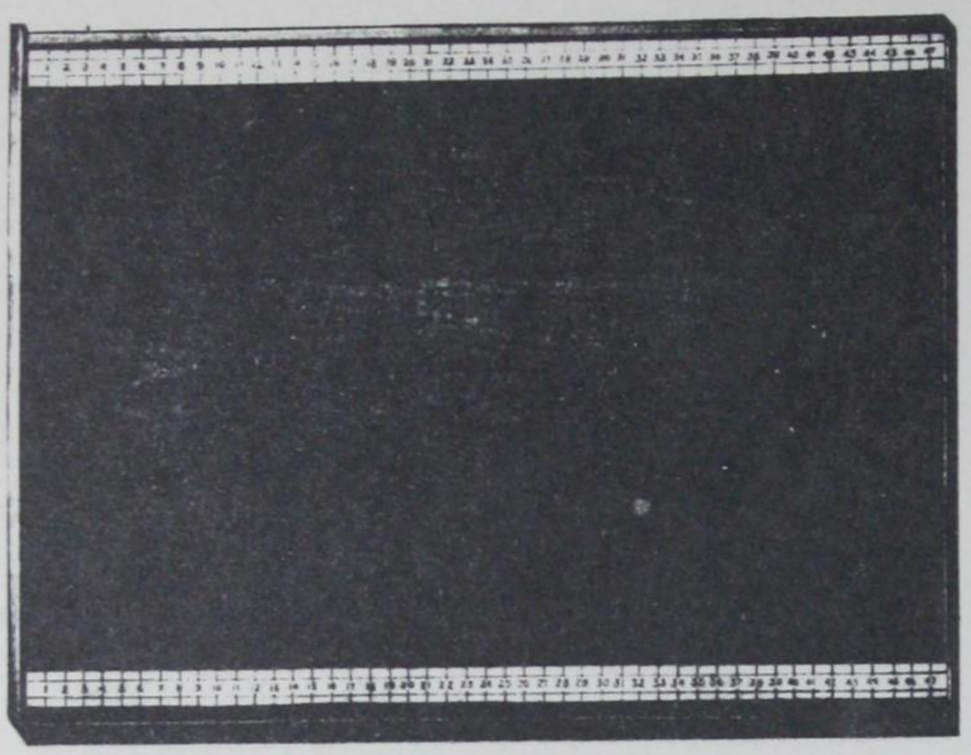

These boards are made of seasoned lumber, will not warp. Rules are 1-in. wide, numbered on both sides, and when worn off on one side can be reversed. Figures large and clear.

Made in sizes 3-ft. x 4-ft. and 4-ft. x 5-ft.

Price List

3x4 feet	$22.00
4x5 feet	27.00

GLASS BOARD RULED LATHS

Made of select hardwood that cannot be easily defaced, one inch wide and ruled on both sides. Specially intended for countersinking in glass boards. Made in two pieces.

Price List

4 ft., each	$2.50
5 ft., each	$2.90

GLASS CUTTERS' "T" SQUARES

Very convenient for use in cutting ordinary glass on a glass board. Saves time and assures a square cut.

Price List

3 ft. long, each	$3.20
3½ ft. long, each	$3.50

GLASS CUTTERS' RULES

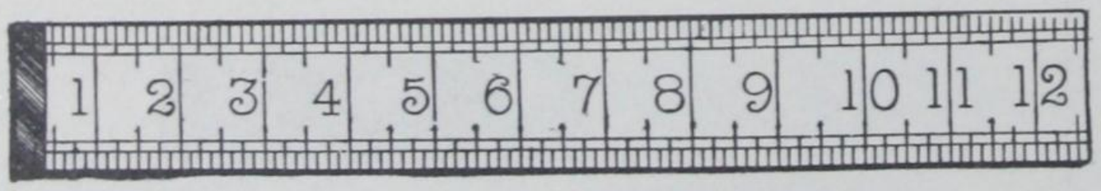

Made from best quality boxwood, ruled both sides, brass tips on ends.

3-ft. length, each	$2.10
4-ft. length, each	$2.80
5-ft. length, each	$4.00
6-ft. length, each	$5.40

GLASS CUTTERS

"It's all in the wheel"

No. 024—Red Devil

One of the most popular and fastest selling glass cutters. Cuts like the old man himself and never gets tired.

Price List

No. 024 ..... per doz.	$4.70

No. 023—Red Devil

A reliable cutter, ball head for tapping glass.

Price List

No. 023 ..... per doz.	4.00

No. 032—Red Devil

This general utility cutter is fitted with extra large wheel to facilitate the cutting with glass rule.

Price List

No. 032 ..... per doz.	$4.80

CIRCULAR GLASS CUTTER

No. 033—Red Devil

Cuts circles 2 to 20 inches.

Each	$ .60

GLAZIERS' DIAMONDS

Price List

A. Regular Pattern (for sheet glass)	$7.00
B. Rack Pattern (for sheet glass)	7.00
Sure-cut (illustrated)	$7.00

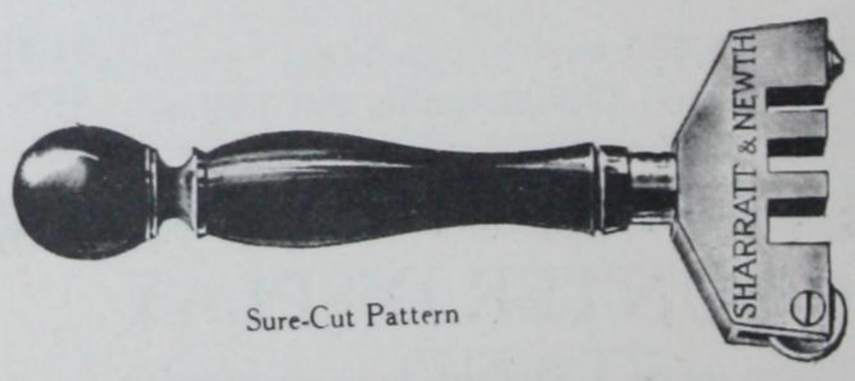

Sure-Cut Pattern

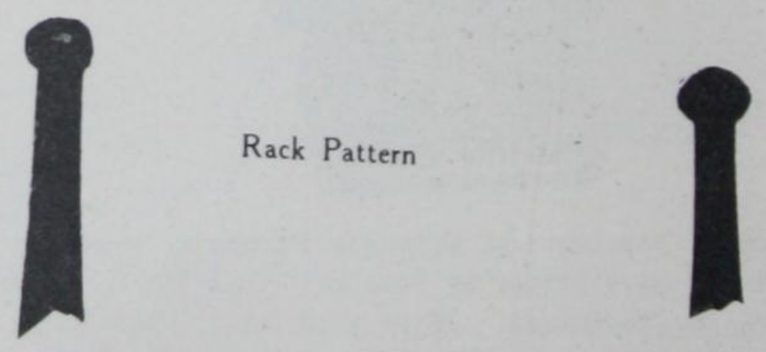

Rack Pattern

Regular Pattern

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STANDARD TOOLS

MURRAY BLACK

The Twenty-Two Trimmer

SIMPLE

ACCURATE

EFFICIENT

Simple The blade, the "Heart" of the tool, can be removed in one operation, by dropping a nail in the oil hole to hold the arbor while turning out the screw which holds the blade. Then sqeeze the gauge and frame together as when in use, and lift the blade off the arbor. The blade adjustment to the straight edge is not changed when removing the blade. NO LONGER IS IT NECESSARY TO TAKE THE ENTIRE TRIMMER APART TO CHANGE THE BLADE.

Accurate To such a degree that fine two-edge work can be done with this trimmer. NO MORE ROCK OR WABBLE. The long ADJUSTABLE gauge makes it possible for you to fit your trimmer to your straight edge as snugly as you may want it.

Efficient So light and smooth running that twice the amount of work can be done in a day with this trimmer.

Price each **$8.75**

Parts for No. 22 Trimmers CARRIED IN STOCK

ZINC STRIPS

3 in. wide by 6 ft., 7 ft., or 8 ft. long.
Price Doz. **$9.30 $10.50 $11.60**

4 in. wide by 6 ft., 7 ft., or 8 ft. long
Price Doz. **$12.20 $13.70 $15.80**

ZINC PLATES

One sixteenth inch thick. Very heavy and has many advantages over thin zinc. Send for free sample.

3 in. by 6 ft., 7 ft., or 8 ft. long.
Price Doz. **$32.60 $37.80 $46.20**

4 in. by 6 ft., 7 ft., or 8 ft. long.
Price Doz. **$42.00 $46.20 $54.60**

Straight Edges

From Well Seasoned Wood Carefully Tested

No. 1—Ruled, trimmer or knife edge. Brass bound.

	Price each		Price each
Lengths—5 ft.,	**$10.20**	7 ft.,	**$12.30**
6 ft.,	**$11.20**	8 ft.,	**$13.70**

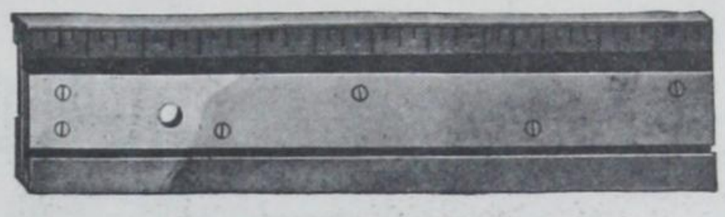

No. 7—Ruled. Brass Bound. For knife only. Nickel plated steel strip inserted full length.

	Lengths—		
	6 ft.	7 ft.	8 ft.
Price each	**$12.30**	**$13.00**	**$13.30**

Standard Paste Table

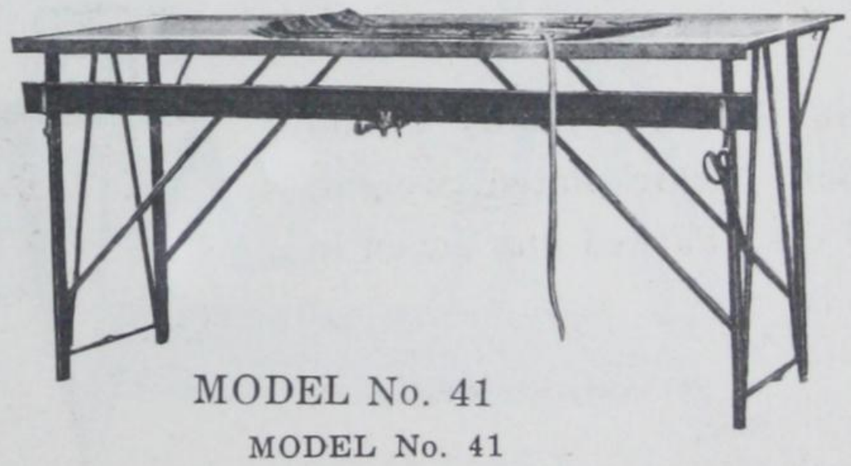

MODEL No. 41

MODEL No. 41

SPECIFY LENGTHS WANTED WHEN ORDERING

	Lengths		
	6 ft.	7 ft.	8 ft.
Price each	**$18.60**	**$20.00**	**$22.00**

A table that will meet the most exacting demands. This table has been built with the idea of making it the best and strongest table that has ever been on the market.

BEAUTIFULLY FINISHED.
TOP BONE DRY WHITE BASSWOOD 23 INCHES WIDE.
LEGS NORWAY PINE.
STEEL RE-INFORCED THROUGHOUT.
HOOKS FOR SHEARS AND STRAIGHT EDGE.
EXTENSION BOARD BRACKETS ATTACHED TO TABLE
No. 302 Basswood Extension Board for No. 41 table.

Ten inches wide,	6 ft.,	7 ft.,	8 ft.
Price each	**$3.90**	**$4.10**	**$4.60**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Casing Knives

Serrated
No. 159—1½ in.

Blades made of Jessup tool steel, hand honed.
Hand shellacked French polished handles.
Comfortable sure grip handles.
Arm on both sides of blade.

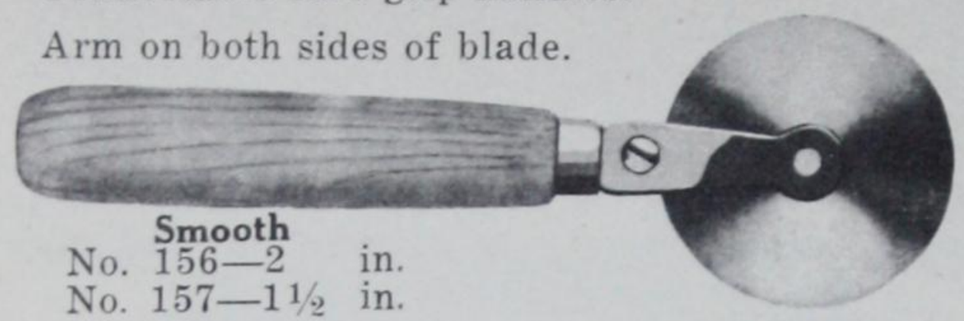

Smooth
No. 156—2 in.
No. 157—1½ in.

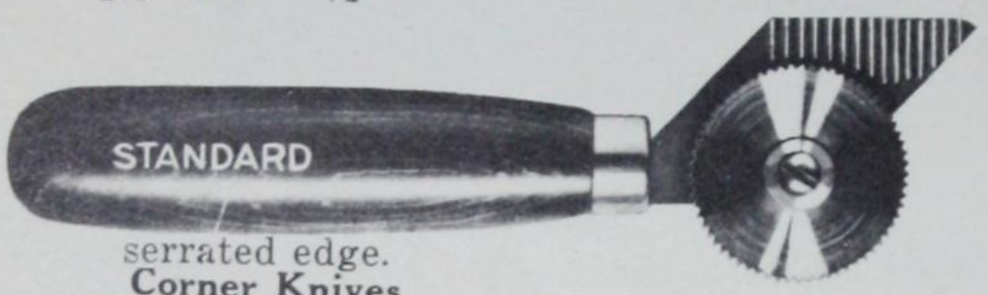

serrated edge.
Corner Knives
No. 1—1½ in.

Per Doz. **$15.54**

Corner Knives, Combination Wheel and Knife

		List Price
No. 159	Per dozen	**$14.50**
No. 156	Per dozen	**15.54**
No. 157	Per dozen	**14.50**

Plumb Bobs

No. 8—High quality Plumb Bob. Nickle plated, weight, 6 ozs. Packed one dozen in box.

List Price
Per dozen..... **$8.40**

Standard Paste Boards

DRY WHITE BASSWOOD

No. 66. Special Paste Boards.

Extra heavy boards, ⅞ inches thick, made of dry basswood, opens to 22½ inches. Wood end battons. The two boards are hinged with three heavy steel butts.

Lengths	5 ft.	6 ft.	7 ft.	8 ft.
Price Each	**$8.40**	**$8.80**	**$9.10**	**$10.20**

Bakelite Seam Rollers

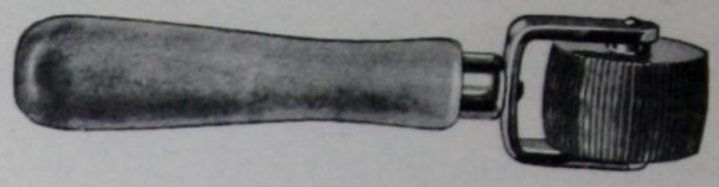

Seam Rollers of **PURE BAKELITE** with specially designed face to pre- vent the seam from showing a flash or shine.

Oval
1 inch
No. 40 Bakelite

Flat
1 inch
No. 41 Bakelite

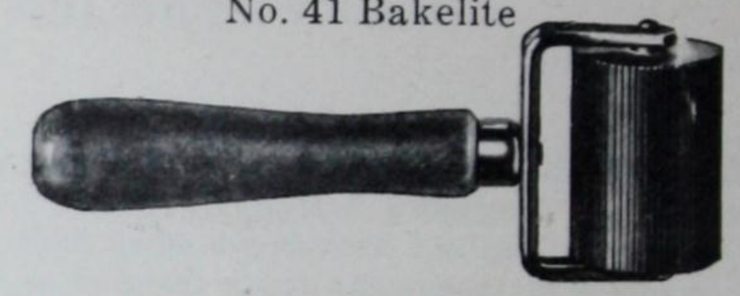

No. 51 **Flat** 2 inch Bakelite

Seam Rollers

Frames nickle plated.

Rosewood.
Maple.
Celluloid tire.
Rubber tire.

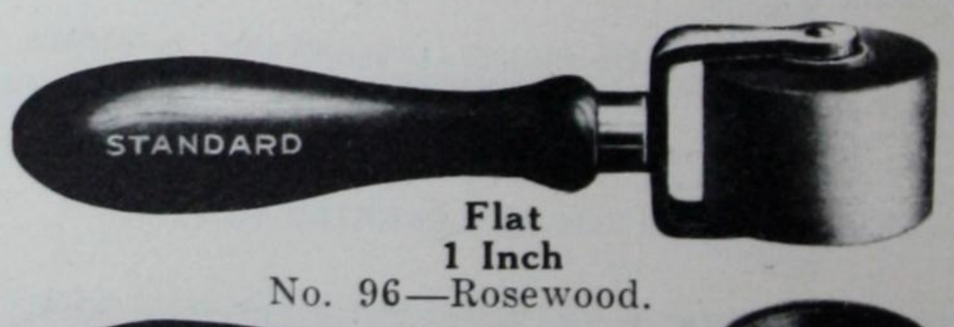

Flat
1 Inch
No. 96—Rosewood.

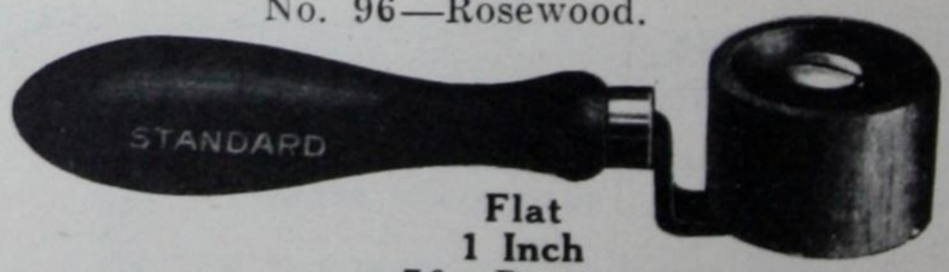

Flat
1 Inch
76—Rosewood.
77—Celluloid.

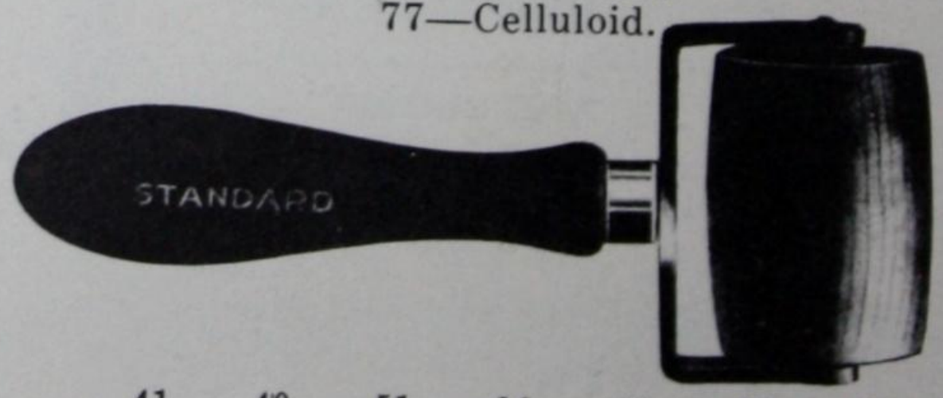

	41	40	51	96	76	77	86
per doz.	**$14.40**	**$14.40**	**$18.80**	**$12.60**	**$12.40**	**$27.30**	**$14.60**

Standard Paper Hangers' Knives

Standard Paperhangers' Knives. Blades made of best quality oil tem- pered steel, and firmly set in hand-fitting burnt wood handles.

No. 164—Round point, standard size. 3⅜ inch blade
Price Per doz. **$8.20**

No. 172—Round point. Extra large. 4 inch blade.
Price Per doz. **$11.60**

No. 168—Square points, standard size. 3⅜ inch blade
Price Per doz. **$8.20**

No. 173—Square point. Extra large. 4 inch blade.
Price Per doz. **$11.60**

The Murray-Black Scraper and Cutter

A TOOL OF MANY USES

Put
Discarded Razor Blades to Work



For the Paper Hanger, Painter, Mechanic
For the House Wife, Store Keeper, Artist

List Price
Doz. **$5.70**

RED DEVIL GLASS SCRAPER

Uses Single or Double Edged Blade

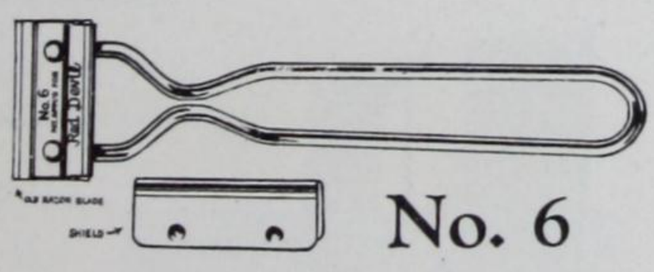

No. 6

his handy scraper quickly emoves paint from window lass—likewise has innumer- ble other mechanical and ousehold uses. The blade gripped snugly by the older. A shield snaps on er the blade for protection hen not in use. The tool is inches long, with nickeled ish. Shipped complete ith shield and one blade.

List Price
Doz. **$3.60**

Graining Tools

Deep corrugations designed to produce a great number of beautiful effects.

List Price
Doz. **$13.20**

The "OO" Shear

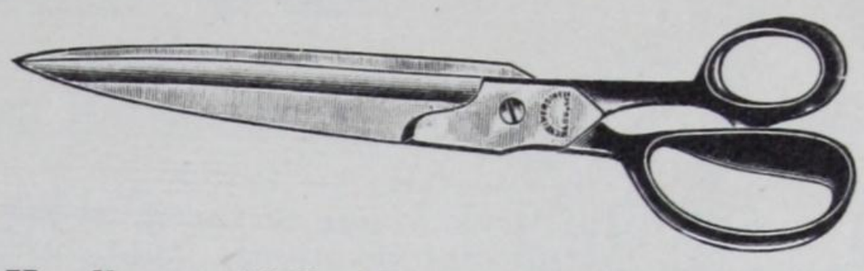

Handles are Malleable Iron, Blades of Special Tempered Spring Steel. Made 12 inch only.
Price Doz. **$58.80**

Paper Hanger's Laid Shears

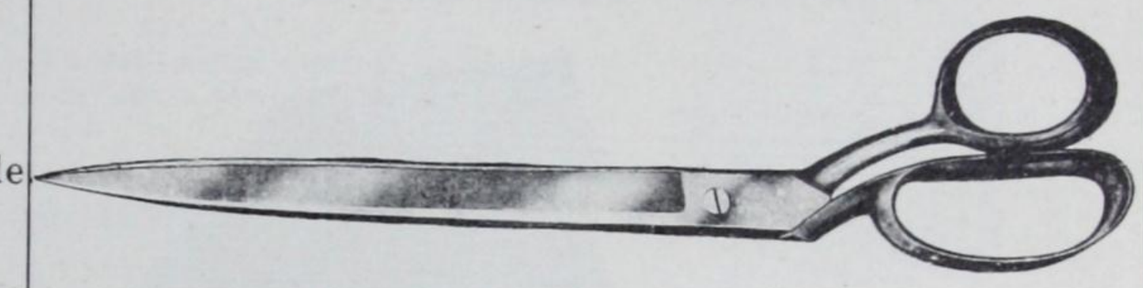

Bent, Japanned handle. Nickel plated blades
No. 94—10 inch. Dozen **$62.00**
No. 96—12 inch. Dozen **72.50**
No. 98—14 inch. Dozen **96.60**

Standard Extension Plank

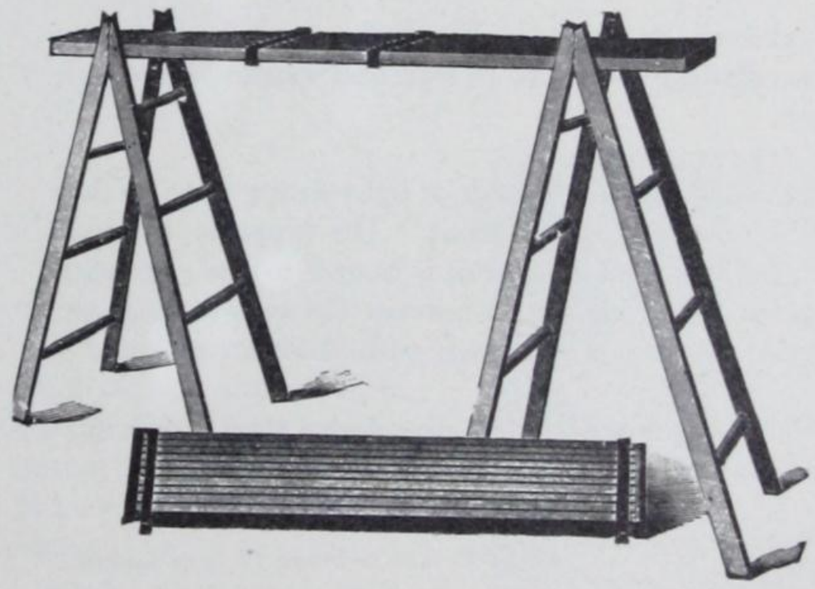

No.	Closed	Open	Price Each
120	6 ft.	10½ ft.	**$11.90**
121	7 ft.	12½ ft.	**13.70**
122	8 ft.	13½ ft.	**16.10**
124	10 ft.	17½ ft.	**21.00**

All lumber air dried and then kiln dried.
AVOID DELAY. ORDER BY NUMBER.

A two-piece plank telescoping together. Made of ten pieces, best quality Norway Pine. Rounded at end corners to prevent chipping. Smoothly finished. We invite comparison with any other plank made, on finish, strength and lightness.

The tensile strength of the Norway pine used in the construction of these planks is greater than any other lumber of equal weight.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Ladder Brackets

No. 601

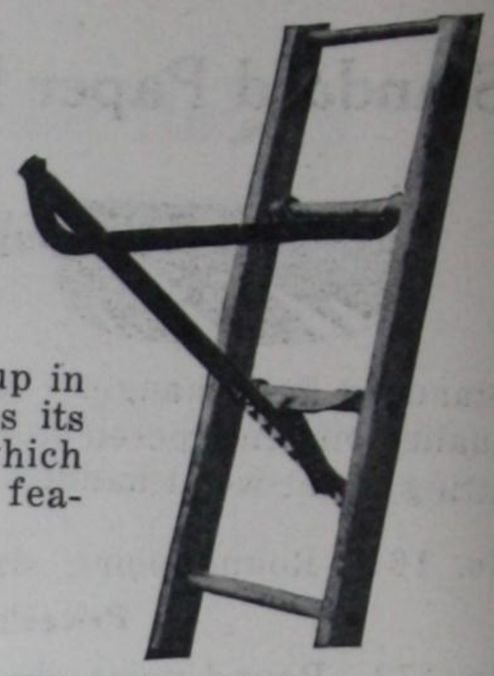

This style is one of the most popular made. May be instantly set up in 3 different positions. Made of special content steel which insures its strength. This bracket is made with specially constructed slots which will prevent the bracket from slipping in any position. A special feature on our bracket found on no other bracket. Enameled black.

Price per pair **$8.40**

Painters' Time Saver

No. 7—Prevents smearing paint on glass or walls when painting sash or interior wood work. Nickel plated, 9 inches long, with felt buffers to prevent marring wall paper when used on wood work.

Price Doz. **$5.88**

Graining Tools

ALL COMBS MADE IN SHEFFIELD, ENGLAND

No. 200. Set of twelve combs, total 30 inches, three combs each of coarse, medium and fine—4 inch, 3 inch, 2 inch and 1 inch. All packed in metal box.



Price Per set **$3.00**

BT Standard Step Ladder

The Standard Step Ladder, Fig. 513 is made in even foot lengths, all sizes, from 4 to 10 feet, and weighs 3½ pounds per foot.

It has a wood top and is made of light strong wood so that it will be easy to move about. The hinge is 18-gauge galvanized iron and each step is bound to the riser with galvanized steel clips, which prevent the nails pulling out. Every second step is supported with ¼-inch iron rod.

A pail tray is provided in all sizes and a steel lock is furnished in all sizes except the 4-foot size.

Fig. 513 (Lair)—Standard Step Ladder.

Standard—	Price Each
4 ft.	$2.64
5 ft.	3.30
6 ft.	3.96
7 ft.	4.62
8 ft.	5.28

BT Extension Ladders

The 20-foot to 48-foot sizes are made in two sections and 52-foot, 56-foot and 60-foot sizes are made in three sections. Ladders are furnished unpainted—16 to 28 feet weighs 2 pounds per foot; 32 to 44 feet weighs 2½ pounds per foot; 48 feet weighs 3 pounds per foot; 52 feet to 60 feet weighs 3½ pounds per foot.

Made of Douglas Fir, shouldered maple rungs; each riser trussed with $\frac{3}{16}$-inch galvanized steel wire; heavy automatic malleable lock; heavy guide irons; furnished with best pure manila rope for raising upper sections.

Risers of all sizes over 28-foot spread at bottom to prevent swaying and strengthened beneath second and fourth rounds from the bottom by ¼-inch rods and by a wooden truss which connects the four bottom rounds.

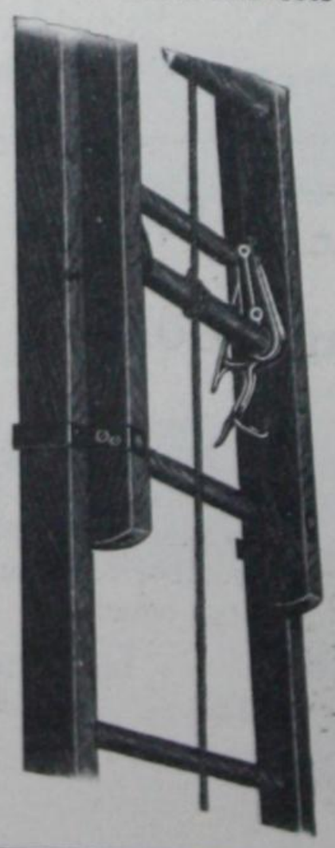

Lock when the Ladder is being raised

	Price Each
16-foot	$7.68
20-foot	9.60
24-foot	12.48
28-foot	14.56
32-foot	17.92
36-foot	20.16
40-foot	25.60
44-foot	33.44
48-foot	48.00

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WINDOLITE

WINDOLITE ORIGINAL SCREEN GLASS

The Practical Glass Substitute

WINDOLITE PERMITS FREE PASSAGE ULTRA-VIOLET-RAY

WHERE TO USE WINDOLITE

IN FACTORIES
GARAGES
SCHOOLS AND
WORKSHOPS

IN THE GARDEN
ON THE FARM
IN HUTS, TENTS,
AND PORTABLE
BUILDINGS

Windolite does not easily discolour, withstands dirt well, and if desired can be washed with a damp flannel or sponge.

Windolite is very light in weight and can be used with advantage for light and weak frames where the use of glass would be impossible.

Windolite is unbreakable and will stand the roughest usage.

Windolite is flexible and can easily be cut to any shape or form with ordinary scissors.

Windolite is not affected by changes in climatic conditions, and whilst it admits light, keeps out cold, rain and wind.

Windolite is a transparent scientific preparation reinforced with a fine wire mesh.

WIDE MESH MEANS MAXIMUM LIGHT

MADE IN ENGLAND

Windolite is supplied in rolls 36" wide of almost any length you might require.

Price in Full Rolls ..... .26 sq. ft.
Price Less than Full Rolls ..... .28 sq. ft.
300 Sq. Ft. to Roll.

FRAMED MIRRORS

York

1-inch Reeded Frame, Stained Brown.

	List
5x 7 in., doz.	$4.96
8x10 in., doz.	$7.76
10x14 in., doz.	$12.40

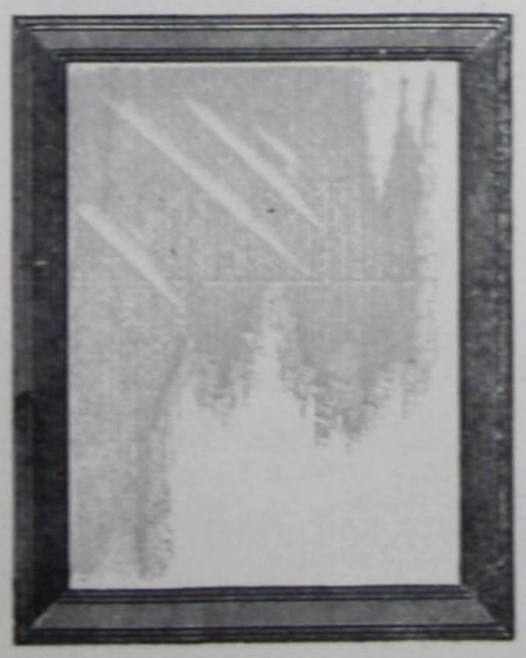

Trilby

¾-inch Reeded White Enamel.

	List
8x10 ins., doz.	$ 8.20
10x14 ins., doz.	$13.18

BATHROOM MIRRORS

No. 54

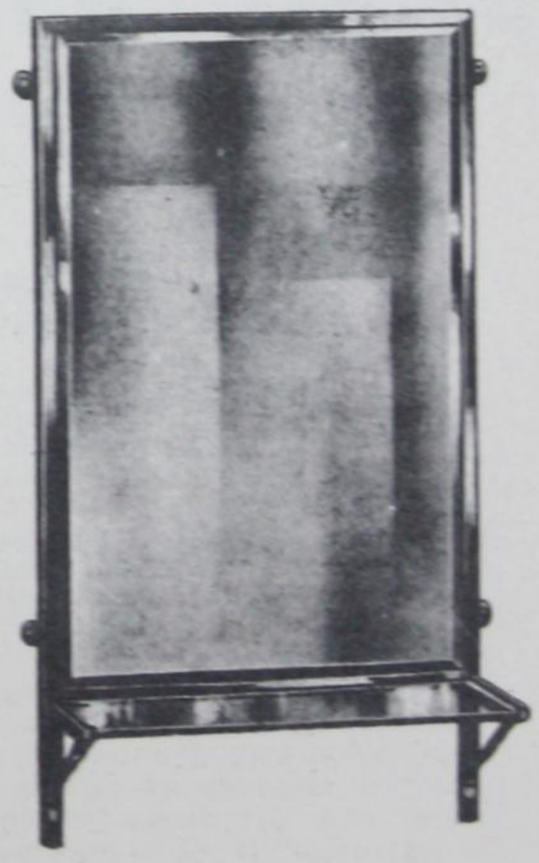

The accompanying illustration shows but one of the many handsome designs in Wall Mirrors carried in stock.

Illustrations and full descriptions covering other designs will be found in The Hardware Section of this Catalogue.

A bevel plate mirror size 16 by 28 with nickel plated solid brass frame.

Shelf is 5½ inches wide and is of polished plate glass.

Price Each $45.00

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

STORE FRONT CONSTRUCTION

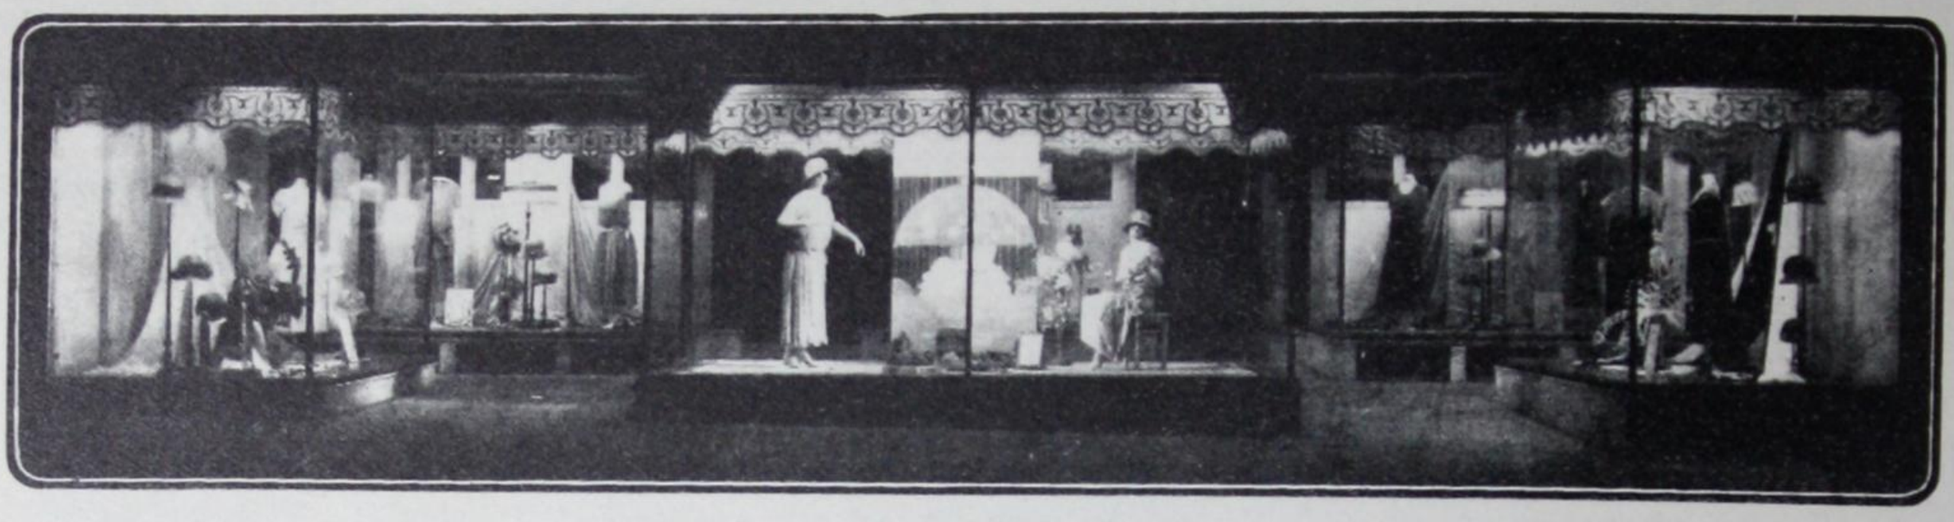

Plate Glass and Brasco Copper

There is no longer any doubt in the minds of merchants and owners, of the business building value of a bright, artistic, modern store front. Arranged to give the most effective display space for the merchandise, it offers as well the powerful attraction value of brilliant lighting, so that the store front actually sells goods and becomes investment rather than expense.

Since it would be impossible to show in any moderate sized book all of the many handsome Brasco designs, we would prefer to send you on request a catalogue and plan with you on your own particular store problem.

Fabricated from heavy gauged copper throughout, and possessing new and improved methods of ventilation and drainage, Brasco construction is yet so reasonably priced that it falls well within the price limitations set for the most modest store building. It can be used independently of jamb coverings when desired, and is obtainable in a great variety of finishes, and in several styles and combinations.

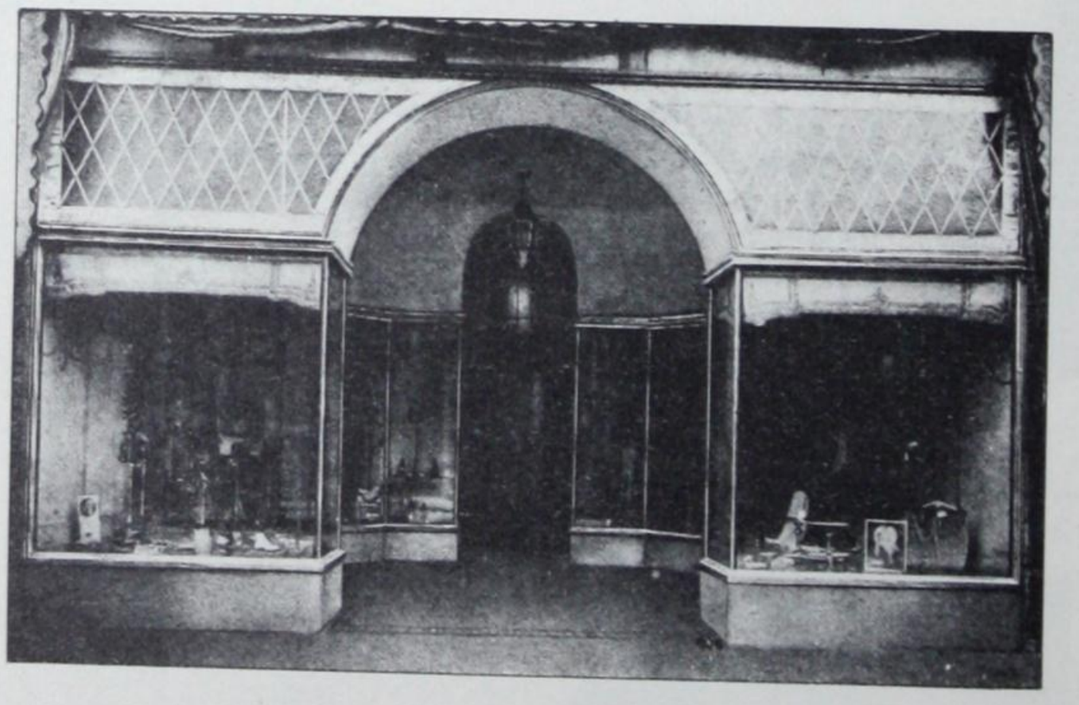

Brasco Store Fronts are the most progressive offered to-day—in simplicity, permanent beauty, glass safety, strength, ventilation, drainage, ease and economy of installation.

We will gladly show you how to get the full value out of your own location with a modern front.

Write for catalogue and full information—no obligation.

MAKE YOUR STORE FRONT SHOW YOU A PROFIT

Agents for

BRASCO Complete Copper Construction

To-day's Greatest Store Front Value

Send us your inquiries for Plate and other Glass for Store Fronts, etc.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

GLASS

PLATE GLASS

Send us your enquiries for Plate Glass for

STORE FRONTS
SHOW CASES
COUNTER TOPS
DESK TOPS
AUTO WINDSHIELDS
AUTO BODY LIGHTS
DOOR LIGHTS
GLASS SIGNS, Etc.

PRICE LIST

	Sq. Ft.		Sq. Ft.
To 1 ft.	$1.10	To 15 ft.	$2.95
" 2 "	1.45	" 25 "	3.10
" 3 "	1.75	" 50 "	3.20
" 4 "	2.20	" 75 "	3.25
" 5 "	2.45	" 90 "	3.30
" 7 "	2.55	" 100 "	3.70
" 10 "	2.85	" 120 "	3.85
" 12 "	2.90	" 140 "	4.70

Discount 50-7½%

PLATE MIRRORS

	Sq. Ft.		Sq. Ft.
To 1 ft.	$2.00	To 12 ft.	$3.75
" 3 "	2.50	" 15 "	3.80
" 5 "	3.25	" 25 "	4.00
" 7 "	3.35	" 50 "	4.15
" 10 "	3.70	Discount 50%.	

PLATE GLASS

Perfect Undistorted Vision for AUTOMOBILES

	20	22	24	26	28	30	32	34	36	38	40	42	44
8	1.40	1.55	1.70	1.85	2.00	2.15	2.30	2.45	2.60	2.75	2.90	3.05	3.20
10	1.70	1.85	2.00	2.15	2.30	2.45	2.60	2.75	2.90	3.05	3.20	3.35	3.60
12	2.10	2.30	2.50	2.70	2.90	3.10	3.30	3.50	3.70	3.95	4.20	4.45	4.70
14	2.45	2.70	2.95	3.20	3.45	3.70	4.00	4.30	4.60	4.90	5.20	5.50	5.80
16	2.75	3.00	3.25	3.50	3.80	4.10	4.40	4.70	5.00	5.30	5.60	5.90	6.20
18	3.10	3.40	3.70	4.05	4.40	4.75	5.10	5.45	5.80	6.15	6.50	6.85	7.20
20	3.45	3.80	4.15	4.50	4.85	5.20	5.55	5.90	6.25	.....	.....	.....	.....
22	.....	4.35	4.75	5.15	5.55	6.00	6.45	6.90	7.35	.....	.....	.....	.....
24	.....	.....	5.20	5.65	6.10	6.55	.....	.....	.....	.....	.....	.....	.....

DISCOUNTS

Plate: 10% **Crystal:** 50%.

Polishing—
Grinding—

PATENTED POLISHED WIRE PLATE

Up to 3 ft.	$1.50 ft.
Up to 7 ft.	2.25 ft.
Over 7 ft.	2.50 ft.

Discount 5%

Shock Mirrors	45c. ft. Net
In 100 ft. cases	40c. ft. Net
Resilvering Mirrors	35c. ft. Net

Freight equalized on nearest stock carrying point, Regina, Moose Jaw, Saskatoon or Winnipeg.

WINDOW GLASS—CASE LIST

100 Ft. Cases

Bracket	16 oz. Single	21 oz. Double	16 oz. Single	21 oz. Double
40"	9.25	15.05	7.95	12.65
50"	10.05	16.15	8.60	13.55
60"	10.40	16.65	8.90	13.95
70"	10.75	17.30	9.15	14.50
80"	.....	18.30	.....	15.30
85"	.....	21.90	.....	18.20
90"	.....	22.90	.....	19.00
95"	.....	25.40	.....	21.00
100"	.....	27.10	.....	22.40
105"	.....	29.90	.....	24.70
110"	.....	32.90	.....	27.10
	Per 100 ft. F.O.B. Winnipeg Discount 10 and 10%		F.O.B. Regina Moose Jaw or Saskatoon NET	

Specially Selected PICTURE GLASS Carried in Stock

CATHEDRAL, WIRED AND SUNDRY GLASS

] Muranese Pattern G Cast Wired

	Cut Size Per Ft.	Case Per Ft.
White Plain and Figured Cathedral	.33	.26
Tinted Plain and Figured Cathedral	.35	.30
Enamelled and Mechanical Embossed	.40	.30
Obscured	.40	.30
Flashed Ruby, Green, Amber, Blue, Opalescent and White Opal	.60	.50
Prismatic Sheet	.55	.40
Opalescent Cathedral	.80	.60
Chipped Glass, 21-oz	.45	.35
Rough Rolled Glass—		
⅛" thick	.28	.25
3/16" thick	.30	.27
¼" thick	.36	.32
Wired, Rolled or Cast—		
¼" thick	.40	.36

Discount 5%

When ordering Doorlights or Windshields for automobiles state make of car, year of model, and serial number if possible. If this information is not procurable, enclose paper pattern of glass required.

We stock only the best British Plate Glass and is selected for silvering plate mirrors.

We also resilver old mirrors. Be sure that mirror to be resilvered is of sufficient value to pay for transportation charges both ways and see that it is well packed to avoid breakage.

PACKING CHARGES EXTRA AT COST.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BUILT-IN CONVENIENCES

Kitchen Cabinet

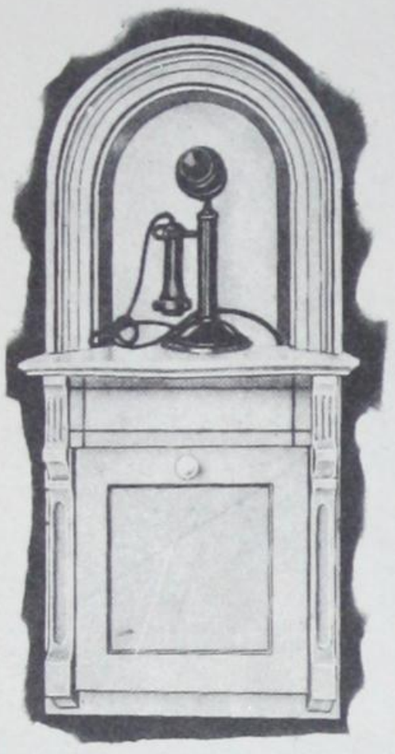

Telephone Cabinet
No. 23 .... **$21.00**

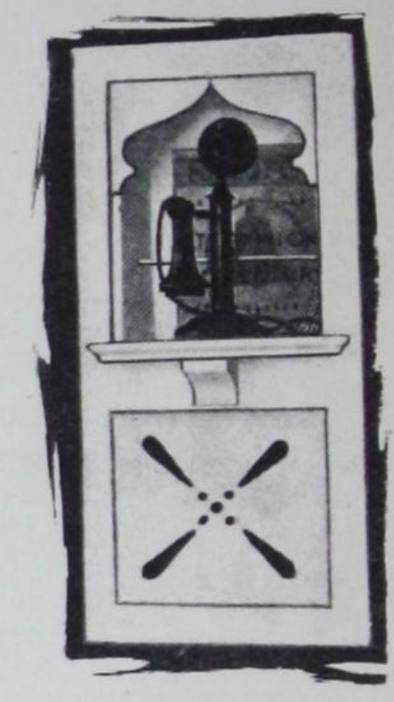

Telephone Cabinet
No. 21 ..... **$9.45**

Ironing Board
No. 17 ..... **$11.90**

Breakfast Nook No. 1A **$35.00**

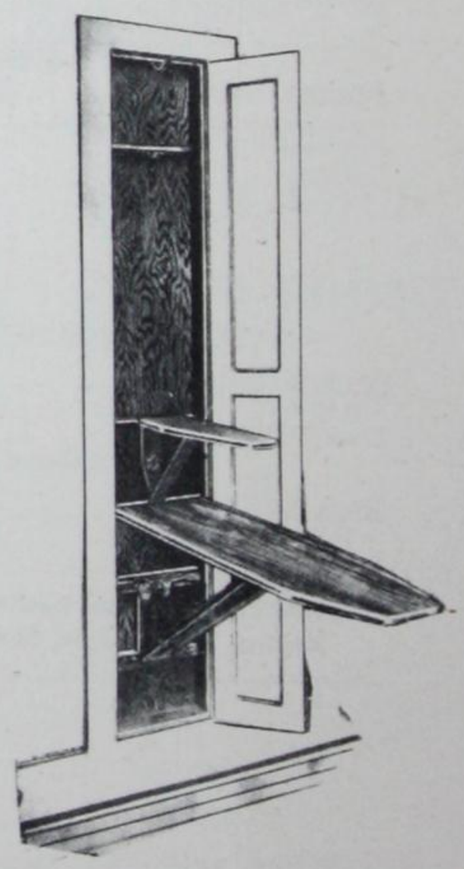

Ironing Board
No. 14 ..... **$16.80**

Send for our fully illustrated catalogue which will be gladly mailed to you on request.

All Prices Subject to Change Without Notice

SCREEN DOORS

KILN-DRIED WOOD **BEST WIRE SCREEN**

No. 265 Dowelled

$\frac{7}{8}$-inch Plain Screen Door—

No. 275 Mortised

$1\frac{1}{8}$-inch Plain Screen Door—

Painted Green. Made from Selected Kiln-Dried Pine. Stiles 3 inches wide. Black Wire Cloth.

Price List

Size	No. 265 Winnipeg	No. 265 Saskatoon	No. 275 Winnipeg	No. 275 Saskatoon
2- 6x6- 6	**$44.00**	**$47.00**	**$55.00**	**$59.00**
2- 8x6- 8	**44.00**	**47.00**	**55.00**	**59.00**
2-10x6-10	**46.00**	**49.00**	**58.00**	**62.00**
3- 0x7- 0	**46.00**	**49.00**	**58.00**	**62.00**

No. 341

Made of Clear Pine. Filled and Varnished. Stiles 3 inches wide. Black Wire Cloth.

Size	Thickness
2- 6x6- 6	1⅛ in.
2- 8x6- 8	1⅛ in.
2-10x6-10	1⅛ in.
3- 0x7- 0	1⅛ in.

Price List

Winnipeg Doz. ....**$69.00** Saskatoon Doz. **$73.00**

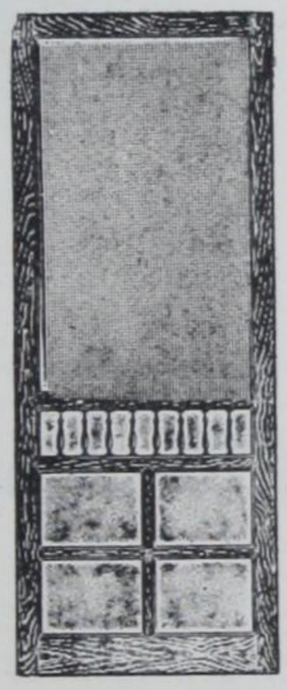

No. 525

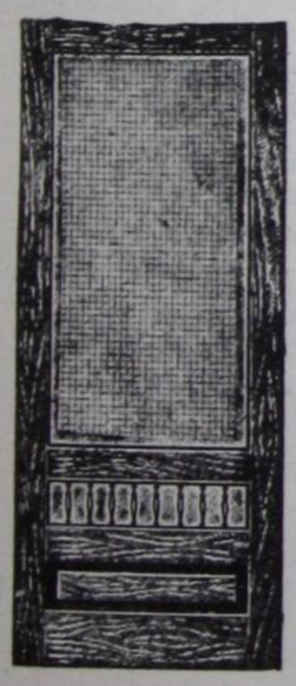

Made of Clear Pine. Filled and Varnished. Stiles 4 inches wide. Black Wire Cloth.

Size	Thickness
2- 6x6- 6	1⅛ in.
2- 8x6- 8	1⅛ in.
2-10x6-10	1⅛ in.
3- 0x7- 0	1⅛ in.

Price List

Winnipeg Doz. ....**$86.50** Saskatoon Doz. **$91.00**

Crated 6 Doors one size in a bundle

Combination Screen and Storm Door

Design No. 10

$1\frac{3}{8}$ inch thick.

A high-grade unpainted pine door. Sash and screen are fastened in with sash buttons and are very easily changed.

Our Combination Doors are made ¼ inch wider and ½ inch longer than regular doors to allow for fitting.

Prices are glazed and wired complete.

Price List

Size	Thickness	Winnipeg or Saskatoon Each
2- 6x6- 6	$1\frac{3}{8}$ in.	**$16.50**
2- 8x6- 8	$1\frac{3}{8}$ in.	**16.50**
2-10x6-10	$1\frac{3}{8}$ in.	**17.32**
3- 0x7- 0	$1\frac{3}{8}$ in.	**18.16**

Full Size Window Screens

Stiles and top rails 2 inches wide, centre rail 1 inch wide, bottom rail $3\frac{1}{2}$ inches wide. Mortised and tenoned joints. Black wire cloth.

No screens are so satisfactory as the full sized screen. They may be used as stationary screens; as hanging screens, hinged to top of window; or as swinging screens, hinged to size of window

Painted Green. Made to cover the entire window on the outside.

Pine frames, ⅞ inch thick.

Sizes up to 30 x 30, 2 lights

See discount sheet for prices.

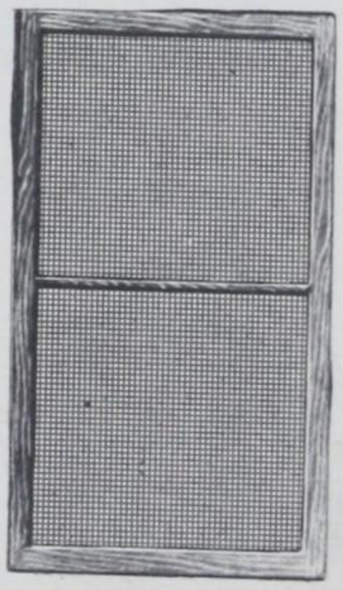

Price List

STOCK SIZES
Winnipeg
Saskatoon
$3.20 Each

SCREEN DOOR HARDWARE

We carry a very complete stock of Screen Door Hardware and Screen Wire Cloth in our Builders' Hardware Department.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ADJUSTABLE METAL WINDOW SCREENS

The sliding of S M P Metal Screens takes place in a tongue and groove arrangement at the side. The grooves are waxed, thus assuring perfect operation at all times. Metal Window Screens will not swell, warp, shrink, split or rot.

A VERY desirable feature of these screens is that they may be used in automobile windows. This fills a long felt want as many tourists sleep in their cars. A set of S M P Adjustable Metal Window Screens will make touring much more enjoyable.

Beautifully Finished in Olive Green Baked Enamel

These screens fit snugly against window frame and sill and as the frames of both sections are uniform in height, even when screen is fully extended, there is no space left for flies or insects to crawl in.

made in 4 sizes. A size to fit any window.

Height	Closed	Open		Winnipeg
10″	19″	32″	Doz.	$8.04
14″	19″	32″	Doz.	$10.20
14″	21″	36″	Doz.	$10.98
14″	24″	40″	Doz.	$11.72

Perfection Extension Window Screens



No.	Height	Closed	Open
1	10-in.	18-in.	28-in.
5	14-in.	18-in.	28-in.
6	14-in.	22-in.	36-in.

Twelve Screens to Bundle

Price List

Winnipeg		Saskatoon	
Doz.	$7.00	Doz.	$7.50
Doz.	$8.90	Doz.	$9.30
Doz.	$10.00	Doz.	$10.50

Our Extension Screens are made of Selected Hardwood, sanded and oiled. Black Wire Cloth.

Building Papers, Roofings

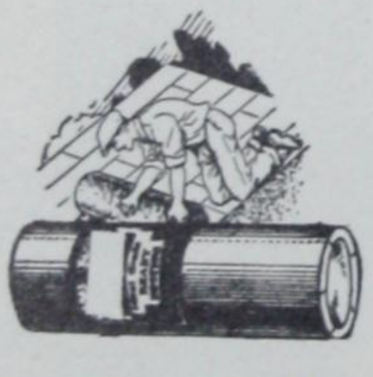

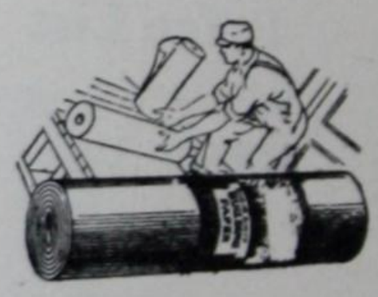

"APEX" ROOFING

	Winnipeg Price	Saskatoon Price
1-ply, 108 sq. ft. to Roll, 35 lbs.	$4.40	$4.98
2-ply, 108 sq. ft. to Roll, 45 lbs.	5.50	6.22
3-ply, 108 sq ft. to Roll, 55 lbs.	6.60	7.48

"CRESCENT" ROOFING

1-ply, 108 sq. ft. to Roll, 35 lbs.	$3.60	$4.26
2-ply, 108 sq. ft. to Roll, 45 lbs.	4.40	5.12
3-ply, 108 sq. ft. to Roll, 55 lbs.	5.20	6.08

RUBEROID RED LABEL ROOFING

1-ply, 108 sq. ft. to Roll, 35 lbs.	$5.00	$5.50
2-ply, 108 sq. ft. to Roll, 45 lbs.	6.00	6.70
3-ply, 108 sq. ft. to Roll, 55 lbs.	7.40	8.30

HEAVY SLATE SURFACED ROOFING

Red or Green, 108 sq. ft., 36 ins. wide, 85 lbs.	$7.50	$8.86
Red or Green, 108 sq. ft., 18 ins. wide, 85 lbs.	9.00	10.32

"SUPREME" BUILDING PAPER

	Winnipeg Price	Saskatoon Price
Plain, 400 sq ft. to Roll, 16 lbs.	$2.54	$2.82
Tarred, 400 sq. ft. to Roll, 27 lbs.	2.96	3.42

PRAIRIE LUMBERMAN'S SHEATHING

Plain, 400 sq. ft. to Roll, 15 lbs.	$2.38	$2.78
Tarred, 400 sq. ft. to Roll, 26 lbs.	2.78	3.24

"ANCHOR" BUILDING PAPER

Plain, 400 sq. ft. to Roll, 15 lbs.	$1.94	$2.20
Tarred, 400 sq. ft. to Roll, 25 lbs.	$2.40	$2.82

"WINNIPEG" BUILDING PAPER

Plain, 400 sq. ft. to Roll, 14 lbs.	$1.42	$1.70
Tarred, 400 sq. ft. to Roll, 25 lbs.	2.04	2.48

"STORM KING" KRAFT SHEATHING

32 in. wide, 400 sq. ft. to Roll, 45 lbs.	$5.50	$6.22
64 in. wide, 800 sq. ft. to Roll, 90 lbs.	11.00	12.44
32 in. Tarred, 400 sq. ft. to Roll, 70 lbs.	8.00	9.10

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Wallboards

BEAVER BOARD

Sizes: 4 ft. wide; 6 ft. to 12 ft. lengths; 10 Sheets in a bundle.

Price, per 1000 sq. ft., f.o.b. Winnipeg.. **$77.00**
Price, per 1000 sq. ft., f.o.b. Saskatoon.. **$80.00**

Genuine Beaver Wall Board is a natural insulator. Due to the use of long, virgin spruce fibre which does not pack, it is filled with millions of microscopic voids or dead air pockets. And building engineers will tell you that dead air is one of the best nonconductors of heat, cold and sound.

APEX WALL BOARD

Winnipeg **$58.00**
Saskatoon **$61.00**

While not the equal of Beaver Board, it is a medium price board.

Board, it is a medium price board.

TEN-TEST
INSULATING BUILDING BOARD

By applying Ten-Test direct to studding in place of wood sheathing, you get much greater structural strength, in addition to insulation. When applied as lining for brick or concrete in place of lath, you have a firm gripping everlasting base for plaster as well as protection against winter's cold and summer's heat as long as the building lasts.

Ten-Test is amazingly low in cost, and its cost is soon returned to you in the saving of ½ to ⅓ it makes in your coal bills.

Sizes: 4 ft. wide; 6, 7, 8, 8½, 9 and 10 ft. lengths; 5 sheets in a bundle.

No. 1, per 1000 sq. ft..... **$90.00**
No. 2, per 1000 sq. ft..... **$80.00**

We also carry in stock the following Lines:-

Painter's Trestles
Drop Cloths
Ladder Brackets
Pails
House Brooms
Painter's Overalls
Scaffold Irons
Roof Jacks
Reversible Mops
Mill Brooms

Information and prices on the above will be gladly furnished on request.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

List of Advances NET on Winnipeg Prices for Prices F.O.B Regina or Saskatoon.

Catalogue Page Number	DESCRIPTION	Unit	5 Gals. or 100 lbs.	1 Gals. or 50 lbs.	½ Gals. or 25 lbs.	¼ Gals. or 12½ lbs.	⅛ Gals. or 5 lbs.	1/16 Gals. or 2 lbs.	1/32 Gals. or 1 lbs.
3	M.S. 100% Pure Paint	Gal.	.15	.15	.20	.20	.25	.25	.....
4	M.S. Neu-Tone and Neu-Glos	Gal.	.15	.15	.20	.20	.25	.25	.....
5	Floor Paint and Enamel	Gal.	.....	.15	.20	.20	.25	.25	.....
6	Durable House and Floor	Gal.	.15	.15	.20	.20	.25	.25	.....
	Peerless House	Gal.	.15	.15	.20	.20	.25	.25	.....
	Marine Paint	Gal.	.15	.15	.20	.20	.25	.25	.....
	Canoe Enamel	Each	.....	.....	.....	.05	.03	.02	.....
7	Wagon and Metal Paints	Gal.	.....	.15	.20	.20	.25	.....	.....
	Carriage Paint	Each	.....	.....	.....	.05	.03	.02	.....
8	Shingle Stains	Gal.	.10	.10	.....	.....	.....	.....	.....
	Roof Paints and Coatings	Gal.	.15	.15	.20	.20	.25	.....	.....
	Roof Coatings	Lb.	.01	.01	.01	.01	.01	.....	.....
9	Concretone	Gal.	.....	.15	.20	.20	.25	.25	.....
	Stock White, Liquid Da-Lite	Gal.	.....	.15	.20	.20	.25	.25	.....
10	Porch and Barn Paints	Gal.	.15	.15	.20	.20	.25	.....	.....
11	Stovepipe Enamel	Doz.	.....	.....	.....	.....	.....	.25	.15
	Screen Paint, Enamels	Gal.	.....	.15	.20	.20	.25	.25	.....
	Aluminum and Gold Paints	Each	.....	.....	.....	.05	.03	.02	.....
	Varnishes ,Oil Stains	Each	.....	.10	.06	.03	.02	.01	.01
12	Lacquer	Each	.....	.15	.10	.05	.03	.02	.01
13	Enamels	Each	.....	.15	.10	.05	.03	.02	.01
14	Varnishes	Each	.....	.10	.06	.03	.02	.01	.01
15	Kwickwork Auto Finishes	Each	.....	.10	.06	.03	.02	.01	.01
	Q.D. Lacqueret	Each	.....	.10	.06	.03	.02	.01	.01
	Bronzing Liquid	Each	.....	.10	.06	.03	.02	.01	.01
16	Lacqueret, Klensa, Oil Stains	Each	.....	.10	.06	.03	.02	.01	.01
17	Varnishes	Each	.....	.10	.06	.03	.02	.01	.01
18	Dye, Varnishes, Dryers	Each	.....	.10	.06	.03	.02	.01	.01
	Paste Filler	Each	.....	.10	.06	.03	.02	.01	.01
19	Varnishes, W.P. & G.	Each	.....	.10	.06	.03	.02	.01	.01
20	Japans. Dryers	Each	.....	.10	.06	.03	.02	.01	.01
	Lingerwett	Each	.....	.10	.06	.03	.02	.01	.01
	Shellac	Gal.	.....	.30	.30	.35	.35	.35	.....
	Shellac Midgets	Doz.	.15	.....	.....	.....	.....	.....	.....
21	Metal Paints	Gal.	.15	.15	.20	.20	.25	.25	.....
	Insulating Varnishes	Gal.	.....	.10	.15	.15	.20	.20	.....
22	Dry Colors	Lb.	.01	.....	.....	.....	.....	.....	.....
	Lamp Black	Lb.	.02	.....	.....	.....	.....	.....	.....
23	Lead Regina	Cwt.	.....	.....	.65	.....	.....	.....	.....
	Lead Saskatoon	Cwt.	.....	.....	.75	.....	.....	.....	.....
	Lead	Lb.	.....	.....	.....	.....	.01	.01	.01
24	Putty, Regina	Cwt.	.60	.....	.....	.....	.....	.....	.....
	Putty, Saskatoon	Cwt.	.70	.....	.....	.....	.....	.....	.....
	Turpentine	Gal.	.10	.10	.....	.....	.....	.....	.....
	Turpentine, Bottles	Doz.	.....	.....	.....	50	.30	.20	.....
	Linseed Oil	Gal.	.10	.10	.....	.....	.....	.....	.....
	Linseed Oil, Bottles	Doz.	.....	.....	.....	.50	.30	.20	.....
25	Colors in Oil and Japan	Lb.	.01	.....	.....	.....	.....	.....	.....
26	Alabastine, etc.	Case	.50	.....	.....	.....	.....	.....	.....
28	Bronzes	Lb.	.01	.....	.....	.....	.....	.....	.....
	Sapolin	Doz.	.15	.....	.....	.....	.....	.....	.....
29	Glues	Lb.	.01	.....	.....	.....	.....	.....	.....
	Le Page's Glue	Doz.	.....	.....	.75	35	.15	.10	.10
31	Waxes	Lb.	.01	.....	.....	.....	.....	.....	.....
35	Fuller's Paste	Lb.	.01	.....	.....	.....	.....	.....	.....
36	Bondex	Lb.	.01	.....	.....	.....	.....	.....	.....
	Hard-n-tyte	Gal.	.15	.15	.....	.....	.....	.....	.....
	Hard-n-tyte	Lbs.	.01	.....	.....	.....	.....	.....	.....
37	Pudlo	Lb.	.01	.....	.....	.....	.....	.....	.....
53	Curling Stones	Pair	$1.00	.....	.....	.....	.....	.....	.....

The above advances are based on car load freight from Winnipeg. On Brushes, Glaziers' and Paperhangers' Supplies and many other items, prices at Saskatoon and Regina are the same as Winnipeg.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

HARDWARE DIVISION

The following Section will be of great interest to the Trade. Many lines of Hardware are stocked for your convenience in - - -

WINNIPEG REGINA SASKATOON

SPECIALIZING IN
RUSSWIN BUILDERS' HARDWARE

◆

We specialize in Bills of Finishing Hardware for Residences; Apartment and Public Buildings. Send in your Plans and Specifications to be figured.

The following are a few of the buildings equipped with Finishing Hardware by us recently :-

ARTS BUILDING, UNIVERSITY OF MANITOBA: WINNIPEG
MANITOBA TELEPHONE SYSTEMS MAIN BUILDING: WINNIPEG
TECHNICAL COLLEGIATE: SASKATOON
THE BANK OF NOVA SCOTIA: WINNIPEG
CANADIAN NATIONAL EAST YARD: WINNIPEG
and Numerous Schools and Apartments.

GENERAL HARDWARE

Large complete stocks of Shelf and Specialty lines are carried in stock; and immediate shipment is made.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

USEFUL FACTS

LIST OF TECHNICAL TERMS IN BUILDERS' HARDWARE

Anti-Friction Bolt—A latch bolt on a store door lock having a small independant section; which, on touching the strike, lessons the resistance of the latch to closing the door.

Astragal Front—The fronts of a double sliding door lock, one part having an offset like a half-round moulding and the other having a corresponding groove, to receive same; intended to break and cover the joint.

Backset of a Lock—Measured from the front edge of a lock to the center of its knob or keyhole.

Bevel of Door—The angle of front edge of door. Regular bevel is usually ⅛ inch in 2 inches.

Bevel of Lock—Is the direction in which the bevel or angle of the latch bolt is inclined. "Regular Bevel" indicates a lock used on a door opening inward, and "Reverse Bevel" one for a door opening outward, as on a church, theatre, etc.

Bevel of Lock Front—The angle of the front of a mortise lock when not square with the case; conforming with the edge of the door.

Bit of a Key—A projecting blade which engages with and operates either or both the bolt and tumblers of lock.

Box Strike—One in which the opening to receive the bolt is enclosed or boxed, to prevent access through the crack of the door and pushing back the latch bolt.

Butt Versus Hinge—A butt is used on the butt or edge of the door; while the hinge should distinguish those applied to the surface or side of the door.

Cap of a Lock—The removable cover of a lock.

Case of a Lock—The box containing the bolts and other mechanism.

Change Key—The key of a Master-Keyed Lock, which differs from all the others of the same series and will operate only its own lock. Sometimes called "Room Key" and used in contradistinction to Master or Pass Key.

Changes—Used in reference to keys, meaning the number of different combinations of tumbler and key furnished regularly with stock goods.

Cup Escutcheon—A flush door pull for use on sliding doors, having a recessed panel for the fingerhold and key; two of the four in a double set have no keyhole.

Cylinder Ring—A washer placed under the head of a cylinder to bush it for a thin door.

Dead Bolt—One having a square head and moved positively by a key or thumb piece in either direction.

Dummy Cylinder—A blank or imitation cylinder, used without a lock, in the escutcheon or plate on the standing leaf of double doors.

Fan-Light—A semi-circular transom light.

Front—The face plate of a mortise lock, through which the bolts extend; also called Face.

Hand—A term indicating whether the article is adaptable to either right or left hand doors.

Handed—A term indicating that an article is adaptable to right or left hand door, but not both.

Hub—A rotating piece containing the square hole to receive the knob spindle and having a lug to engage with the bolt or tail piece in the lock, whereby the knob acts on the bolt.

Janus Face Lock—A rim lock, both sides of which are similarly moulded or ornamented, so that either side may be applied to the door.

Knuckle—The enlarged part of a hinge or butt which receives and encloses the pin.

Latch Bolt—One having a beveled head and actuated by the knob and a spring; it is forced back by the edge of the strike or turning of knob and automatically thrown forward again by the spring.

Lever—An abbreviation of "Lever Tumbler". It dogs and blocks the motion of the bolt until accurately engaged by the key bit.

Lock—A fastening of any kind having a dead bolt operated by a key as distinguished from one having a spring latch bolt actuated by knob only.

Lock Set—A lock complete, with its trim of knobs, escutcheon plates and screws.

Master Key—(Sometimes called Pass Key). The key to a series of master key locks which will actuate any and all of the locks, each of which has an individual key differing from the others.

Grand Master Key—One passing several master keyed sets of locks.

Night Keys—Pertaining to front door and vestibule locks; those which control the night work and operate the latch bolt from the outside, when the outer knob is stopped by the plungers in the lock face. All cylinder locks have three keys which operate both bolts; bit key front door locks usually have two night latch and one dead bolt key.

Night Work—A term used to indicate two plungers in the faceplate; that part of the mechanism of a front door or vestibule lock which controls the latch bolt and is actuated by the night key.

Rabbeted Front of Lock or Door—The doors have overlapping edges. It is better, however, to use a bevel-edge door with stop to cover the joint, and the regular lock.

Rail—Any of the horizontal strips which form the top and bottom of the panels and which, with the stiles or side pieces, constitute the framework of door or sash.

Rim—A term given to articles of hardware intended to be applied to the surface of doors, windows, etc., in contradistinction to those which are mortised into wood.

Rose—A round plate forming a base and socket for the knob or handle.

Spacing—The distance between the center of knob hub and the center of keyhole of a lock, or its escutcheon.

Spindle—The axle or shaft which connects the knobs of a lock turns the hub and actuates the latch bolt.

Stile—Any of the vertical strips or side pieces which enclose the panels and with the rail constitute the framework of door or sash.

Stop of a Lock or Latch—A small sliding projection which holds the bolt or knob, locked or unlocked.

Stop Work—Usually spoken of as Night Work, being the plungers in lock face which hold or release the outer knob on a mortise lock. Rim locks have stop on edge of case.

Swivel Spindle—A spindle having a joint or swivel midway in its length, whereby the knob attached to the one end may be made stationary, while the knob attached to the other end is left free to turn and actuate the latch mechanism.

Thimble—The socket or bearing on escutcheon plate which receives the knob shank, also called socket.

Tumbler—The obstruction or guard in a lock which dogs or prevents the motion of the bolt until accurately engaged by the bit of the key.

Vestibule Latch—A front door lock without a dead bolt, in which the keys operate the latch bolt from the outside, if the outer knob is stopped by the night work in the lock face.

Ward—A projection from the case or the keyhole of a lock, to obstruct the entrance of the key necessitating a corresponding depression or grooving in the key.

HAND OF DOORS

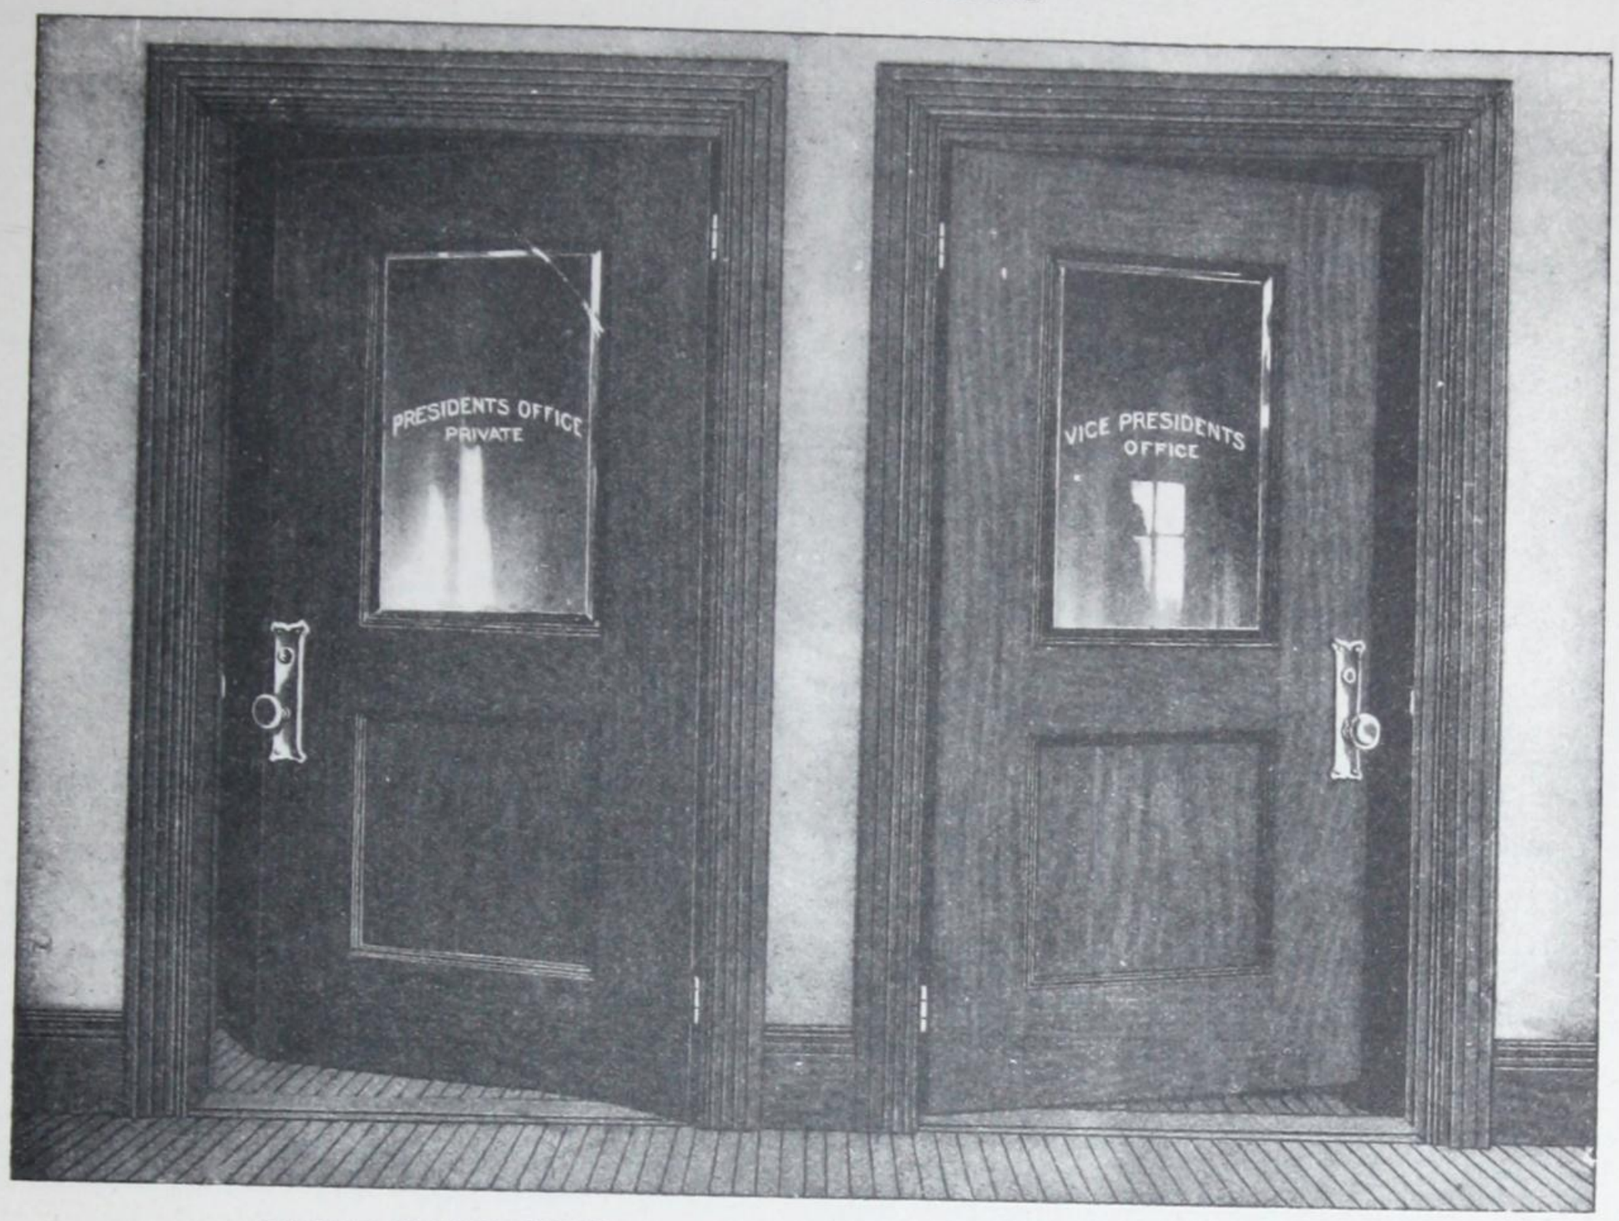

RIGHT-HAND DOOR — LEFT-HAND DOOR

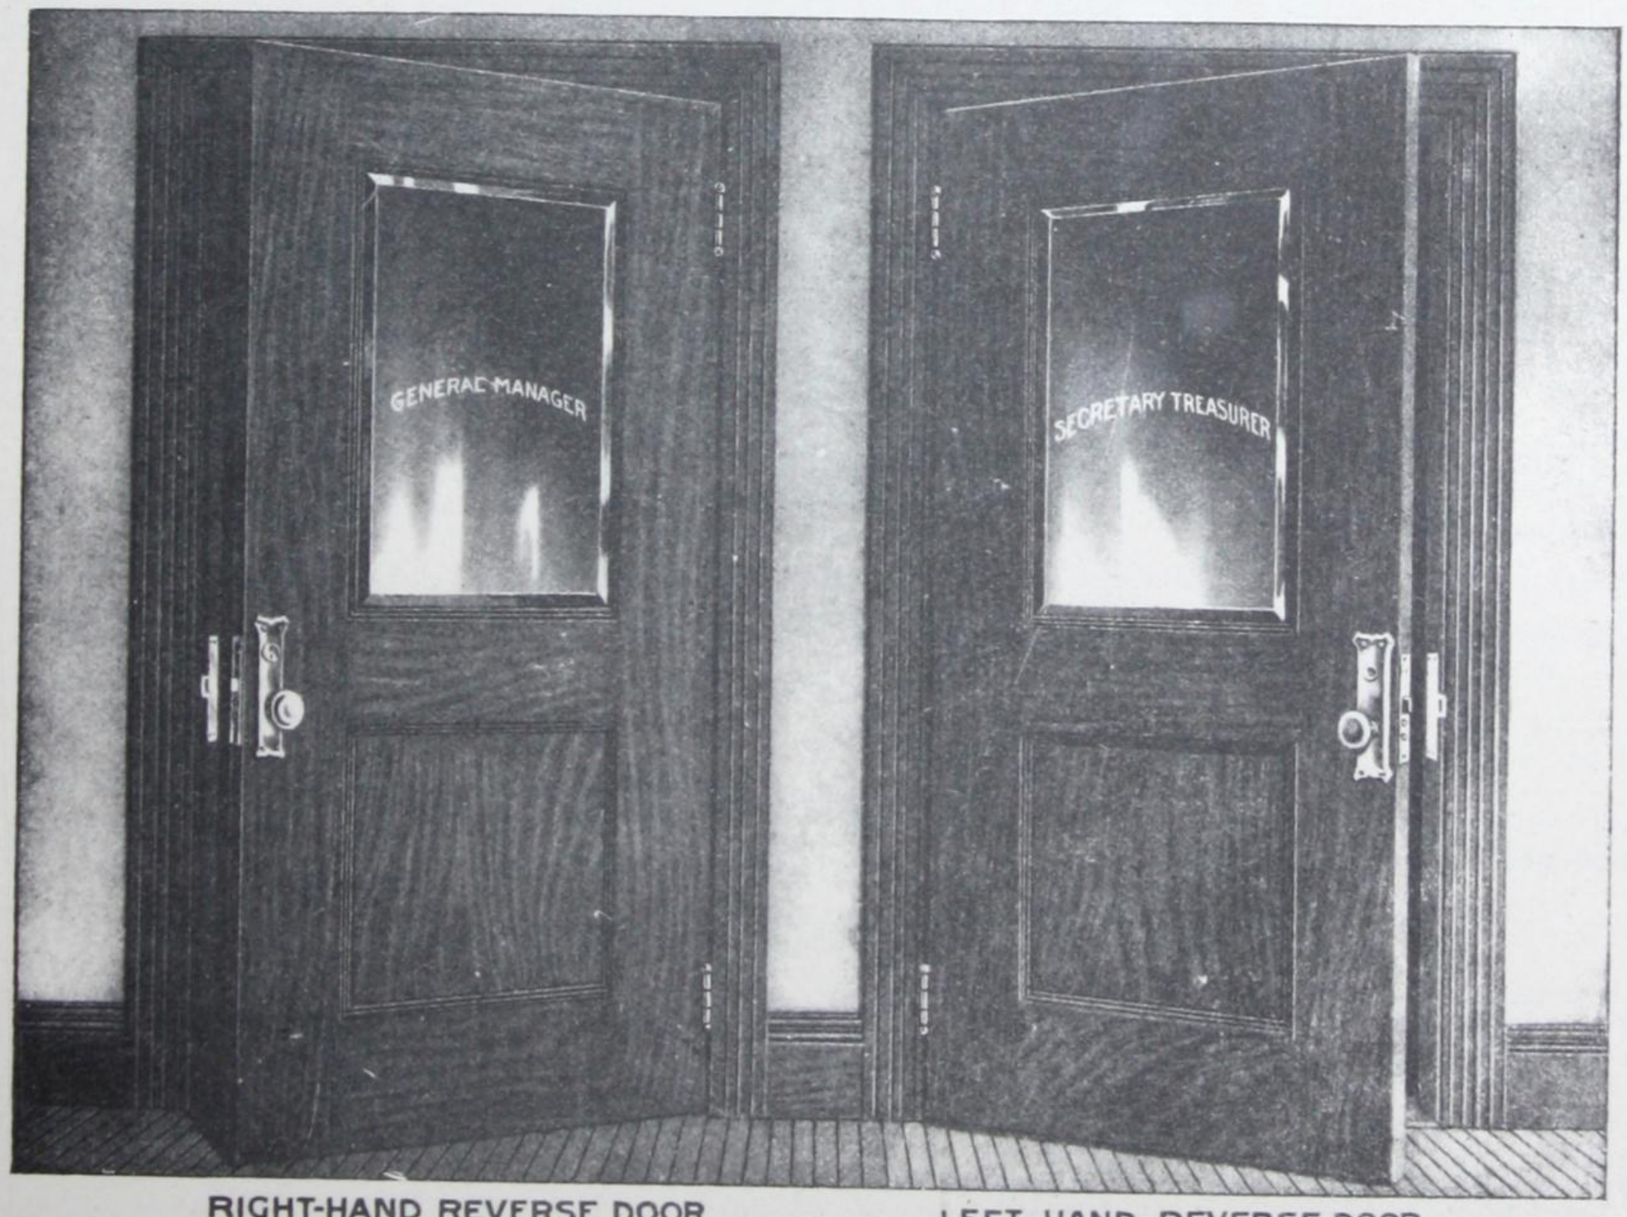

RIGHT-HAND REVERSE DOOR — LEFT-HAND REVERSE DOOR

The hand of a door is always determined from the outside. By the outside is meant the street side of an entrance door or the corridor side of a room door. If standing on the outside of a door, the butts are on the right, it is a right hand door; if on the left, a left hand door.

If standing on the outside, the door opens from you, it takes a lock with regular bevel bolt. If door opens out, the lock is required with a reverse bevel bolt and if door is hinged on the right and opens out it would be right hand reverse bevel; if hinged on the left and opens out it would be left hand reverse bevel.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

USEFUL FACTS

HANDY NOTES

Terra Cotta Tiling Weighs from 25 to 35 lbs. per Square Foot.

Hollow Tile for 5 inch Partition Weighs from 22 to 35 lbs. per Superficial Foot.

Lath and Plastering, Two Coat Work, Weighs from 9 to 12 lbs. per Superficial Foot.

The Weight of a Superficial Foot of Brick Work 8 inches Thick including Mortar, is from 83 to 87 lbs.

An Iron Roof 100 feet Wide, with a rise of One-third Pitch, will Weigh from 10 to 15 lbs. per Superficial Foot.

One Hundred Pounds per Square Foot, Distributed Uniformly over a Surface of a Bridge, is a Safe Working Standard.

The Weight per Square Foot of Roof Tiling, Set in Iron or Between Wood Rafters Ready for Slating is about 12 lbs.

A Fireproof Floor Constructed of Iron Beams and 4 inch Brick Arches will Weigh from 65 to 75 lbs. per Superficial Foot.

The Safe and Proper Bearing of Joist, Timber and Girders Supporting a Floor Should not Exceed 10 tons on Brick Walls and 14 tons on Good Stone Walls.

A Fireproof Floor Constructed of Iron Beams and Iron Arches Made of No. 18 Iron, and Filled in on Top with Concrete or Slag and Cement, Will Weigh about the Same as Brick Work 4 inches Thick.

Smallest Convenient Size of Slab for a 14 inch Washbowl, 21 by 24 inches. Height of Slab from Floor 2 feet 6 inches. Very Small (12) inch Corner Washbowl; Slab 1 foot 11 inches each side.

Space Occupied by Water Closets 2 feet 6 inches Wide; 2 feet Deep.

Urinals Should be not Less than 2 feet 2 inches Between Partitions; Partitions 6 feet High.

Horse Stalls, Width 3 feet 10 inches to 4 feet, or Over 5 feet in Width and 9 feet Long; Width Should not be Between 4 and 5 feet, as in Such Case the Horse is Liable to Cast himself.

Pitch of Tin, Copper or Tar and Gravel Roof, Five-eighths of an inch to the Foot and Upward.

A Load of Mortar Measures a Cubic yard; Requires a cubic yard of Sand and 9 bushels of Lime, and will fill 30 Hods.

A Bricklayers Hod Measures 1 foot 4 inches by 9 inches; Equals 1296 cubic inches in Capacity, and Contains 20 Bricks.

A Single Load of Sand or Other Materials Equals a Cubic Yard.

One Thousand Old Bricks, Closely Stacked, Occupy about 56 cubic feet.

One Thousand Old Bricks, Cleaned and Loosely Stacked, Occupy about 72 cubic feet.

One Hundred Yards of Plastering will Require 1400 Laths, 4½ Bushels of Lime, Four-fifths of a Load of Sand, 9 lbs. of Hair and 5 lbs. of Nails for Two-coat Work.

A Bushel of Hair Weighs, when Dry, about 15 lbs.

Flashings—By "Flashings" are Meant Pieces of Tin, Zinc or Copper Laid over Slate and up Against Walls, Chimneys, Coping, etc.

Counter Flashings are of Lead or Zinc, and are Solid Between the Courses in Brick and Turned Down over the Flashings.

In Flashing Against Stonework, Grooves Should be Cut to Receive the Counter Flashing.

ESTIMATES OF MATERIAL

To find the Number of Bricks Required in Building, Multiply the Number of Cubic Feet in the Walls by 22½. The Number of Cubic Feet is found by Adding the Lengths in Feet of Sides and Ends, Multiplying this Result by the Height in Feet, and this by the thickness of the Wall in Feet or Fraction of a Foot. Bricks are Usually made 8 inches long, 4 inches wide and 2 inches thick; hence it Requires 27 Bricks to make a Cubic Foot without Mortar, but it is Generally Assumed that the Mortar Fills One-sixth of the Space.

Three and a Half Barrels of Lime will do 100 square yards Plastering Two Coats.

Two Barrels of Lime will do 100 square yards Plastering, One Coat.

One and One-half Bushels of Hair will do 100 square yards Plastering.

One and One-quarter Yards Good Sand will do 100 square yards Plastering.

Eight bushels of Good Lime 16 bushels of Sand and 1 bushel of Hair will make Enough Good Mortar to Plaster 100 square yards.

One-third Barrel of Plaster (Stucco) will Hard Finish 100 square yards Plastering.

Two Barrels of Lime will Lay 1 cord Rubble Stone.

One-half Barrel of Lime will Lay 1 Perch Rubble Stone (estimating one-quarter Cord to Perch).

To every Barrel of Lime Estimate about Five-eighths Yard of Good Sand for Plastering and Brickwork.

One and One-eighth Barrels Lime and Five-eighths Yard Sand will Lay 1000 Bricks.

One man with One and One-quarter Tenders will Lay 1800 to 2000 Brick per Day.

One and One-quarter Barrels Lime or Cement and 1 yard of Sand will Lay 100 feet of Stone.

One Man will Lay 150 feet of Stone per Day with 1 Tender.

To Find the Number of Square Yards in a Floor or Wall Multiply the Length by the Width or Height (in feet) and Divide the Product by 9; the Result will be Square Yards.

Five Course of Brick will Lay 1 foot in Height on a Chimney, 8 Bricks in a Course will make a Flue 4 inches Wide and 12 inches Long, and 16 Bricks in a Course will make a Flue 8 inches Wide and 16 inches Long.

Thirty-two cubic feet of Stone, when Built into a Wall, is 1 Perch.

Three Pecks of Lime and 4 bushels of Sand are Required to each Perch of Wall.

There are 22½ Common Bricks to a Cubic Foot when Laid, and 15 Common Bricks to a Foot of 8 inch Wall when Laid.

Fifty feet of Boards will Build 1 Rod of Fence, Five Boards High, First Board being 10 inches Wide, Second 8 inches, Third 7 inches, Fourth 6 inches, Fifth 5 inches.

WEIGHT OF VARIOUS MATERIALS

Weight of Stones—Granite (Averages), per Cubic Foot, 170 pounds; Limestone (Magnesium), 144 pounds; Berea (Sand Stone), 140 pounds; Free Stone, 140 pounds; Gypsum, Natural State, 140 pounds. One Ton of Vein Marble is 13 Cubic Feet; of Statuary Marble 13½; Granite 13½; of Berea Stone 14⅓; of Limestone (Magnesium), 13¾.

Weight of Masonry—Granite per Cubic Foot, 160 pounds; of Berea Stone Range, 140; of Limestone Rubble, 140; of Brick, Dry, 115; of Brick, Dry (Press), 130; of Brick, Dry (Fire), 150; of Brick Masonry in Mortar, 110; of Brick Masonry Cement, 112.

Weight of Marble Slabs—One-half Inch Thick per Square Foot, 7.17 pounds; ¾ inch Thick, 10.75; 1 inch Thick, 14.32; 1¼ inch Thick, 17.92; 1½ inch Thick, 21.05; 1¾ inch Thick, 25.08; 2 inch Thick, 28.67; 2½ inch Thick, 35.83.

Cement and Lime—One Bushel of Portland Cement Weighs 96 pounds; Of Rosendale, 70; of Louisville, 62; of Quick Lime, well Shaken, 80; of Quick Lime, Loose, 70.

Iron and Wood—One Cubic Foot of Wrought Iron Weighs 480 pounds; of Cast Iron 450; of Oak (Seasoned), 48; of Pine (Seasoned), 36.

Coal—One Bushel of Anthracite Weighs 86 pounds; of Bituminous 80; of Coke (Connellsville), 40; of Charcoal (Hardwood), 30.

Miscellaneous Weights—Per Cubic Foot: Ordinary Quick Lime, 53 pounds; Old Mortar, 90; New Mortar, Well Tempered, 115; New Mortar, 110; River Sand (Average), 107; River Sand (Screened), 95; Clay with Gravel, 130; Earth, Vegetable, 90; Earth, Loamy, 100; Earth, Semi-fluid, 110.

USEFUL FACTS

NAILS REQUIRED FOR DIFFERENT KINDS OF WORK

For 1,000 Shingles, 3½ to 5 lbs. 1½ inch Nails, or 3 to 3½ lbs. 1¼ inch.
For 1,000 Laths, about 7 lbs. 1¼ inch Fine.
For 1,000 feet Clapboards, about 18 lbs. 2 inch, box.
For 1,000 feet Covering Boards, about 20 lbs. 2½ inch Common, or 25 lbs. 3 inch.
For 1,000 feet Upper Floors, Square Edged, about 38 lbs. 3 inch floor, or 41 lbs. 3¼ inch Floor.
For 1,000 feet Upper Floors, Matched and Blind Nailed, 38 lbs. 3 inch, or 42 lbs. 3¼ inch Common.
For 10 feet Partitions, Studs or Studding, 1 lb. 3 inch Common.
For 1,000 feet Furring, 1x3, about 45 lbs. 3 inch Common.
For 1,000 feet Furring, 1x2 about 65 lbs. 3 inch Common.
For 1,000 feet Pine Finish, about 30 lbs, 2½ inch Finish.
To Case and Hang One Door, 1 lb. 2½ inch Casing or Finish. To Case and Hang One Window, ¾ lb.
For 100 lineal feet of Base Board, 1 lb. 2½ inch Casing or Finish. For 1,000 feet of Rafters or Joists, 3 lbs. 3 inch Common.
To put up 1,000 feet of Studding, 3 lbs. 3 inch Common. For 1,000 feet 6 inch Pine Floor, 15 lbs. 2¼ inch Flooring.

WEIGHT OF LUMBER, ETC. DRY

Flooring—Dressed and Matched, per 1,000 feet	1,800 lbs.
Siding—Dressed, per 1,000 feet	800 lbs.
Ceiling—⅜ inch Thick, per 1,000 feet	800 lbs.
Ceiling—½ inch Thick, per 1,000 feet	900 lbs.
Boards—Dressed One Side, per 1,000 feet	2,100 lbs.
Boards and Dimensions, Rough per 1,000 feet	2,500 lbs.
Shingles—Per 1,000 Pieces	250 lbs.
Lath—Per 1,000 Pieces	500 lbs.
Pickets—Rough, per 1,000 Pieces	2,500 lbs.
Pickets—Dressed, per 1,000 Pieces	1,800 lbs.

TO REMOVE RUSTY SCREWS

Apply a Red Hot Iron to the Head of the Screw for a Short Time, then Use the Screw Driver While the Screw is Still Hot.

TO REMOVE RUSTY BOLTS

The Best Method is to Apply Kerosene Oil Liberally, and Give Time for it to Soften the Rust Before an Attempt is Made to Turn the Nut. If, After the Rust has Softened, it Does not Start Easily with the Wrench, Give a Rap on One Corner with a Hammer. A Hammer and Cold Chisel Rightly Used will Often Start a Rusted Nut that Will not Yield to the Wrench without Twisting off the Bolt.

HINTS FOR ROOFERS

The Average Width of a Shingle is 4 inches. Hence, when Shingles are Laid 4 inches to the Weather, Each Shingle Averages 16 Square inches, and 900 are Required for a Square of Roofing (100 Square Feet). If 4½ inches to the Weather, 800; 5 inches, 720; 5½ inches, 655; 6 inches, 600. In Hip-roofs where Shingles are Cut More or Less to Fit the Roof, 5% Should be Added to these Figures.

One Thousand Shingles Laid 4 inches to the Weather will Require 5 lbs. of Shingle Nails; 6 lbs. of 1½ inch. Nails will Lay 1000 Split Pine Shingles.

A Carpenter will Carry up and Lay on the Roof from 1500 to 2000 Shingles per Day, or Two Squares and a Half of Plain Gable Roofing.

The Pitch of a Slated Roof should be About One in Height to Four in Length. The Usual Lap is About 3 inches, Sometimes 5 inches. Each Slate should be Fastened by Two 1¼ inch Slate Nails, either Galvanized Iron, Copper or Zinc. On Roofs of Gas Houses the Nails should be of Copper or Yellow Metal.

The Sides and Bottom Edges of Roof Slates Should be Trimmed, and the Nail Holes Punched as Near the Head as Possible. When Slates are Not of Uniform Size they Should be Sorted, and the Smallest Placed Near the Ridge.

In a First-class Slate Roof the Top Course on Ridge, and the Slate from 2 to 4 feet from Gutters and 1 foot Each Way from Valleys and Hips, Should be Bedded in Elastic Cement.

Roof-boards for Slate Roofs Should be Covered with One or Two Thicknesses of Tarred Felt Roofing Paper Before Slates are Laid, Dry Rosin-size Felt Should Not be Used on Roofs.

To Find the Length of Rafters, Giving the Roof ⅓ Pitch, Take Three-fifths of the Width of the Building. If the Building is 30 feet Wide they Must be 18 feet Long, Exclusive of Projection.

PINE SHINGLES

Number and Weight of Pine Shingles to Cover One Square of Roof

1 Square=100 Square Feet

Number of Inches Exposed to Weather	4	4½	5	5½	6
Number of Shingles per Square of Roof	900	800	720	655	600
Weight in Pounds of Shingles on One Square of Roof	216	192	173	157	144

The Number of Shingles per Square is for Common Gable Roofs For Hip Roofs, add 5% to these Figures. The Weights per Square are Based on the Number per Square.

Find the Number of Shingles Required to Cover a Roof 38 feet Long and the Rafters on Each Side 14 feet, Shingles Exposed 4½ inches. 28x38, 1064 (square feet), x 8, 8512 Shingles. Answer.

METAL ROOFING

A Tin Roof, Properly Put on and Kept Painted, will Last Thirty Years. It Ought not to be Painted for the First Time Until it has been on About Thirty Days, so as to Get the Grease off the Tin, and all the Rosin Should be Carefully Scraped off.

It is Sometimes Necessary, on Buildings where there is much Dampness or Steam, as Stables, Blacksmith Shops, Roundhouses, etc. to paint the Roof Tin One Coat on the Under Side Before Laying.

Tin Roofs Should be Laid with Cleats, and not by Driving the Nails Through the Tin Itself.

There are Two Kinds of Tin—"Bright Tin," the Coating if which is all Tin, that is the Tin Proper; and "Terne," "Leaded" or "Roofing" Tin the Coating of which is a Composition, Part Tin and Part Lead. This Last is a Little Cheaper, and will not Rust Any quicker, but the Sulphur in Soft Coal Smoke Eats Through the "Leaded" Coating Sooner than Through the "Tinned."

There are Two Sizes of Tin, 10x14, and 14x20, and Two Grades of Thickness—IC, Light, and IX, Heavy. For a Steep Roof (One-sixth Pitch or over) the IC 14x20 Tin ("Leaded" if High up where Little Smoke will get to it: "Bright" if Low Down), Put on with a Standing Groove, and with the Cross Beams Put Together with a Double Lock, Makes as good a Roof as Can be Made. For Flat Roofs IX 10x14 "Light" is Best, Laid with Cleats; but the Others Make Good Roofs and Any of Them will Last 25 Years at Least.

Number of Square Feet a Box of Roofing Tin will Cover; For Flat Seam Roofing, Using ½ inch Locks, a Box of "14x20" size will cover About 192 Square Feet, and for Standing Seam, Using ⅜ inch Locks and Turning 1¼ and 1½ inch Edges, Making 1 inch Standing Seams, it will Lay About 168 Square Feet.

For Flat Seam Roofing, Using ½ inch Locks, a Box of "28x20" Size will Cover About 399 Square Feet, and for Standing Seam, Using ⅜ inch Locks and Turning 1¼ and 1½ inch Edges, Making 1 inch Standing Seams, it will Lay About 365 Square Feet.

Every Box of Roofing Plates (IC or IX "14x20" or "28x20" Sizes) Contains 112 Sheets.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Mantels, Grates and Tiles

MANTELS

We carry a complete line of mantels from the small plain model to the large, impressive models fitted with bevelled Plate Mirrors.

We supply mantels in plain unfinished Oak, and in stained and polished finishes, in both plain and Quarter Cut Oak.

OUR RANGE IS VERY COMPLETE

TILE

For Floors, Entrances, Walls, Fireplaces, etc.

We are Specialists in Tile Work and can quote on supplying Tile for all purposes :—

Residences

Apartments

Public Buildings

GRATES

DAMPERS, COAL HODS, FENDERS, FIRE SETS, SCREENS, etc.

We carry in stock:—

RATCHET DAMPERS
DOME DAMPERS
ASH DUMPS
CLEAN-OUT DOORS
PORTABLE BASKETS
POLISHED BRASS FENDERS
HAMMERED ANTIQUE BRASS FENDERS
ANDIRONS
COAL HODS
FIRE SETS, Hammered and Polished Finishes
SCREENS AND SPARK GUARDS IN MANY PATTERNS

We have been building up our Mantel and Mantel Accessories Department for many years, and have a very complete line.

We issue a special illustrated catalogue covering our complete line of mantels, grates and tiles. A copy will gladly be forwarded on request.

BUILDERS' HARDWARE FINISHES

COMPARATIVE LIST AND EXPLANATION OF FINISHES

Belleville Mfg. Co.	Peterboro Mfg. Co.	Russell & Erwin Mfg. Co.	Yale & Towne Mfg. Co.	P. & F. Corbin	Stanley Works	
R7	**8**	**7½**	**CZ17**	**R**	**D2**	**Copper Oxidized light mottled.**
R3	**13**	**9**	**AY22**	**DA**	**F**	**Dull Brass**
RS6	**19**	**9C**	**AY21**	**KA**	**F4**	**Dull Brass Slightly Oxidized**
ZS21	**20**	**09B**				**Light Oxidized and High Lights Buff, Sanded**
R3	**19S**	**09C**	**A x 24**	**SKA**	**SF4**	**Dull Brass Slightly Oxidized Sanded.**
N1	**30**	**4**	**N210**	**E**	**N**	**Nickel Plated.**
Bower Barff	**41**	**46**	**F x 80**	**F**	**G**	**Genuine Bower Barff Sanded.**
Dead Black	**40**	**06**	**B x 16**	**KF**	**H**	**Dead Black Electro Plate.**
		Kahala				**Dark Brown Oil Finish Baked.**
NS6	**32**					**Dull Nickel, Dark Oxidized and Relieved**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BLUE BIRD Tinners' Snips

Packed 2 Pair in attractive three-color display container as illustrated

"A SILENT SALESMAN"

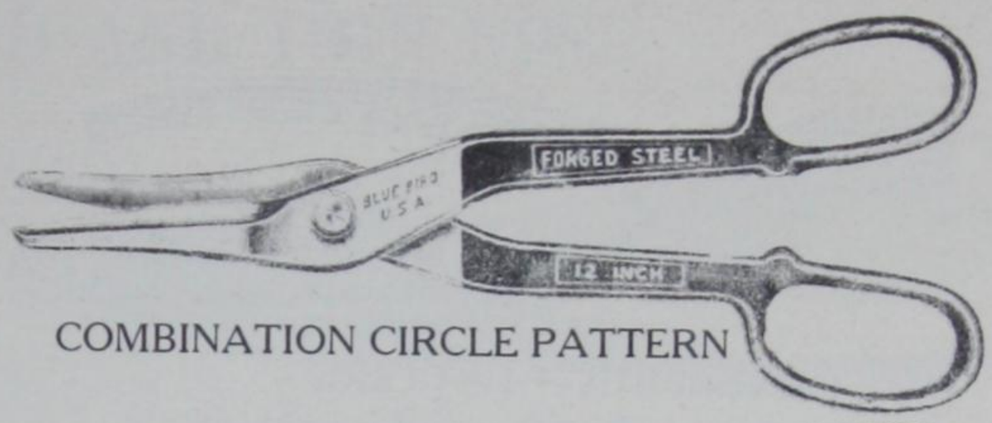

COMBINATION CIRCLE PATTERN

STRAIGHT PATTERN

a Quality Tool at a Popular Price

COMBINATION PATTERN, ADAPTED FOR CUTTING STRAIGHT, CIRCULAR AND IRREGULAR SHAPES, SCROLLS OR INTRICATE PATTERNS

						Price per Doz.
SPECIFICATIONS	212	Combination	3 in.	12 in.	19 lbs.	$ 29.50

DROP FORGED SNIPS

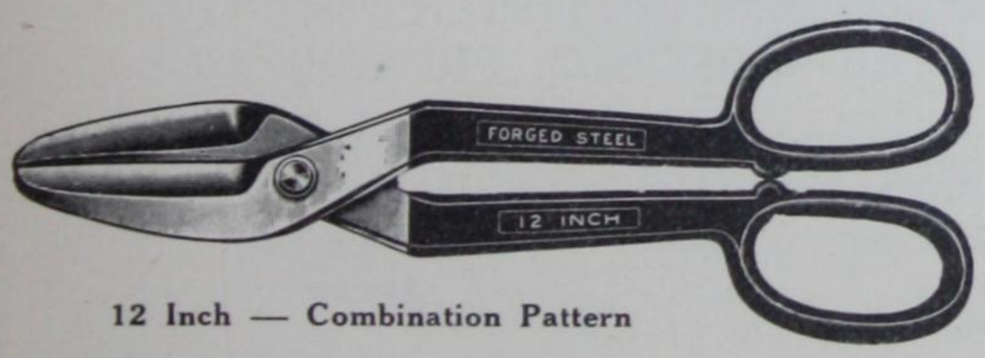

12 Inch — Combination Pattern

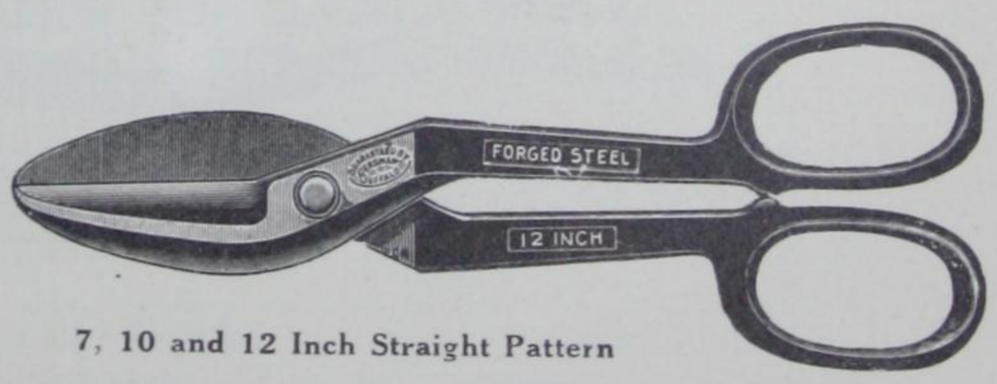

7, 10 and 12 Inch Straight Pattern

Presented to Meet the Demand for Quality Snips at Low Price

SPECIFICATIONS

MACHINE HOLLOW GROUND

CAREFULLY TEMPERED

BLADES NICELY POLISHED

No.	Cutting Edge	Total Length	Weight per doz.	Price per doz.
2 Auto	2 inch	7 inch	6¼ lbs.	$ 13.10
2¾ Household	2¾ inch	10 inch	12 lbs.	$ 17.30
3¼ Tinners'	3¼ inch	12 inch	18 lbs.	$ 19.60
312 Combination	3 inch	12 inch	18 lbs.	$ 23.90

Packed: One in Envelope—Six in Container—3 Dozen in Case

Combination Pattern Adapted for Cutting Straight, Circular or Irregular Shapes

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

COMBINATION PLIERS
SLIP JOINT

5 AND 6 INCH PATTERN

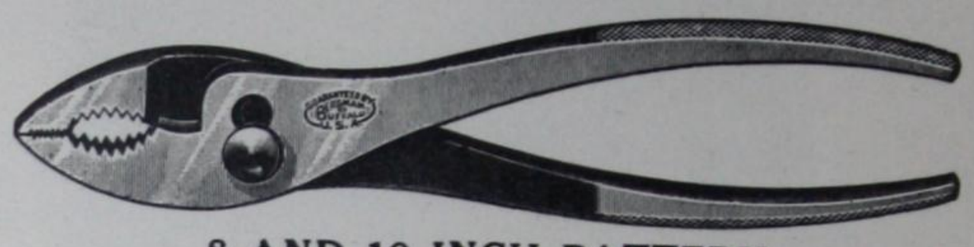

8 AND 10 INCH PATTERN

To meet the demand for high grade economical combination pliers, these lines are presented in the certainty that they will give utmost satisfaction and service. Drop forged from high carbon steel, perfectly tempered. Bolt holes drilled before punching. Tempered Bolts. Bearing surfaces restruck, preventing friction. Handles knurled for perfect grip. Machine, Semi-Hand and Full Hand Finishes. Nickel-plated on copper.

PACKED ONE IN A CARTON — 5 INCH, 12 DOZEN IN CASE
6 INCH, 6 DOZEN IN CASE — 8 AND 10 INCH, 3 DOZEN IN CASE

803	5 in.	2¾ lbs.	Special Nickel	$7.30
803	6 in.	6 lbs.	Special Nickel	$7.30
803	8 in.	7¼ lbs.	Special Nickel	$10.00

BLUE BIRD BATTERY PLIERS
DROP FORGED - TEMPERED

SAVES TIME

AND ENERGY

A PRACTICAL NUT WRENCH AND TERMINAL LIFTER
PLIER—WIRE CUTTER—GROUP PULLER—POST NUT WRENCH

SPECIFICATIONS

NO.	LENGTH	WEIGHT PER DOZ.	LIST PRICE Doz.
12	8 in.	8 lbs.	$19.60

PACKED IN INDIVIDUAL BOXES

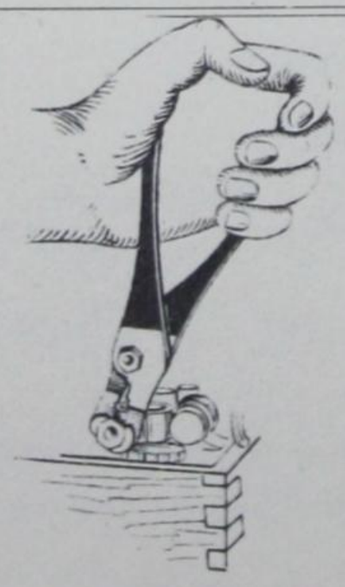

NUT WRENCH

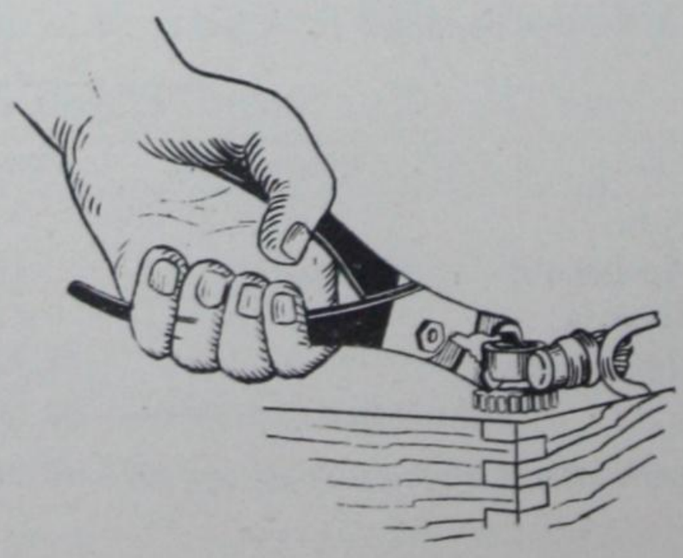

TERMINAL LIFTER

POST NUT WRENCH

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

COMBINATION PLIERS

SLIP JOINT—KNURLED HANDLES

NARROW TAPERED AND THIN NOSE

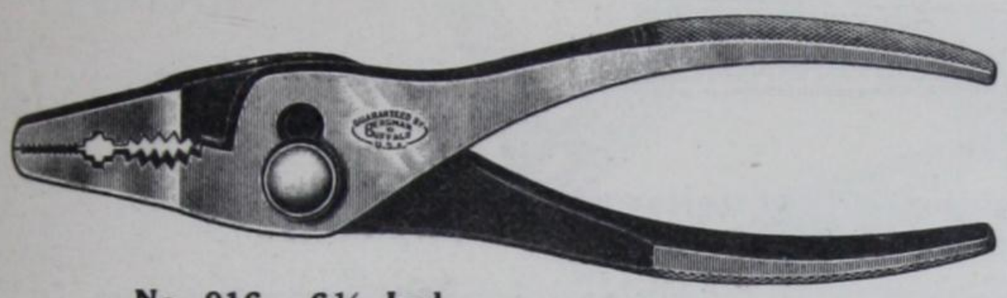

No. 016 - 6½ Inch
Thin Tapered Nose

No. 106 - 6 Inch — No. 107 - 7½ Inch
Thin Long Narrow Tapered Nose

Especially designed to get into the tight places and inaccessible corners, these pliers are admirably adapted for RADIO and AUTO work. Drop Forged from specially selected steel and perfectly heat treated. Highly hand finished and heavily Nickel Plated on copper.

Special grip for square and hexagon nuts in center of Jaws. Bearing surfaces cup ground to insure free working and perfect alignment.

Superior quality backed by our rigid standard guarantee of satisfaction.

No.	Finish	Length	Weight per doz.	Price
016	Full Nickel	6½-in.	5 lbs.	**$18.20** Doz.
106	Full Nickel	6-in.	3 lbs.	**$14.70** Doz.
107	Full Nickel	7½-in.	5½ lbs.	**$17.30** Doz.

No. 60 SIDE CUTTING COMBINATION PLIER

Drop Forged

Heat Treated

Fully Warranted

An all around utility Plier for Motorist, Electrician and Mechanic adapted for cutting Plain or Insulated wire. Machine ground cutting edges will stand the test under severe service.

A strictly High Grade Tool at a Popular Price.

No.	Finish	Length	Weight per doz.	Price
60	Full Nickel	7-in.	6⅔ lbs.	**$15.50** Doz.

BLUE BIRD Pruning Shears

VOLUTE SPRING

POSITIVE
Spring Tempered
END LOCK

CALIFORNIA PATTERN

Perfect shearing and clean cutting insured by machine hollow ground inside surface and machine ground cutting edge.

NO.	LENGTH	WEIGHT PER DOZ.	PRICE PER DOZ.
9	9 in.	12 lbs.	**$20.00**

PACKED IN INDIVIDUAL TELESCOPE BOXES

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BLUEBIRD IMPROVED ADJUSTABLE 22½ Degree WRENCH

DROP FORGED HEAT TREATED

The wrench with parts that can't work loose or come out unless you want them out.
Easily removed or replaced if necessary

COIL SPRING TENSION HOLDS ADJUSTMENT
DROP FORGED FROM SPECIAL HIGH TENSILE STRENGTH STEEL
CAREFULLY HEAT TREATED AND TEMPERED
A GENERAL UTILITY WRENCH FOR SHOP, GARAGE AND HOME
DESIGNED TO REACH THE HARD-TO-GET-AT PLACES
BACKED BY AN UNLIMITED GUARANTEE OF SATISFACTION

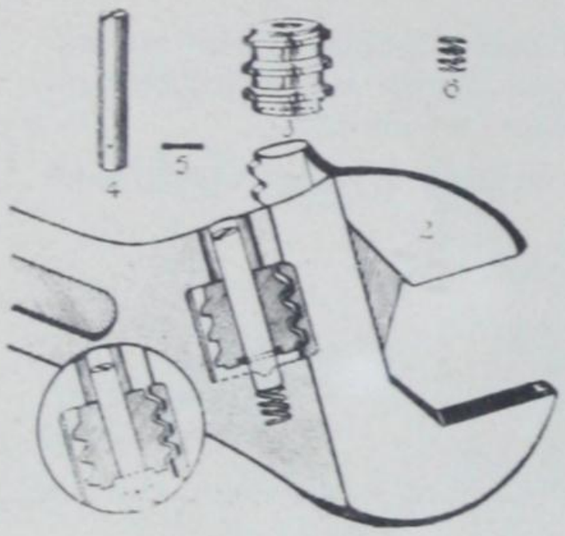

SPECIFICATIONS

No.	Size	Capacity	Weight	List Price
B6	6 in.	¾ in.	4 lbs. doz.	**$15.80** Doz.
B8	8 in.	15/16 in.	8 lbs. doz.	**$18.80** Doz.
B10	10 in.	1⅛ in.	14 lbs. doz.	**$28.80** Doz.

Full Polished Finish

Packed in Individual Boxes

Hold-Fast Steel Plumb Bob

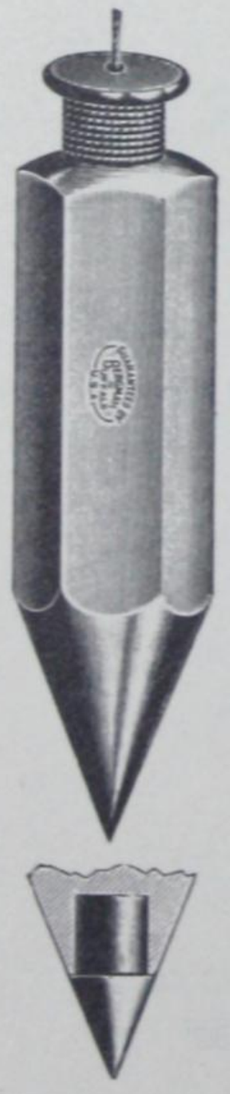

Made with many Exclusive Bergman Features. Hexagonal in shape to prevent rolling when dropped or laid down. Special cord holding feature. Inserted tool steel tempered point which will not blunt or turn over.

7½ feet braided linen twine furnished with each Bob.

Nickel Plated on Copper. Accurately centered and true.

No.	Weight	Weight per Gross	Price per Dozen
14	4 oz.	45 lbs.	$ **11.00**
16	6 oz.	57 lbs.	$ **12.00**
18	8 oz.	72 lbs.	$ **13.00**

Packed in Individual Cartons.
½ Dozen in Box.

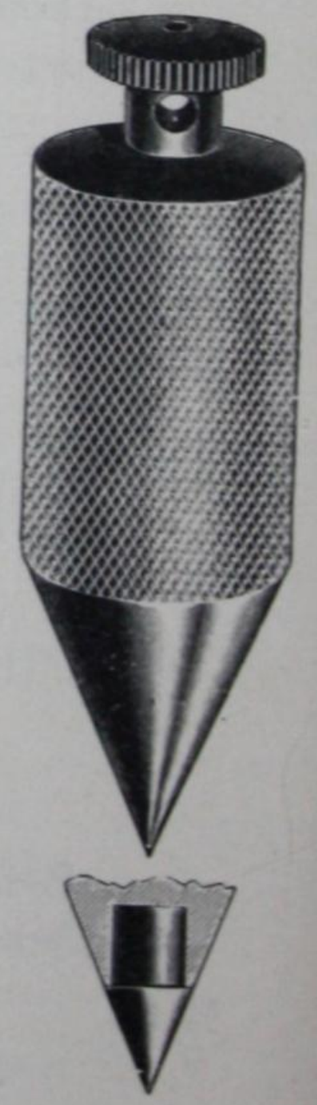

Round Steel Plumb Bob

Turned from Solid Steel Bar.

Unusually attractive to dealers because of its low price. Absolutely accurate as it is turned from a solid steel bar, not cast. Body is knurled to prevent slipping. Special cord holding feature. Two finishes, polished or nickel plated. Inserted Tool Steel Tempered Point.

No.	Weight	Finishes	Weight per Gross	Price per Dozen
08	8 oz.	Nickel-Plated	72 lbs.	**$9.00**

Packed: ½ Dozen in Box.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CARDED ASSORTMENTS

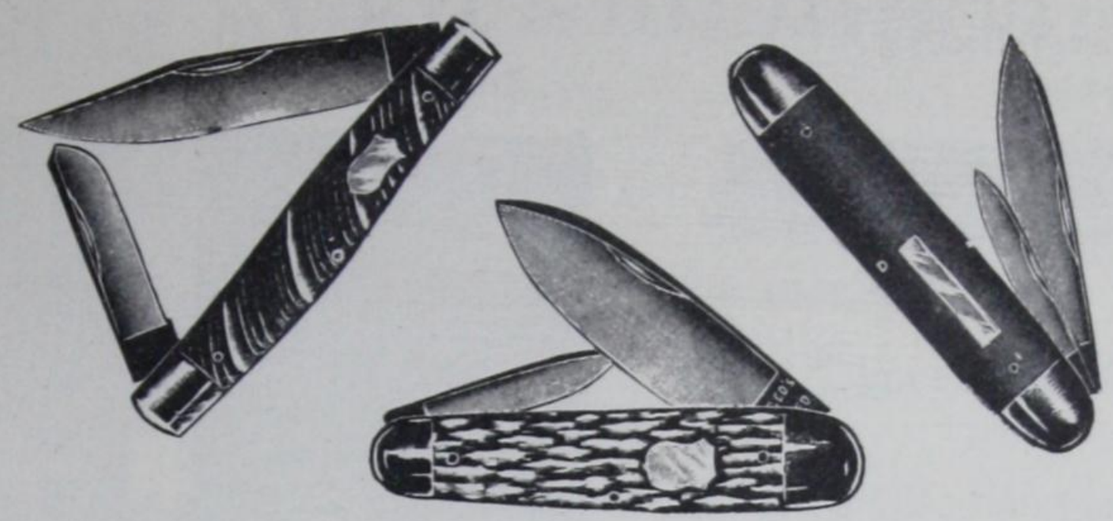

A splendid display, consisting of One dozen selected pocket knives.

A real assortment. Each knife retails at $1.00.

Per card **$16.00**

An attractive display card containing twenty-four Pocket Knives, to retail at 50 cents each. Weight per card, 2 lbs.

Per Card **$16.00**

ALL STEEL GARDEN TOOL SETS "STANLEY"

The Stanley All Steel Garden Tool Set consists of a trowel, fork, transplanter and cultivator. Each tool is light in weight, yet strongly made of cold rolled steel. Handles are very smooth and shaped to fit the hand. Each tool is finished in distinctive and brilliant two tone colored lacquers. Individually wrapped and packed one set complete in a handsome colored box. Length overall: Trowel 11 ins. Fork 11 ins. Cultivator 10 ins. Transplanter 11½ ins.

—Stanley All-Steel Garden Tool Set. Weight per dozen sets 18 lbs. - per dozen sets **$20.10**

Packed 24 Sets in a Carton, Weighing 49 lbs.

WROUGHT BRASS LINE CLAMPS

(Patented)

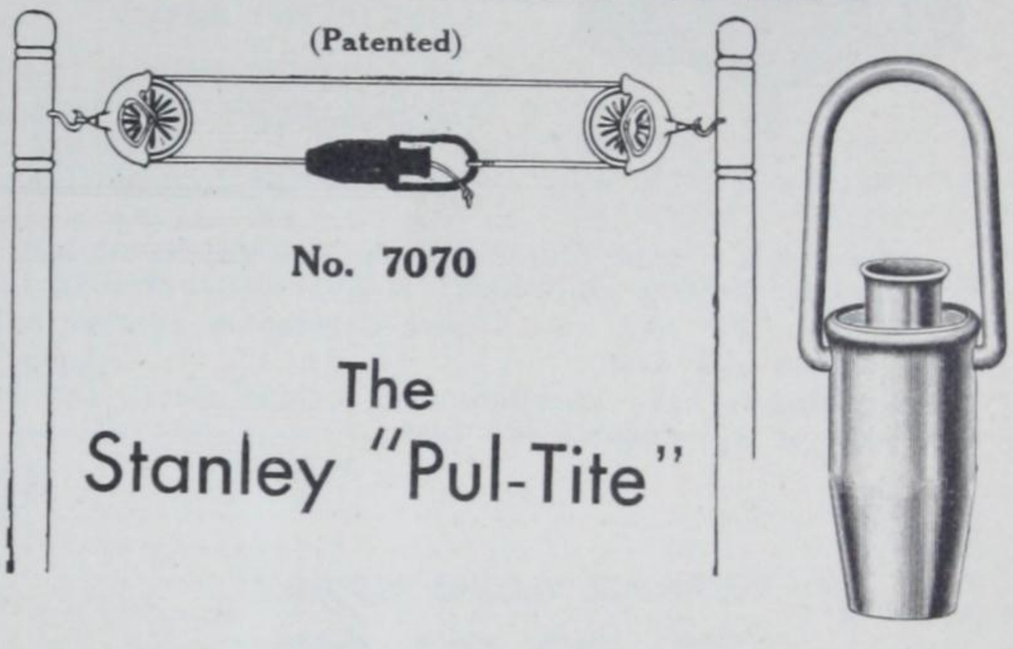

No. 7070

The Stanley "Pul-Tite"

For Tightening Ropes or Wires—Size Overall 3¾ in.

Designed for use on clothes lines, tennis and volley ball nets, tent lines, aerials, etc. The clamp is so constructed that the line cannot slip through until the flared end of the tube is pulled out. Adapted for rope or wire from ⅛ to 5/16 inch in thickness.

No. 7070—Wt. per dz. 3 lb. per doz. **$9.20**

One Dozen on a Display Card in a Box

STANLEY *Adjustable*
CLOTHES HANGER BAR



THE Stanley Clothes Hanger Bar No. 7020 replaces the unsightly broom handle, gas pipe or bamboo fish pole generally used for hanging clothes in closets. A strong, rigid support for clothes hangers, easily applied, and one which will "stay put."

Furnished in three sizes — 18", 30" and 48" in length. The 18" size is adjustable to 30 inches, the 30" to 48 inches, and the 48" to 78 inches.

PRICE LIST

18"	each	$1.80
30"	each	2.10
48"	each	3.00

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DOOR COMMUNICATORS

Outside View

Style "A"

Outside Guard
with
Knocker and Number
Inside Door and Frame

Inside View

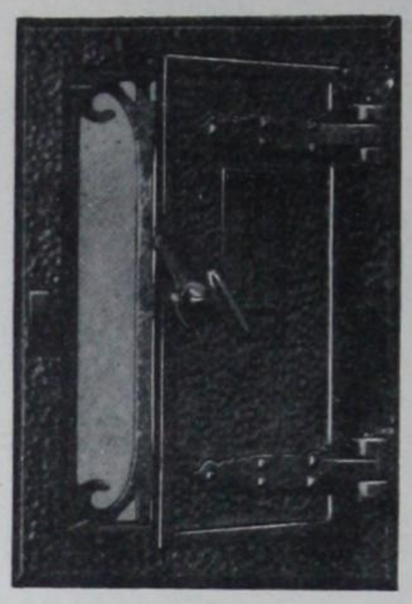

Made for door panel, or solid doors.

Can be furnished with metal sleeve and longer screws for solid doors.

Size opening required, 3⅛"x5⅛"
Size over all 4¼"x8"
Finishes—Old Iron and Statuary Bronze

Model "M" (not illustrated) is Modernistic Style. Models "A" and "M" have number holders embodied. If no number desired, ornamental filler is used.

Models "F" and "F2" have detachable number holder. If no number desired, deduct .30c List.

All Models have knockers and include sleeve for 1¾" doors. If for panel doors ¼" or ⅜" deduct .40c List.

PRICES	Old Iron	Statuary Bronze
Model A	$6.00	$6.80
Model F	12.20	14.00
Model F-2	8.20	9.40
Model M	6.80	7.80

1650

Style "F" and "F-2"

Syle F—
Size of opening required, 5¾"x9½"
Size over all 8"x13½"

Style F-2—
Size of opening required, 4½"x7½"
Size over all 6"x11"
Finishes—Old Iron or Statuary Bronze

Door Knockers

No. 014

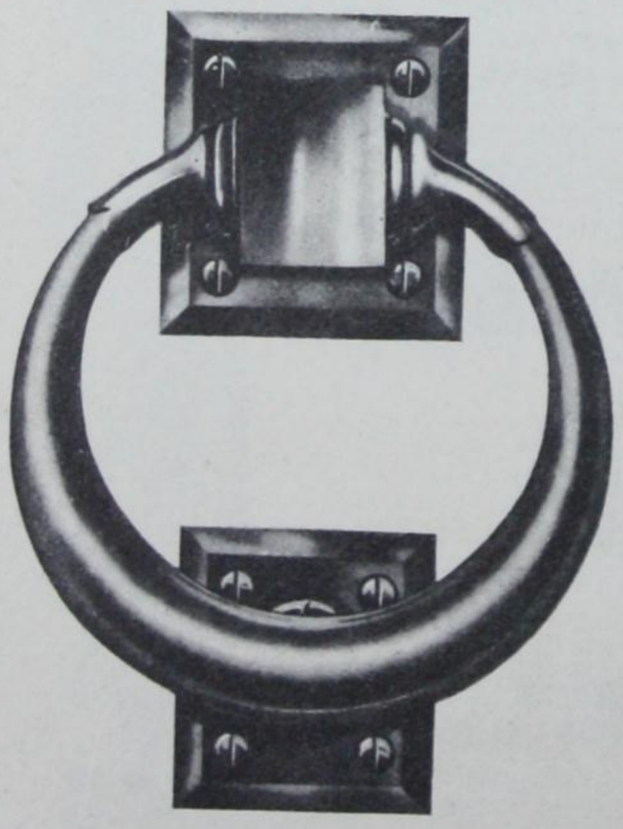

Size 5¾ x 4⅜ in.
Price each **$9.00**

Cast Brass or Bronze
No. 012

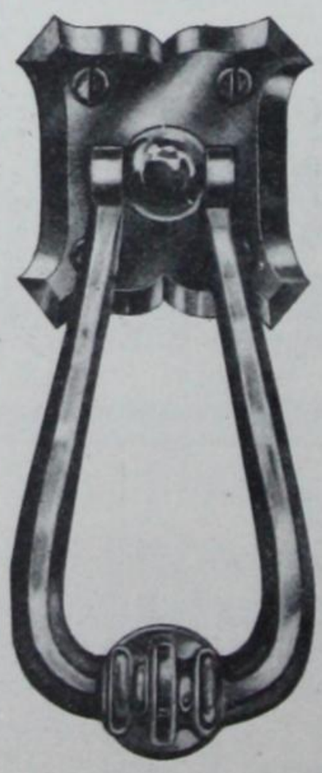

4⅞ x 2¼ in.
Price each **$3.00**

No. 47½

6¾ x 4⅞
Price each **$9.50**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ROPE

BLUE STAR MANILA

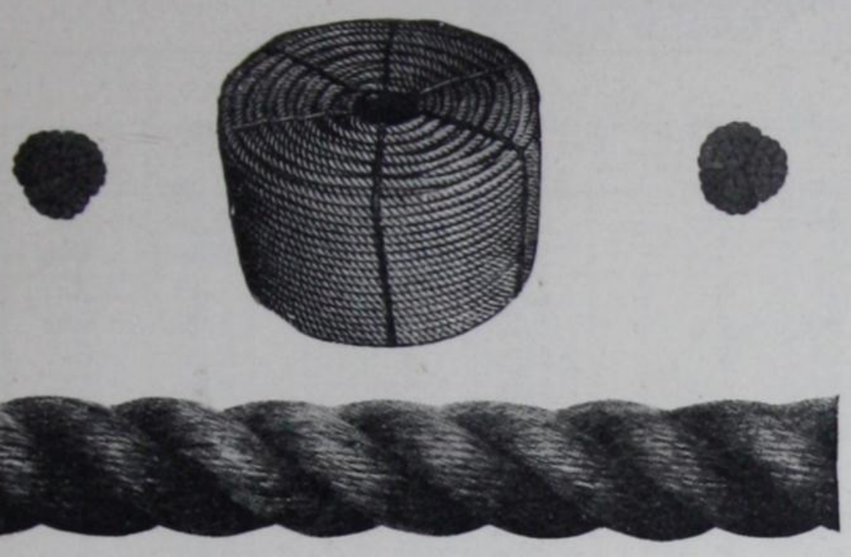

Recommended for all work requiring best grade rope. Guaranteed pure, high quality Manila Fibre.

Diam., in., -	¼	5/16	⅜	7/16	½
Adv. over base,	$0.04	.04	.03	.02	.02
Diam., in -	**⅝**	**¾**	**⅞**	**1**	**1¼**	**1½**
Adv. over base,	$0.01	Base	Base	Base	Base	Base

MERCHANT MANILA

SPECIAL ROPE

For All Work on Which a Lower Priced Cordage than Pure Manila Is Desired

Diam., in., - - -	¼	5/16	⅜	7/16	½
Adv. over base, -	$0.02	.02	.01 ½	.01	.01
Diam., in., - - -	**9/16**	**⅝**	**¾**	**⅞**	**1**
Adv. over base, -	$0.01	.00 ½	Base	Base	Base

SISAL ROPE

Available in same sizes and price as Merchants Manila.

Approximate Weight and Strength of Pure Manila Rope

Diameter, ins.	3/16	¼	5/16	⅜	7/16	½	9/16	⅝	¾	⅞	1	1⅛	1¼	1½	1¾	2	2¼	2½
Strength in lbs.	480	620	1000	1275	1750	2450	3150	4000	4900	7000	8200	11000	12500	17500	25500	30000	38500	43500
Feet to the lb	66⅔	55	36⅓	27	18½	13⅛	9½	7½	6-1/12	4-5/12	3⅔	2¾	2-5/12	1⅔	1-1/12	11/12	⅔	7/12
No. of ft. in coil	3333	2750	1820	1350	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
W't. per coil, lbs.	50	50	50	50	65	90	125	160	198	270	324	432	502	720	1080	1296	1764	2016

Prices Market

TACKS

CUT

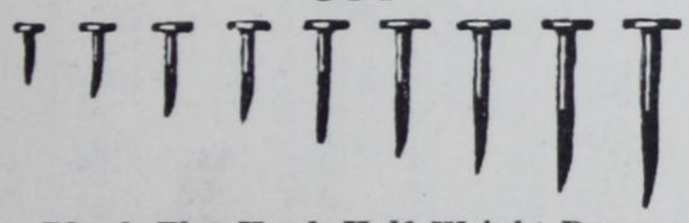

Blued, Flat Head, Half Weight Papers

Ounces -	1	1½	2	2½	3	4	6
Length, ins. -	3/16	7/32	¼	5/16	⅜	7/16	½
Weight doz., lbs.	½	¾	1	1⅛	1¼	2	2½
Per doz., Papers	$1.05	1.05	1.05	1.17	1.32	1.53	2.02
Ounces -	**8**	**10**	**12**	**14**	**16**	**18**	**20**
Length, ins. -	9/16	⅝	11/16	⅞	13/16	⅞	15/16
Weight doz., lbs.	3½	4	5	6	7	8	9
Per doz. Papers	$2.49	2.96	3.42	3.89	4.44	4.97	5.32

One Dozen Papers in a Carton.

LARGE HEAD CARPET

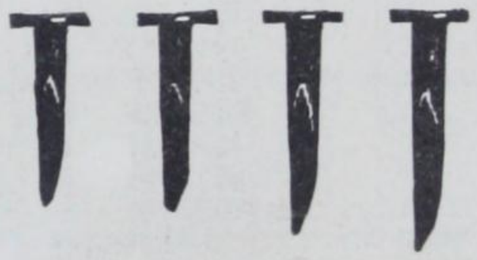

Flat Head, Blued, Half Weight Papers.

Ounces - -	4	6	8
Length, ins. -	7/16	½	9/16
Weight per doz., lbs.	2	2½	3
Per dozen Papers	$1.25	1.76	2.16

One Dozen Papers in a Box

Discount Market

FOOT SCRAPERS

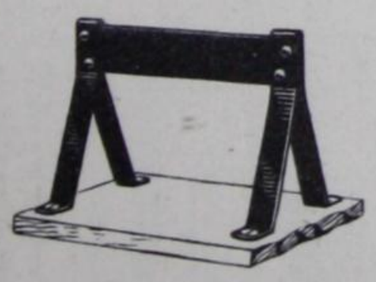

Western; Heavy Wrot Steel; Japanned; May be Screwed to Wood or Embedded in Concrete.

	Per Doz.
Width at Base, 9 in.; Height 7 in.; Length Scraper Bar 6¾ in...	$10.00
Open Stock; Weight 18 lbs. Dozen	

STOVE PIPE WIRE

BLACK ANNEALED —IN ¼ LB. COILS.

Gauge	18
Per 100 lbs. - - -	$18.20

Ten Pounds in a Bundle.

All Prices Subject to Change Without Notice

CARRIAGE BOLTS

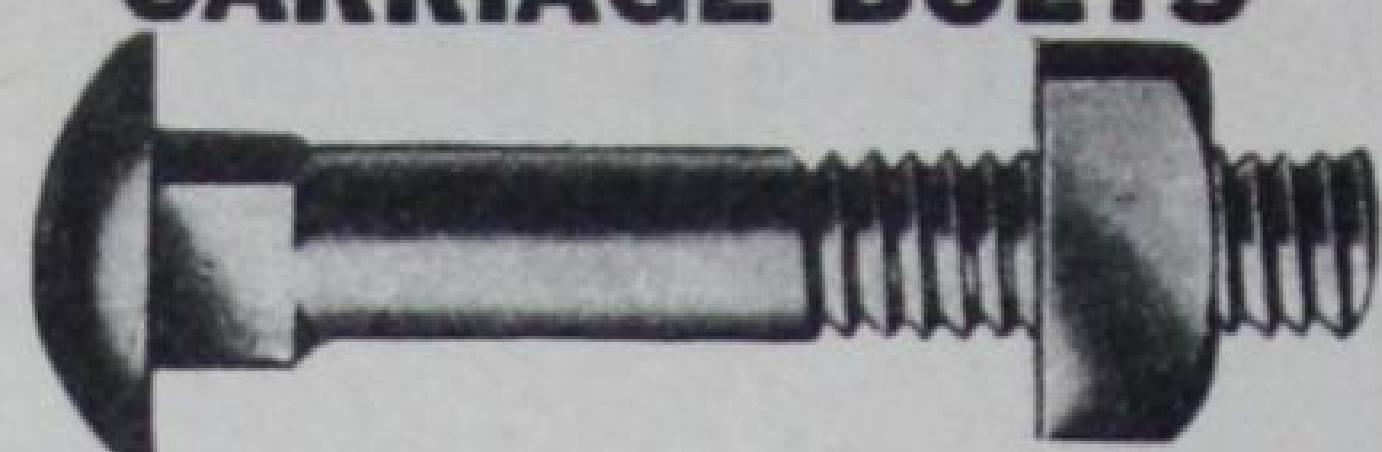

DISCOUNT **MARKET**

List January 2nd, 1924.

OVAL HEAD, SQUARE NECK, FORGED NUT

Diam. In	3/16 & ¼		5/16		⅜		7/16		½		9/16 and ⅝		¾
Length	Per 100	Length	Per 100	Length	Per 100	Length	Per 100	Length	Per 100	Length	Per 100	Length	Per 100
1½	$1.00	1½	$1.40	1½	$1.90	1½	$2.50	2½	$3.25	2½	$6.00	2½	$9.80
2	1.10	2	1.55	2	2.10	2	2.75	3	3.55	3	6.40	3	10.30
2½	1.20	2½	1.70	2½	2.30	2½	3.00	3½	3.85	3½	6.80	3½	10.80
3	1.30	3	1.85	3	2.50	3	3.25	4	4.15	4	7.20	4	11.30
3½	1.40	3½	2.00	3½	2.70	3½	3.50	4½	4.45	4½	7.60	4½	11.80
4	1.50	4	2.15	4	2.90	4	3.75	5	4.75	5	8.00	5	12.30
4½	1.60	4½	2.30	4½	3.10	4½	4.00	5½	5.05	5½	8.40	5½	12.80
5	1.70	5	2.45	5	3.30	5	4.25	6	5.35	6	8.80	6	13.30
5½	1.80	5½	2.60	5½	3.50	5½	4.50	6½	6.40	6½	9.20	6½	13.80
6	1.90	6	2.75	6	3.70	6	4.75	7	6.70	7	9.60	7	14.30
6½	2.75	6½	3.65	6½	4.65	6½	5.75	7½	7.00	7½	10.00	7½	14.80
7	2.85	7	3.80	7	4.85	7	6.00	8	7.30	8	10.40	8	15.30
7½	2.95	7½	3.95	7½	5.05	7½	6.25	8½	7.60	8½	10.80	8½	15.80
8	3.05	8	4.10	8	5.25	8	6.50	9	7.90	9	11.20	9	16.30
8½	3.15	8½	4.25	8½	5.45	8½	6.75	9½	8.20	9½	11.60	9½	16.80
9	3.25	9	4.40	9	5.65	9	7.00	10	8.50	10	12.00	10	17.30
9½	3.35	9½	4.55	9½	5.85	9½	7.25	11	9.10	11	12.80	11	18.30
10	3.45	10	4.70	10	6.05	10	7.50	12	9.70	12	13.60	12	19.30
11	3.65	11	5.00	11	6.45	11	8.00	13	10.30	13	14.40	13	20.30
12	3.85	12	5.30	12	6.85	12	8.50	14	10.90	14	15.20	14	21.30
13	4.05	13	5.60	13	7.25	13	9.00	15	11.50	15	16.00	15	22.30
14	4.25	14	5.90	14	7.65	14	9.50	16	12.10	16	16.80	16	23.30
15	4.45	15	6.20	15	8.05	15	10.00	17	12.70	17	17.60	17	24.30
16	4.65	16	6.50	16	8.45	16	10.50	18	13.30	18	18.40	18	25.30
17	4.85	17	6.80	17	8.85	17	11.00	19	13.90	19	19.20	19	26.30
18	5.05	18	7.10	18	9.25	18	11.50	20	14.50	20	20.00	20	27.30
19	5.25	19	7.40	19	9.65	19	12.00						
20	5.45	20	7.70	20	10.05	20	12.50						

3/16 and ¼, 100, 5/16 all Lengths, 50, ⅜ to ½ up to 6 inch, 50, over 6 inch. 25, balance 25 in a Package.

Weight, Pounds, Per 100 Carriage Bolts.

Length in.	1½	2	2½	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Diam. 3/16 in.	3⅗	4⅕	5	5⅗	7	8⅗	10	11⅗	12½												
Diam. ¼ in.	3⅗	4⅕	5	5⅗	7	8⅗	10	11⅗	12½												
Diam. 5/16 in.	6⅕	7⅕	8⅓	9	11⅕	13⅕	16	18⅕	20½	22½											
Diam. ⅜ in.	9⅓	11	12⅕	14	17	19⅗	23	26⅔	29⅓	33½	36⅔	38⅔	42½								
Diam. 7/16 in.	13⅗	15⅔	17⅓	19⅓	23⅕	27½	31⅗	35⅕	39½	44	47⅗	52	56½								
Diam ½ in.	....	....	23⅕	25⅓	31	36½	41½	47½	51	57	62	70	73	82	83	89⅗	93⅗	104	105	113½	121
Diam. 9/16 in.			39	44	51	60	70	77½	83⅗	93⅗	101½	110½	118	127	132	145	150		163		184
Diam. ⅝ in.			39	44	51	60	70	77½	83⅗	93⅗	101½	110½	118	127	132	145	150		163		184
Diam. ¾ in.				67⅗	81	95⅗	108	120⅗	132⅘	145⅕	157⅘	170⅕	182⅗	195	207⅕	219⅘	232⅕				

Bolts without nuts 10% extra discount. Bolts with hexagon nuts add 15% to list price.

Bolts with left hand threads add 25% to list price. Round neck carriage bolts add 10% to list price.

Intermediate lengths charged at price of next larger sizes. For ⅞ inch diameter and larger use Machine Bolt List.

From this list the following bolts are sold at varying discounts:—Askew Head Carriage Bolts, Common Carriage Bolts, Convex Head Fluted Carriage Bolts, Fin Head Carriage Bolts, Round Neck Carriage Bolts.

Table Showing Standard Number of Threads to an Inch

Diameter, in.	No. Threads	Diameter, in.	No. Threads
¼	20	1⅜	6
5/16	18	1½	6
⅜	16	1⅝	5½
7/16	14	1¾	5
½	13	1⅞	5
9/16	12	2	4½
⅝	11	2¼	4½
¾	10	2½	4
⅞	9	2¾	4
1	8	3	3½
1⅛	7	3¼	3½
1¼	7	3½	3½

The threads of all carriage and machine bolts and bolt ends will be cut to above standard. Plow bolts have a special plow bolt thread.

STOVE BOLTS

FLAT AND ROUND HEAD

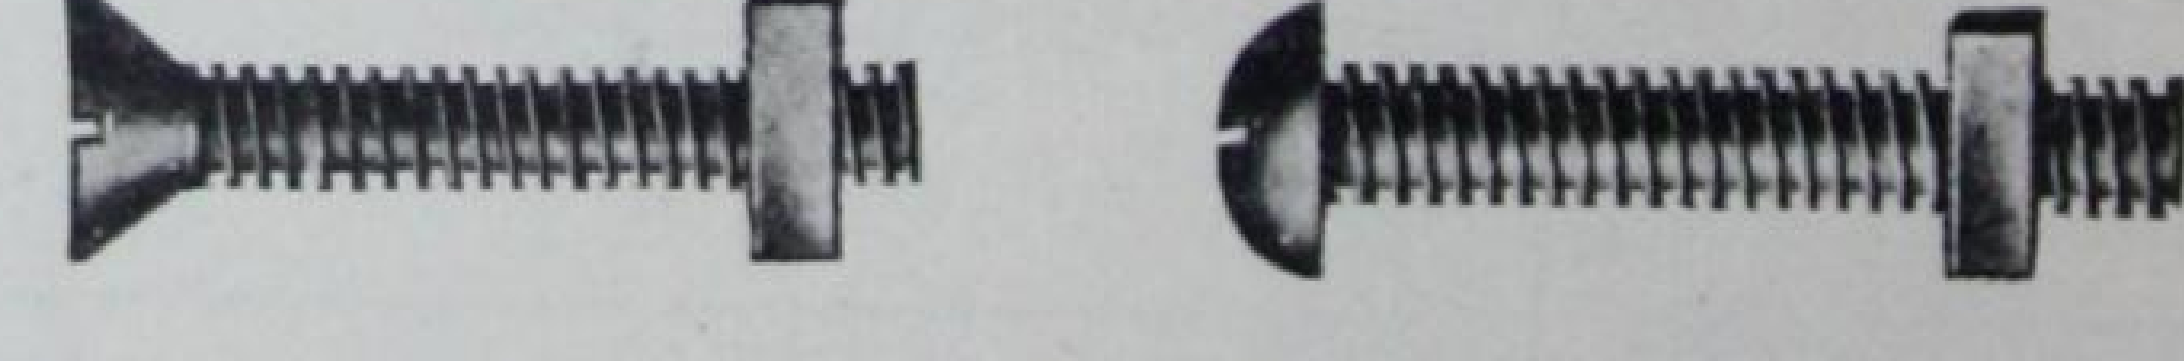

List Adopted June 30th, 1927.—Price per 100.

Diam., In.	⅛	3/16	¼	5/16	⅜
Length ½ in.	$0.85	$0.85	$1.20	....	....
Length ⅝ in.	.85	.85	1.20	....	....
Length ¾ in.	.85	.85	1.20	$1.75	$2.65
Length ⅞ in.	....	.90	1.25	....	....
Length 1 in.	.90	.90	1.30	1.85	2.85
Length 1¼ in.	1.00	1.00	1.40	1.95	3.05
Length 1½ in.	1.10	1.10	1.50	2.05	3.25
Length 1¾ in.	....	1.20	1.60	2.25	....
Length 2 in.	1.30	1.30	1.70	2.45	3.85
Length 2¼ in.	....	....	1.85	....	....
Length 2½ in.	....	1.60	2.00	2.75	4.25
Length 3 in.	....	....	2.20	3.05	....

100 in a Package.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MACHINE BOLTS

DISCOUNT 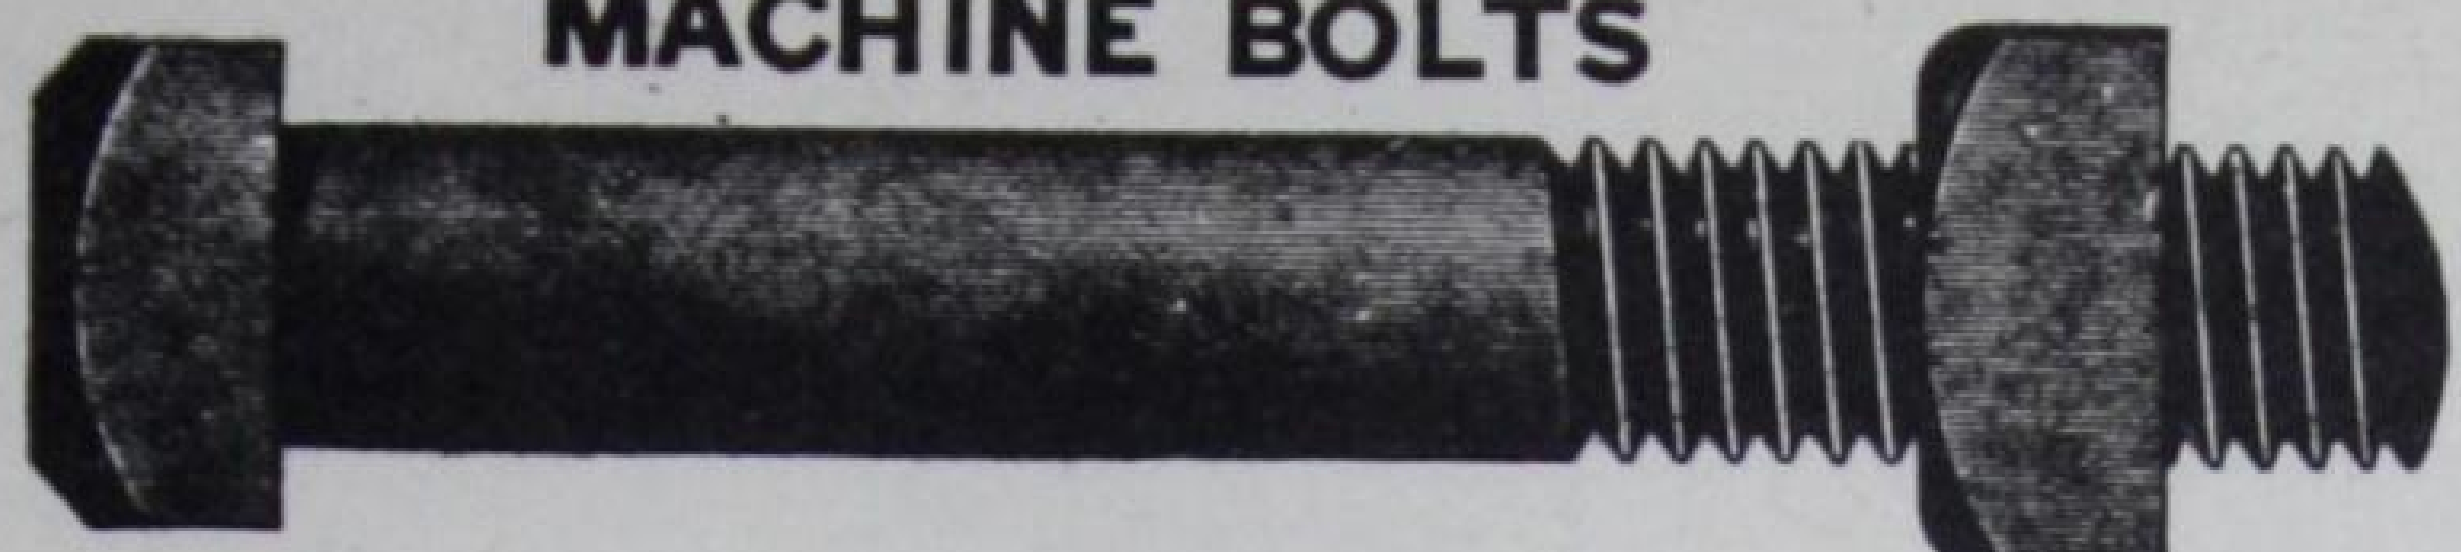 MARKET

Square Head and Nut, Finished Point Manufacturers' Standard List Revised January 2nd, 1924

Diam. In. ¼ Length	Per 100	$\frac{5}{16}$ Length	Per 100	⅜ Length	Per 100	$\frac{7}{16}$ Length	Per 100	½ Length	Per 100	$\frac{9}{16}$ and ⅝ Length	Per 100	¾ Length	Per 100	⅞ Length	Per 100	1 Length	Per 100
¾	$1.70	¾	$2.00	¾	$2.40	...	.....	...	.....	...	.....	...	.....	...	.....	...	.....
1	1.70	1	2.00	1	2.40	1	$3.00	1	$3.70	1	$5.50	..	.....	...	.....	...	.....
1¼	1.70	1¼	2.00	1¼	2.40	1¼	3.00	1¼	3.70	1¼	5.50	...	.....	...	.....	...	.....
1½	1.70	1½	2.00	1½	2.40	1½	3.00	1½	3.70	1½	5.50	1½	$7.70	1½	10.50	1½	.....
1¾	1.80	1¾	2.15	1¾	2.60	1¾	3.25	1¾	4.00	1¾	5.90	1¾	8.25	1¾	11.20	1¾	.....
2	1.80	2	2.15	2	2.60	2	3.25	2	4.00	2	5.90	2	8.25	2	11.20	2	16.00
2¼	1.90	2¼	2.30	2¼	2.80	2¼	3.50	2¼	4.30	2¼	6.30	2¼	8.80	2¼	11.90	2¼	16.90
2½	1.90	2½	2.30	2½	2.80	2½	3.50	2½	4.30	2½	6.30	2½	8.80	2½	11.90	2½	16.90
2¾	2.00	2¾	2.45	2¾	3.00	2¾	3.75	2¾	4.60	2¾	6.70	2¾	9.35	2¾	12.60	2¾	17.80
3	2.00	3	2.45	3	3.00	3	3.75	3	4.60	3	6.70	3	9.35	3	12.60	3	17.80
3¼	2.10	3¼	2.60	3¼	3.20	3¼	4.00	3¼	4.90	3¼	7.10	3¼	9.90	3¼	13.30	3¼	18.70
3½	2.10	3½	2.60	3½	3.20	3½	4.00	3½	4.90	3½	7.10	3½	9.90	3½	13.30	3½	18.70
3¾	2.20	3¾	2.75	3¾	3.40	3¾	4.25	3¾	5.20	3¾	7.50	3¾	10.45	3¾	14.00	3¾	19.60
4	2.20	4	2.75	4	3.40	4	4.25	4	5.20	4	7.50	4	10.45	4	14.00	4	19.60
4¼	2.30	4¼	2.90	4¼	3.60	4¼	4.50	4¼	5.50	4¼	7.90	4¼	11.00	4¼	14.70	4¼	20.50
4½	2.30	4½	2.90	4½	3.60	4½	4.50	4½	5.50	4½	7.90	4½	11.00	4½	14.70	4½	20.50
4¾	2.40	4¾	3.05	4¾	3.80	4¾	4.75	4¾	5.80	4¾	8.30	4¾	11.55	4¾	15.40	4¾	21.40
5	2.40	5	3.05	5	3.80	5	4.75	5	5.80	5	8.30	5	11.55	5	15.40	5	21.40
5½	2.50	5½	3.20	5½	4.00	5½	5.00	5½	6.10	5½	8.70	5½	12.10	5½	16.10	5½	22.30
6	2.60	6	3.35	6	4.20	6	5.25	6	6.40	6	9.10	6	12.65	6	16.80	6	23.20
6½	.....	6½	4.50	6½	5.40	6½	6.50	6½	7.70	6½	9.50	6½	13.20	6½	17.50	6½	24.10
7	3.80	7	4.65	7	5.60	7	6.75	7	8.00	7	9.90	7	13.75	7	18.20	7	25.00
7½	.....	7½	.....	7½	5.80	7½	7.00	7½	8.30	7½	10.30	7½	14.30	7½	18.90	7½	25.90
8	4.00	8	.....	8	6.00	8	7.25	8	8.60	8	10.70	8	14.85	8	19.60	8	26.80
8½	.....	8½	.....	8½	6.40	8½	7.75	8½	9.20	8½	11.50	8½	15.95	8½	21.00	8½	28.60
9	.....	9	.....	9	6.40	9	7.75	9	9.20	9	11.50	9	15.95	9	21.00	9	28.60
9½	.....	9½	.....	9½	6.80	9½	8.25	9½	9.80	9½	12.30	9½	17.05	9½	22.40	9½	30.40
10	.....	10	.....	10	6.80	10	8.25	10	9.80	10	12.30	10	17.05	10	22.40	10	30.40
10½	.....	10½	.....	10½	7.20	10½	8.75	10½	10.40	10½	13.10	10½	18.15	10½	23.80	10½	32.20
11	.....	11	.....	11	7.20	11	8.75	11	10.40	11	13.10	11	18.15	11	23.80	11	32.20
11½	.....	11½	.....	11½	7.60	11½	9.25	11½	11 00	11½	13.90	11½	19.25	11½	25.20	11½	34.00
12	.....	12	.....	12	7.60	12	9.25	12	11.00	12	13.90	12	19.25	12	25.20	12	34.00
12½	.....	12½	.....	12½	8.00	12½	.....	12½	11.60	12½	14.70	12½	20.35	12½	26.60	12½	35.80
13	.....	13	.....	13	8.00	13	.....	13	11.60	13	14.70	13	20.35	13	26.60	13	35.80
13½	.....	13½	.....	13½	8.40	13½	.....	13½	12.20	13½	15.50	13½	21.45	13½	28.00	13½	37.60
14	.....	14	.....	14	8.40	14	.....	14	12.20	14	15.50	14	21.45	14	28.00	14	37.60
14½	.....	14½	.....	14½	.....	14½	.....	14½	12.80	14½	16.30	14½	22.55	14½	29.40	14½	39.40
15	.....	15	.....	15	.....	15	.....	15	12.80	15	16.30	15	22.55	15	29.40	15	39.40
16	.....	16	.....	16	.....	16	.....	16	13.40	16	17.10	16	23.65	16	30.80	16	41.20
17	.....	17	.....	17	.....	17	.....	17	14.00	17	17.90	17	24.75	17	32.20	17	43.00
18	.....	18	.....	18	.....	18	.....	18	14.60	18	18.70	18	25.85	18	33.60	18	44.80
19	.....	19	.....	19	.....	19	.....	19	15.20	19	19.50	19	26.95	19	35.00	19	46.60
20	.....	20	.....	20	.....	20	.....	20	15.80	20	20.30	20	28.05	20	36.40	20	48.40
21	.....	21	.....	21	.....	21	.....	21	16.40	21	21.10	21	29.15	21	37.80	21	50.20
22	.....	22	.....	22	.....	22	.....	22	17.00	22	21.90	22	30.25	22	39.20	22	52.00
23	.....	23	.....	23	.....	23	.....	23	17.60	23	22.70	23	31.35	23	40.60	23	53.80
24	.....	24	.....	24	.....	24	.....	24	18.20	24	23.50	24	32.45	24	42.00	24	55.60
Adv. per in.	.20		.30		.40		.50		.60		.80		1.10		1.40		1.80

PACKING OF MACHINE BOLTS

Diam., In.	¼	$\frac{5}{16}$	⅜	$\frac{7}{16}$	½	½	$\frac{9}{16}$	$\frac{9}{16}$	⅝	⅝	¾	¾
Lengths, in.	All	All	All	All	Up to 10	Over 10	Up to 10	Over 10	Up to 10	Over 10	Up to 10	Over 10
No. in Package	100	50	50	50	50	25	50	25	25	Open Stock	25	Open Stock

WEIGHTS PER 100 OF MACHINE BOLTS

Diam., In.	¼	$\frac{5}{16}$	⅜	$\frac{7}{16}$	½	⅝	¾	⅞	1	Diam., in.	⅜	$\frac{7}{16}$	½	⅝	¾	⅞	1
Length	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Length	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.
1½ in.	3	6	8	13	19	34	...	...	...	8 in.	28	39	54	86	130	188	255
1¾ in.	3½	6	9	14	20	36	...	...	...	9 in.	..	43	56	96	140	204	275
2 in.	4	7	10	16	21	38	58	...	...	10 in.	..	47	62	104	155	220	295
2¼ in.	4	7	10	16	22	39	62	...	...	11 in.	..	51	66	111	167	235	315
2½ in.	4½	8	11	17	23	41	66	98	...	12 in.	..	54	72	120	177	250	336
3 in.	5	9	13	19	26	46	72	106	...	13 in.	..	..	77	126	190	265	360
3½ in.	6	10	14	21	29	50	78	114	...	14 in.	..	..	82	136	201	282	380
4 in.	6	10	16	23	31	55	85	122	170	15 in.	..	..	89	145	214	302	402
5 in.	8	13	19	27	37	63	96	139	190	16 in.	..	..	95	153	225	317	424
6 in.	9	14	21	31	41	71	108	155	210	18 in.	..	..	105	167	250	350	465
7 in.	...	..	24	34	47	79	120	170	235	20 in.	..	..	116	185	273	382	507

All Prices Subject to Change Without Notice

BASE NAILS MARKET

Standard Wire Nails in Kegs

List of Extras per 100 Lbs. Over Base

Size	2-D	3-D Fine	3-D	4-D	5-D	6-D	7-D	8-D	9-D	10-D	12-D	16-D	20-D	30-D	40-D	50-D	60-D
Length in inches	1	1⅛	1¼	1½	1¾	2	2¼	2½	2¾	3	3¼	3½	4	4½	5	5½	6
COMMON Ge.	15	15	14	13	12	12	11	10	10	9	9	7	6	5	4	3	2
Extra over Base	1.65	1.60	1.15	.80	.75	.60	.55	.50	.45	.40	.35	.30	.25	.25	.25	.25	.25
MOULDING Ge.	16	16	15	14	13	12	12	11	11	10	9	8	7	6	5	4	3
Extra over Base	1.90	1.80	1.40	1.05	1.00	.85	.80	.75	.70	.65	.60	.55	.50	.50	.50	.50	.50
FINISHING Ge.	17	17	16	15	14	13	13	12	12	11	11	10	9				
Extra over Base	2.25	2.05	1.65	1.45	1.35	1.10	1.05	1.00	.95	.90	.85	.80	.75				
CASING Ge.	17	17	16	15	14	13	13	12	12	11	11	10	9	9	8		
Extra over Base	2.00	2.00	1.65	1.30	1.25	1.10	1.05	.80	.80	.70	.65	.60	.55	.40	.40		
FLOORING Ge.						11	11	10	10	9	9	8	7				
Extra over Base						.85	.80	.55	.55	.45	.40	.35	.30				
CLINCH Ge.	14		14	13	13	12	12	11	10	9	9	8	7				
Extra over Base	1.75		1.40	1.15	1.15	1.05	1.05	.90	.90	.85	.80	.75	.70				
BOX Ge.	16	16	15	14	14	13	13	12	11	11	11	10	9	9	8	6	4
Extra over Base	2.20	2.15	1.40	1.05	1.00	.85	.80	.55	.55	.45	.40	.35	.30	.30	.25	.25	.25
LIGHT CAR Ge.				12	10	10	9	9	8	8	7	7	6	6	5	4	4
Extra over Base				.95	.75	.70	.60	.50	.50	.45	.40	.30	.25	.25	.25	.25	.25
HEAVY CAR Ge.				10	9	9	8	8	7	7	6	6	5	5	4	3	3
Extra over Base				.80	.70	.65	.60	.50	.50	.45	.35	.35	.25	.25	.25	.25	.25
SIDING OR CLAPBOARD Ge.					12	12	12	11									
Extra over Base					1.00	.85	.80	.55									
HINGE NAILS, Diamond Pt. Ge.				6		3,4 or 6		3,4 or 6		3 or 4	3 or 4	3 or 4	3 or 4				
Extra over Base Csk. Head.				1.40		1.30		1.15		1.10	1.10	1.10	1.05				
SLATING Ge.	12	12	11	11	10	10											
Extra over Base	1.45	1.35	1.20	1.10	1.00	.90											
ROOFING Ge.	12	12	11	11	10	10											
Extra over Base	1.20	1.10	.95	.80	.75	.65											
BARREL OR BROOM Ge.	14	14	14	13													
Extra over Base	1.75	1.65	1.40	1.05													
SASH PINS Ge.	8	8	8	8													
Extra over Base	2.00	2.00	1.75	1.50													

Sash Pins 10 gauge 25c advance over 8 gauge.

Special Sizes	¾ x 12 or 13 1.55	⅞ x 12 1.30	1⅜ x 11 .90	
Special Sizes	⅝ x 15 2.85	¾ x 15 2.50	⅞ x 14 2.25	1⅜ x 13 1.25
Special Sizes	⅝ x 8 2.75	¾ x 8 2.50	⅞ x 8 2.25	1⅜ x 8 1.75

COMMON SPIKES, Diamond Pt. Flat Head	3 x 6	3¼ x 6	3½ x 5	4 x 3	4½ x 3	5 x 2	5½ x 2	6 x 1	7 x 1	8 x 0	9 x 0	10 x 00	12 x 00
Extra over Base	.40	.35	.30	.25	.25	.25	.25	.25	.25	.35	.35	.45	.45

Pennyweight sizes shown for reference only. All orders will be entered and invoiced in inches.

EXTRAS FOR SPECIAL WIRE NAILS AND SPECIAL GAUGES

Eavetrough Spikes

5 inch and longer x 3, 4, and 5 gauge—over same length common wire nails............. } Flat head, **50c.** per 100 lbs. Oval or round head, **75c.** per 100 lbs.

Special Gauge Common Wire Nails

Additional extras applying to F. H. Common wire nails only, in quantities of not less than 100 lbs. To be added to extras shown for Standard wire nails of the same length.

1 & 1⅛ x 12—13—14
1¼ x 11—12—13
1½ x 11—12—14
1¾ x 10—11—13—14
2 x 10—11—13
2¼ x 9—10—12—13
2½ x 8—9—11—12
2¾ x 8—9—11
3 x 6—7—8—10—11
3½ x 5—6—8—9—10
4 x 4—5—7—8—9
4½ x 4—6—7—8—9
5 x 3—5—6—7—8
5½ x 4—6 : 6 x 3—4
} 25c. per 100 lbs. over same length standard.

1⅜ x 16.................
2 x 14.................
} 50c. per 100 lbs. "

Lath and Fine Nails

1 x 16.............. $2.20
1 x 17.............. 2.40
1⅛ x 15.............. 1.60
1⅛ x 16.............. 2.15

Shingle Nails

1¼ x 13.............. $1.40
1¼ x 14.............. 1.15
1½ x 12.............. 1.05
1¾ x 12.............. .75
2 x 12.............. .65

Berry Box Nails

¾ x 16.............. $2.80
¾ x 17.............. 3.00
⅞ x 16.............. 2.55
⅞ x 17.............. 2.75
1 x 16.............. 2.35
1 x 17.............. 2.55
1⅛ x 16.............. 2.35
1⅛ x 17.............. 2.50
1¼ x 16.............. 2.25
1¼ x 17.............. 2.45

Other Extras Net

Barbing.................................$ .25 per 100 lbs.
Annealing................................ .25 "
Special Heads............................ .25 "
Special Points........................... .25 "
Blued or Coated.......................... .35 "
Packing in 25 and 50 lb. boxes........... 1.00 "
Galvanizing, tinning, coppering and brass plating...On application.
Base price.................................On application.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STEEL WIRE NAILS

ILLUSTRATIONS ACTUAL SIZE

REGULAR BOX

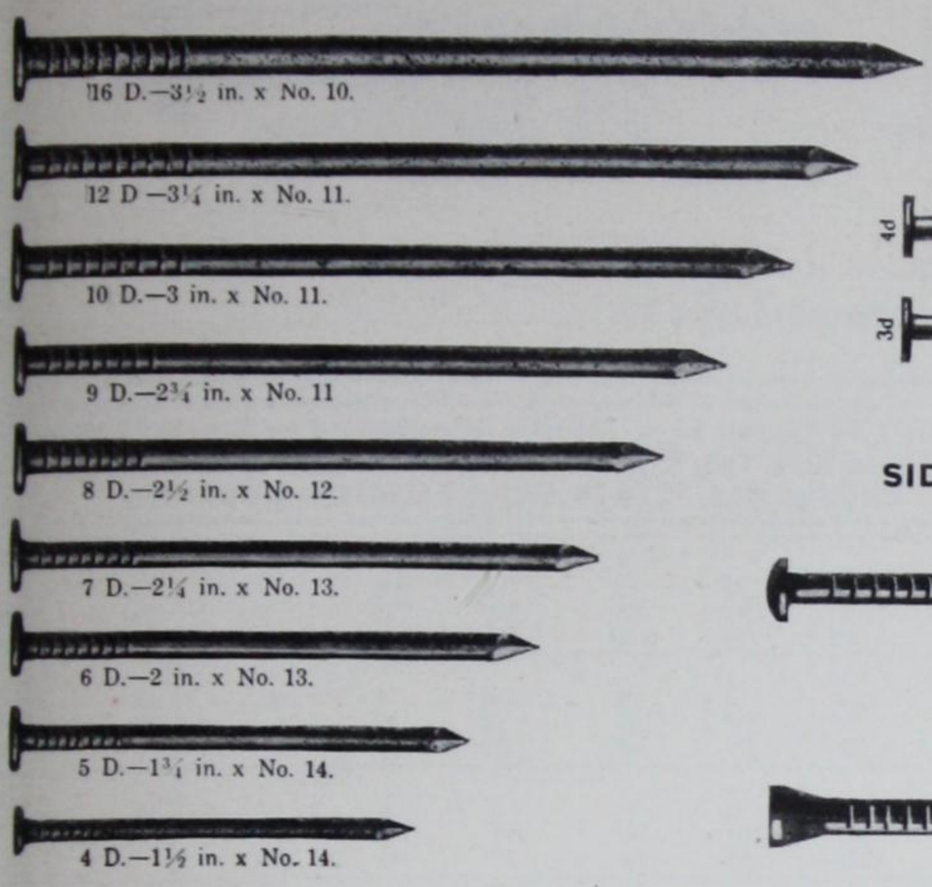

SHINGLE

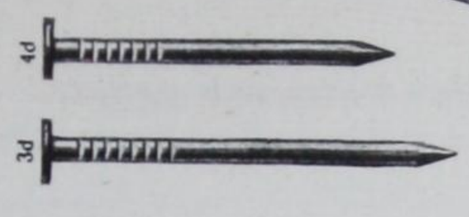

SIDING OR CLAPBOARD



FLOORING

COMMON

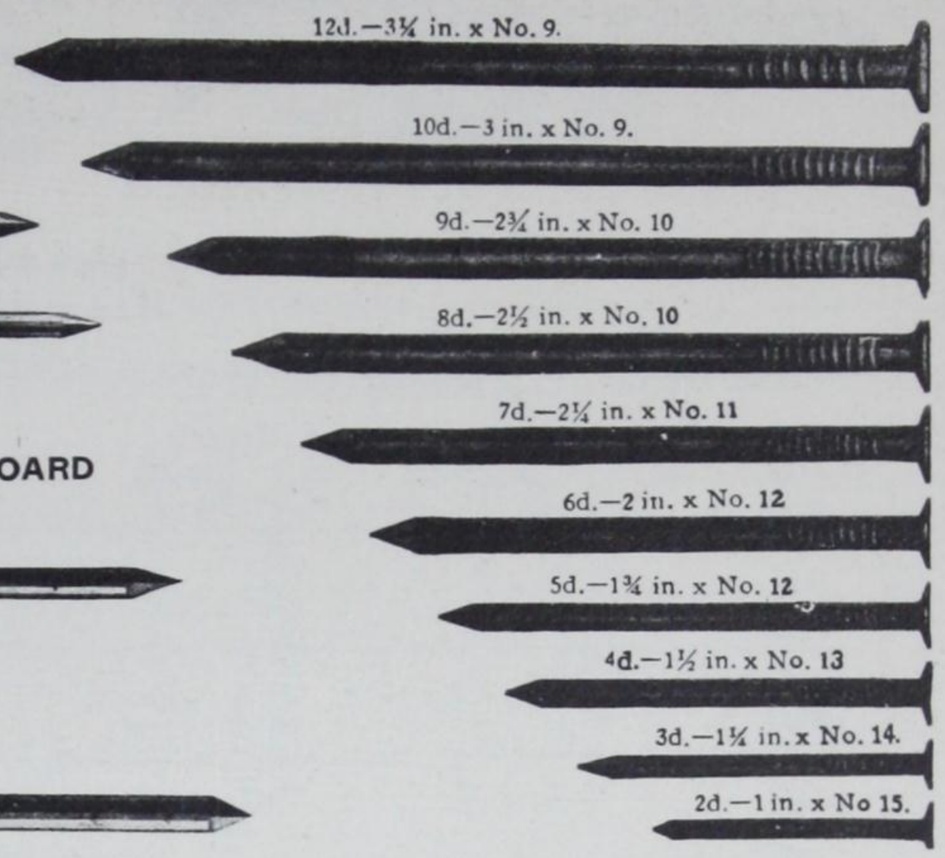

FINISHING

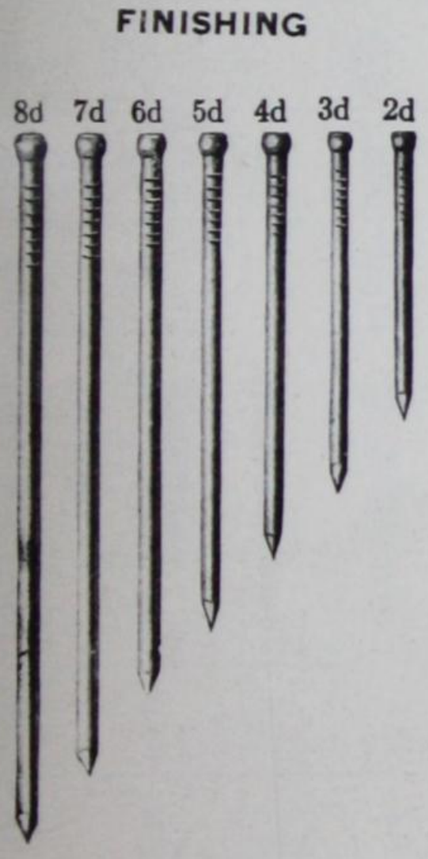

LARGE HEAD BARBED ROOFING

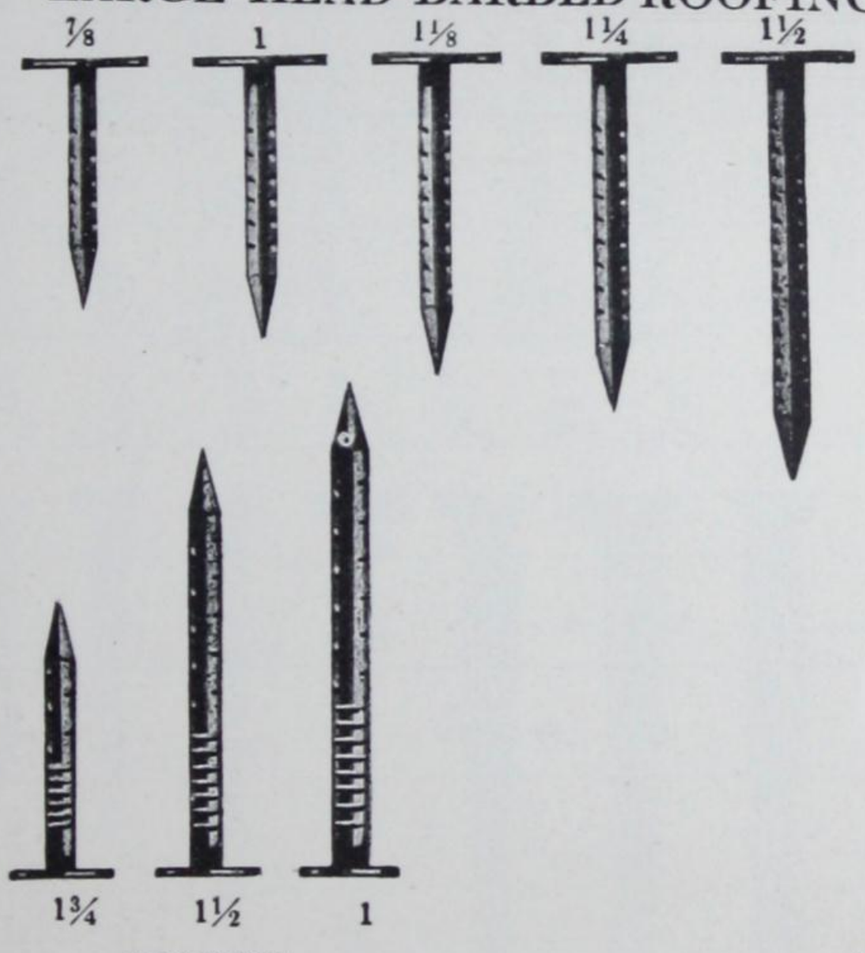

ROOFING

CASING

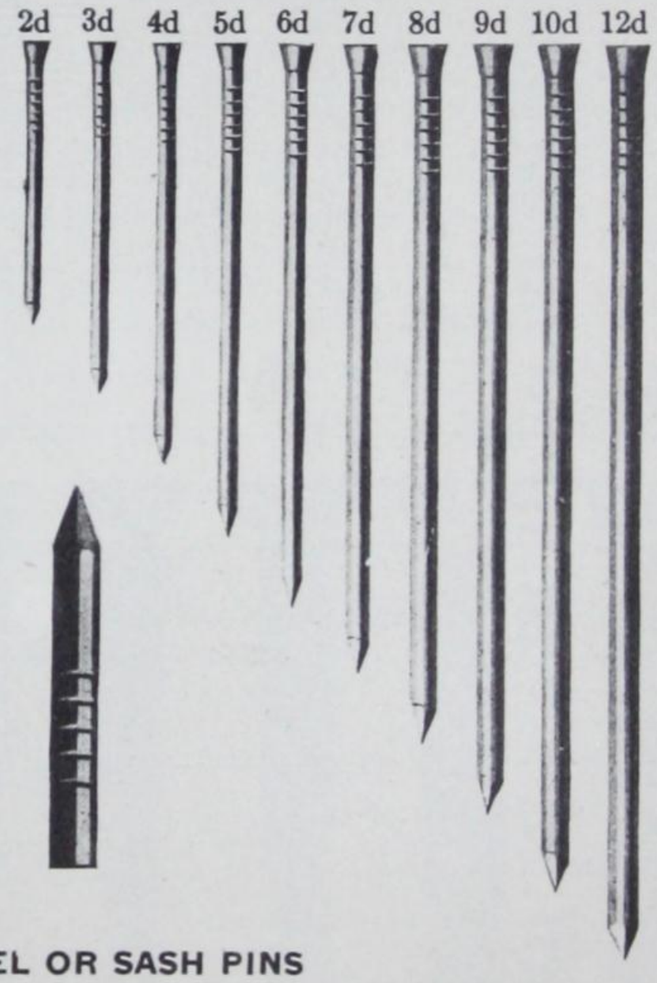

DOWEL OR SASH PINS

FINISHING—IN PAPERS

Length ins.,	⅜	½	⅝	¾	⅞	1	1¼	1½
Gauge No.	20	20	19	18	18	17	16	15
No. to pound.	10,000	7500	4267	2758	2364	1510	913	584
Per lb.	**$0.80**	**.66**	**.52**	**.42**	**.39**	**.34**	**.32**	**.28**

In One Pound Papers

CIGAR BOX NAILS

Suitable for all small work where a nail with a head is required.

GYPROC NAIL

The New Gyproc Nail is for use on all types of Gyproc work.

ADVANTAGES OF NEW GYPROC NAIL

The 45° angle of countersink prevents cutting of the paper when the nail is driven flush.

The 1½" length is an added safety factor.

The cadmium plating resists corrosion and gives the nail a smoother finish than an ordinary galvanized nail.

PRICE MARKET

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STANDARD LIST OF WOOD SCREWS

DISCOUNT

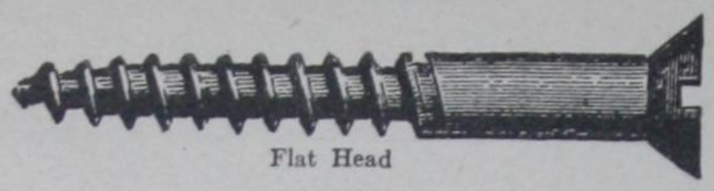

Flat Head

STEEL WOOD SCREWS

Price List Adopted In Effect Feb. 13, 1928.

MARKET

Round Head

BRASS WOOD SCREWS

LIST PRICE PER GROSS

Length of Flat Head and Round Head Screws is Measured Over All.

The Number of Gross in a Bundle is indicated by Small Figures above the Line of Size Nos. Example—1¼ inch, Nos. 3 to 14, Come 10 Gross in a Bundle; Nos. 15 to 24, Come 5 Gross in a Bundle.

Inch															
1/4	*10*														
	Nos.	0	1	2	3	4									
	Steel	$0.24	.24	.24	.24	.24									
	Brass	.26	.28	.30	.32	.34									
3/8	*10*														
	Nos	0	1	2	3	4	5	6	7	8					
	Steel	.26	.26	.26	.26	.26	.26	.28	.30	.32					
	Brass	.28	.30	.32	.34	.36	.40	.45							
1/2	*10*														
	Nos	1	2	3	4	5	6	7	8	9	10				
	Steel	.28	.28	.28	.28	.28	.30	.32	.34	.36	.38				
	Brass	.34	.36	.38	.40	.45	.50	.55	.65						
5/8	*10*														
	Nos.	2	3	4	5	6	7	8	9	10	11	12			
	Steel	.30	.30	.30	.30	.32	.34	.36	.38	.40	.42	.46			
	Brass	.38	.40	.45	.50	.55	.60	.70	.80	.90					
3/4	*10*														
	Nos	2	3	4	5	6	7	8	9	10	11	12	14		
	Steel	.32	.32	.32	.32	.34	.36	.38	.40	.42	.46	.50	.65		
	Brass	.42	.45	.50	.55	.60	.70	.80	.90	1.00	1.10	1.25			
7/8	*10*														
	Nos	3	4	5	6	7	8	9	10	11	12				
	Steel	.34	.34	.34	.36	.38	.40	.44	.46	.50	.55				
	Brass		.55	.60	.70	.80	.90	1.00	1.10	1.20	1.40				
1	*10*														
	Nos	3	4	5	6	7	8	9	10	11	12	14	16		
	Steel	.36	.36	.36	.38	.40	.44	.46	.50	.55	.60	.75	.90		
	Brass		.60	.70	.80	.90	1.00	1.10	1.20	1.30	.155	1.95			
1 1/4	*10*											*5*			
	Nos	4	5	6	7	8	9	10	11	12	14	16	18		
	Steel	.38	.40	.42	.44	.46	.50	.55	.60	.65	.80	1.00	1.15		
	Brass			.90	1.00	1.10	1.25	1.40	1.55	1.80	2.30				
1 1/2	*10*									*5*					
	Nos	4	5	6	7	8	9	10	11	12	14	16	18	20	
	Steel	.40	.44	.46	.48	.50	.55	.60	.65	.70	.90	1.10	1.25	1.60	
	Brass			1.00	1.20	1.30	1.40	1.65	1.80	2.10	2.65				
1 3/4	*10*							*5*							
	Nos	6	7	8	9	10	11	12	14	16	18	20			
	Steel	.50	.55	.60	.65	.70	.75	.80	1.00	1.20	1.35	1.75			
	Brass			1.45	1.65	1.85	2.05	2.40	3.00						
2	*5*											*1*			
	Nos	6	7	8	9	10	11	12	14	16	18	20			
	Steel	.55	60	.65	.70	.75	.80	.85	1.10	1.30	1.45	1.95			
	Brass			1.65	1.85	2.05	2.30	2.70	3.45	4.10	4.80				
2 1/4	*5*										*1*				
	Nos	6	7	8	9	10	11	12	14	16	18	20			
	Steel	.60	.65	.70	75	.80	.85	.90	1.20	1.40	1 60	2.05			
	Brass					2.30	2.55	3.00	3.65	4 45	5 40				
2 1/2	*5*								*1*						
	Nos	6	7	8	9	10	11	12	14	16	18	20			
	Steel	.65	.70	.75	.80	.85	.90	1.00	1.30	1 60	1.90	2.30			
	Brass					2.55	2.80	3.25	4.25	5.00	6.00				
2 3/4	*1*														
	Nos	8	9	10	11	12	14	16	18	20					
	Steel	75	.80	.90	1.00	1.10	1.45	1.80	2.20	2.60					
	Brass														
3	*1*								*1/2*						
	Nos	8	9	10	11	12	14	16	18	20	24				
	Steel	.80	.85	1.00	1.15	1.35	1.70	2.05	2.50	2.90	4.00				
	Brass					3.90	4.95	5.90	7.20						
3 1/2	*1/2*														
	Nos	10	11	12	14	16	18	20	24						
	Steel	1.25	1.40	1.60	2.00	2.40	2.80	3.20	4.50						
	Brass			4.80	6.00	7.10	8.75								
4	*1/2*														
	Nos	12	14	16	18	20	24								
	Steel	1.90	2.30	2.70	3 10	3.60	5.10								
	Brass														
4 1/2	*1/2*														
	Nos	14	16	18	20	24									
	Steel	2.60	3.00	3.50	4.10	5.60									
	Brass														
5	*1/2*														
	Nos	14	16	18	20	24									
	Steel	2.90	3.30	4.00	4.70	6.20									
	Brass														

All Screws 1, 5 and 10 Gross in Bundle, are Packed One Gross in a Package; Screws ½ Gross in a Bundle, are Packed Half Gross in a Package.

Note—Lengths and diameters not listed are special; but are furnished to the extent they may be in stock, or when required in sufficient quantities of a size to warrant being made to order. Such non-listed lengths and diameters take the list prices of the next longer or larger listed sizes.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DISCOUNT **SOCKET HEAD STEEL WOOD SCREWS** MARKET

FLAT HEAD — ROUND HEAD — OVAL HEAD

Manufacturers' List

PRICE PER GROSS

3/8 Inch No.		1/2 Inch No.		5/8 Inch No.		3/4 Inch No.		7/8 Inch No.		1 Inch No.	
4	$0.90	4	$0.90	4	$0.90	4	$0.95	4	$0.95	4	$1.00
5	.90	5	.90	5	.95	5	.95	5	1.00	5	1.05
6	.90	6	.90	6	.95	6	1.00	6	1.05	6	1.10
7	.90	7	.95	7	1.00	7	1.05	7	1.10	7	1.15
8	.90	8	1.00	8	1.05	8	1.10	8	1.15	8	1.20
		9	1.05	9	1.10	9	1.15	9	1.20	9	1.25
		10	1.10	10	1.15	10	1.20	10	1.25	10	1.30
				11	1.20	11	1.25	11	1.30	11	1.35
				12	1.25	12	1.30	12	1.35	12	1.40
						14	1.40	14	1.50	14	1.60
										16	1.85

1 1/4 Inch No.		1 1/2 Inch No.		1 3/4 Inch No.		2 Inch No.		2 1/4 Inch No.		2 1/2 Inch No.		2 3/4 Inch No.	
4	$1.10	4	$1.20	6	$1.40	6	$1.55	6	$1.75	6	$1.95	8	$2.15
5	1.15	5	1.25	7	1.45	7	1.60	7	1.80	7	2.00	9	2.25
6	1.20	6	1.30	8	1.50	8	1.65	8	1.85	8	2.05	10	2.45
7	1.25	7	1.35	9	1.60	9	1.75	9	1.95	9	2.15	11	2.60
8	1.30	8	1.40	10	1.70	10	1.85	10	2.05	10	2.25	12	2.80
9	1.35	9	1.45	11	1.80	11	2.00	11	2.20	11	2.40	14	3.25
10	1.40	10	1.50	12	2.00	12	2.20	12	2.40	12	2.60	16	3.80
11	1.50	11	1.60	14	2.25	14	2.50	14	2.75	14	3.00	18	4.45
12	1.60	12	1.80	16	2.60	16	2.90	16	3.20	16	3.50	20	5.20
14	1.80	14	2.05	18	3.05	18	3.40	18	3.75	18	4.10		
16	2.05	16	2.35	20	3.60	20	4.00	20	4.40	20	4.80		
18	2.40	18	2.75										
		20	3.25										

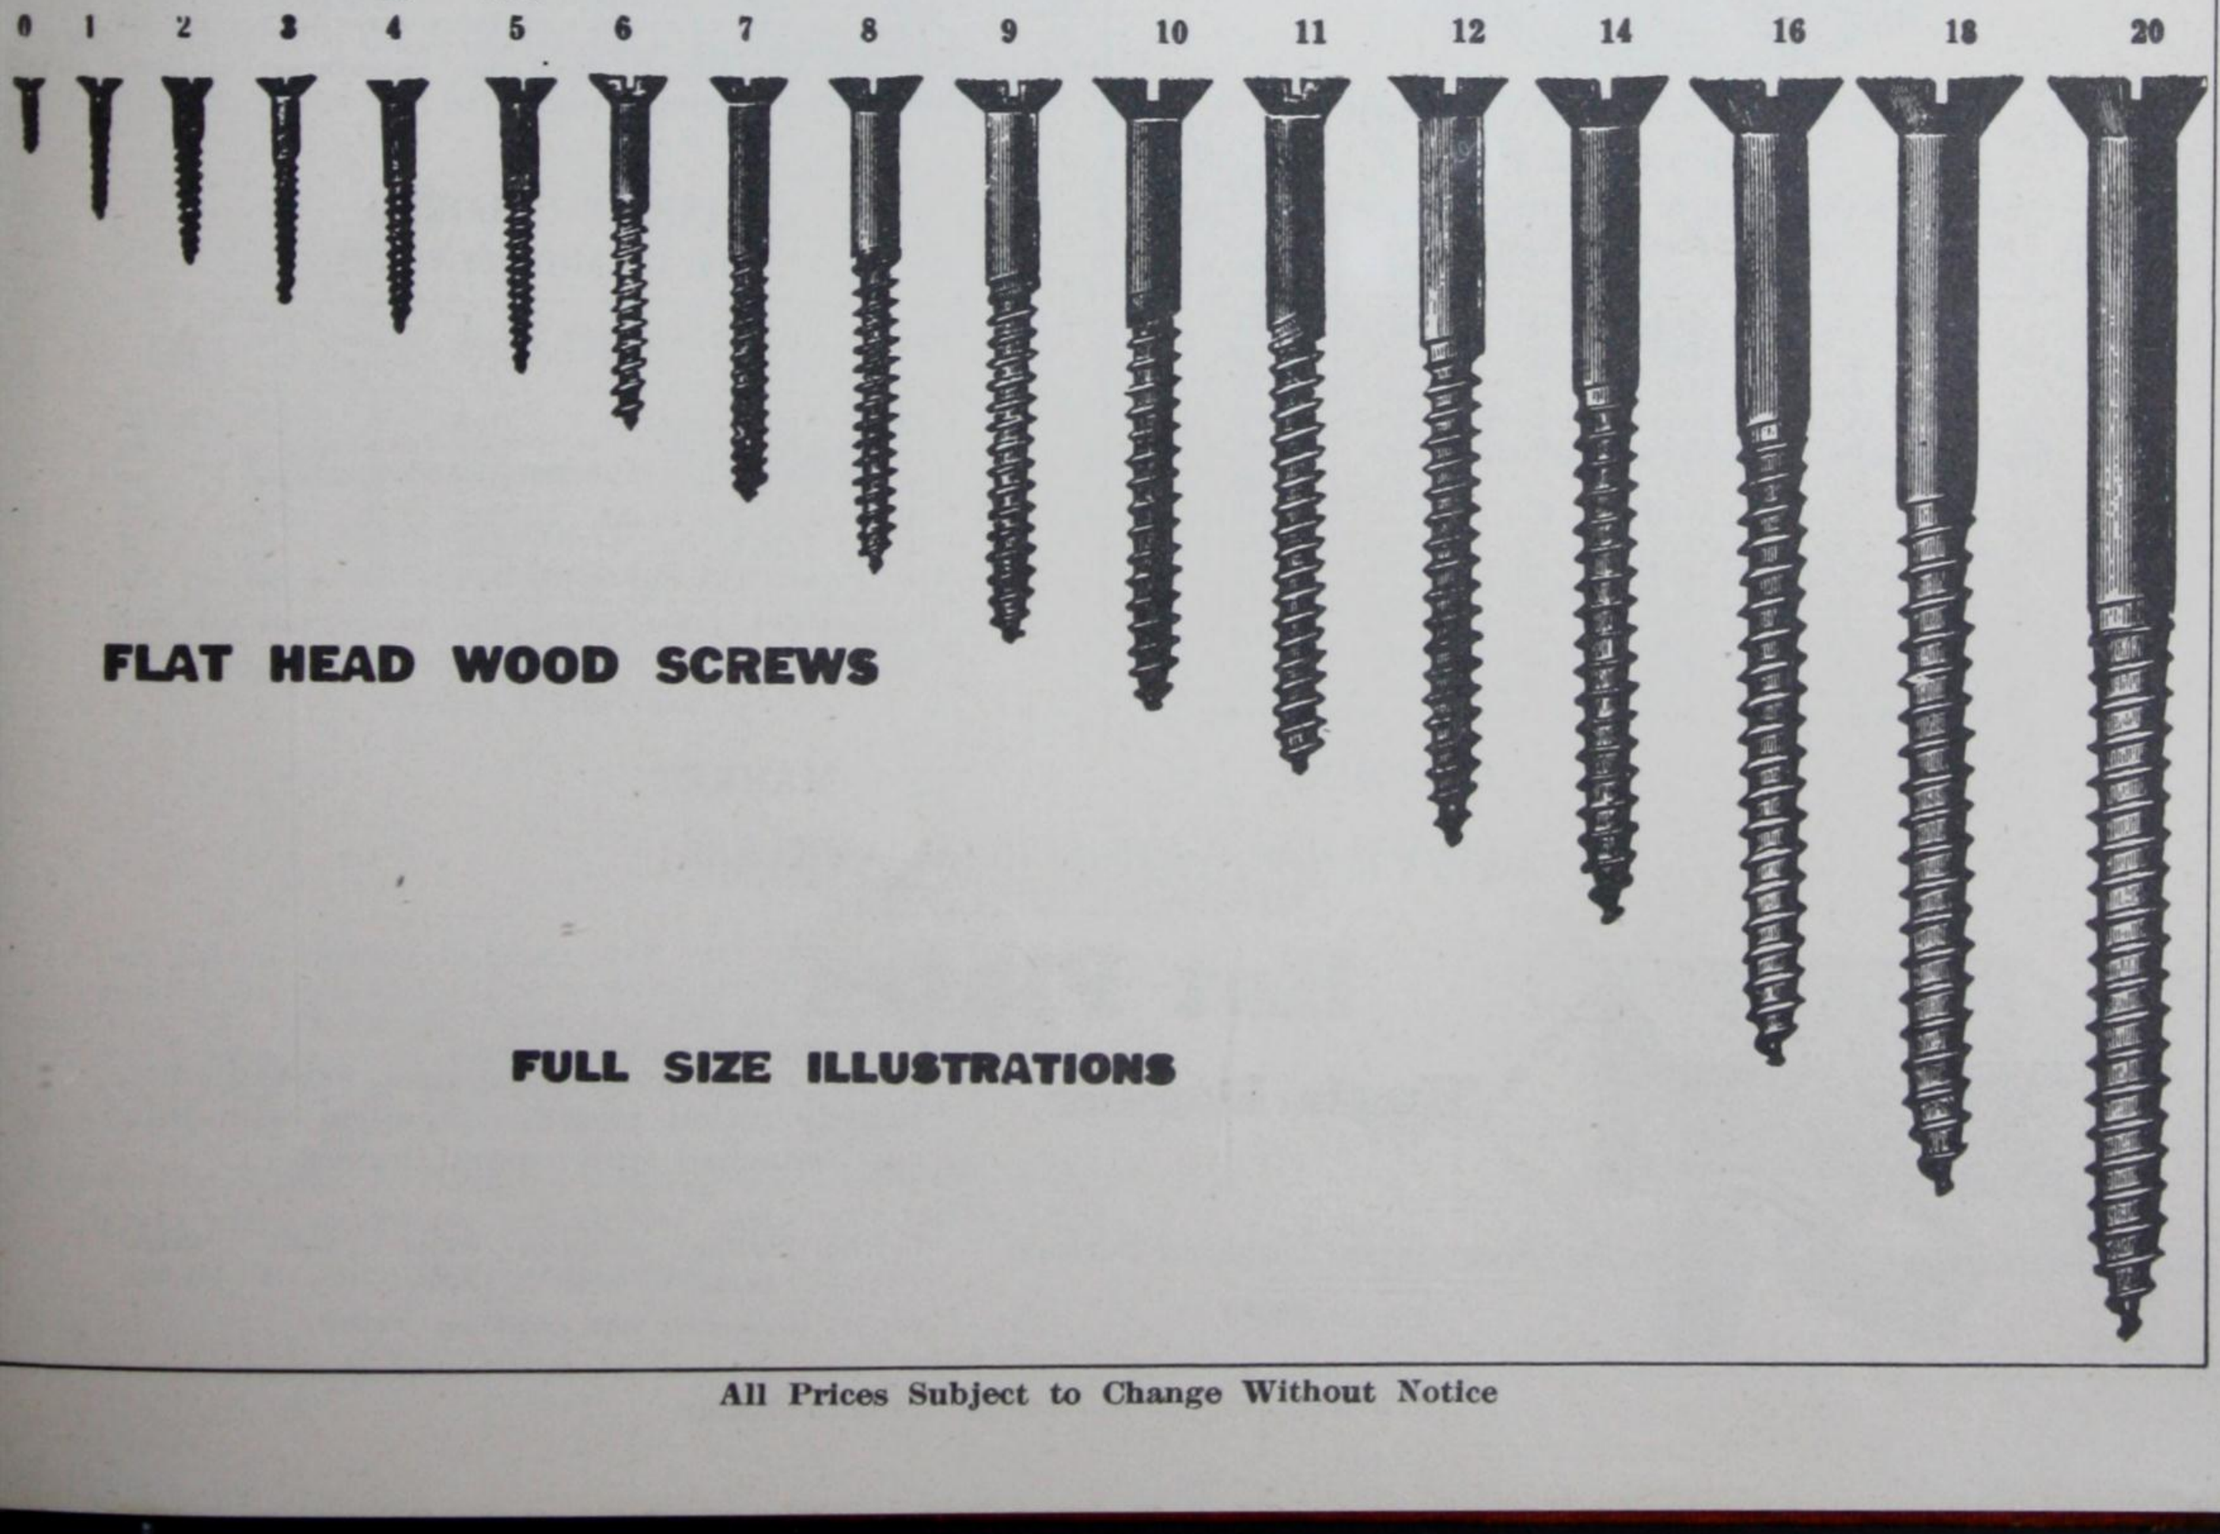

FLAT HEAD WOOD SCREWS

FULL SIZE ILLUSTRATIONS

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Edison Mazda Lamps

Popular Selling Sizes

100 Watts

40 Watts



25 Watts

F15-Bulb



60 Watts

PS-Bulb

INSIDE FROSTED
110, 115 AND 120 VOLTS

Watts	Bulb	Base	Mazda B or C	Std. Pkg. Qty.	List Price
15	A-17	Med.	B	120	**$0.25**
25	A-19	Med.	B	120	**.25**
40	A-21	Med.	B	120	**.25**
60	A-21	Med.	C	120	**.25**
100	A-23	Med.	C	60	**.48**
150	PS-25	Med.	C	24	**.90**
200	PS-30	Med.	C	24	**1.20**
300	PS-35	Mog.	C	24	**1.80**
500	PS-40	Mog.	C	12	**2.90**
750	PS-52	Mog.	C	6	**5.30**
1000	PS-52	Mog.	C	6	**5.55**

All above lamps Universal Burning.

GENERAL LIGHTING CLEAR
110, 115 AND 120 VOLTS

Watts	Bulb	Base	Mazda B or C	Std. Pkg. Qty.	List Price
25	A-19	Med.	B	120	**$0.35**
*50	A-19	Med.	B	120	**.35**
50	A-21	Med.	C	120	**.45**
75	A-21	Med.	C	120	**.50**
100	A-23	Med.	C	60	**.57**
150	PS-25	Med.	C	24	**.85**
200	PS-30	Med.	C	24	**1.10**
250	PS-35	Med.	C	24	**1.70**
300	PS-35	Mog.	C	24	**1.70**
500	PS-40	Mog.	C	12	**2.75**
750	PS-52	Mog.	C	6	**5.00**
1000	PS-52	Mog.	C	6	**5.25**

*May be supplied in Standard Coated Colors at list price, 55 cents.

DECORATIVE

*10	S-11 Clear	Int.	B	120	**$0.32**
*10	S-11 White	Int.	B	120	**.32**
†*10	S-11 Colored	Int.	B	120	**.32**
15	F-10 White	Cand.	B	100	**.50**
15	F-10 Flametint	Cand.	B	100	**.50**
†15	F-10 Colored	Cand.	B	100	**.70**
25	F-15 White	Med.	B	120	**.40**
25	F-15 Flametint	Med.	B	120	**.40**
25	F-15 Ivory	Med.	B	120	**.40**
†25	F-15 Colored	Med.	B	120	**.45**
25	G-18½ White	Med.	B	120	**.40**
25	G-18½ Flametint	Med.	B	120	**.50**
†25	G-18½ Colored	Med.	B	120	**.55**
25	G-25 White	Med.	B	60	**.45**
25	G-25 Flametint	Med.	B	60	**.55**
†25	G-25 Colored	Med.	B	60	**.65**
40	G-25 White	Med.	B	60	**.45**
40	G-25 Flametint	Med.	B	60	**.55**
†40	G-25 Colored	Med.	B	60	**.65**

*These lamps are suitable for sign lighting service and are identical with the corresponding lamps listed under Sign.
†Supplied Red, Yellow, Green, Blue, Amber-Orange and Rose Coated Colors.

INSIDE COLORED
110, 115 AND 120 VOLTS

Watts	Bulb	Base	Mazda B or C	Std. Pkg. Qty.	List Price
25	A-19 Flametint	Med.	B	120	**$0.35**
25	A-19 Ivory	Med.	B	120	**.35**
†25	A-19 Colored	Med.	B	120	**.37**
40	A-21 Flametint	Med.	B	120	**.35**
40	A-21 Ivory	Med.	B	120	**.35**
†40	A-21 Colored	Med.	B	120	**.37**

†Supplied Red, Yellow, Green, Blue, Amber-Orange and Rose Colors.

DISCOUNT **MARKET**

120 VOLT ALWAYS SUPPLIED UNLESS OTHERWISE SPECIFIED

Hot Plates

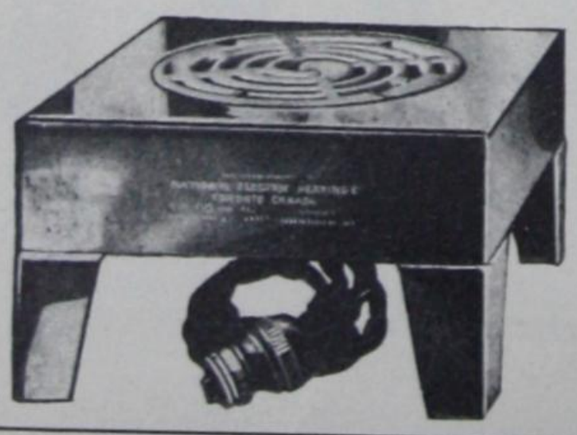

Single Burner

"Has Liberal Cooking Surface"

Each **$6.80**

Heavy gauge cold rolled steel, beaded edge, heavily nickel plated. Supplied with 6-ft. cord attached with separable plug.

Cat. No.	Size of Top	Size of Burner	Watts	Volts	Weight
351	9x9x5	5¾"	600	105-115	4½ lbs.

No. 351 is supplied with single heat switch.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Durable "Non-Skid" Mat

Silent
Sanitary
Reversible

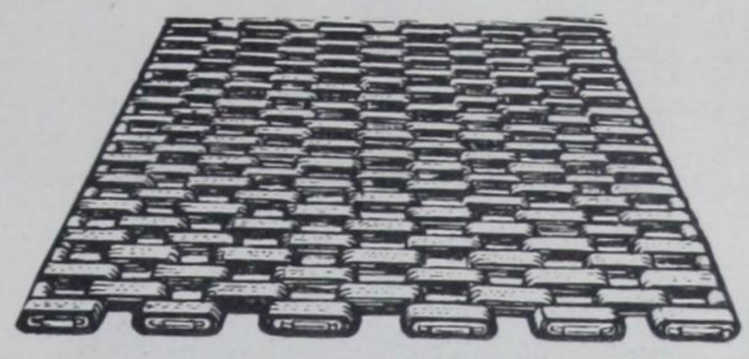

Weather-Proof
Washable
Wear-Resisting

DURABLE NON-SKID blocks or links are made of laminated rubberized cotton fabric (auto tires), which is the toughest and longest wearing material yet devised.

As woven on the rods, only the vertical edge or effective area is exposed to traffic, providing a wearing surface which will retain the original resilient grip that makes the "foot-stay-put" perpetually, wet or dry.

for Public Buildings and the Home

STOCK SIZE MATS

No. 2	14" x 22" (2 sq. ft.) . .	**$4.50**
No. 3	17" x 25" (3 sq. ft.) . .	**6.90**
No. 4	20" x 29" (4 sq. ft.) . .	**9.00**
No. 6	24" x 37" (6 sq. ft.) . .	**13.70**
No. 10	30" x 48" (10 sq. ft.) . .	**22.50**

Also made in any size or shape.
Prices on application.

HAY BALE TIES



14 GAUGE, BLACK WIRE

Single Loop, for Bailing or Bundling Hay, Straw, Flax, etc.				
Length, feet - - -	9	9½	10	10½
Wire gauge - - -	14	14	14	14
Ties in a bundle, about -	280	260	220	200
Weight per bundle, lbs. -	45	45	45	45
Per 100 lbs. - -	$10.70	10.70	10.70	10.70

One bundle of ties will bale approximately one carload of hay.

BLACK ANNEALED WIRE

Regular Coils. Approx. 50 to 75 lbs.

Nos.	9	10	11	12	13	14	15	16
Per 100 lbs. -	$9.00	9.10	9.20	9.30	9.50	9.70	10.10	10.50

SOLDER



FORTY-FIVE—FIFTY-FIVE
Contains 45 Parts Tin and 55 Parts Lead.

Per Lb
No. 45—Size Bar 13¼ x ¾ x ⅜ in. . . . . **$ .52**
Weight 1½ lbs. Bar

SOLDER



FIFTY-FIFTY
Warranted Strictly Fifty-Fifty— 50 Parts Tin and 50 Parts Lead.

Per Lb.
No. 50—Size Bar 13¼ x ¾ x ⅜ in. . . . . **$ .54**
Weight 1½ lbs. per Bar

REINFORCED STUCCO NETTING

This Stucco Netting is being used very extensively for new construction, as well as for Stucco work on old frame houses. It acts as a wire lath for the stucco and also as a reinforcing, as it has double selvage wires every six inches through the long way of the roll. Being totally embedded in the stucco, this netting prevents cracks from weather conditions.

Reinforced Stucco Netting—1 inch mesh, 20 gauge, 36 inches wide; weight per roll, 50 lbs. - per roll **$11.00**

50 Yards in a Roll.

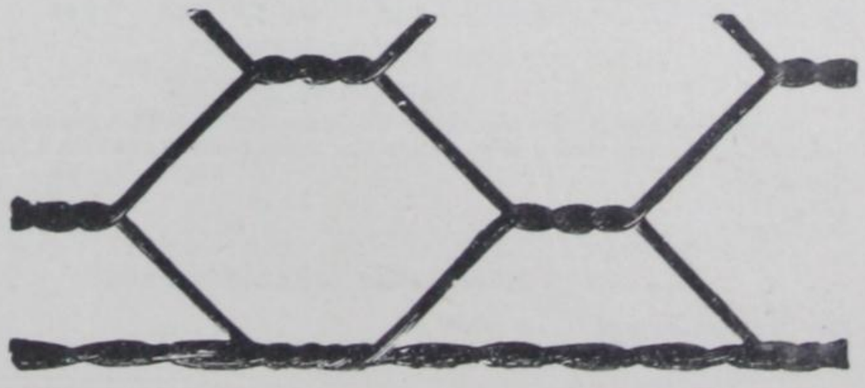

All Prices Subject to Change Without Notice

COACH OR LAG SCREWS

DISCOUNT

Gimlet Pointed, Square Head

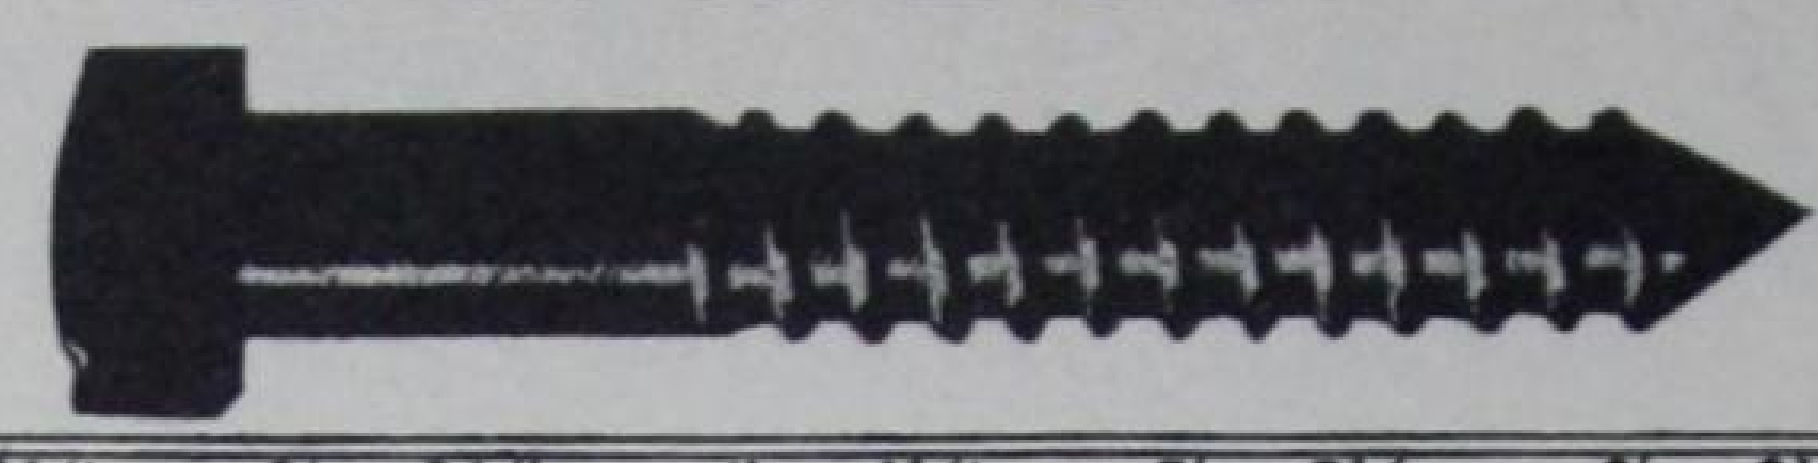

MARKET

Manufacturers' List in Light Type

Length, In.	1½	2	2½	3	3½	4	4½	5	5½	6	6½	7	7½	8	9	10	11	12	14
Diam. 1/4 in.	$2.25	2.45	2.65	2.85	3.05	3.25	....	....	....	....	....	....	....	....	....	....	....	....	....
Diam. 5/16 in.	2.25	2.45	2.65	2.85	3.05	3.25	3.45	3.65	3.85	4.05	....	....	....	....	....	....	....	....	....
Diam. 3/8 in.	2.70	3.00	3.30	3.60	3.90	4.20	4.50	4.80	5.10	5.40	6.70	7.00	....	....	....	....	....	....	....
Diam. 7/16 in.	3.15	3.50	3.85	4.20	4.55	4.90	5.25	5.60	5.95	6.30	7.65	8.00	....	....	....	....	....	....	....
Diam. 1/2 in.	3.75	4.15	4.55	4.95	5.35	5.75	6.15	6.55	6.95	7.35	8.75	9.15	9.55	9.95	10.75	11.55	12.35	13.15	....
Diam. 5/8 in.	....	....	6.50	7.00	7.50	8.00	8.50	9.00	9.50	10.00	10.50	11.00	11.50	12.00	13.00	14.00	15.00	16.00	18.00
Diam. 3/4 in.	....	....	....	9.90	10.60	11.30	12.00	12.70	13.40	14.10	14.80	15.50	16.20	16.90	18.30	19.70	21.10	22.50	25.30

EXPANSION SHIELDS

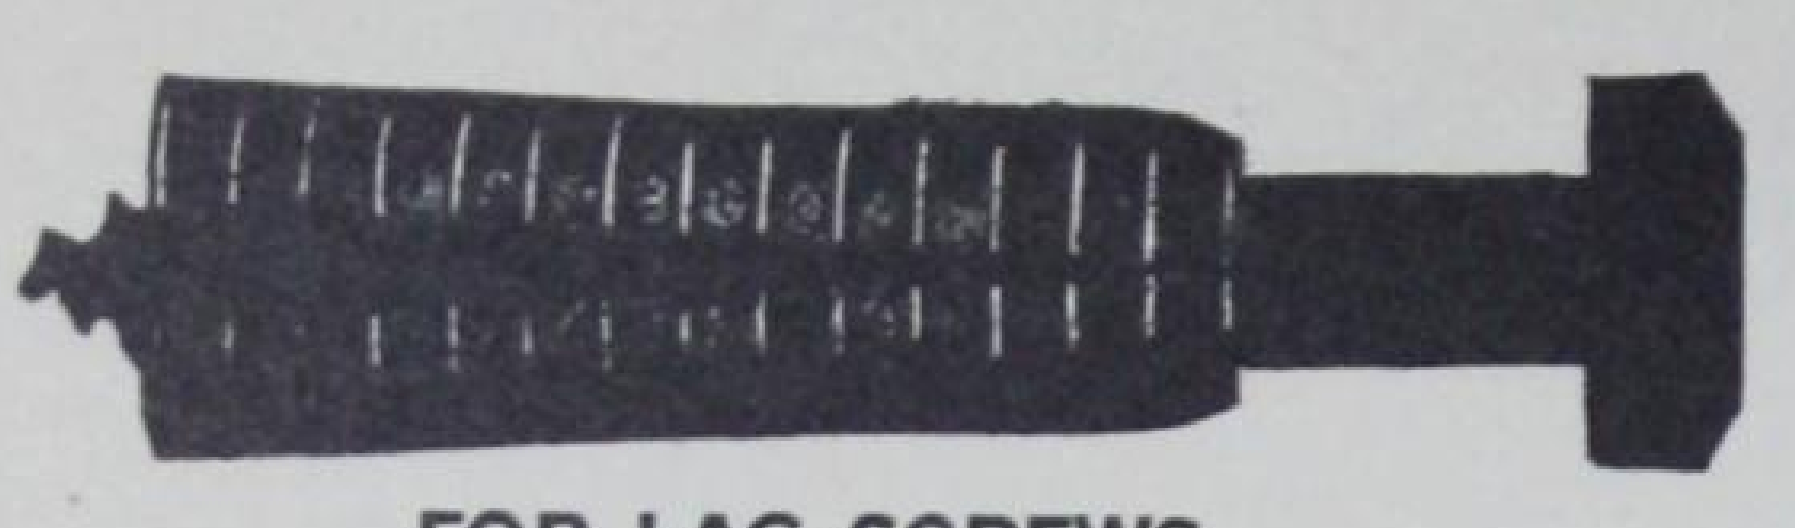

FOR LAG SCREWS

Malleable Iron
No. LML—Long Standard

Diam. Screw In.	Length Shield in.	Diam. Shield in.	Weight Per 100 lbs.	Per 100 Shields Only
3/16	1	3/8	2½	$15.00
1/4	1½	7/16	4	15.00
5/16	2	1/2	6	18.00
3/8	2¾	5/8	11½	25.00
1/2	3½	3/4	17½	38.00
5/8	3½		25	45.00
3/4	3½	1	26	65.00
No. LMS—Short Standard				
1/4	1	7/16	3	$15.00
5/16	1½	1/2	9	18.00
3/8	2	5/8	9	25.00
1/2	2	3/4	11½	38.00
5/8	2	7/8	13½	45.00
3/4	2	1	16½	65.00

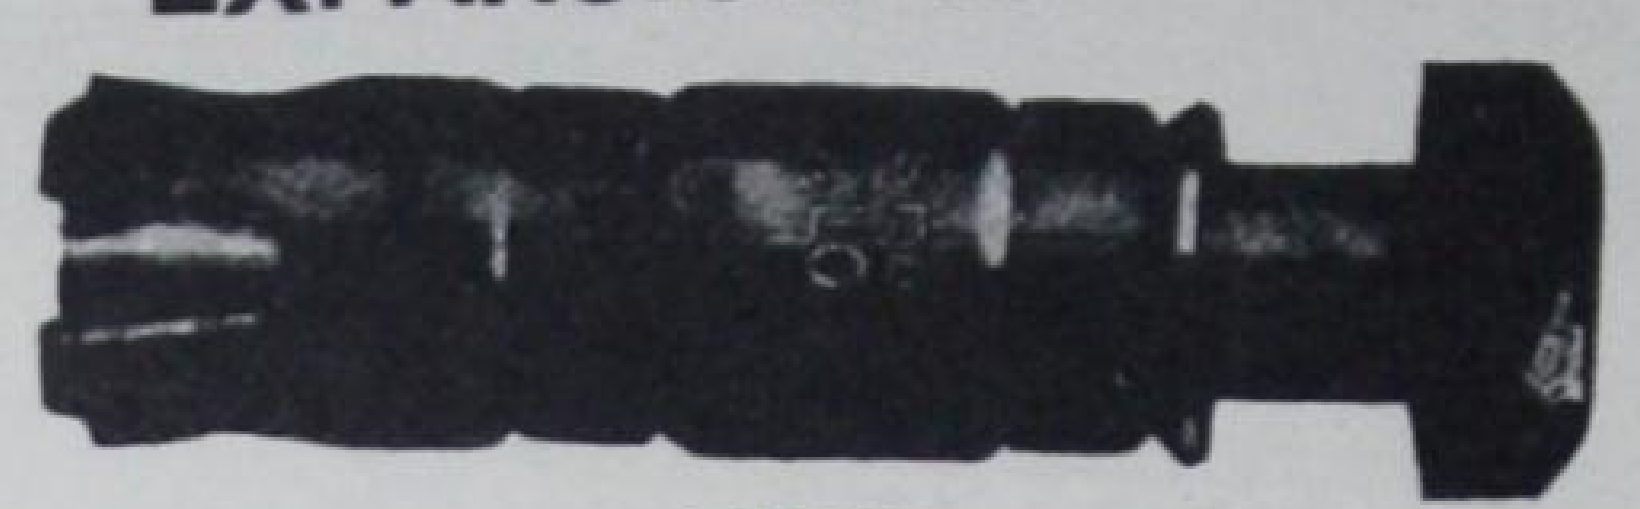

LOXIN

Hot Galvanized; Single Machine Bolt Type. Hold in loose holes as well as tight holes. Carry greater load and are easier to install than other bolt expansions.

For Bolt In.	Len. Shield In.	Out Diam. In.	Weight Per 100 Lbs.	Per 100
1/4	1¼	1/2	3½	$15.00
5/16	1½	5/8	6¼	18.00
5/16	2	5/8	8	18.00
3/8	1½	5/8	6	25.00
3/8	2	5/8	8	25.00
7/16	2½	7/8	18	32.00
1/2	2	7/8	14	38.00
1/2	2½	7/8	18	38.00
5/8	2½	1	24	45.00
5/8	3	1	26	45.00
3/4	3½	1⅜	37	65.00

Sizes to 3/8, 100 in Package.; 7/16 to 5/8, 50 in Package; 3/4 in; 25 in Package

TAMPIN

For use with Machine Screws or Bolts. Unequalled for Electrical installations and similar attachments to Concrete Brick or Stone.

Bolt or Screw Size In.	Diam. Hole In.	Depth Hole In.	Weight Lbs.	Per 100
6–32	5/16	1/2	1½	$ 3.80
8–32	5/16	1/2	1½	4.50
10–24	3/8	5/8	2	4.95
12–24	1/2	7/8	5	6.50
1/4	1/2	7/8	5	7.20
5/16	5/8	1	7½	9.75
3/8	3/4	1¼	14	12.00
7/16	7/8	1½	19	15.00
1/2	7/8	1½	19	15.00
5/8	1	2	24	25.00

Sizes to 10-24, 100 in Package; Balance 50 in Package

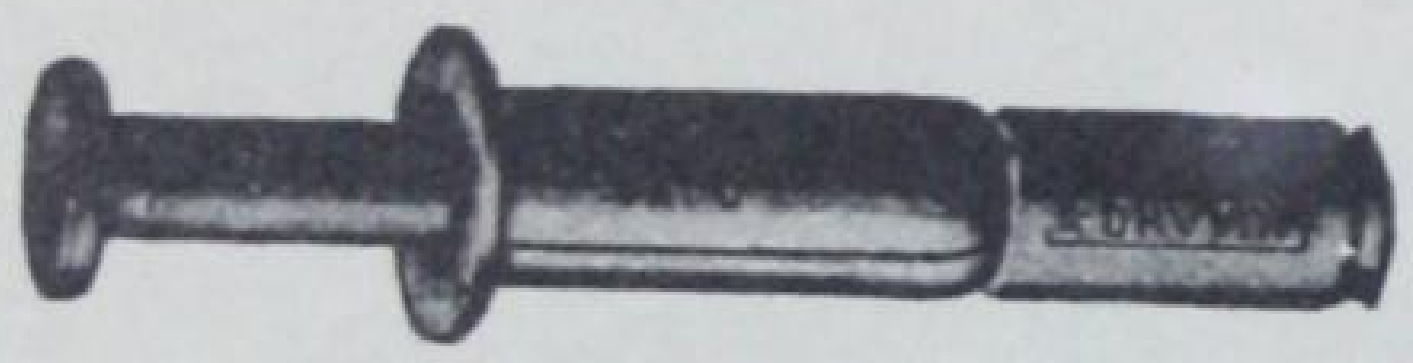

DRYVINS

An expansion shield that uses Nails, Hot Dip Galvanized Shields and Nails complete. Sizes cover dimensions of shield—not the Nail.

Shield In.	Drill In.	Working Lbs.	Per 100 Lbs.	Per 100
3/16 x 7/8	3/16	130	1¼	$ 8.00
3/16 x 1¼	3/16	150	1½	9.00
1/4 x 1	1/4	200	2¼	10.00
1/4 x 1¼	1/4	300	2¾	11.00
1/4 x 1½	1/4	350	3½	12.00
5/16 x 1¼	5/16	400	4½	14.00
5/16 x 1¾	5/16	450	5½	16.00
5/16 x 2¼	5/16	500	6¼	18.00
5/16 x 2¾	5/16	500	8	20.00
3/8 x 2	3/8	700	10½	20.00
3/8 x 3¼	3/8	700	13½	25.00
1/2 x 2¼	1/2	1200	18	30.00
1/2 x 3½	1/2	1200	25	35.00

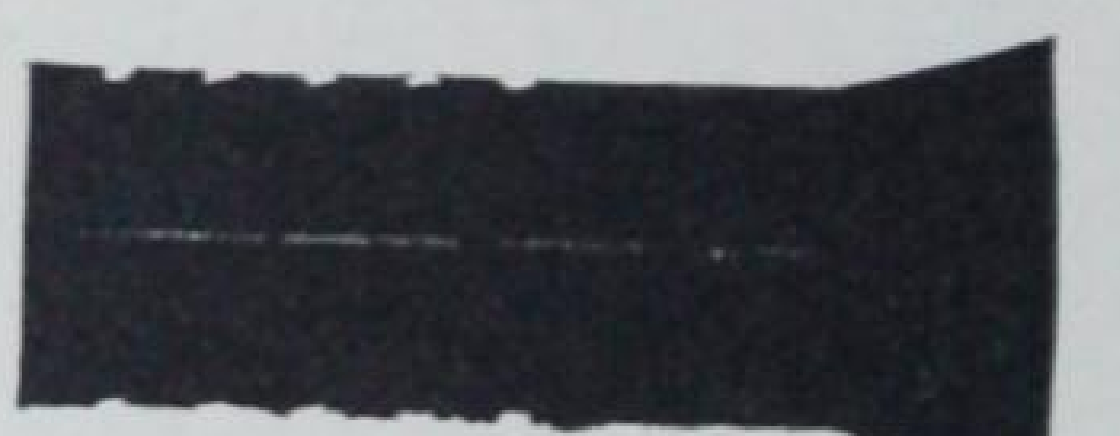

SCRUIN

A new design Lead Screw Anchor which gives greater holding power and requires a smaller installation hole for corresponding size screw.

Screw Size and Length Anchor	Fractional Screw Size In.	Diam. and Drill Size In.	Weight Per 100 Lbs.	Per 100
6-8-10 x ¾ in.	1/8-3/16	1/4	1¾	$5.00
6-8-10 x 1½ in.	1/8-3/16	1/4	2¼	5.60
10-12-14 x 1 in.	3/16-1/4	5/16	2½	5.60
10-12-14 x 1½ in.	3/16-1/4	5/16	3½	8.00
16-18 x 1 in.	5/16	3/8	4	6.25
17-18 x 1½ in.	5/16	3/8	5	9.00
20-22-24 x 1¾ in.	3/8	7/16	8	10.00

HAMRTWIST DRILL POINTS

Size, In.	3/16	x7/32	1/4	x9/32	5/16
Weight Dozen, lbs.	1/2	1/2	3/4	1	1
Per Dozen	$5.40	5.40	5.40	5.90	6.40
Size, In.	3/8	7/16	1/2	x9/16	x5/8
Weight Dozen, lbs.	2	2	2¼	2½	3½
Per Dozen	$7.40	9.40	11.40	13.40	14.40

xMade with Large Shank Only

DRILL HOLDERS

	Per Doz.
Plain—Weight 9½ lbs.	$24.00
Rubber Grip—Weight 12 lbs.	48.00

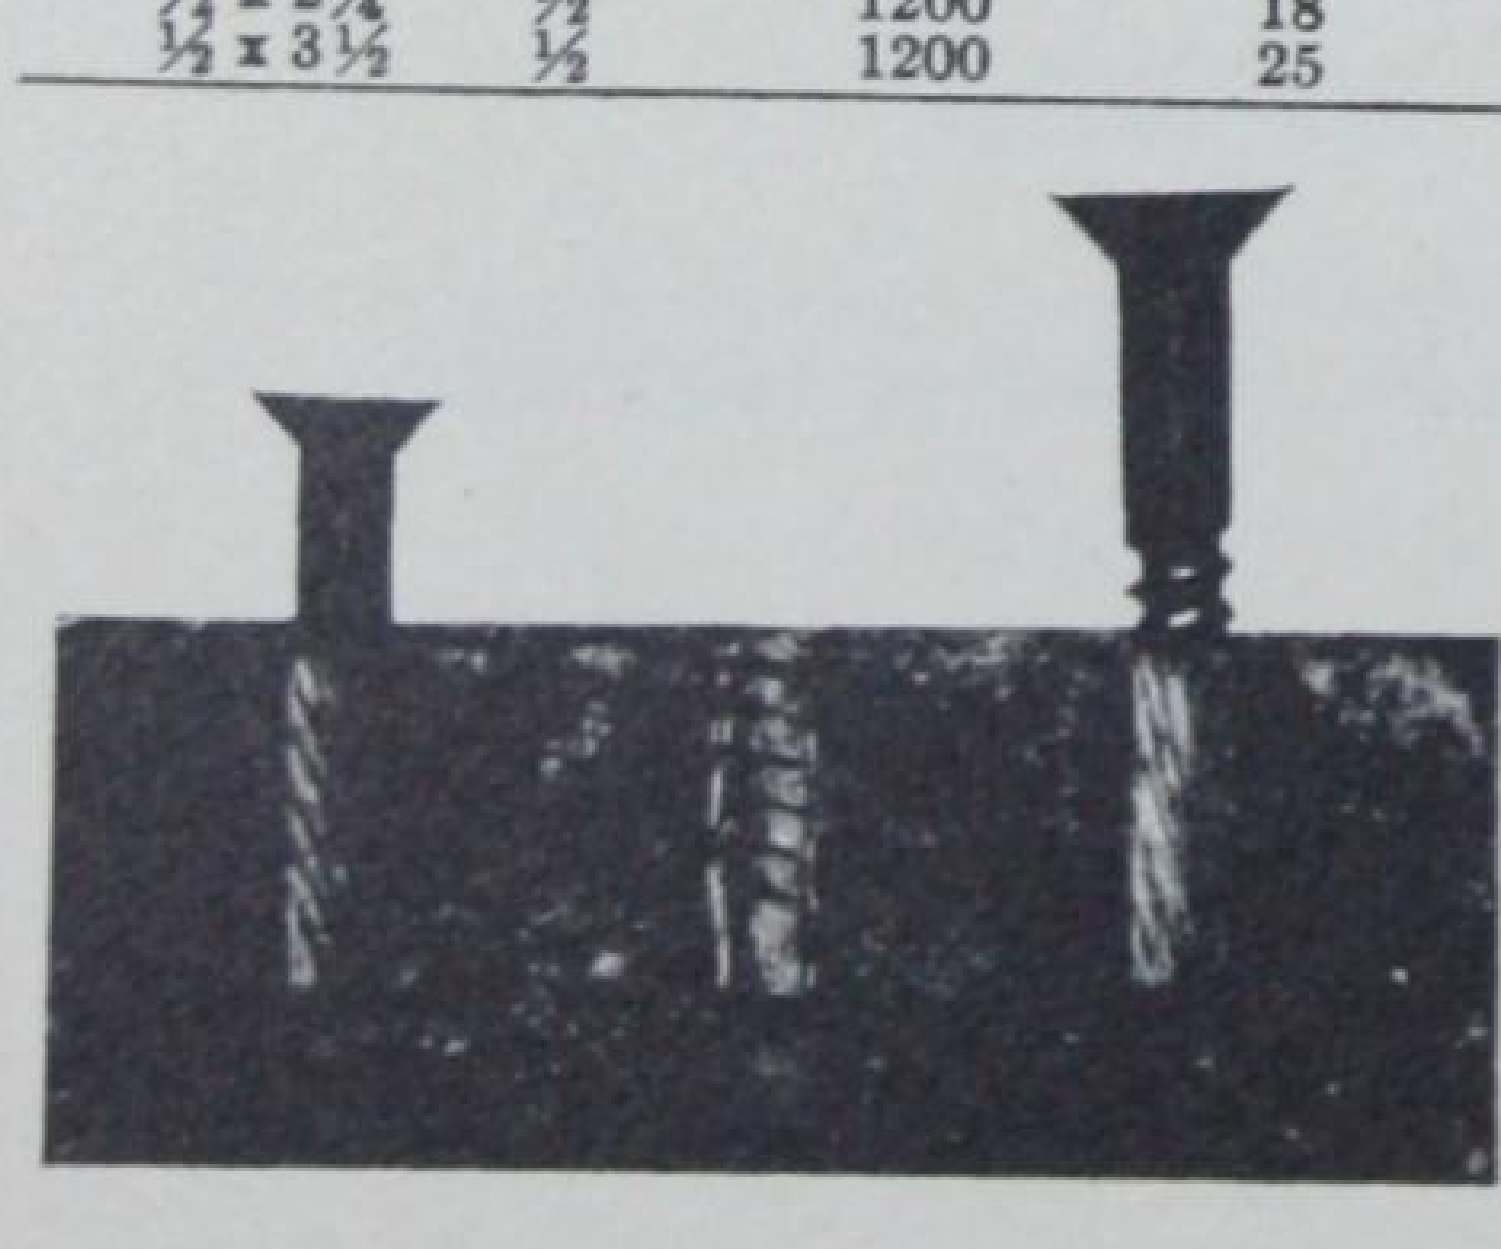

RAWLPLUGS

Rawlplugs are made of Highly Compressed Jute Fibre and are not affected by dampness or weather changes. In Concrete, Brick and other hard materials they make possible the use of Wood Screws for fastening Signs, Brackets or other Equipment. Expansion takes place along the entire length and screws cut their own thread.

Nos.	8	8	10	10	12	14	14
Length, in.	1	1½	1	1½	1	1	1½
Takes Screws No.	8–9	8–9	10–11	10–11	12–13	14–15–16	14–15–16
Per 100	$1.80	2.20	2.05	2.55	2.45	2.90	3.50

All above 100 in Box

RAWLPLUG DRILLS

Rawlplug Drills are numbered to correspond with Rawlplugs and bore the correct size hole for a snug, strong grip. They are easily re-sharpened on a Grindstone.

Nos.	8	10	12	14
Diam., in.	5/32	7/32	1/4	9/32
Per Dozen	$3.00	3.30	3.70	4.20

RAWLPLUG DRILL HOLDERS

	Per Doz.
No. 8—For use with No. 8 Drills	$10.80
No. 14—For use with Nos. 10, 12 and 14 Drills	10.80

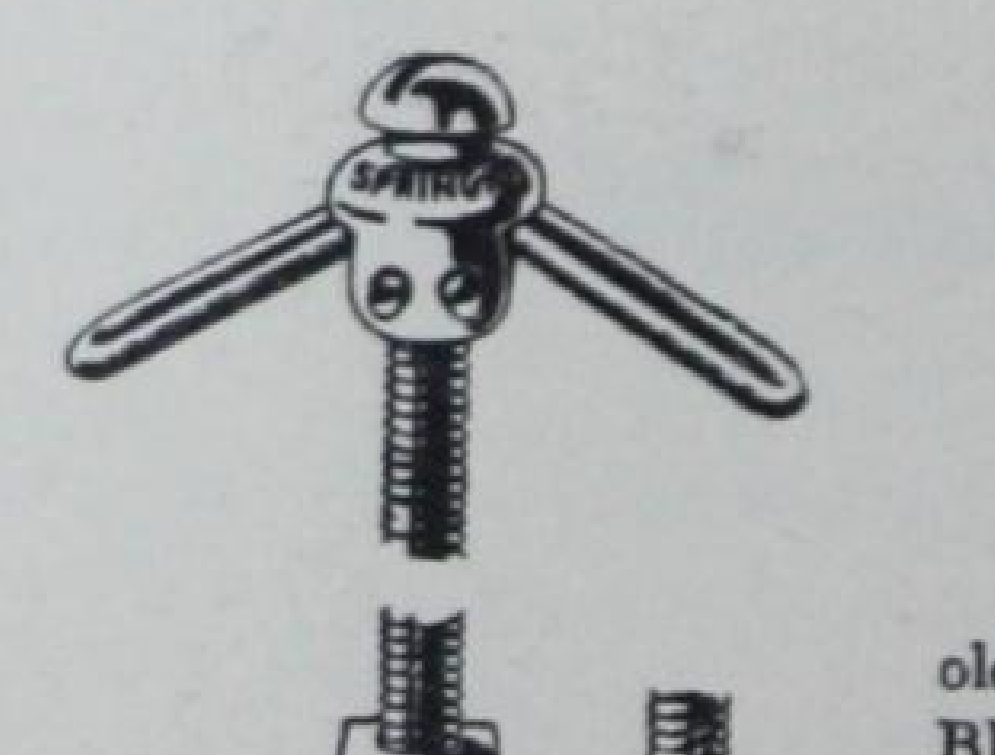

N P

SPRINGINS

No. 5500—With Round Head Screws

An improved type Toggle Bolt much superior to the old style for making fastenings to Hollow Tile, Cement Blocks and Walls constructed of Metal or Wood Lath.

Size Screw, In.	Drill Size, in.	Weight Per 100 lbs.	Quantity in Box	Per 100
1/8 x 2	3/8	1¾	100	$6.50
1/8 x 3	3/8	2½	100	6.75
1/8 x 4	3/8	2¾	100	7.00
3/16 x 3	1/2	5	50	6.85
3/16 x 4	1/2	6	50	7.15
3/16 x 5	1/2	6½	50	7.50
3/16 x 6	1/2	7½	50	7.80
1/4 x 3	5/8	8	50	7.85
1/4 x 4	5/8	9	50	8.15
1/4 x 5	5/8	10	50	8.55
1/4 x 6	5/8	11	50	8.95

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

No. 6022. Size, 2 inches.

Case.—Heavy pressed steel or brass.

Shackle.—Malleable steel or cast brass.

Mechanism.—Six inter-locking Levers of heavy metal; two heavy Plates; 12 key changes.

Keys.—Two double bitted, flat steel nickeled Keys to each Lock.

Weight.—Per dozen, 4½ lbs.

Packed.—One-half dozen to a box.

PRICE Per doz. **$4.60**

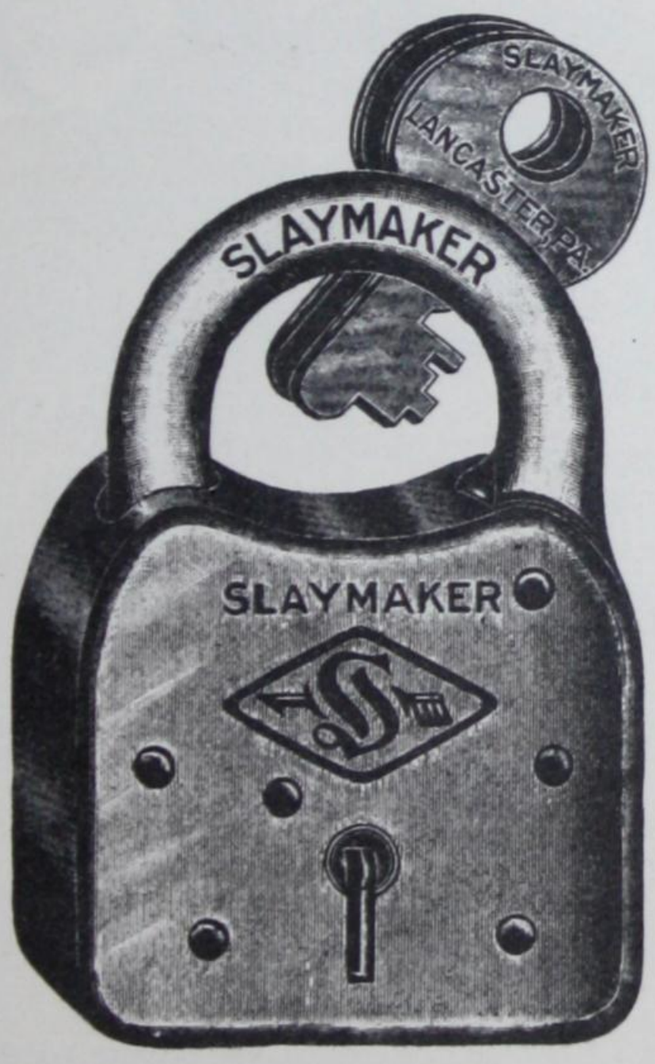

No. 4008—1⅝ In.
No. 4012—2 In.

Case.—Pressed steel.

Shackle.—Malleable steel.

Mechanism.—Bolt and Spring, locking both heel and nose of Shackle.

Keys.—Two heavy milled steel Keys to each Lock.

Packed.—One dozen to a box.

4008 **PRICE** Per doz. **$3.00**

4012 **PRICE** Per doz. **$3.70**

No. 4048. Size, 1 5/16 inches.

No. 4048B.P. Brass plated Case and Shackle.

No. 4050. Size, 1⅞ inches.

No. 4050B.P. Brass plated Case and Shackle.

4048 **PRICE** Per doz. **$2.90**

4050 **PRICE** Per doz. **$3.70**

No. 16034. Size, 2½ inches.

Case.—Heavy steel.

Shackle.—Malleable iron or cast brass.

Mechanism.—Eight Levers, locking both sides of Shackle.

Keys.—Two double bitted, drilled barrel, nickeled Keys to each Lock.

Per doz **$18.50**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

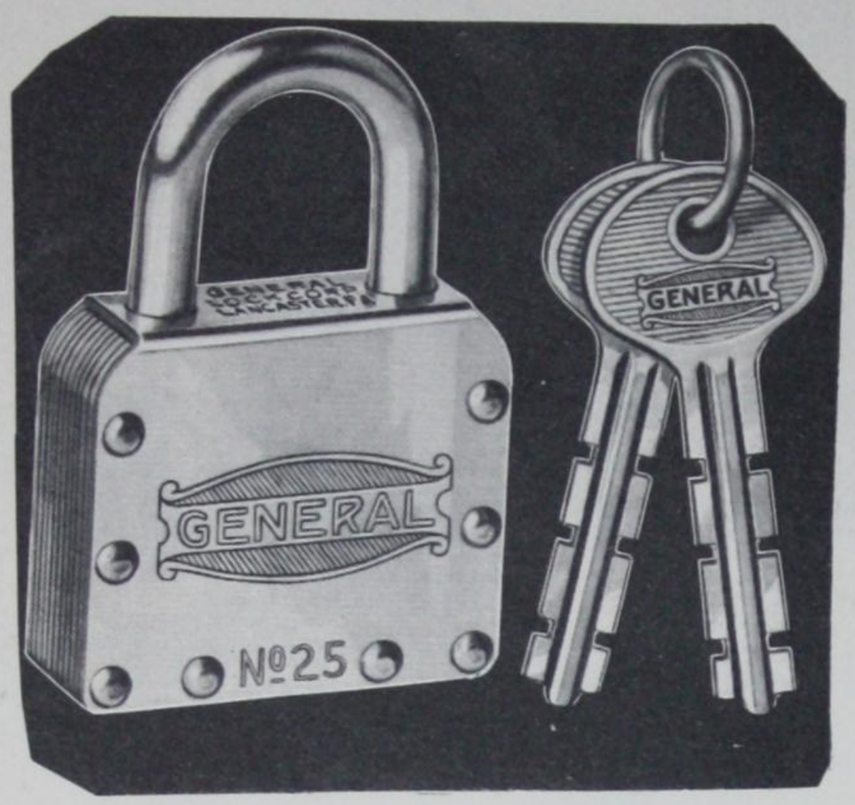

No. 25

An Improved LAMINATED Padlock

Double riveted—inside and out—for DOUBLE strength. Two embossed corrugated steel keys. Rust-Proofed with pure Cadmium.

Packed in an exceptionally beautiful counter sales display carton.

Price per doz. **$7.50**

No. 2561

CASE: Pressed steel.

SHACKLE: Heavy Iron.

MECHANISM: Strong lever-bolt and quick-acting Spring.

KEYS: Two flat steel nickeled Keys to each Lock.

WEIGHT: Per dozen, 3 lbs.

PACKED: One dozen to a Box.

CHAIN: Nine inches of No. E, cadmium plated Chain when so ordered; see page 105, Cat. 103.

No. 2561BP Brass plated Case and Shackle.

No. 2561CP Cadmium plated Case and Shackle.

Price per doz. **$2.70**

Size 2 Inches

No. 800

SILVER SENTINEL

Size across Case 1½ inches

Shackle opening ¾ × ¾ inches

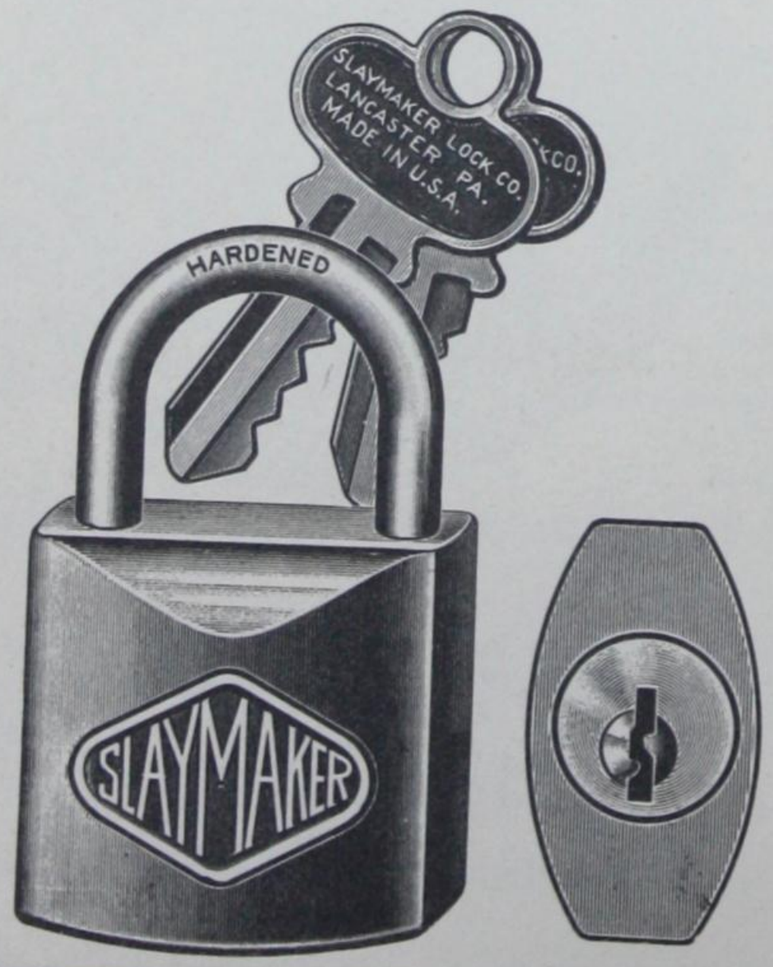

Two nickel silver, coined and slotted Keys each. Key operates both ways. Key blank No. K220.

Drain hole at bottom keeps Lock dry. Occasional graphite lubrication insures long life.

Beautiful display Carton of black, red, white and silver. contains ½ dozen Padlocks individually packed. Weight, 5 lbs. per doz.

Price per doz. **$18.50**

One-piece solid die-cast Case. No rivets or seams. Satin silver finish. Very tough non-rusting Alloy.

Case-hardened free-swinging steel Shackle, ¼ inch diameter. Cadmium plated.

Full size 4 pin Tumbler mechanism. Deep-rooted locking Bolt. Smooth and definite action.

Unlimited Key changes. Can be master-keyed in 500 Key changes. Positive Key security.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

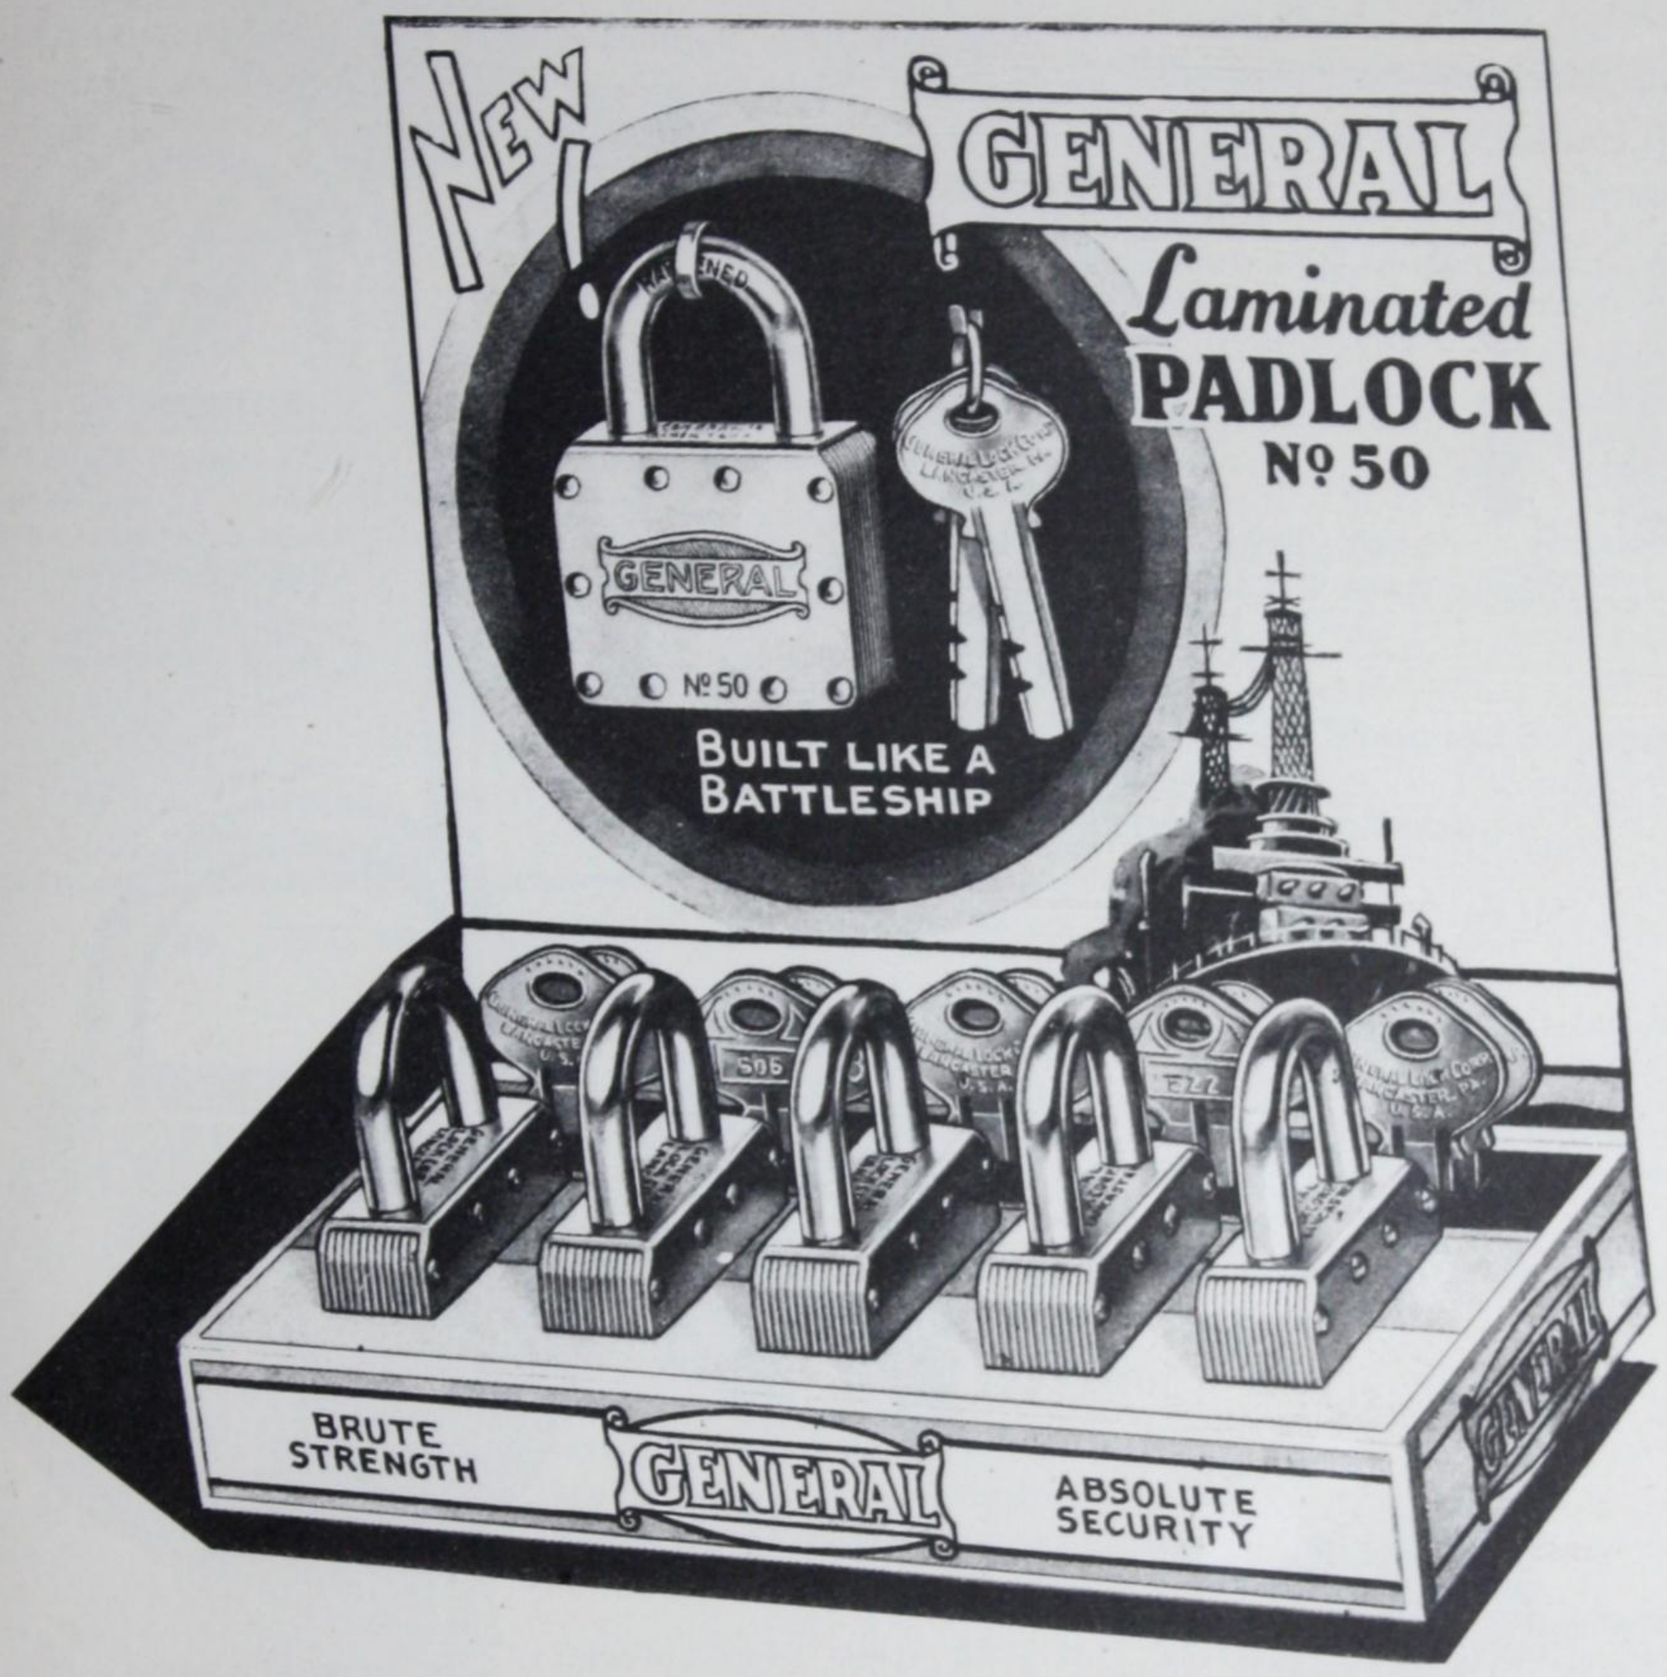

A Brand NEW

Sales Display

. . . . that will SELL padlocks for you!

To help you sell these wonderful new improved LAMINATED padlocks—fast—they will be packed in this very latest sales-producing display at no extra cost. Each display contains six padlocks, weighs about 2¾ lbs. per display.

This display can be used as counter—window—or table-top display.

Assortment .....Each **$7.50**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

For Golf Bags, Dog Collars, Luggage, Tire Mirrors and many other Purposes where a Small Padlock is Required.

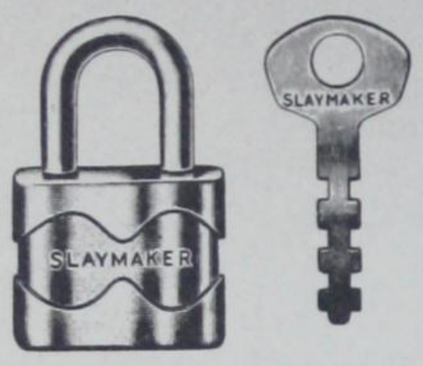

No. 89 Size 13/16 in.

No. 89

A sturdy little Padlock available in eleven different finishes. Designate finish desired by adding the following letters when ordering:

CP—CadmiumPlated.
BP—Brass Plated.
COP—Copper Plated.
NP—Nickel Plated.
CHR. PL—Chromium Plated.
ST. BZ—Statuary Bronze Plated.

BK—Black Case.
BE—Blue Case.
RD—Red Case.
BR—Brown Case.
GR—Green Case.

Note: All enameled case Locks have cadmium plated Caps and Shackles.

Doz. **$2.20**

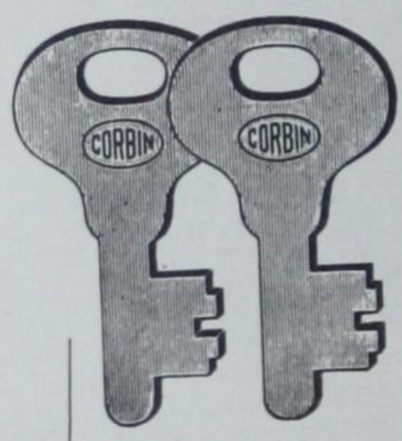

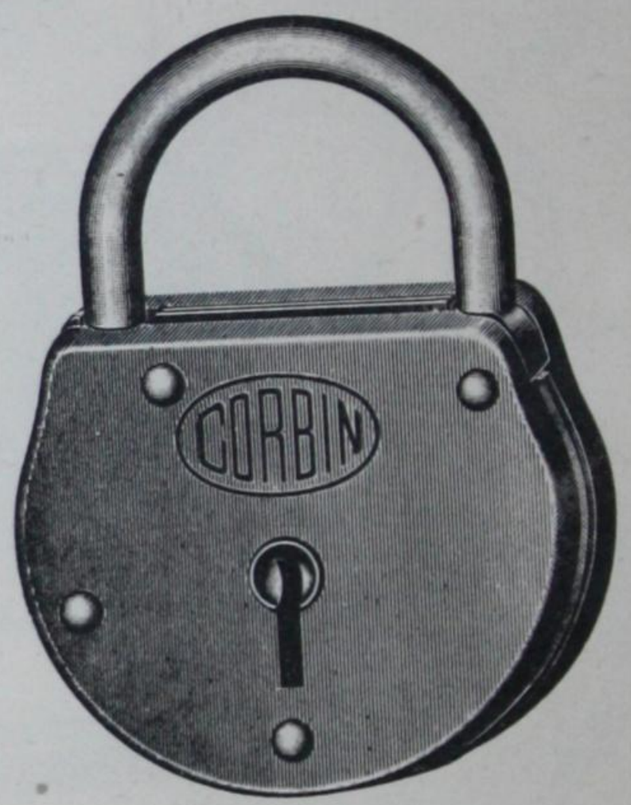

No. **9704¾ Steel,** brass-plated, brass-plated shackle.
2 inch. Wrought steel spring shackle.
2 nickel-plated flat steel keys to each lock.
Key blank No. 4904. Weight per dozen 1¾ lbs.

ONE DOZEN IN A BOX.

Doz. **$2.50**

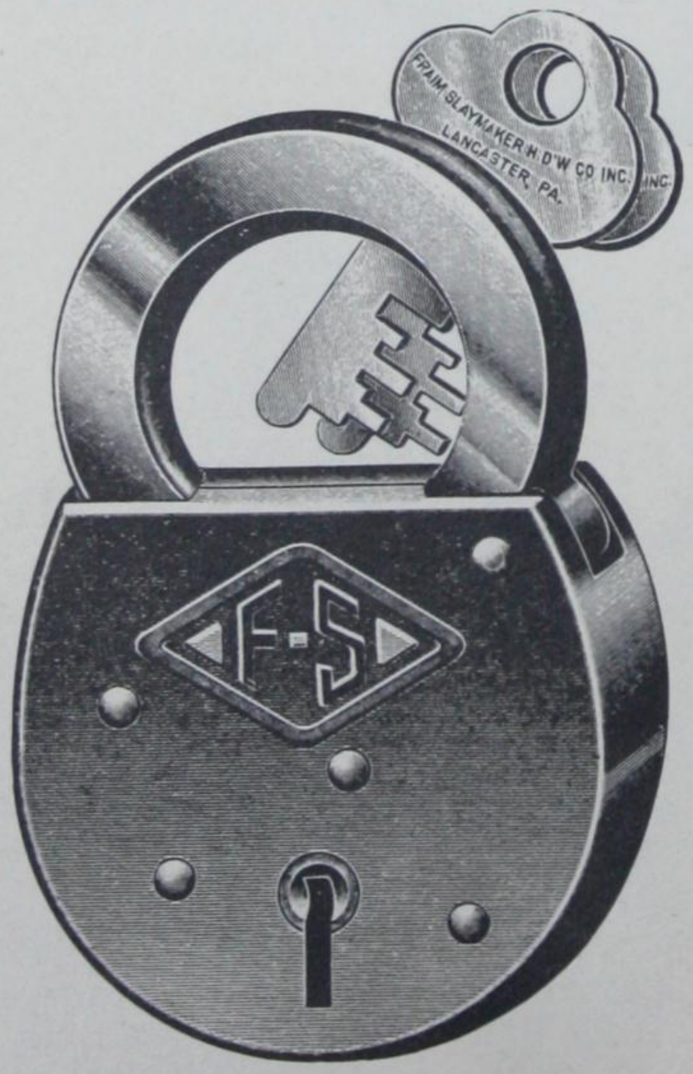

No. 70 CP:—Cadmium-Plated Case and Shackle.

CASE:—Heavy Pressed Steel.
SHACKLE:—Malleable Steel.
MECHANISM:—Ward and Lever Construction.
KEY CHANGES:—Eighteen.
KEYS:—Two Flat Steel Nickeled Keys to each Lock.
WEIGHT:—Per Dozen, 5½ lbs.
PACKED:—One Dozen to a Box.

Doz. **$6.00**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

No. 20 SIZE 1¾ INCHES

No. 20

LOCKS AND OPENS AUTOMATICALLY

SOLID DIE-CAST BODY
Provides Strength and Accuracy, and Permits a New and Modern Method of Good Lock-Making.

SEAMLESS PROTECTOR CASING
Swedged onto the Die-Cast Body, under Great Pressure and *without Rivets.*
Drain Hole in Bottom.

AUTOMATIC (In and Out) SHACKLE
Double Cam Construction Releases Shackle at Turn of Key and Snaps It Shut with Your Little Finger. Case-Hardened.

DISC TUMBLER MECHANISM
Affords Unusual Security, with Endless Changes of Keys.
Can Be Master-Keyed, on Order.

CHROMIUM PLATED
A Super-Finish, Highly Buffed, Durable and Attractive.

WINDOW-TYPE INDIVIDUAL BOXES 6 IN AN ATTRACTIVE COUNTER DISPLAY CARTON

KEYS: 2 Nickel Silver Coined and Slotted Keys.

WEIGHT: 6¼ Pounds Per Dozen.

PRICE Doz. **$21.60**

No. 1600

A ONE-HAND LOCK (Key Retaining)

One-piece solid die-cast Case. No rivets or seams. Bright buffed cadmium finish. Very tough non-rusting Alloy.

Case-hardened steel Shackle. 21/64 inch diameter. Buffed cadmium finish. Full size 5 pin Tumbler mechanism.

Key-retaining feature insures constant protection. Lock must be closed to remove Key.

A one-hand Lock. Insert Key and pull down on Case. Lock snaps shut automatically.

Unlimited Key changes for regular Stock and master-keyed Series.

Two nickel-silver coined and slotted Keys to each Lock.
Key blank No. K221.

Beautiful display carton of black, red, white and silver, contains ½ dozen Padlocks individually packed.
Weight, 7½ lbs. per dozen.

Size across Case 2 inches
Shackle opening ⅞ x ⅞ inches

PRICE Doz. **$27.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WROUGHT STEEL PADLOCKS

IN ASSORTED COLORS

ON DISPLAY CARDS

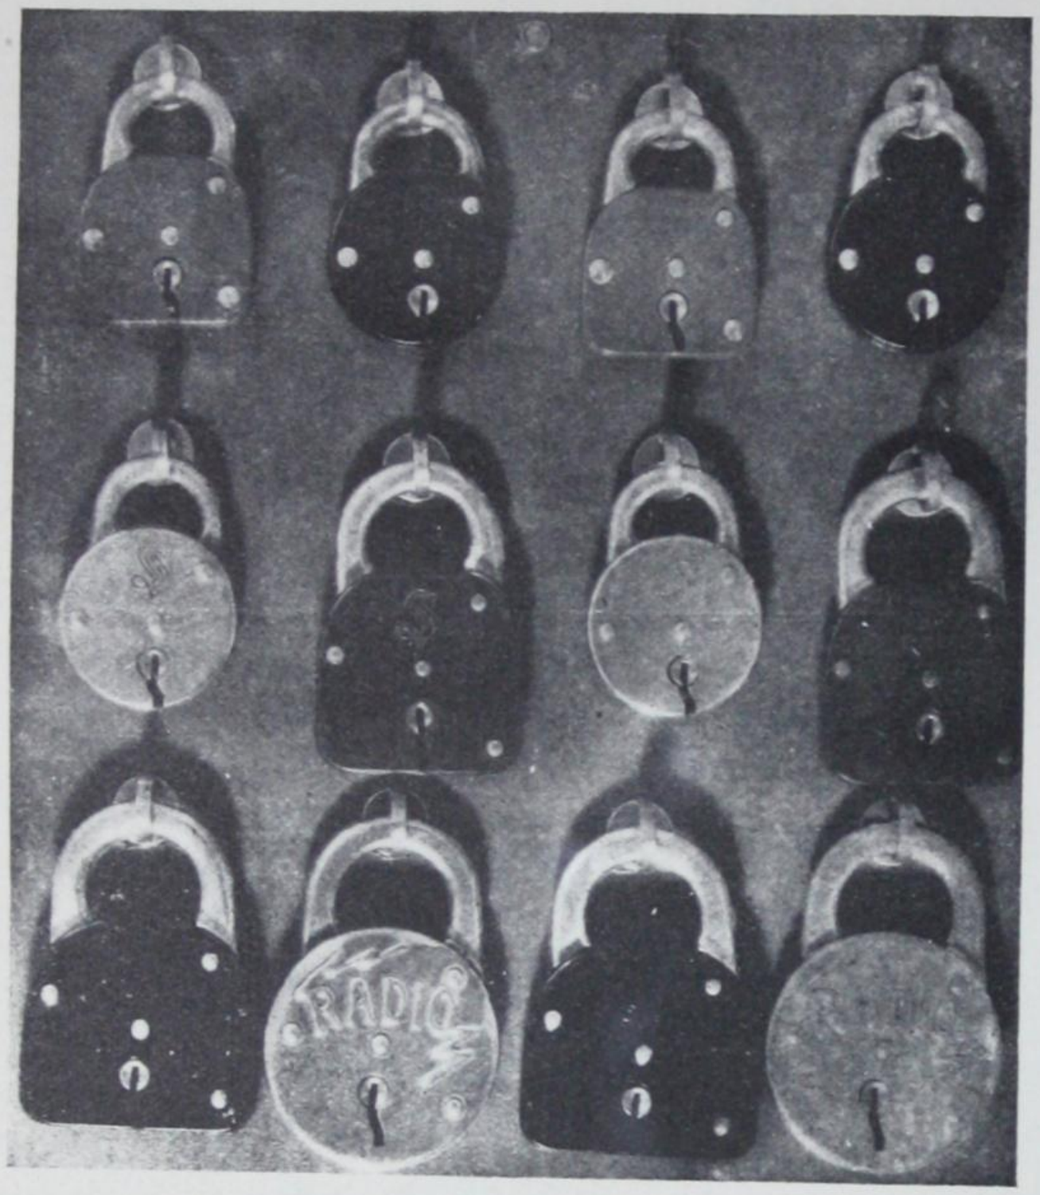

No. AR5040 PADLOCK ASSORTMENT

Contains one dozen wrought steel Padlocks, in various shapes, sizes, and finishes, as follows :

Eight have square shaped Cases, four have round shaped Cases.

Six measure 1½", two measure 1¾", and four measure 2" across Case.

Finishes are either brass-plated, black, blue, green or red enameled Cases. Brass plated Shackles.

Two nickeled steel Keys for each Lock on back of card. Card measures 8¾ x 9⅞ inches.

Packed 1 in a box, with wire easel. Weight complete, 2¼ lbs. Price each..... **$2.40**

No. 722—2⅛ In.

Polished brass Case and Shackle; ornamentation in colors of modernistic design. Bolt and Wards construction. Two Keys each. Packed ½ doz. to a box. Wgt. per doz. 4½ lbs

PRICE Doz. **$10.60**

No. 4902—1⅝ In.

Polished brass Case; ornamentation in colors of modernistic design. Nickeled rod Shackle. Lever and Wards construction. Two Keys each. Packed 1 doz. to a box. Wgt. per doz. 2⅞ lbs.

PRICE Doz. **$9.00**

No. 4903—1¼ In.

Polished brass Case, ornamentation in colors of modernistic design. Nickeled rod Shackle. Lever and Wards construction. Two Keys each. Packed 1 doz. to a box. Wgt. per doz. 1½ lbs.

PRICE Doz. **$8.10**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

THREE-KEYED PADLOCKS ON
ATTRACTIVE STEEL PANEL DISPLAYS

No. ST 1 ASSORTMENT

Displays 16022—4019ND—16022
87—4019ND—87

Six 2 inch pressed steel Padlocks, in an assortment. of popular types.

One in a Box. Weight 2½ lbs.

PRICE each **$2.70**

No. ST 2 ASSORTMENT

Displays 2903—2902—2903
2904—2902—2904

Cast brass Padlocks in 3 sizes, 1¼ in., 1⅝ in. and 2⅛ in.

One in a Box. Weight 2 Lbs.

$4.70

No. ST 3 ASSORTMENT

Displays 180—721—180
9303—721—9303

Six 2 inch brass Padlocks with round or square Shackles and large Shackle Openings.

One in a Box. Weight 3 Lbs.

$5.70

DOUBLE DISPLAY PANEL ASSORTMENT
No. ST89

Six Locks on Each Panel—One Dozen Locks in the Package

No. ST8 Steel Panel Display Assortment

Size of Panel 9 x 9½ inches

Displays: 2 each Nos. 181, 182, 183, as illustrated. 3 Keys each. Heavy steel Easel.

No. ST9 Steel Panel Display Assortment

Size of Panel 9 x 9½ inches

Displays: 3 each Nos. 722 and 4904, as illustrated. 3 Keys each. Heavy steel Easel.

MODERNISTIC DESIGNS

No. ST89 Double Display Panel Assortment

Contains: 1 each Nos. ST8 and ST9 Padlock displays. Packed as a unit in a single box. Weight complete (one dozen Padlocks) 5¼ lbs. Not sold singly.

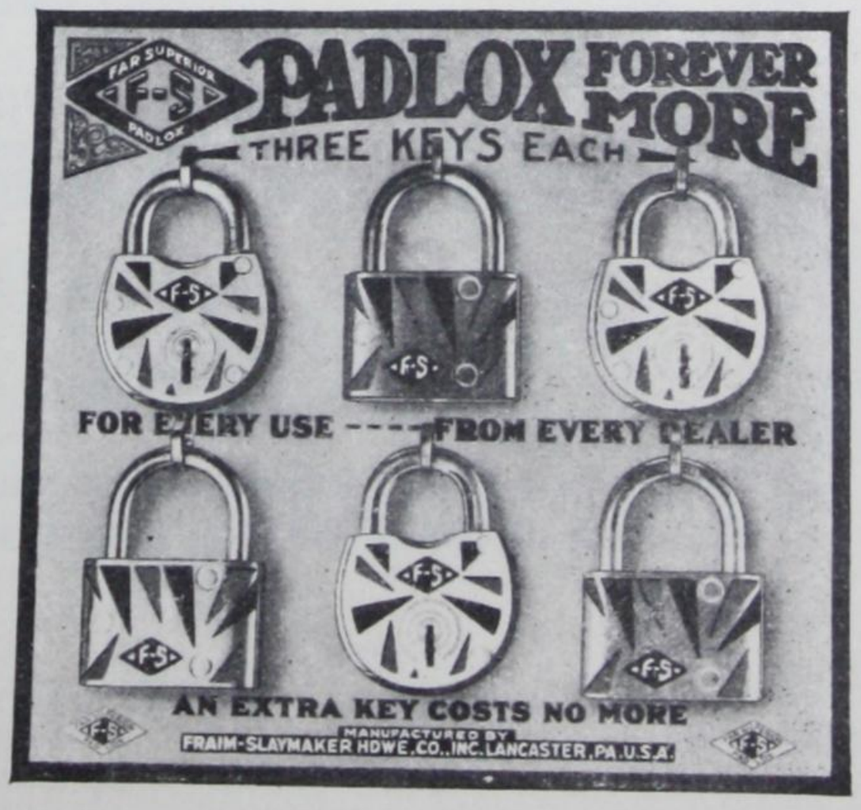

Price each **$10.20**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

Mail Box Lock

Case:—Heavy brass, polished. Size 1⅝ inches across Case.

Shackle:—Automatically springing to a right angle turn; with patented Stop to permit operation with one hand.

Mechanism:—Spring Levers, locking both sides of Shackle; warded Key Guide; 16 key changes.

Keys:—Two heavy steel, corrugated nickeled Keys to each Lock.

Master Key:—One heavy steel, corrugated nickeled Master Key packed without extra charge with each dozen Locks; will operate all Locks of this line.

No. 2525
With Brass Plated Steel Shackle
Without Chain.

PRICE Doz. **$7.40**

Bronze Metal Padlock

SEMI PIN-TUMBLER TYPE

No. 156R.P.—Parkerized black rustproof finish.

Mechanism.—Bronze metal centrifugal Spring Bolts, securely locking both ends of Shackle. Deep laminated wrought brass Bushing and Key Guide; countersunk and centered; spring actuated; always in proper alignment to receive the Key; cannot be jarred or turned out of place.

Keys.—Two nickel silver, coined and slotted Keys to each Lock.

Weight.—Per dozen, 3 lbs.

Packed.—In individual boxes, one-half dozen to a container.

Case.—Bronze metal, full polished and finely finished.

Shackle.—Automatic self-locking, heavy steel rod.

No. 156. Size, 1⅜ inches.
Price Doz. **$21.80**

No. 1092

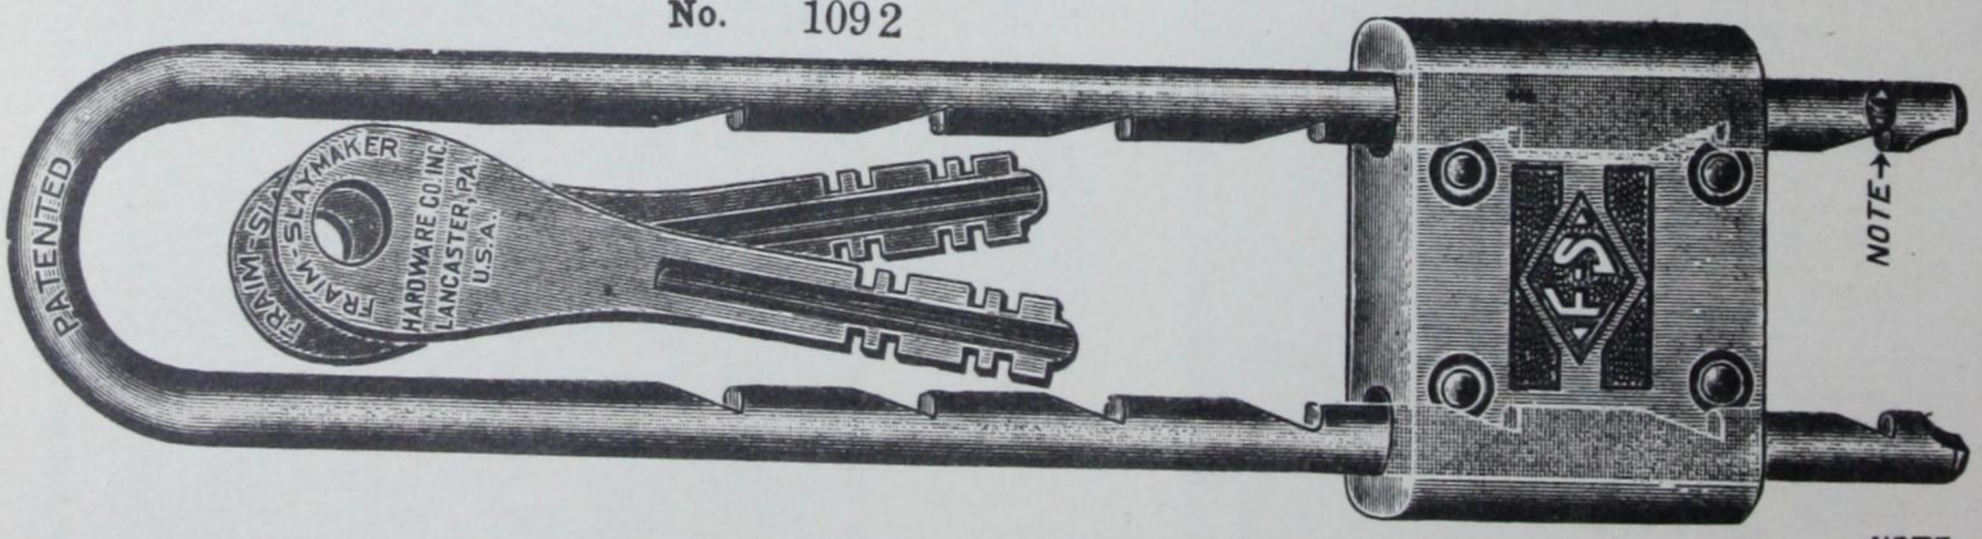

Case.—Cast brass, highly polished.

Shackle.—Milled steel rod, nickel plated, **adjustable**, No. 1091, from 1 inch to 4½ inches; No. 1092, from 1 inch to 5½ inches; width, 15/16 inches.

Mechanism.—Brass interlocking bolts, securing both ends of Shackle.

Keys.—Two nickeled corrugated steel Keys with each lock.

Weight.—Per doz., No. 1091, 4⅞ lbs.; No. 1092, 5⅛ lbs.

Packed.—In individual cartons, one-half doz. in a box.

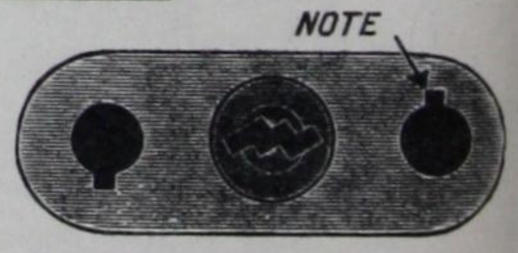

No. 1092 Patented. Size, 1⅝ inches.
Price Doz. **$16.50**

All Prices Subject to Change Without Notice

PADLOCKS

563

No. 563, Seamless Steel, Bower Barff ..... **Doz. $20.00**

Size 1½ in.
Three Lever Tumblers
Self-locking Spring Shackle
2 Flat Keys. 48 Changes
½ Doz. in Box

565

No. 565, Seamless Steel, Bower Barff ..... **Doz. 25.00**

Size 2 in.
Four Lever Tumblers
Self-locking Spring Shackle
2 Flat Keys. 48 Changes
½ Doz. in Box

0326

No 0326, Iron, Copper Plated ..... **Doz. 16.80**

Size 2¼ in.
Self-locking Spring Shackle
2 Flat Keys. 6 Changes
½ Doz. in Box

No. 0324 ..... **Doz. 13.80**

225

No. 225, Cast Iron, Bower Barff ..... **Doz. 12.80**

Size 2 in.
Self-locking Steel Spring Shackle
2 Flat Keys. 6 Changes
½ Doz. in Box

9465J

No. 9465J, Steel, Japanned ..... **Doz. 5.50**

Size 2 in.
Six Steel Lever Tumblers
Malleable Iron Shackle
2 Double-bitted Keys. 12 Changes
½ Doz. in Box

No. 0324 is the same as No. 0326 but smaller.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PADLOCKS

YALE

805 F

Size 2 in.
Four Pin Tumblers
Self-locking Bronze Shackle
2 Flat Keys. 144 Changes
½ Doz. in Box

No. 805F, Iron, Bower Barff..... Doz. **$30.00**

2 Inch Size

A. R. 61

Six steel tumblers, 12 key changes, two keys. Case steel assorted colors. 1 dozen on a card.
Price per dozen **$3.30**

CATCH BASIN COVERS and FRAMES

CAST IRON

Catch Basin Cover and Frame

Diameter of Cover	Diameter of Frame	Diameter of Opening		
6 in.	9 in.	5 in.	Each	**$1.40**
8 in.	11 in.	7 in.	Each	**$2.20**
10 in.	13 in.	9 in.	Each	**$2.80**
12 in.	15 in.	11 in.	Each	**$4.00**
14 in.	17 in.	13 in.	Each	**$5.00**
16 in.	19 in.	15 in.	Each	**$7.50**
18 in.	21 in.	17 in.	Each	**$16.20**

When Ordering Use Diameter of Cover Size

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MANTELS

Wood Mantels

No. 3
Unfinished Plain Oak
Price **$69.00**

DIMENSIONS

Height 60 inches.
Width 60 inches.
Projection 3 inches.
Tile Opening Width 42 inches, height 42 inches.
Shipping weight 150 lbs.

No. 2
Unfinished Plain Oak
Price **$60.00**

DIMENSIONS

Height 60 inches.
Projection 4 inches.
Width 60 inches.
Tile Opening width 42 inches, height 39 inches.
Shipping weight 130 lbs.

acking Charged at Cost. Above Prices are for Mantels Only.
All Prices Subject to Change Without Notice.

Mantels

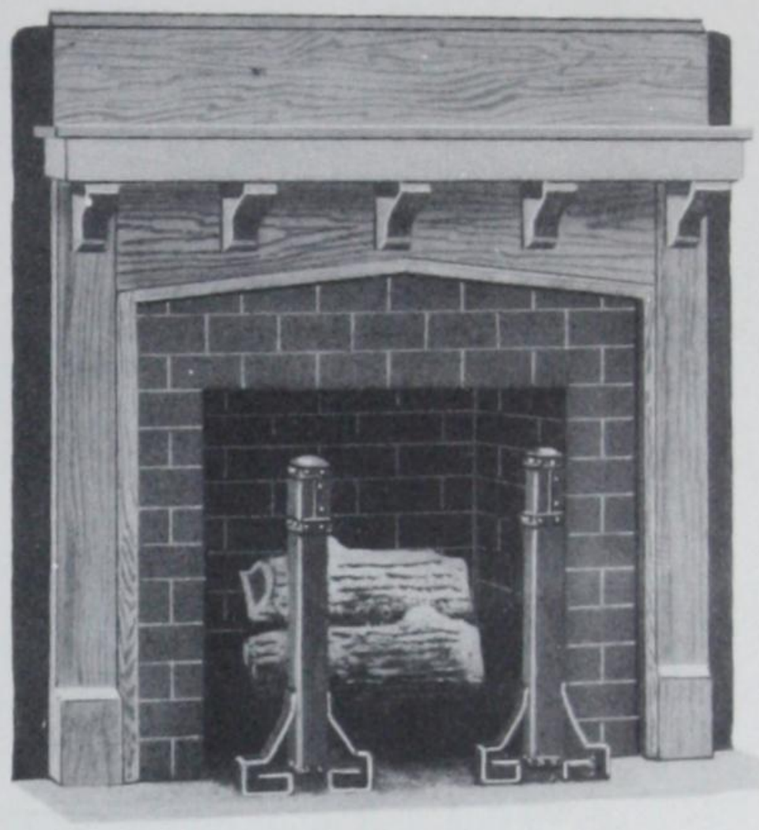

No. 8
Plain Oak, Unfinished
Price **$68.00**

DIMENSIONS

Height 60 inches.
Width 60 inches.
Projection 3 inches.
Tile Opening—width 42 inches, height 39 inches.
Shipping weight 130 lbs.

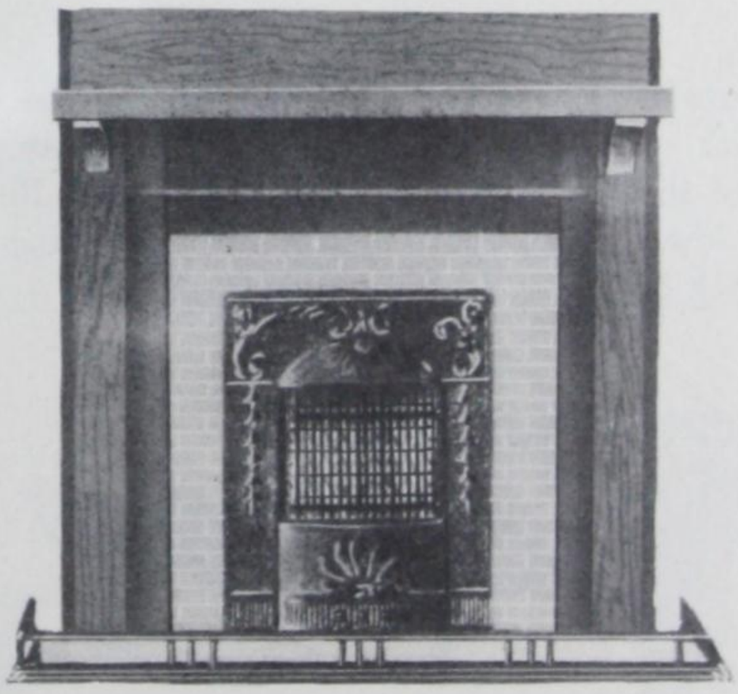

No. 1
Plain Oak, Unfinished
Price **$40.00**

DIMENSIONS

Height 58 inches.
Width 54 inches.
Projection 3 inches
Tile Opening width 36 inches, height 39 inches.
Shipping weight 120 lbs.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

COAL AND WOOD GRATES

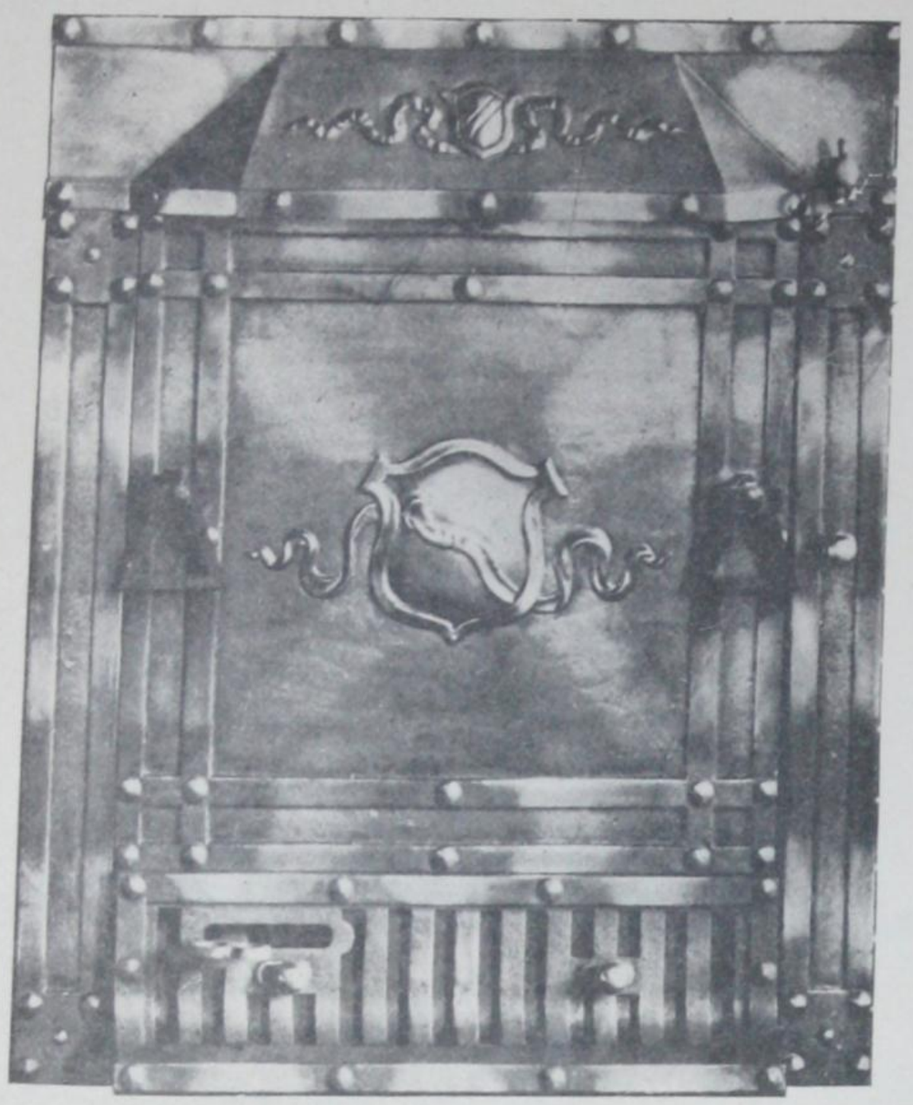

Nos. 140 and 140½

Nos. 140 and 140½

No. 140—Width 24 inches, height 30 inches, grate opening 20 inches, shipping weight 170 lbs.

No. 140½—Width 30 inches, height 30 inches, grate opening 26 inches, shipping weight 230 lbs.

Note.—This grate fitted with shaking grate, sliding lower screens, triple front and brick back.

No. 140		No. 140½	
Ox. Copper or Ox. Brass	**$57.00**	Ox. Copper or Ox. Brass	**$64.00**
Dull Black	**54.00**	Dull Black	**62.00**

No. 5

Note.—This fitted with shaking grate and sliding damper in lower screen and brick back.

Width 24 inches, height 30 inches, grate opening 20 inches. Shipping weight 160 lbs.

Ox. Copper or Ox.
Brass **$47.50**

Packing Charged Extra at Cost.

No. 5

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Portable Fire Baskets

Casters on Rear Legs

Dead Black Finish

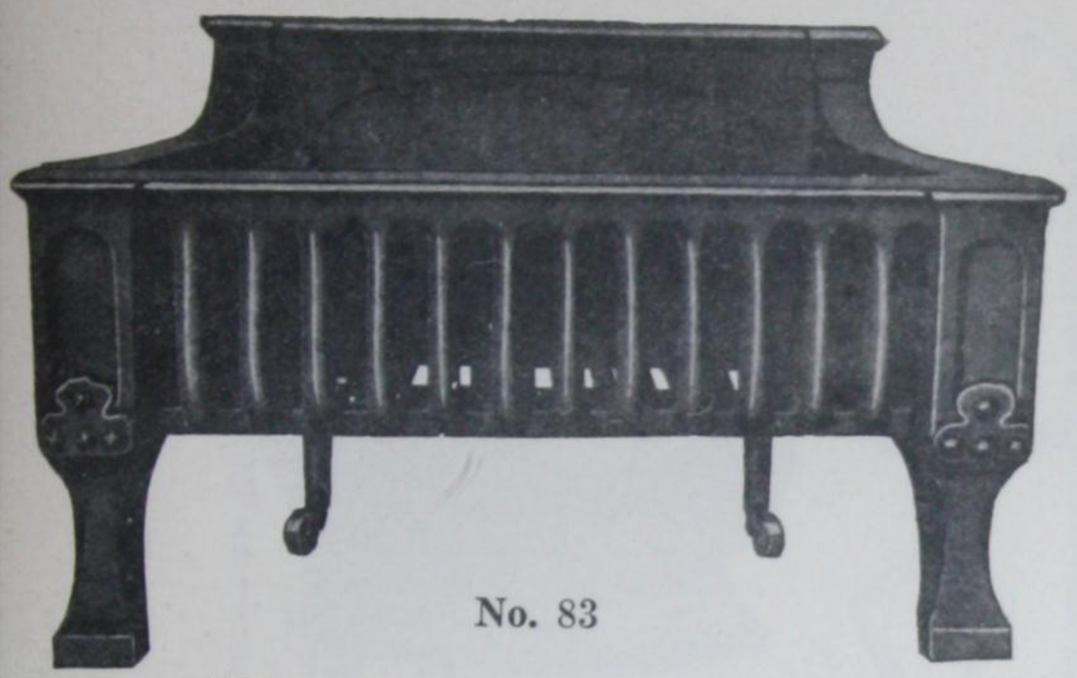

No. 83

Width Front	Depth	Weight	Each
24 ins.	13 ins.	75 lbs.	**$16.80**
26 ins.	13 ins.	90 lbs.	**$18.50**

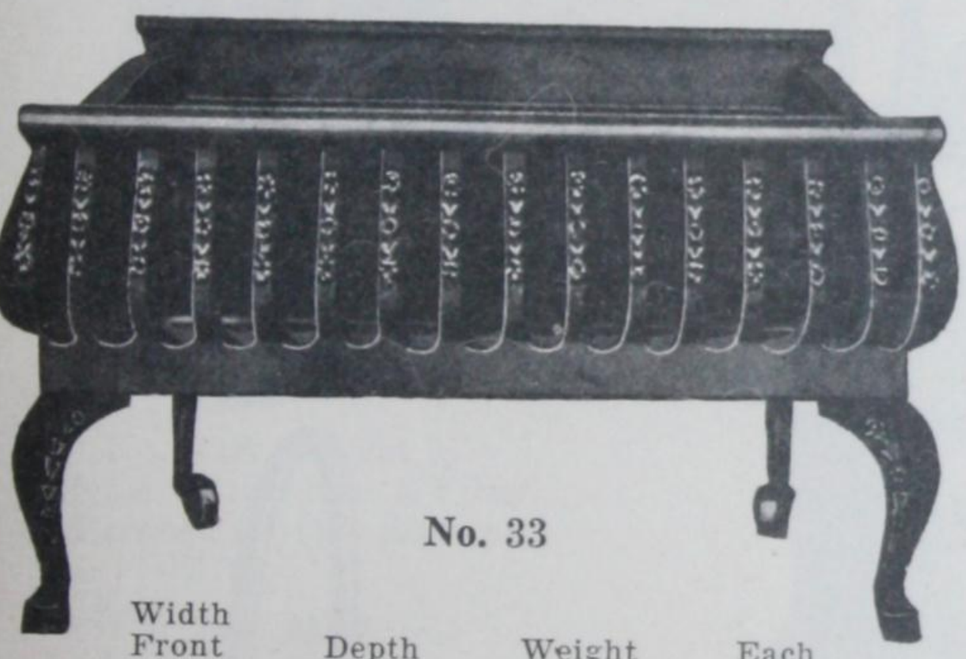

No. 33

Width Front	Depth	Weight	Each
18 ins.	12 ins.	50 lbs.	**$14.00**
20 ins.	12 ins.	60 lbs.	**14.00**
22 ins.	12 ins.	65 lbs.	**15.00**
24 ins.	12 ins.	75 lbs.	**16.00**

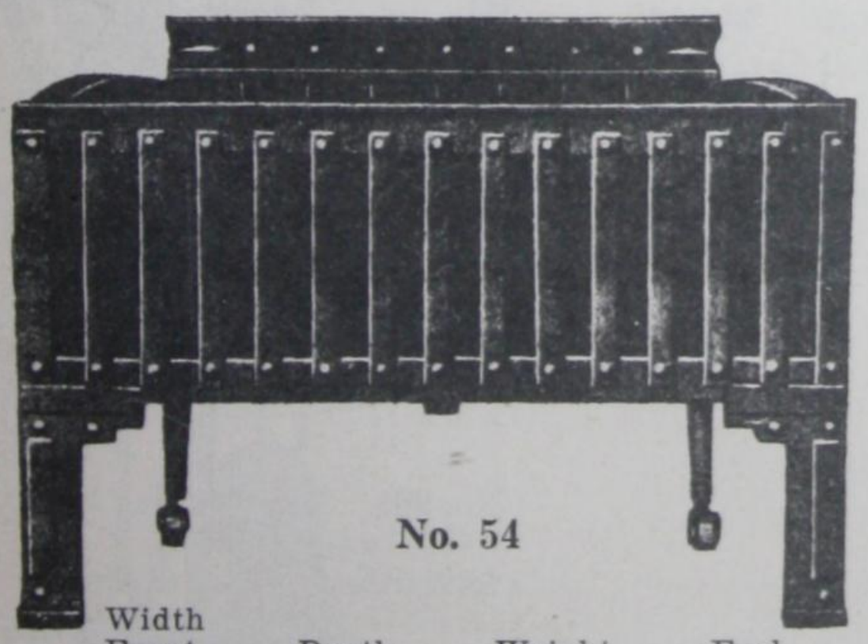

No. 54

Width Front	Depth	Weight	Each
20 ins.	12 ins.	60 lbs.	**$14.00**
22 ins.	12 ins.	65 lbs.	**15.00**
24 ins.	12 ins.	75 lbs.	**16.00**

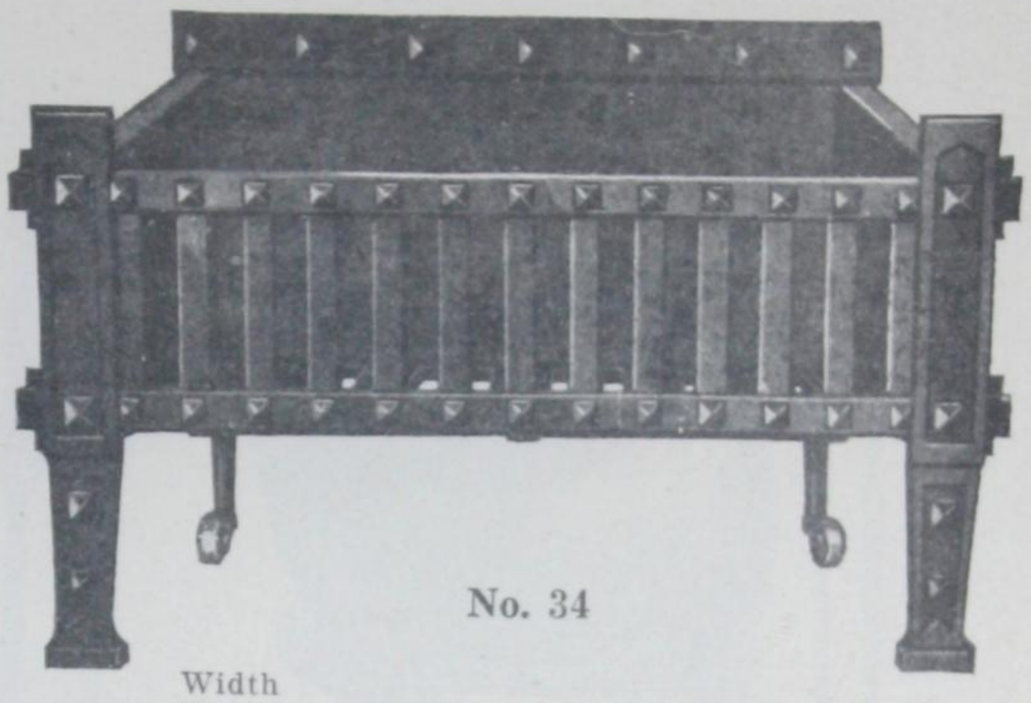

No. 34

Width Front	Depth	Weight	Each
20 ins.	12 ins.	60 lbs.	**$15.00**
24 ins.	12 ins.	70 lbs.	**17.00**

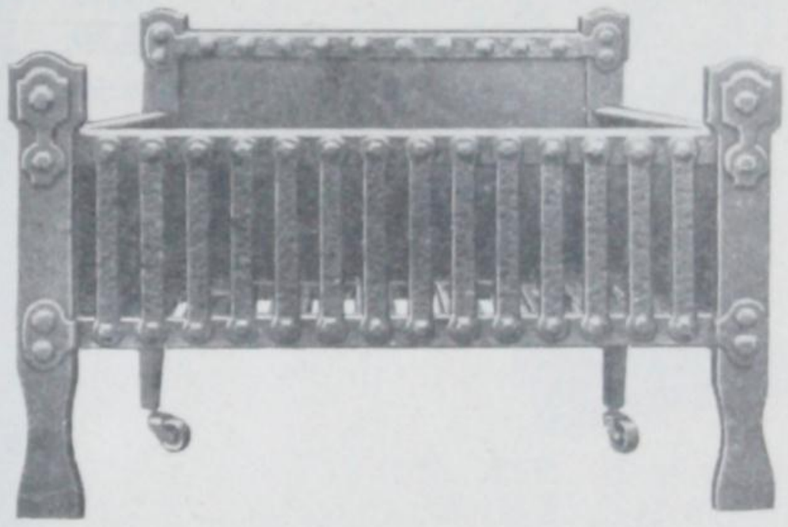

No. 249

No. 249—Hammered Antique Brass Finished Front

Width Front	Depth	Weight	Each
23 ins.	12½ ins.	70 lbs.	**$19.50**
26 ins.	12½ ins.	85 lbs.	**22.50**
29 ins.	12½ ins.	95 lbs.	**28.00**

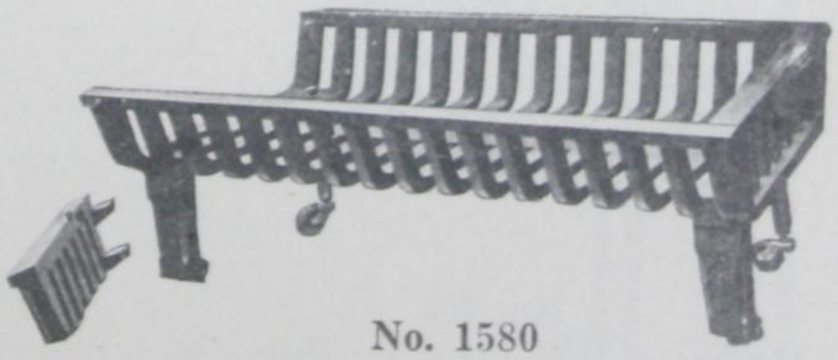

No. 1580

No. 1580—Black, supplied with ends that can be taken out

Width Front	Depth	Weight	Each
24 ins.	15 ins.	75 lbs.	**$14.00**
27 ins.	15 ins.	95 lbs.	**16.00**
30 ins.	15 ins.	120 lbs.	**19.50**

Packing Charged Extra at Cost.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

COAL HODS

IN BURNT ANTIQUE BRASS, SWEDISH OR BLACK

No. 192. Helmet Coal Hod.
12½in. Opening.
Solid Brass. Polished **$12.60**
Antique Finish. **$13.50**

No. **277** Solid Brass.
Hand Wrought throughout.
15″ Diameter at top.
Finished Antique. **$21.00**

No. 200

No. 200

Height	Finish	Price
16 ins.	Antique Brass	**$21.00**

Shipping weight 25 lbs.

No. 202

Height	Finish	Price
12½ ins.	Antique Brass	**$21.00**

Shipping weight 20 lbs.

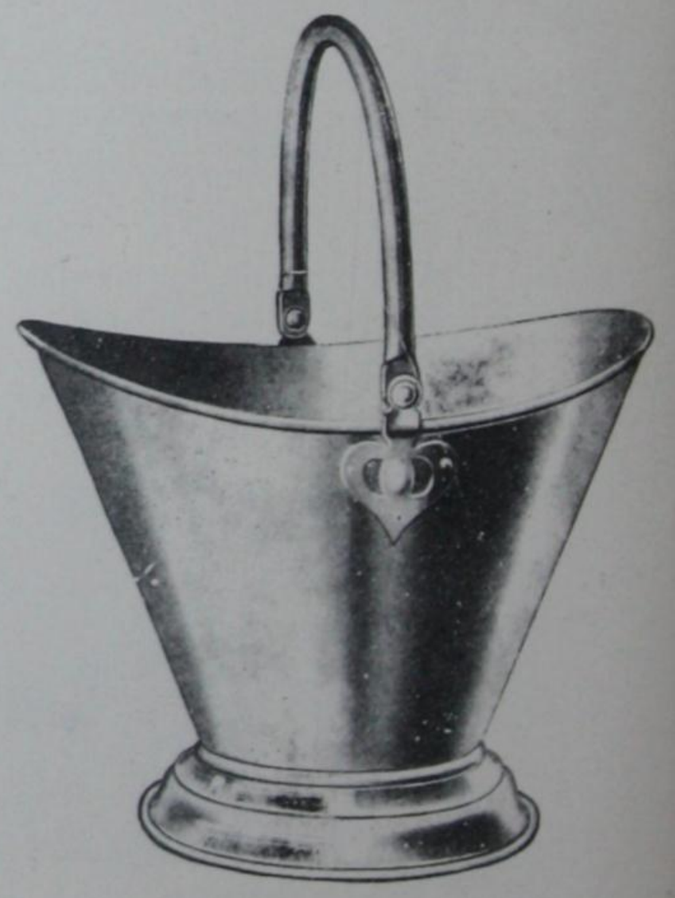

No. **261.** Waterloo Coal Hod.
15in. Opening.
Solid Brass. Finished Bright.
Price
$12.60

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FIRE SETS

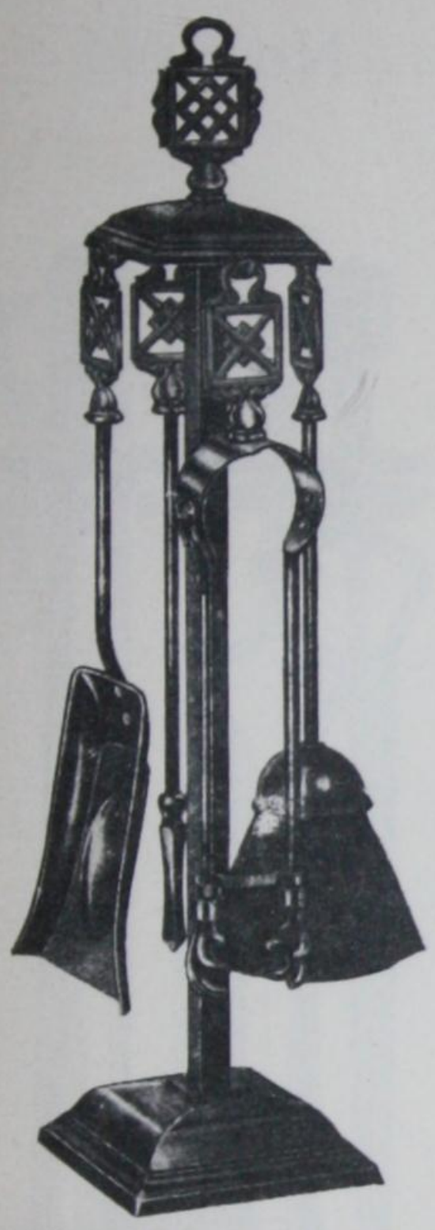

No **918** Height 21"
Heavy Square Base & Pillar
Finished Antique Brass on Steel

Per Set, $5.40

903

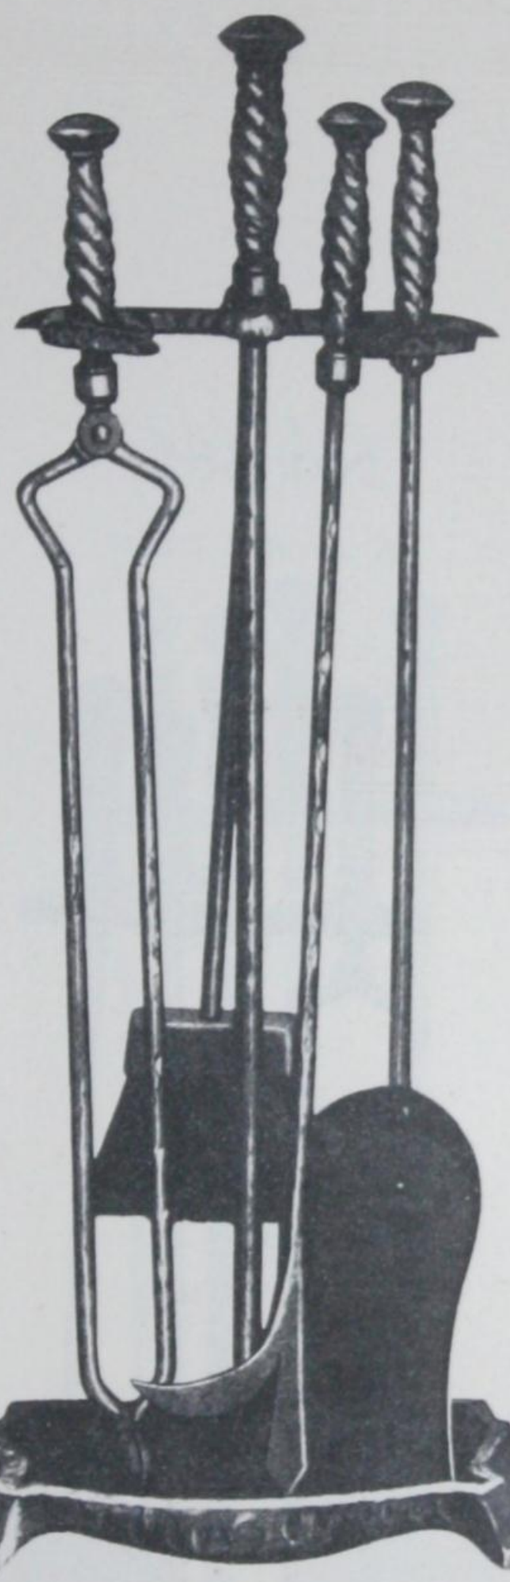

30 INCHES HIGH

Hammered
Antique Brass
Finished

Height 30 ins.
Weight 25 lbs.

Per Set, $21.60

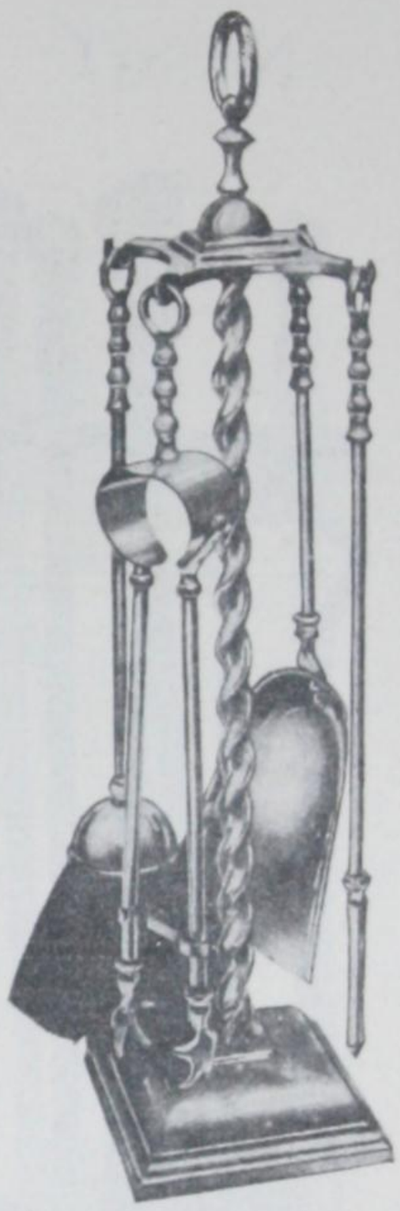

No. **869** Height 22½"
Solid Brass Hanging
Fireside Set

	Set
Polished Brass	**$14.00**
Antique Brass	**$13.80**

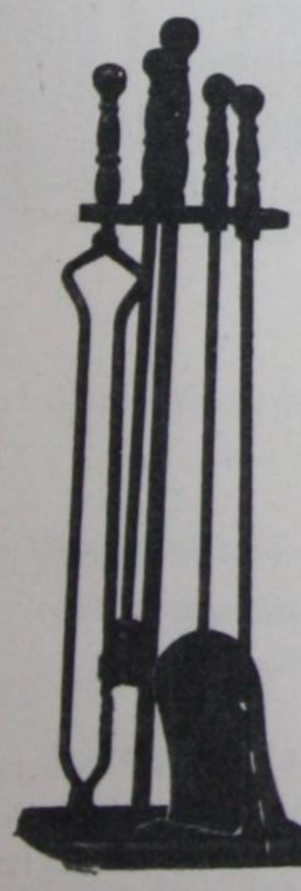

No. 846—Dead Black

Height	Weight	Set
30 ins.	22 lbs.	**$18.00**

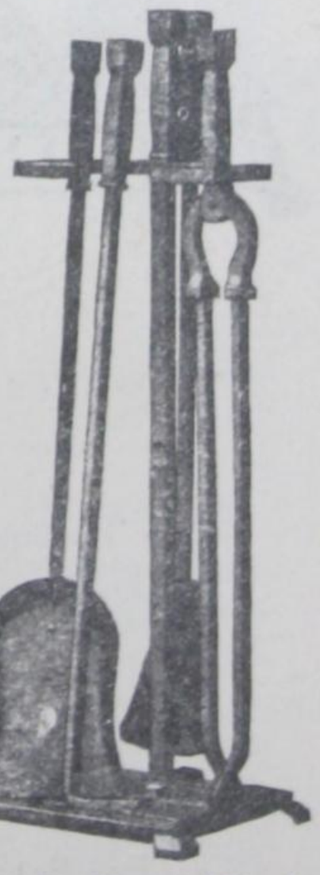

No. 845 Dead Black

Height	Weight	Set
27½ ins.	20 lbs.	**$18.00**

Packing Charged Extra at Cost.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

IRON FIRE SETS

No. 831

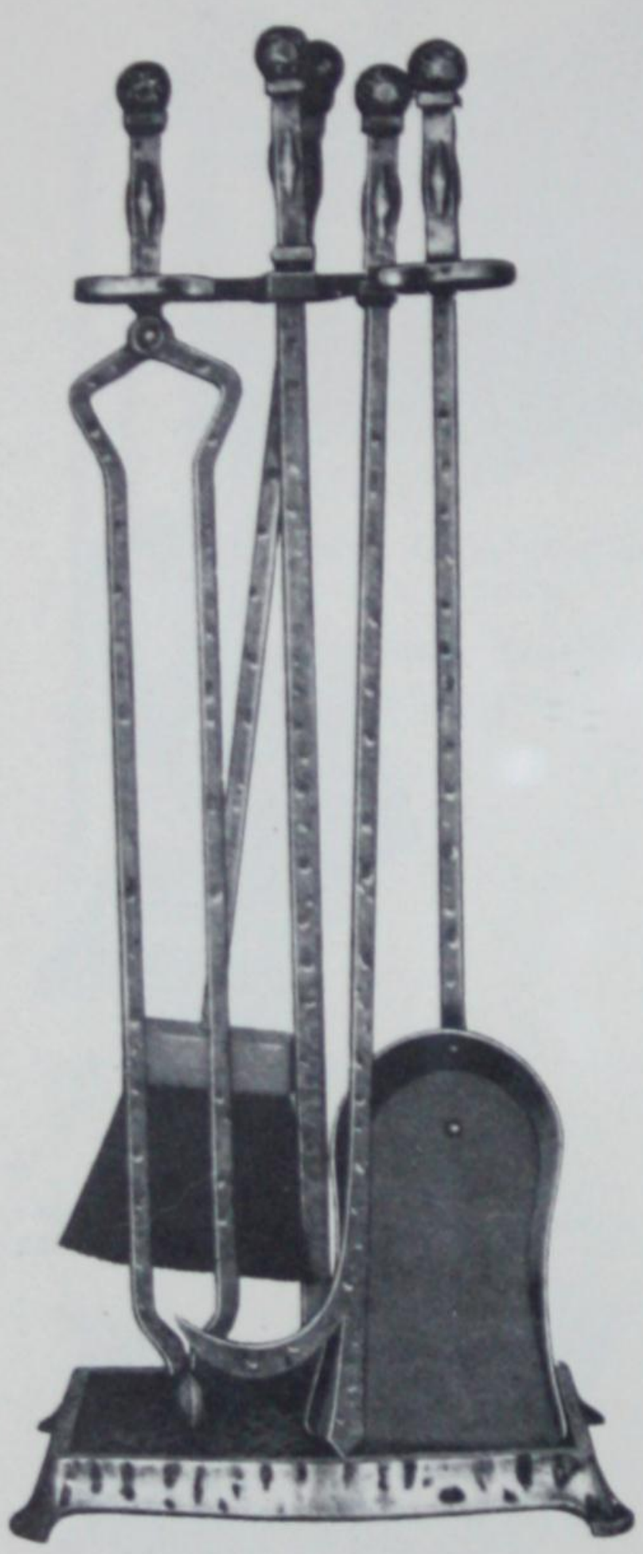

30 INCHES HIGH

No. 831

Hammered Antique Brass Finished

Height 30 ins.
Weight 25 lbs.

Per Set, $21.60

Fenders 661 and 662

Wrought Iron to match

No. 863

26 INCHES HIGH

No. 863 Dead Black with Antique Brass Handles

Height	Weight	Set
27½ ins.	20 lbs.	**$12.60**

Packing Charged Extra at Cost.

No. 851

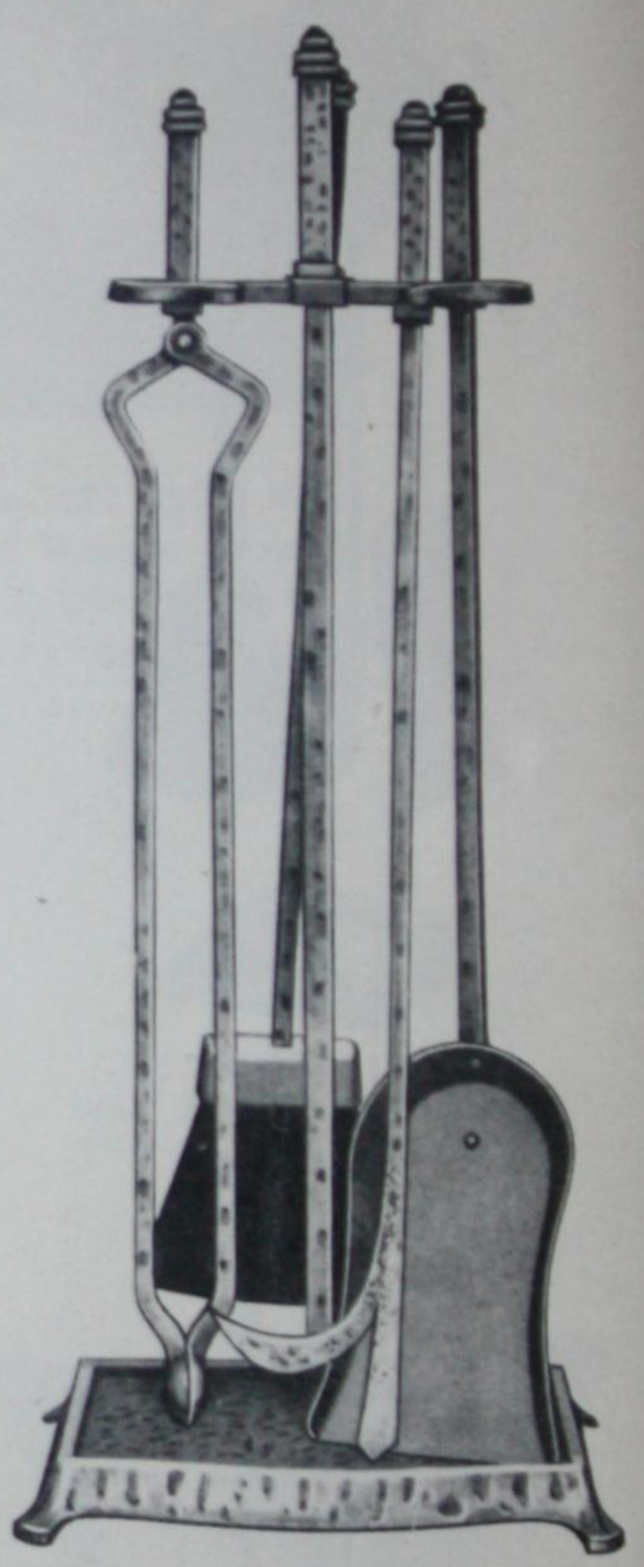

30 INCHES HIGH

No. 851

Hammered Antique Brass Finished

Height 30 ins.
Weight 25 lbs.

Per Set. $22.00

Fenders 661 and 662

Wrought Iron to match

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

IRON
FIRE SETS

No. 904

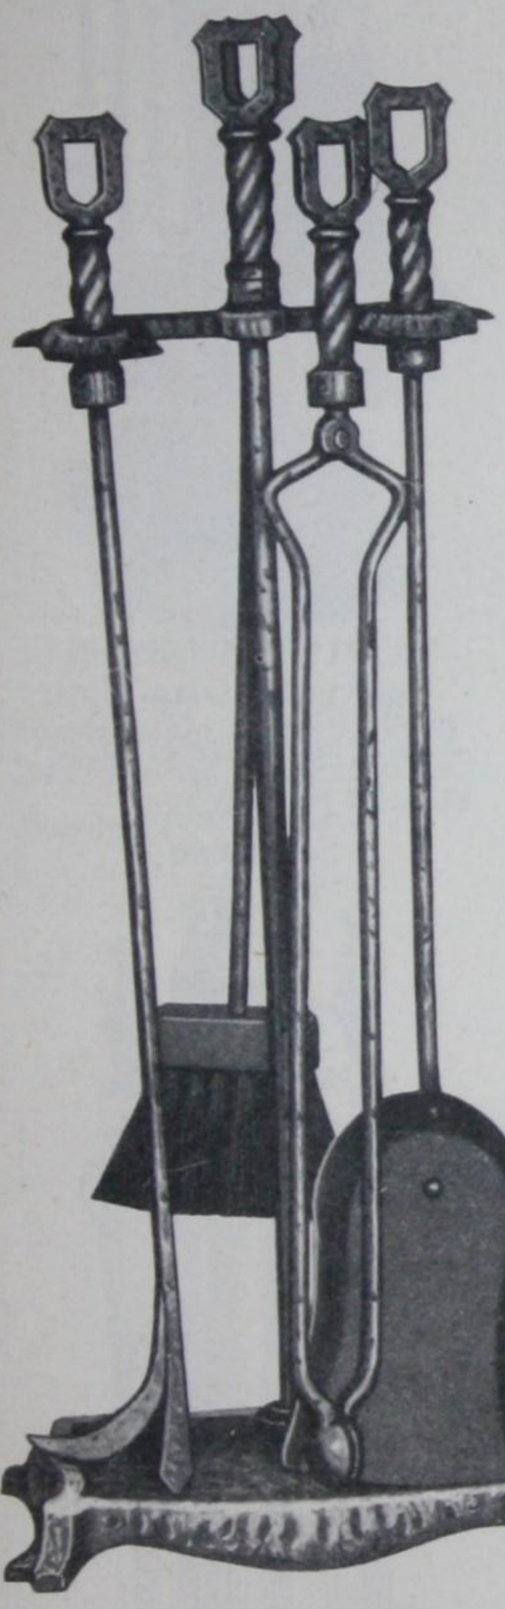

30 INCHES HIGH

Hammered Antique Brass Finished

Height 30 ins.
Weight 25 lbs.

Per Set, $21.60

No. 847

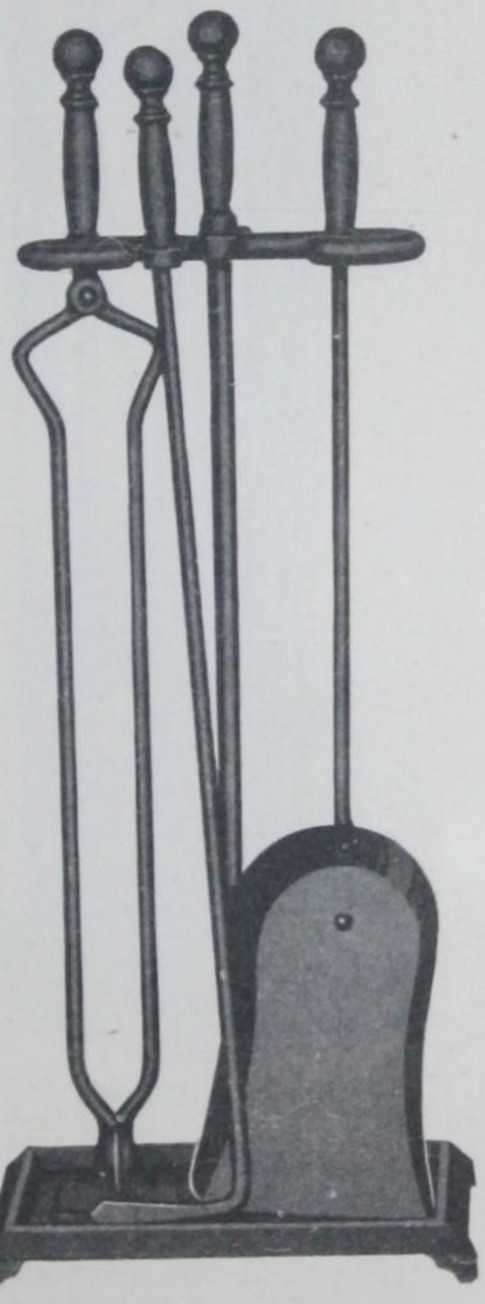

25 INCHES HIGH

No. 847—Dead Black

Height	Weight	Set
25 ins.	16 lbs.	**$10.40**

No. 914

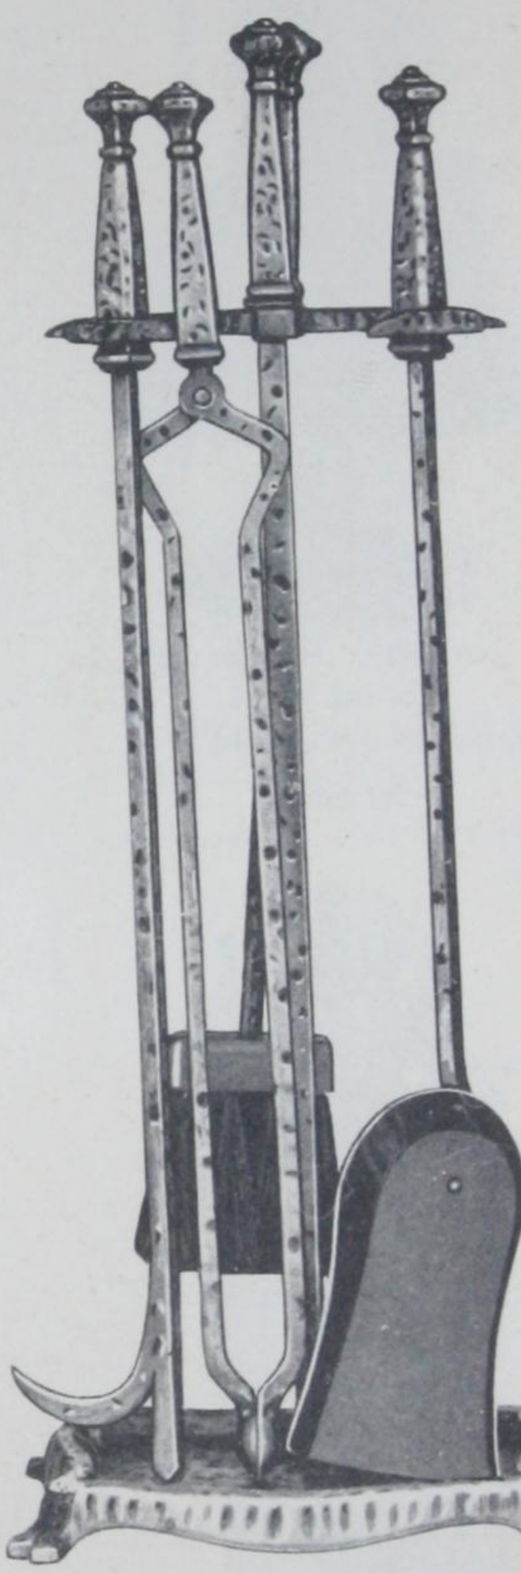

30 INCHES HIGH

Hammered Antique Brass Finished

Height 30 ins.
Weight 25 lbs.

Per Set, $21.60

Packing Charged Extra at Cost.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FIRE SETS

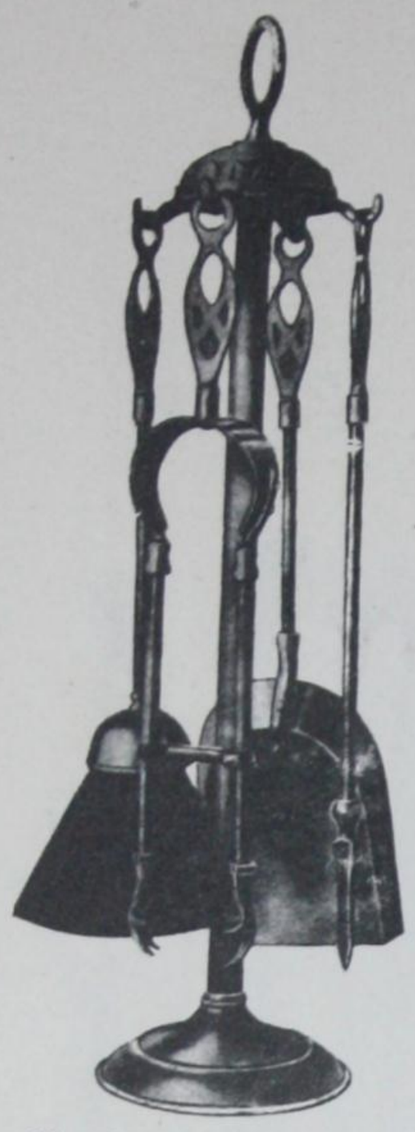

No. **905** Height 22″
Solid Brass
Finished Polished Brass

Set **$9.80**

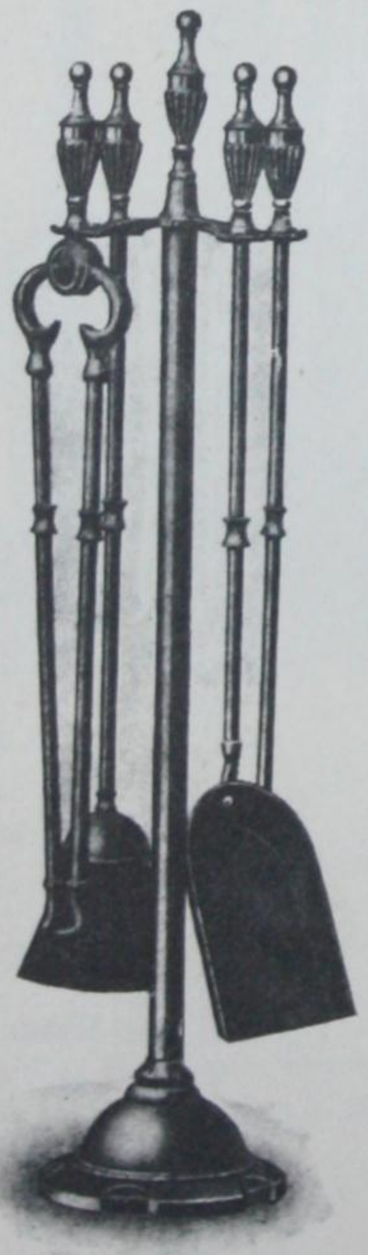

No **43** Height 28″
Solid Brass Throughout
Heavy Cast Base

Antique Brass Set **$25.60**

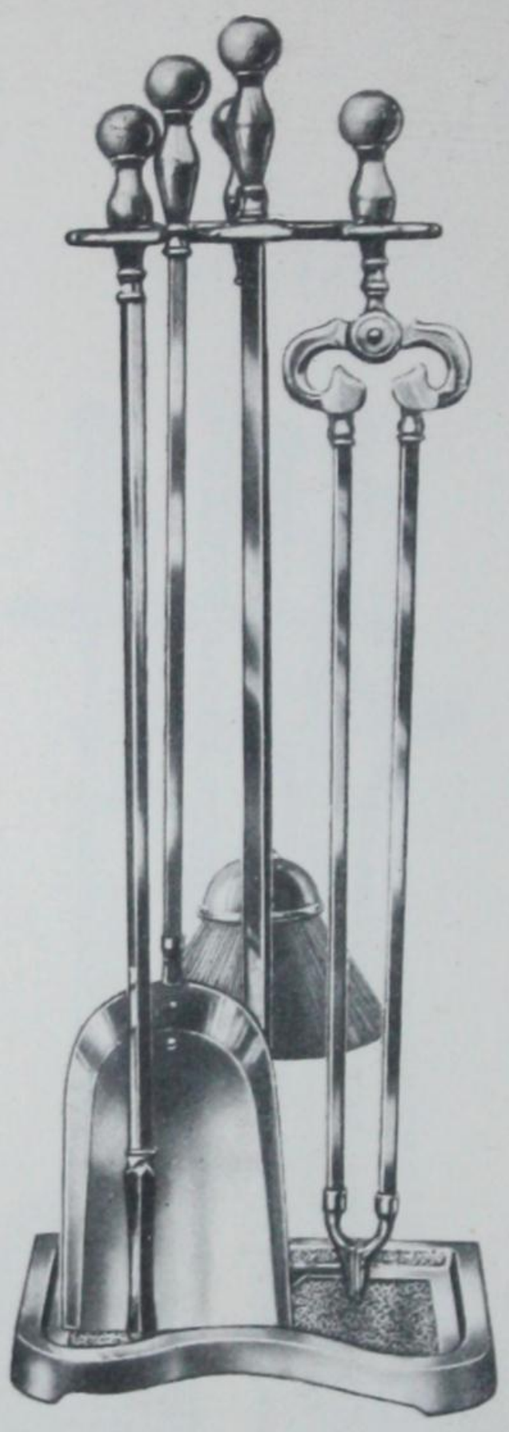

Set **$20.00**

No. **5A.** Solid Brass Fireplace Set. Height 27½ in. Finished Bright Brass with Dull Black Base. An exceptionally heavy well-made piece.

Packing Charged Extra at Cost.

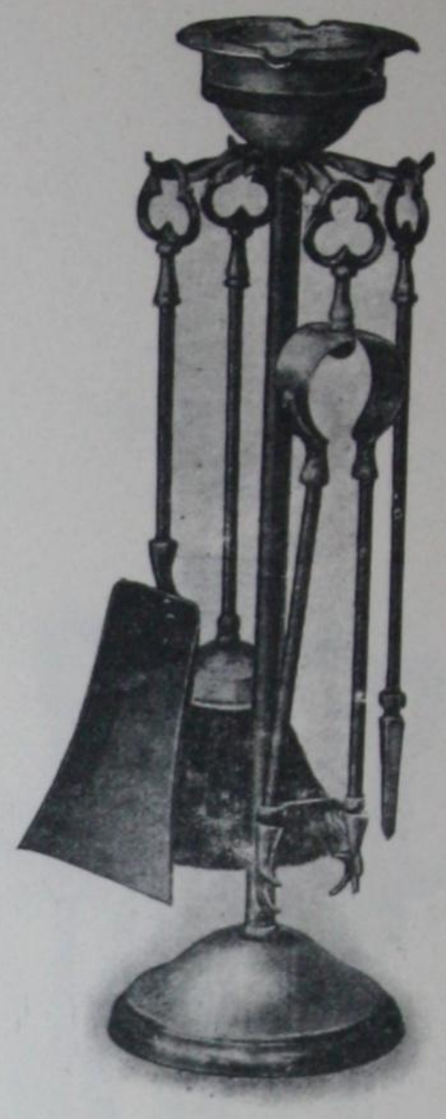

No. **911** Height 19½″
Detachable Glass Liner
Replacements may always be obtained Solid Brass.
Finished Polished Brass

Set, $9.80

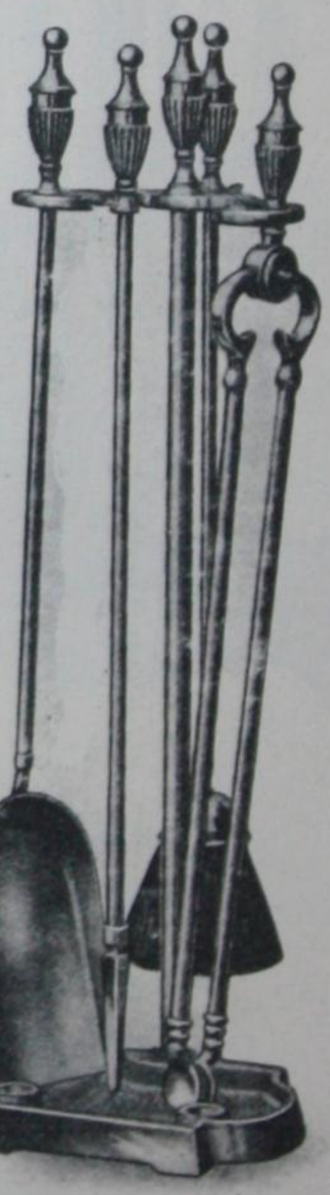

No. **38** Height 26″
Solid Brass Throughout
Implements of Exceptional Strength.
Finished Polished Brass

Set **$24.90**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FIRE SETS

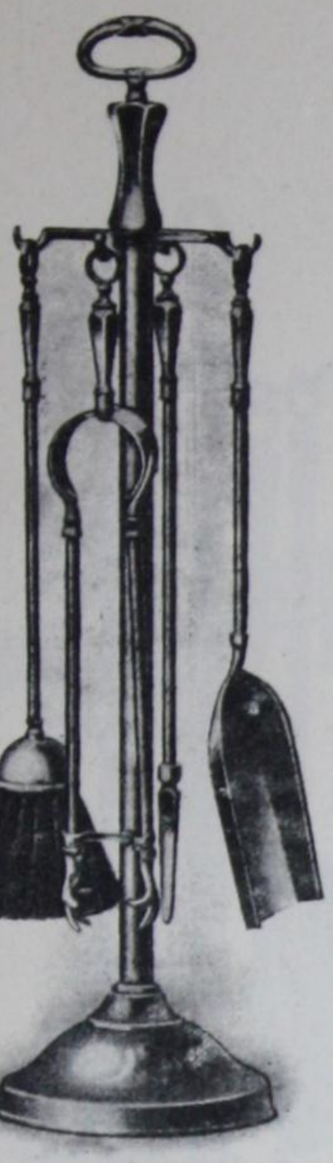

No. **37** Height 26"
Solid Brass Heavy and Massive.
Finished Polished Brass

Set **$19.60**

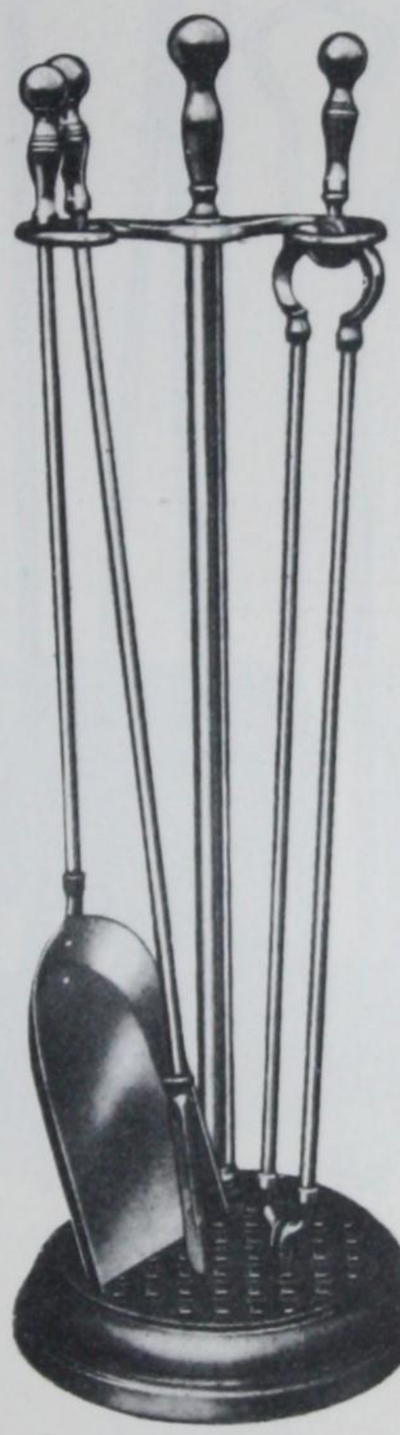

No. **7.** Solid Brass Fireplace Set with heavy Cast Iron Base. Height 25in. Finished Bright Brass with Dull Black Base.

Set $14.00

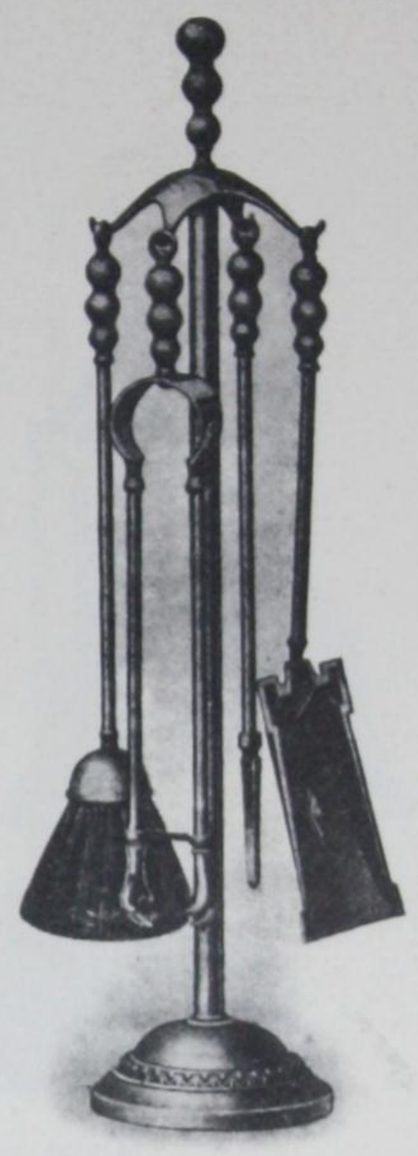

No. **40/3108** Height 29"
Solid Brass.

Antique Brass **Set $23.80**

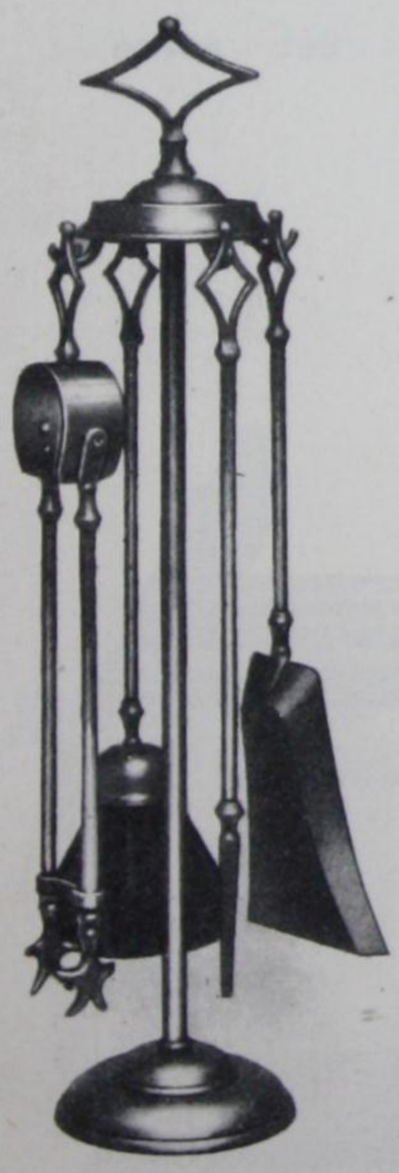

No. **862.** Solid Brass Hanging Fireside Set. Height 22in. Finished Bright Brass.

Set $9.00

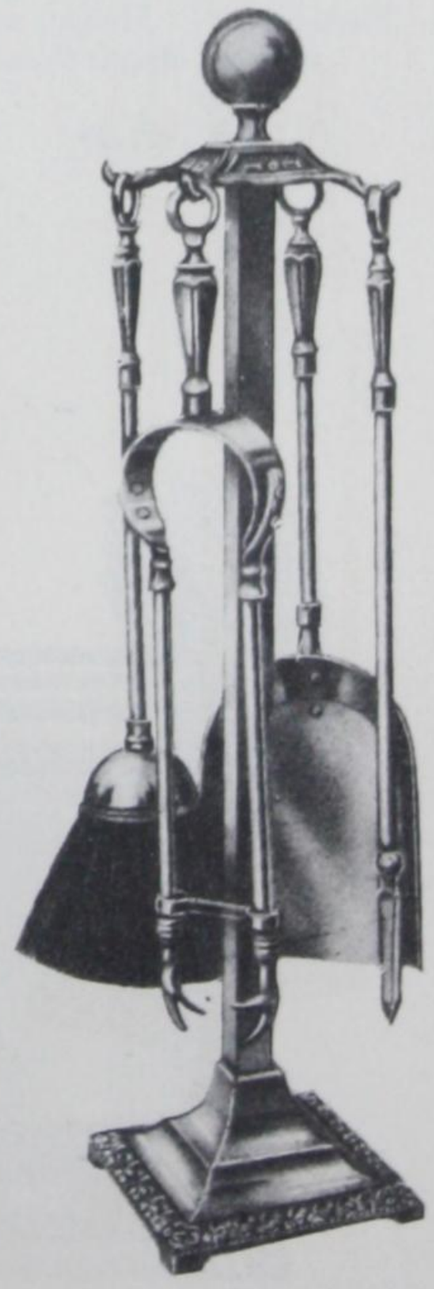

No. **874.** Solid Brass Hanging Fireside Set. Height 23in. Finished Bright Brass.

Set $15.00

Packing Charged Extra at Cost.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FIRE SETS

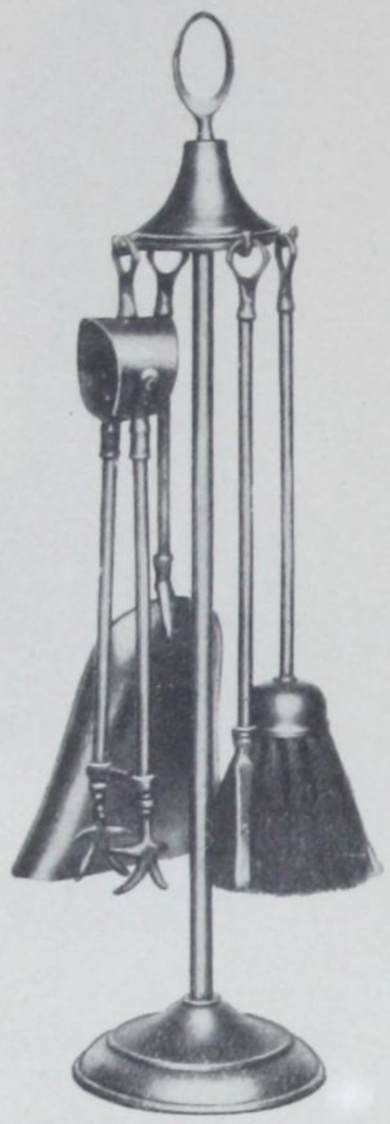

No. 847*E* Solid Brass Hanging Fireside Set. Height 21½in. Finished Bright Brass.

Set $7.00

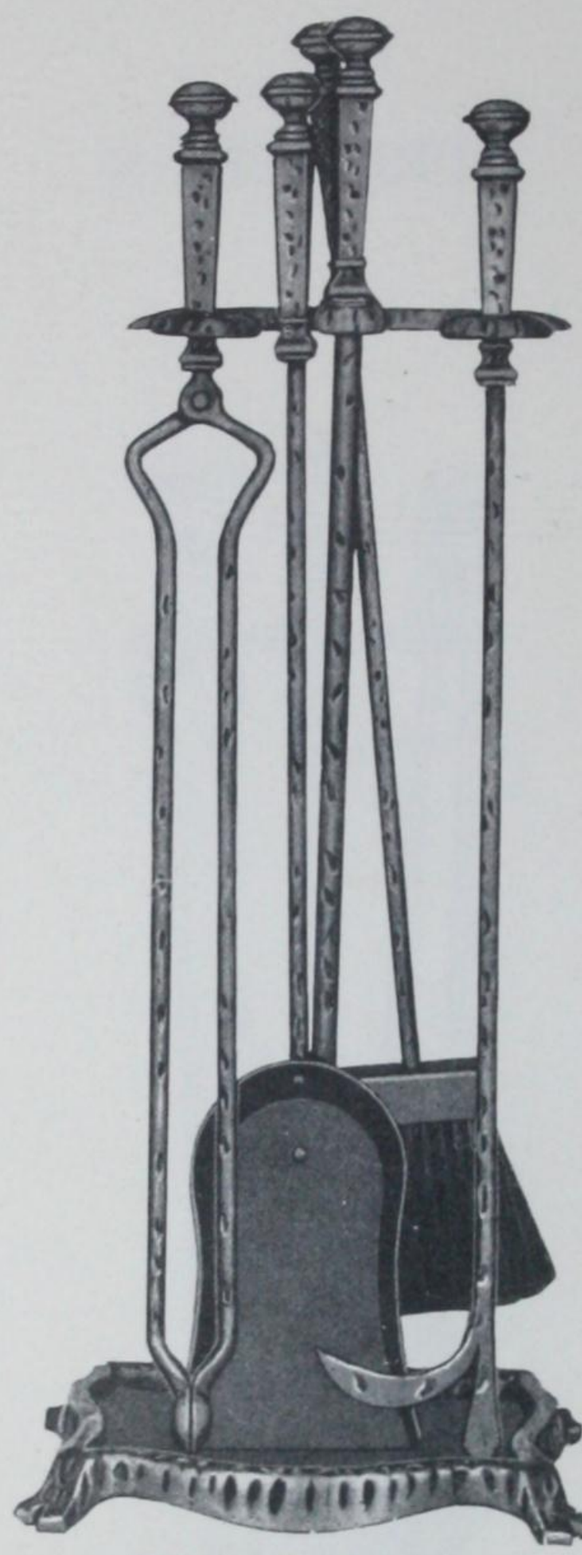

Set 913 $21.60

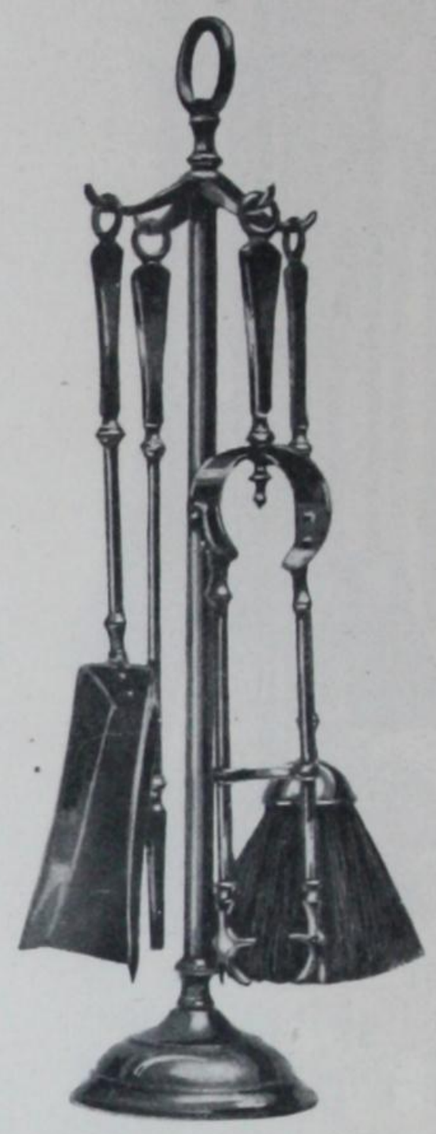

No. 842. Solid Brass Hanging Fireside Set. Height 23in. Finished Bright Brass.

Set $14.00

BRASS FENDERS

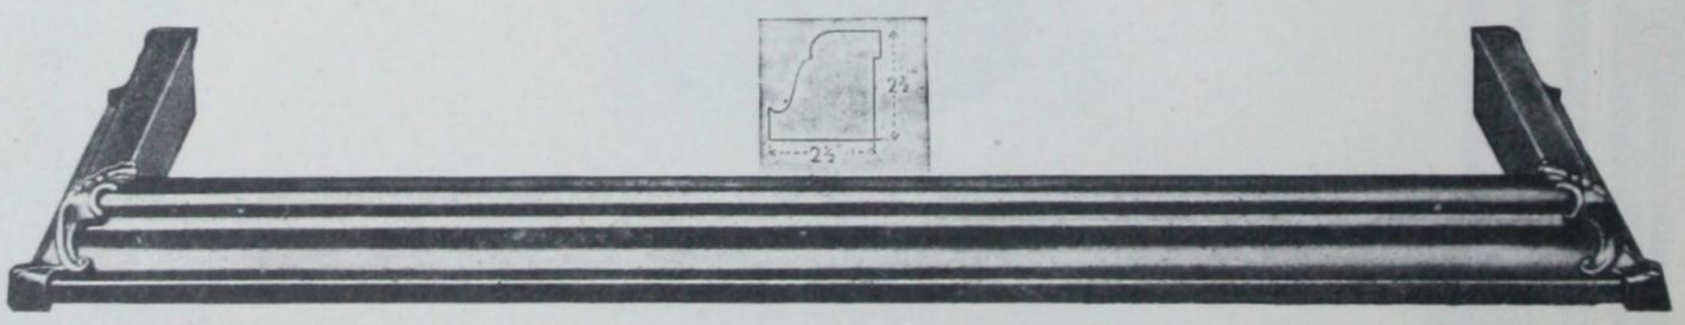

No. **1154**. Solid Brass. Cast Corners. Finished Plain B., **Each $18.20**

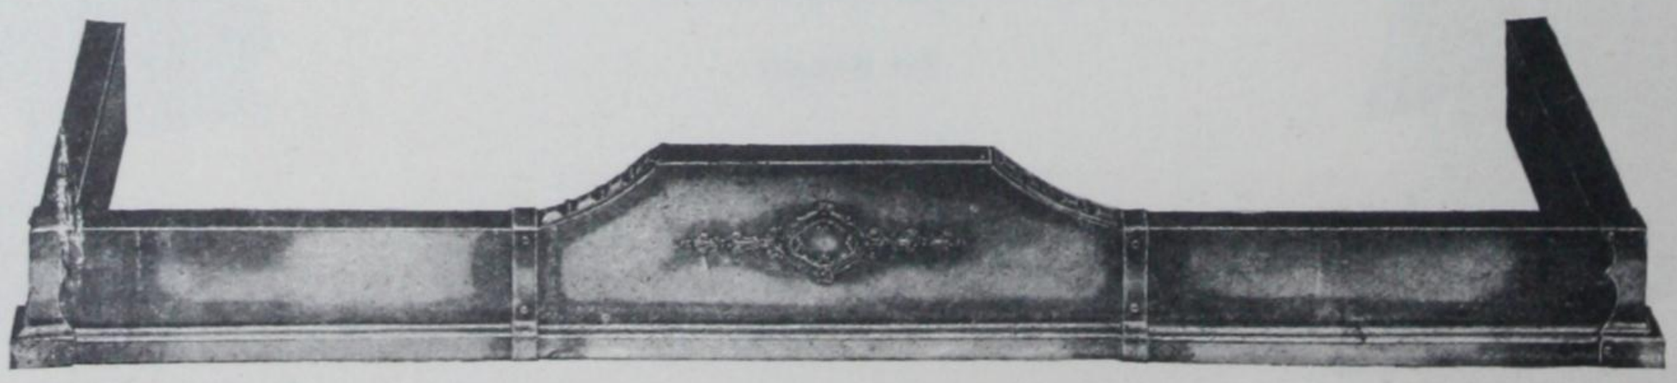

No. **544**. 6″ High in Centre. Cast Corners. Highly Finished Antique Brassed. **Each $16.80**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CAST IRON ANDIRONS

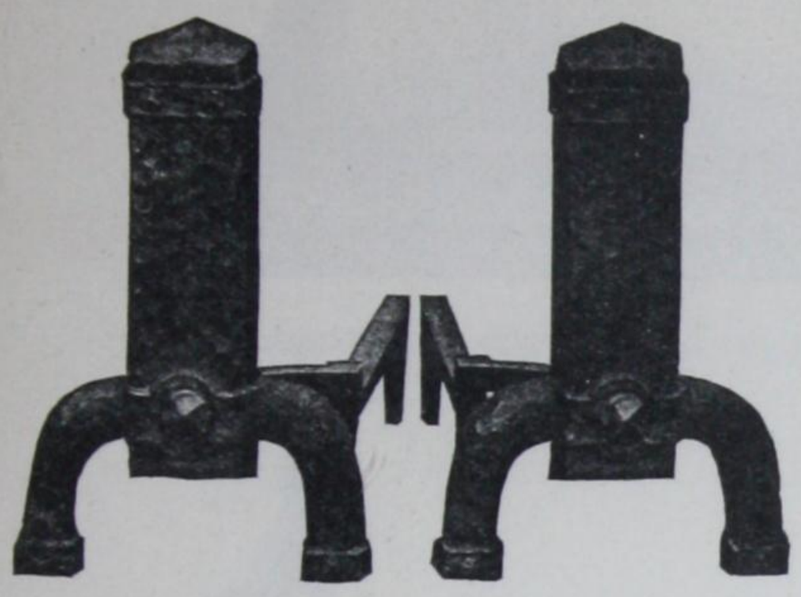

No. 3500—Cast Iron, Antique Brass Finished

Height	Shipping Weight	Pair
14 ins.	20 lbs.	**$16.00**

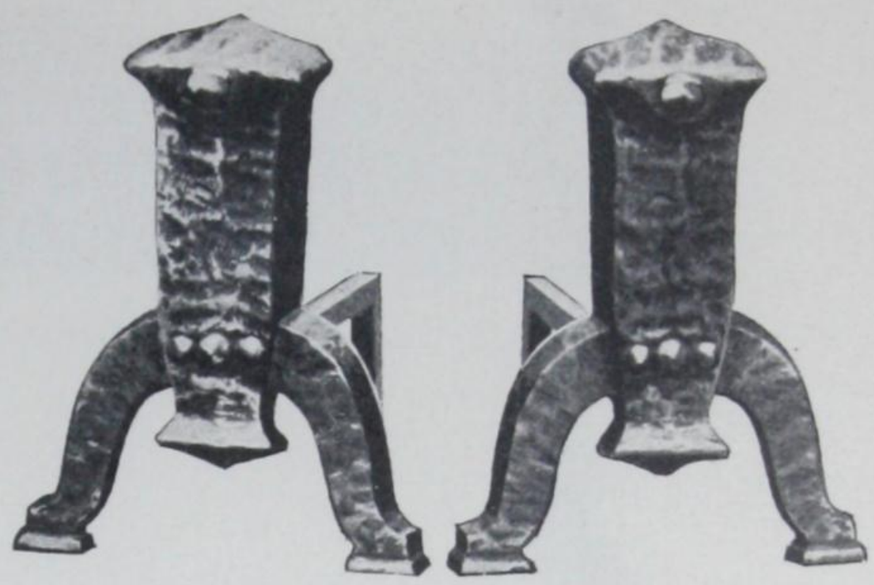

No. 3513S

Antique Brass Finished

Height	Shipping Weight	Pair
12¼ ins.	20 lbs.	**$12.50**

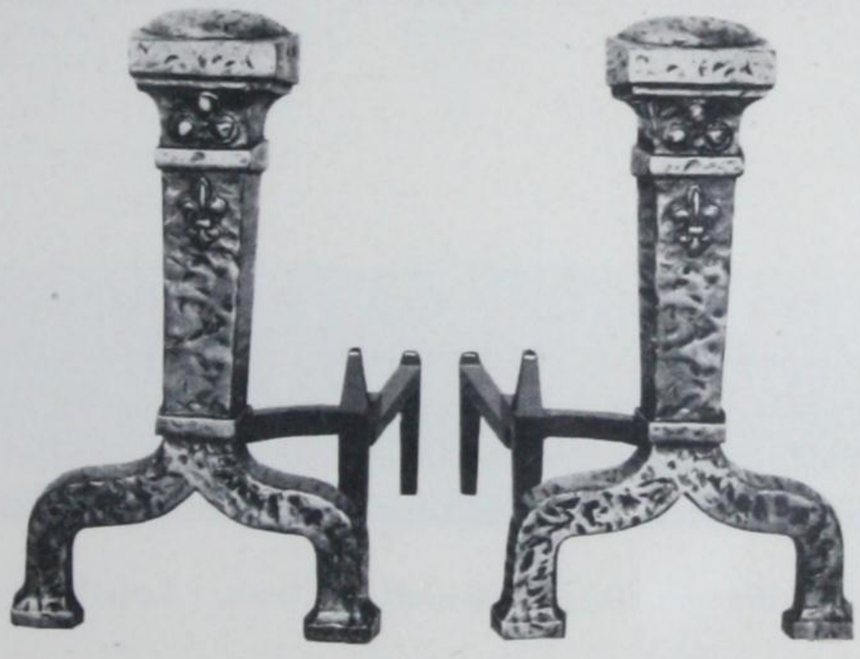

No. 3547

17 INCHES HIGH

Pair $12.50

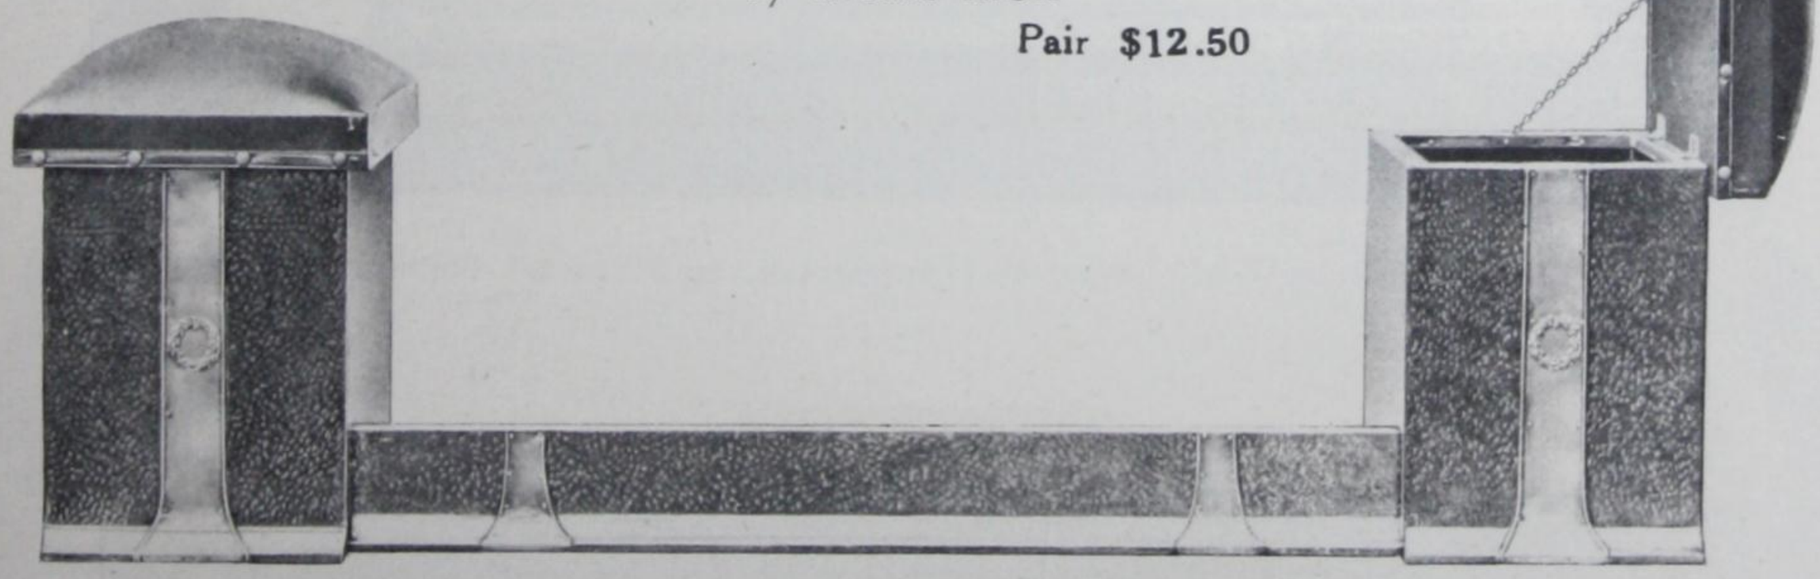

No. **2050**. Adjustable. To fit practically any Hearth. Solid Brass on Plywood. Upholstered Seats in Rexine. One Box has large Iron Liner for Coal, the other is Baize lined. Finished Old Brass.

Each **$40.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FENDERS

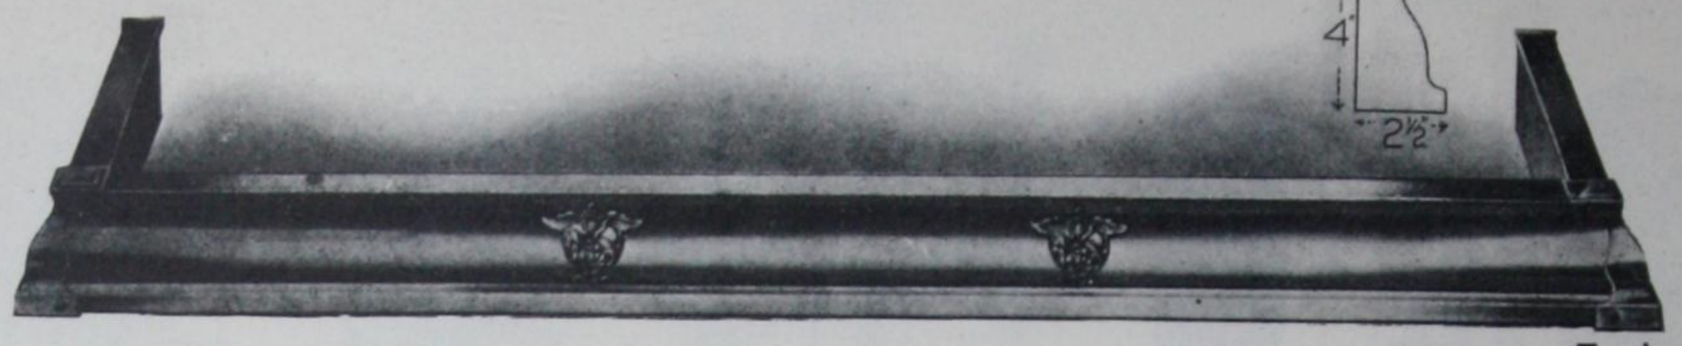

No. 8811. Solid Brass Kerb. Finished Bright. Length 60in. overall. Can easily be shortened. **Each $24.00**

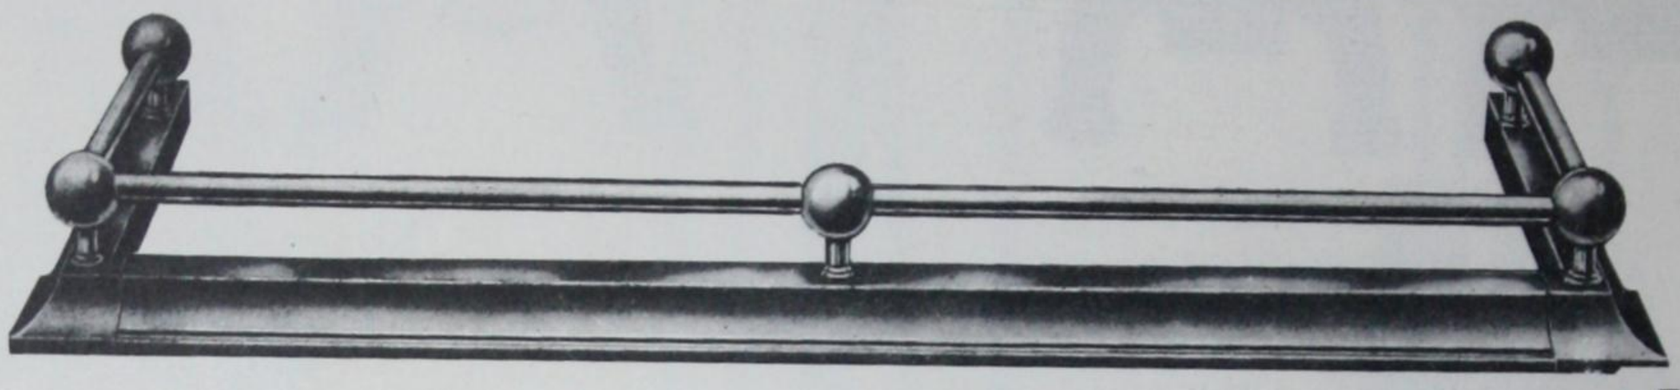

No. 1615. Solid Brass Kerb. ⅞in. Round Rail. Length 60in. overall. Finished Bright Brass. Heavy Base and Cast Corners. **Each $ 28.00**

No. 1616. As above, but lighter. ⅝in. Round Rail. Length 60in. overall. Finished Bright Brass **15.00**

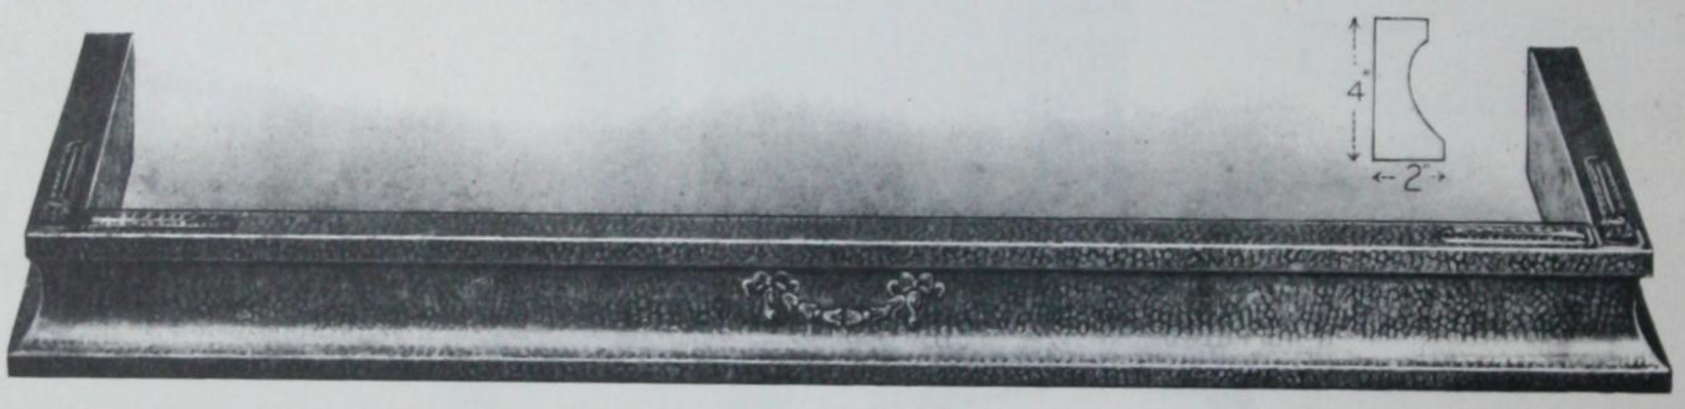

No. 468. Solid Brass on Wood. Finished Old Brass. Length 60in. overall. **Each $ 14.00**

No. 2058. Solid Brass on Wood. Adjustable to fit practically any Fireplace. Finished Bright Brass **$22.00**

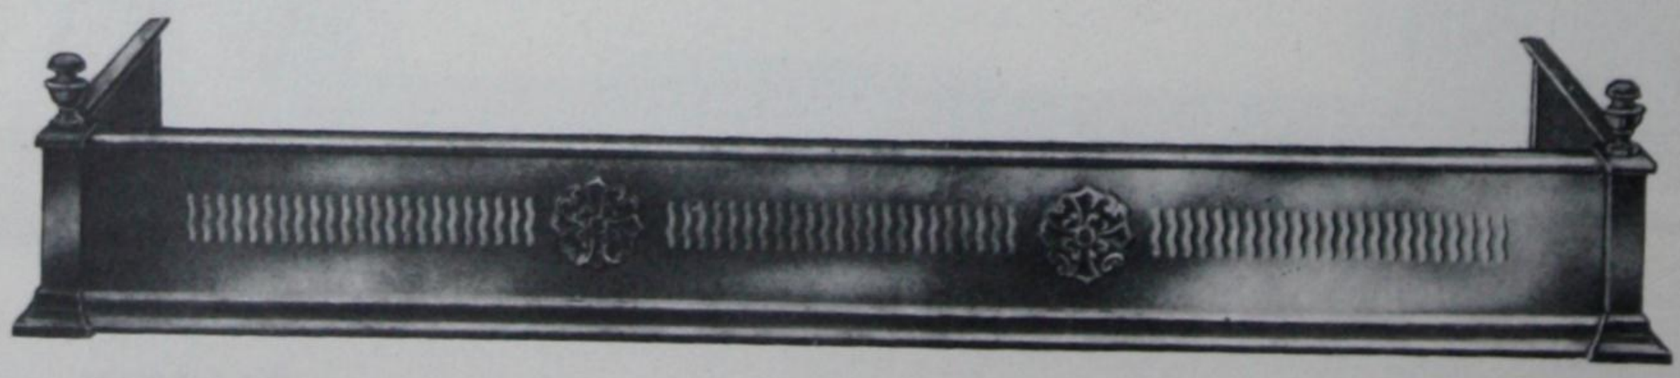

No. 1617. Solid Brass Pierced Kerb. Length 60in. overall. 6in. high. **Each $22.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FENDERS

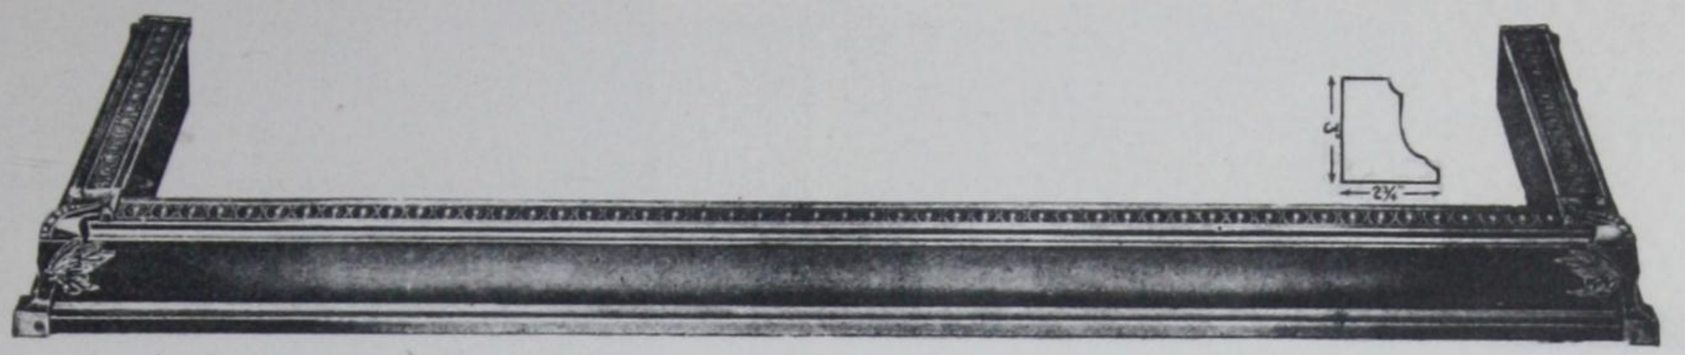

No. **8863**. Solid Brass. Tastefully Ornamented Finished — Each $25.60

No 661

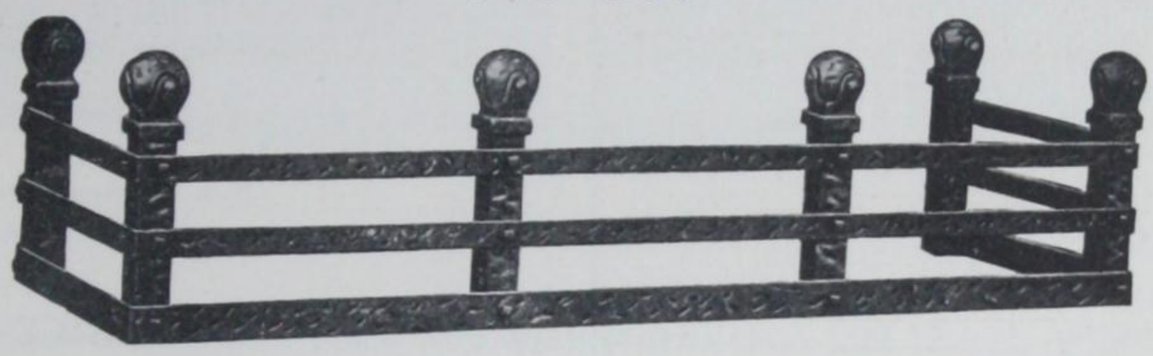

Width Over All Inches	Height Over All Inches	Depth Over All Inches	Each
54	11	14	$35.00

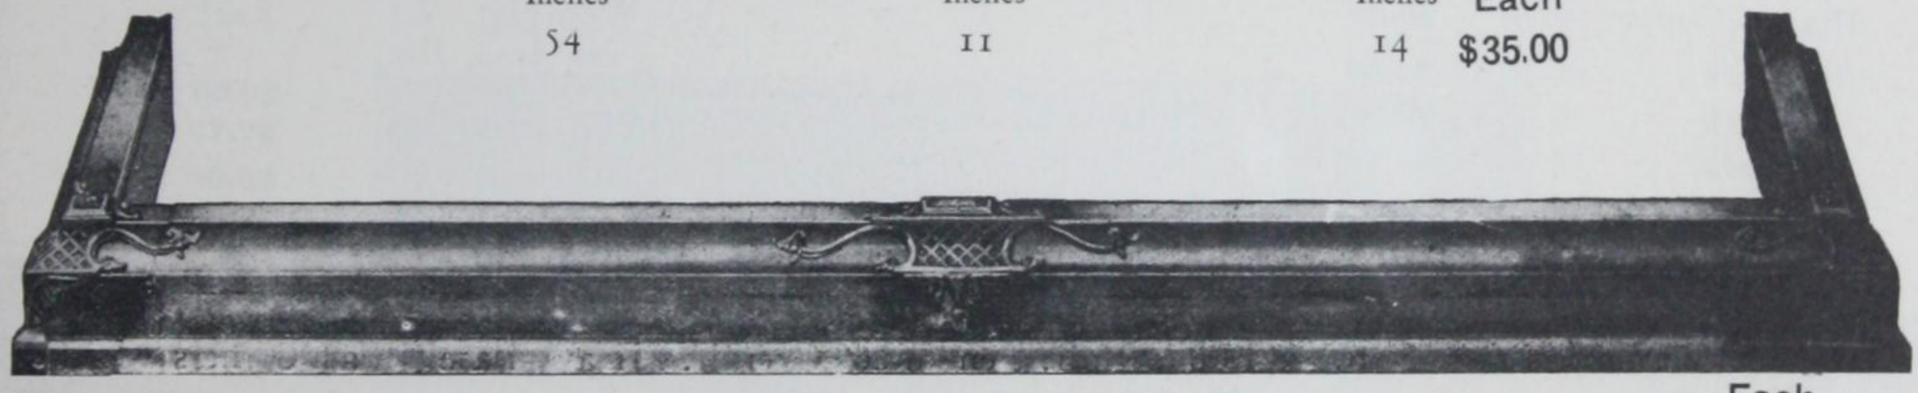

No. **8866**. Solid Brass. Cast Embellishments. Finished P.B., A.B. or Copper. — Each $35.90

No. 662

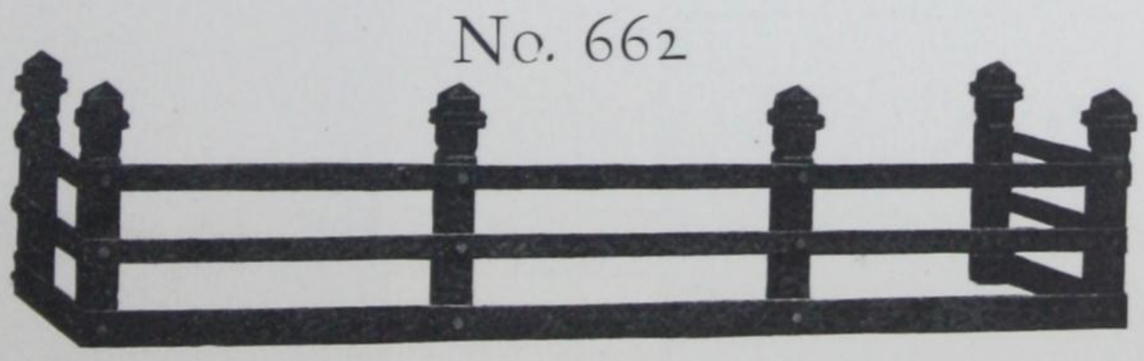

Width Over All Inches	Height Over All Inches	Depth Over All Inches	Each
54	11	14	$35.00

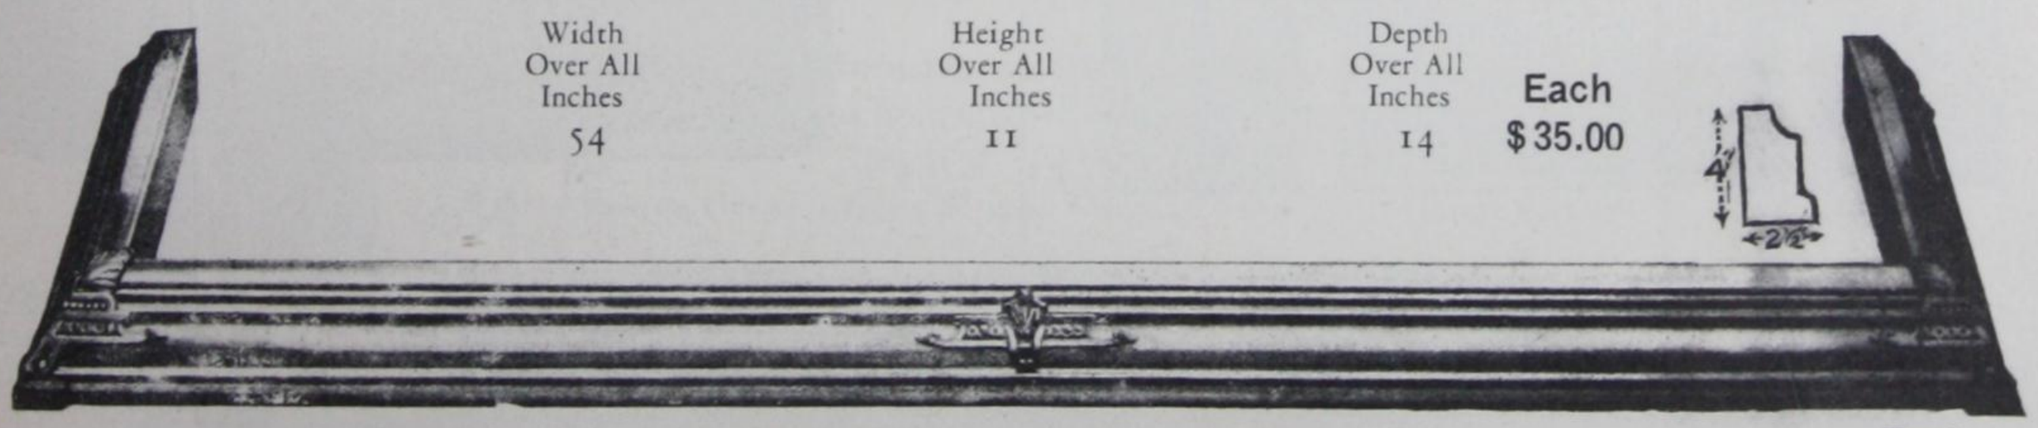

No. **8864**, Solid Brass. Cast Enrichments. Finished P B. — Each $22.80

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SPARK GUARDS

No. 2 Lined Spark Guards

Wire lined with fine mesh cloth.

PRICE LIST

	Wdh. ins.	Ht. ins.	Wt. Each lbs.	
Black & Copper	24	30	10	**$4.50**
Black & Copper	30	30	15	**$5.20**
Black & Copper	36	30		**$6.80**
All Black.....	24	30	10	**$4.50**
All Black.....	30	30	15	**$5.20**
All Black.....	36	30		**$6.80**

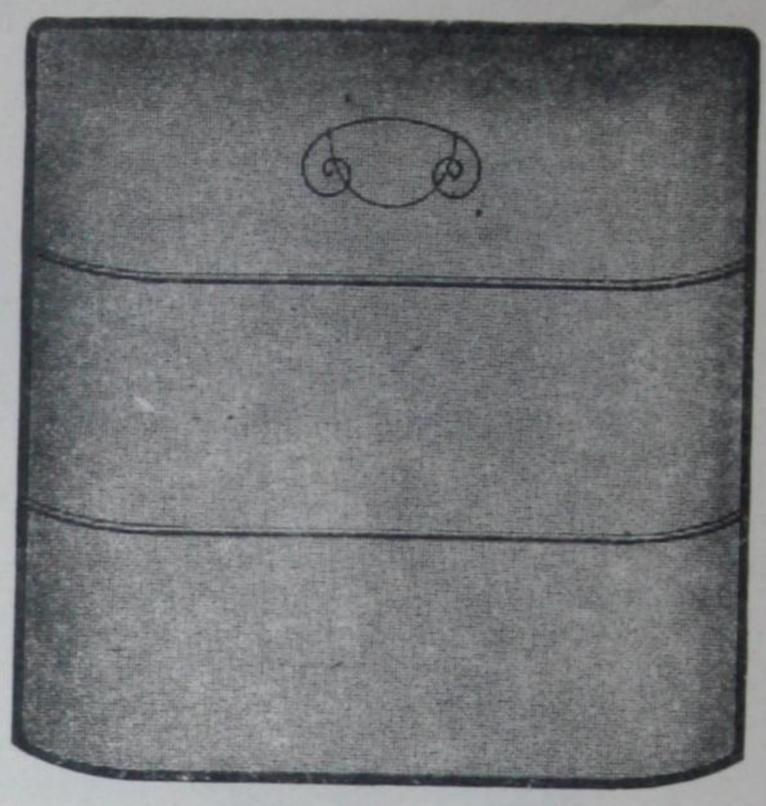

No. 11 Heavy Boston Guards

6 x 6 mesh No. 20 gauge wire with extra heavy frame

PRICE LIST

All Black—

Wdh. ins.	Hgt. ins.	Ship. Wt. lbs.	Each
24	30	15	**$6.60**
30	30	20	**$7.70**
36	30		**$9.00**

Note.—Above guards can be made any special size, special from factory.

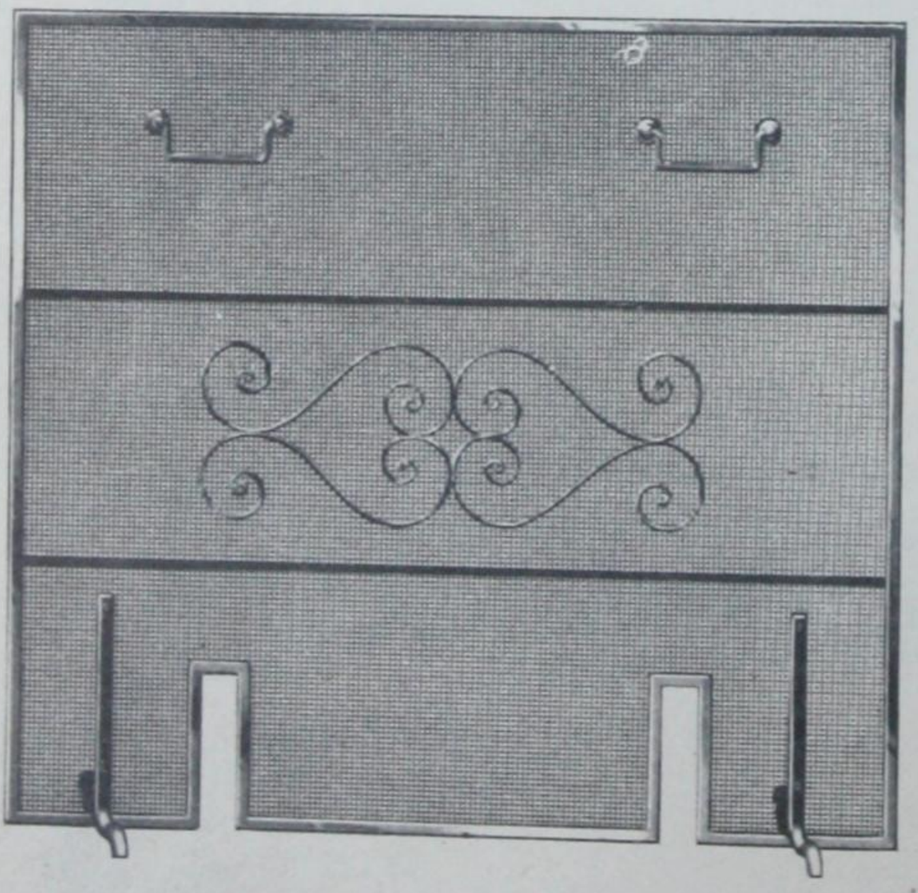

No. 22

3/8-inch square brass frame, black 6-mesh cloth, brass handles and scrolls. Made with or without slots for andirons. Can be made in special sizes.

Width, Inches	Height, Inches	Each
31	31	**$24.00**

No. 3B

Heavy iron rod frame, welded joints, 6-mesh, 21-gauge, wire cloth, brass handles and scrolls. Fitted with heavy brass bands. Velvet black "baked-on" finish.

Width Inches	Height Inches	Depth Inches	Each
31	31	6	**$20.40**
37	31	7	**$23.40**

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

FOLDING SCREENS

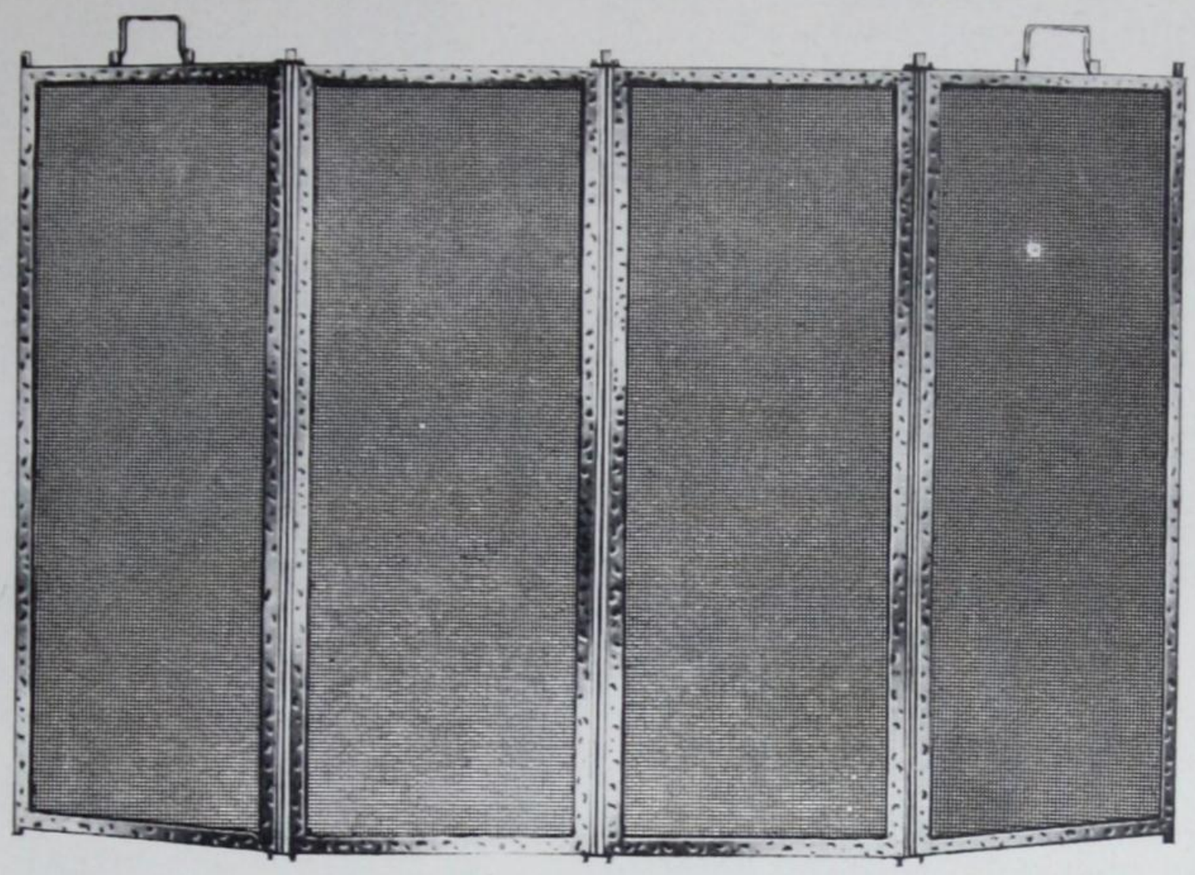

No. 2427

—Hammered Metal Frame

Antique brass finish, black wire mesh centres, four-fold 12-inch each.

PRICE LIST

No. 2427—Antique Brass, height 30 ins., weight 20 lbs. . . . . Each **$21.50**

Companion Kerb

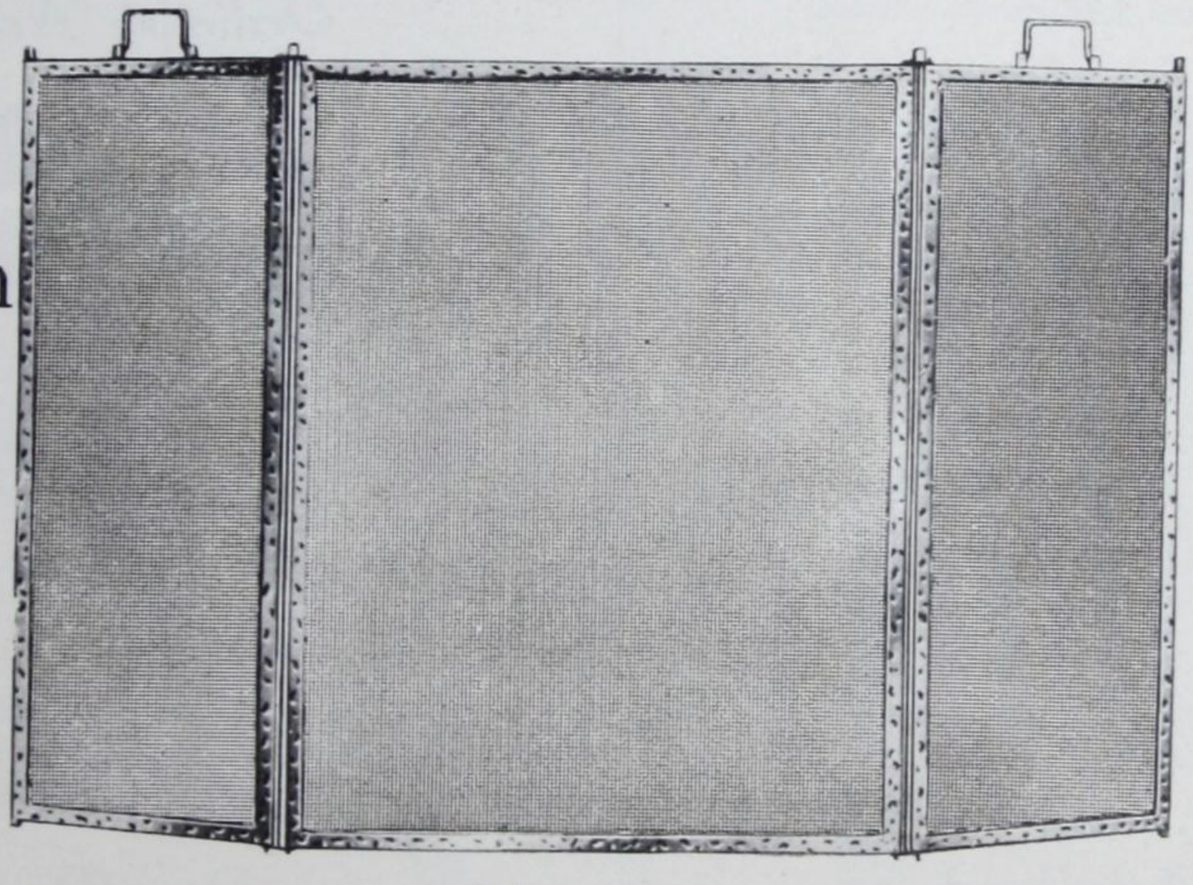

No. 2459

Hammered Metal Frame

Antique brass finish, black wire mesh centres,

PRICE LIST

Antique Brass, height 30 ins., weight 20 lbs. . . . . Each **$21.50**

Solid Brass

No. **1204**

Each **$70.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

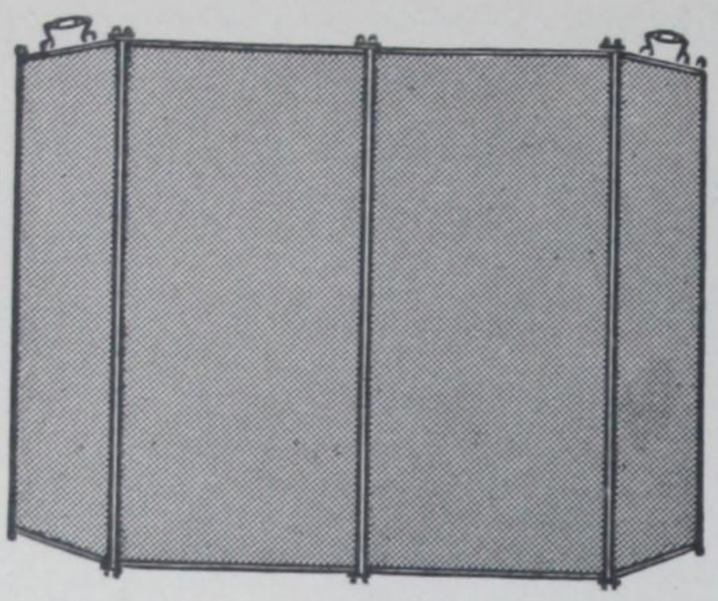

No. 2423

Black round iron frame. Mattress weave wire cloth. Brass handles and knobs. Welded corners. Each fold 12 in. wide and 30 in. high.

No. 2423—Black—Height 30 ins., weight 20 lbs. Each **$13.50**
No. 2423—Gilt—Height 30 ins., weight 20 lbs. Each **18.00**
Note.—Gilt is Dull Brass Color.

Clean-Out Door

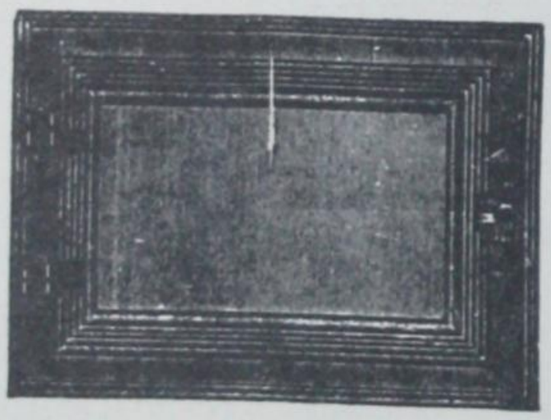

Size of Door	Each
6 x 8	**$1.80**
8 x 10	**2.60**
10 x 12	**3.20**

Automatic Ash-Dump

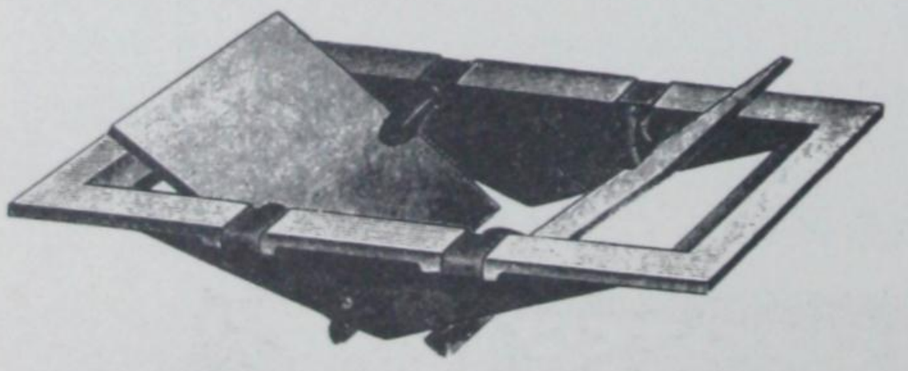

Size	Weight	Each
7x9 ins.	6 lbs.	**$2.00**

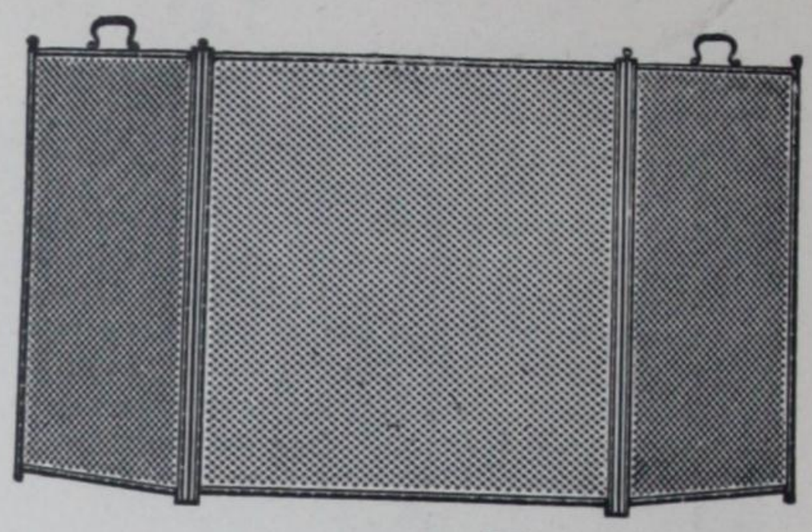

No. 2420 BT

Black round iron frame. Mattress weave wire cloth. Brass handles and knobs. Welded corners. Centre fold, 24 in.; wings, 12 in.; heighth, 30 in.

BLACK Each **$13.50**

Ordinary Ash-Dump

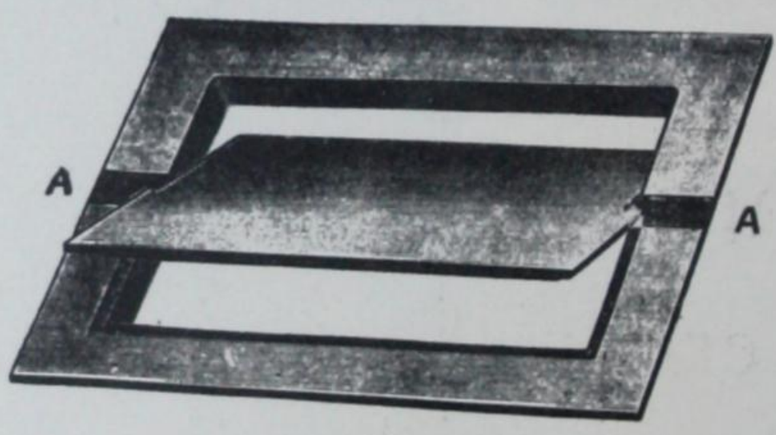

Size	Weight	Each
7x9 ins.	5 lbs.	**$1.50**

Dome Damper

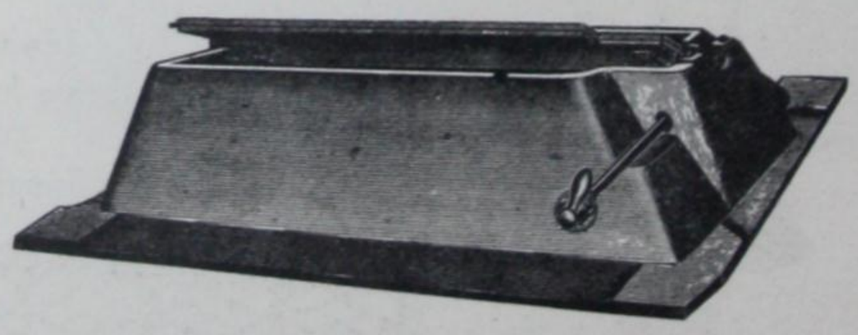

For Open Fireplace
Note—This is size inside Dome.

Width	Weight	Each
24 ins.	24 lbs.	**$12.00**
30 ins.	28 lbs.	**14.00**
36 ins.	32 lbs.	**16.00**

ELECTRIC FIREPLACES

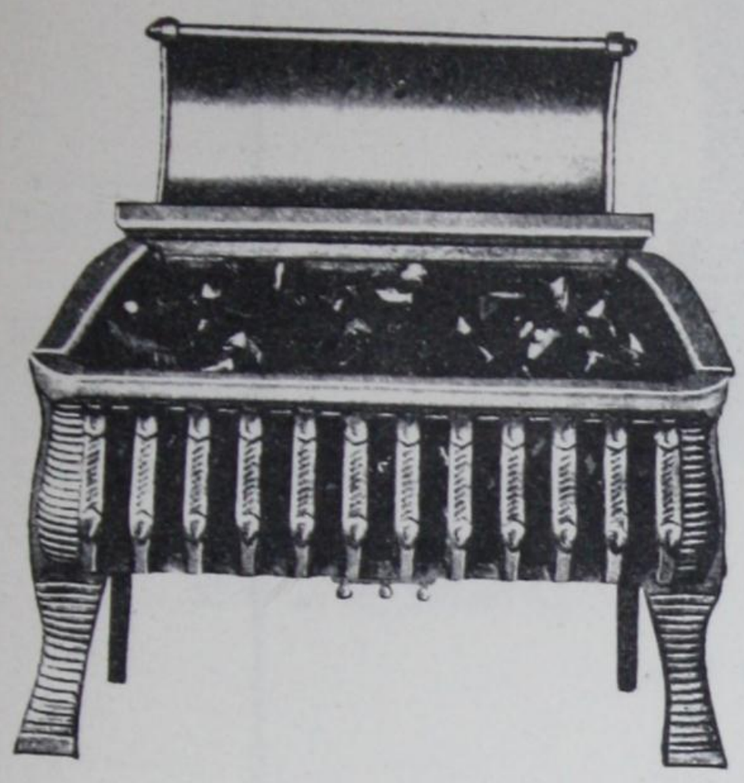

TRENT

Cat. No.	Watts	Width inches	Height inches	Depth inches	Price
1703	3000	18 Front 15 Back	19	15	$42.80

Plated any Standard Finish—Oxidized Brass, Oxidized Copper, Brushed Brass, Bronze.

THE HUMBER

Cat. No.	Watts	Width inches	Height inches	Depth inches	Price
1585	3000	22 Front 18½ Back	22	15½	$68.40

Plated any Standard Finish—Oxidized Brass, Oxidized Copper, Brushed Brass, Bronze.

National Electric Fires are made in designs to harmonize with any type of mantle or hearth.

ADAM

Cat. No.	Watts	Width inches	Height inches	Depth inches	Price
1555	3000	30 Front 18½ Back	24	19½	$102.60

Plated any Standard Finish—Oxidized Brass, Oxidized Copper, Brushed Brass, Bronze.

There is nothing more cheerful on chilly evenings than a coal fire. The Adam Period Electric Fire shown above gives this cheerful effect by the simple turn of a switch. By the turn of another switch healthful heat can be had without dust, smoke or fumes to ruin draperies or discolor walls.

Can anything be simpler or more convenient? And yet very beautiful.

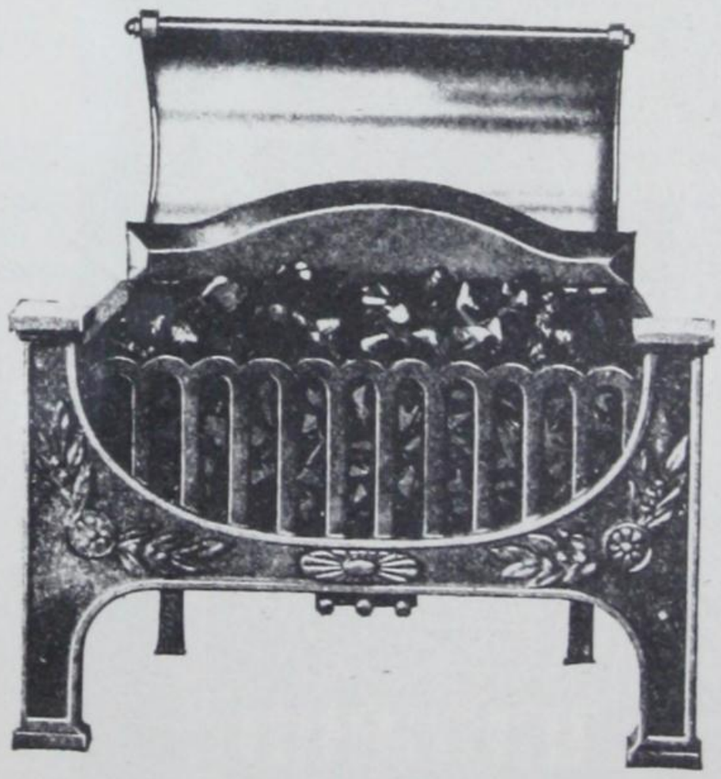

YORK

Cat. No.	Watts	Width inches	Height inches	Depth inches	Price
1723	3000	20½ Front 15 Back	20	15	$51.30

Plated any Standard Finish—Oxidized Brass, Oxidized Copper, Brushed Brass, Bronze.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ELECTRIC FIREPLACES

No. 105A
Cast Iron Imitation Wrought Iron Basket

Width	20"
Depth	13"
Height of Reflector	22½"
Heating capacity	3,000 watts.

Flickering fire with movement down the front.
Solid fuel.

Each $45.00

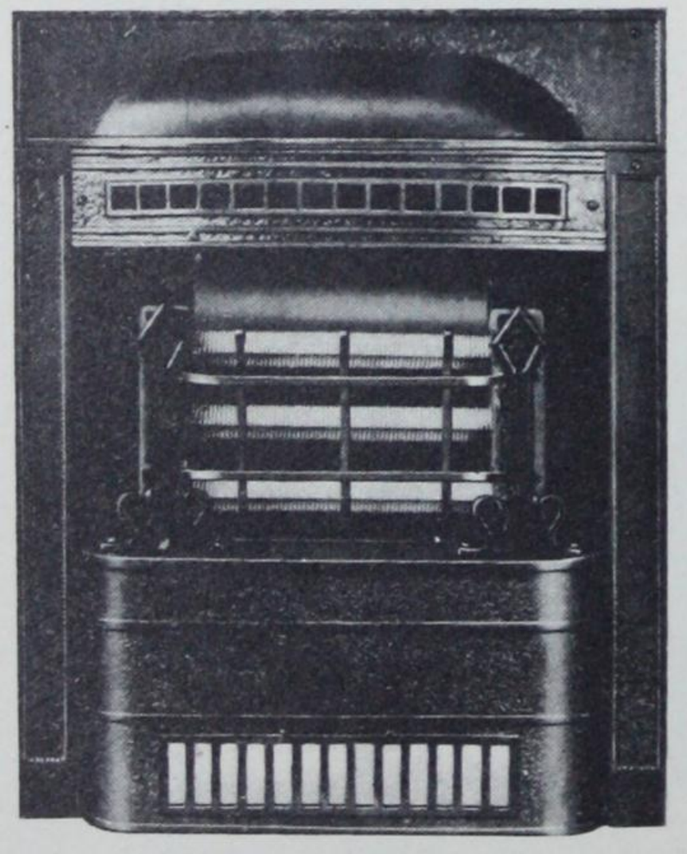

Model "A"
3000 Watts—110 Volts
(Finish—Oxidized Copper)
Copper Reflector—Polychrome Supports
Convenient Switch Control
Sizes—24½ in. x 30¼ in.
Each 64.00

No. 91
3000 Watts—110 Volts
Finish—Antique Brass
Equipped with Glowing Electric Fire
Convenient Switch Control and
Extremely Rugged Heating Units

Made in Two Sizes	Each
24½ in. x 30¼ in.	**$72.00**
30½ in. x 30¼ in.	**$76.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

TILE

Class "A"
GLAZED TILE

Mottled.—

In many attractive colors and designs to match different finishes. Size 6 x 1½ inches.

Plain.—

All colors in light, medium and dark shades. Stocked in 6 x 2 inches and 6 x 1½ inches.
Shipping weight 6 lbs. per sq. ft.,
Note.—Set includes facing and hearth.

Price List
200 lbs. per Set. . **$2.60** sq ft., **$47.00** Set

Class "D"
RED UNGLAZED TILE

Quality We stock only first quality English and American Tile.
Quantity For an ordinary mantel, about 15 feet of tile are required.
We slab tile in three pieces (two sides and one head piece) and send loose tile for hearth floor.
Stocked in 6 x 6 inches. 6 x 3 inches, 4¼ x 4¼.
Shipping weight 6 lbs. per sq. ft., 200 lbs. per Set

PRICE
$1.40 sq. ft., **$30.00** Set

Class "B"
DULL OR EGG-SHELL TILE

Plain.—In all leading colors. Size 6 x 2 inches.
Antique.—Rough Surface. New and artistic.
In several attractive colors. Size 6 x 2 inches.
Shipping weight 6 lbs. per sq. ft., 200 lbs.
Note.—Set includes facing and hearth.

Price List
per Set. . **$3.00** sq. ft., **$52.00** Set

Tile Floors

For Bath-rooms, Vestibules, Store Entrances and Public Buildings

Tile for floors in Bath Rooms or Vestibules easily kept clean easy to lay. Comes to you in sheets 2-ft. x 1-ft.
Setting instructions will be supplied if required.

Border stocked in Green and White
Border stocked in Blue and White
Border stocked in Black and White
} 70 Lin. Feet

Body, 1-in. White Hexagon . . . . . 96 Sq. Feet.

Tile Walls

For Bath-rooms, Vestibules, Store Entrances and Public Buildings

Samples.—We will be pleased to furnish loose samples of any of the above tile on request.

Illustration shows Tile Floor of 1 inch hexagon with 7 inch Grecian Key Border

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DIRECTIONS FOR SETTING MANTELS, TILE AND FIREPLACES

See that your chimney is well built and sound and an arch is turned for the hearth. The chimney breast should be at least five feet across the face as this is the standard width of Wood Mantels.

1st—Put all the hearth tile to soak in clean water for one hour; then lay out to drip.

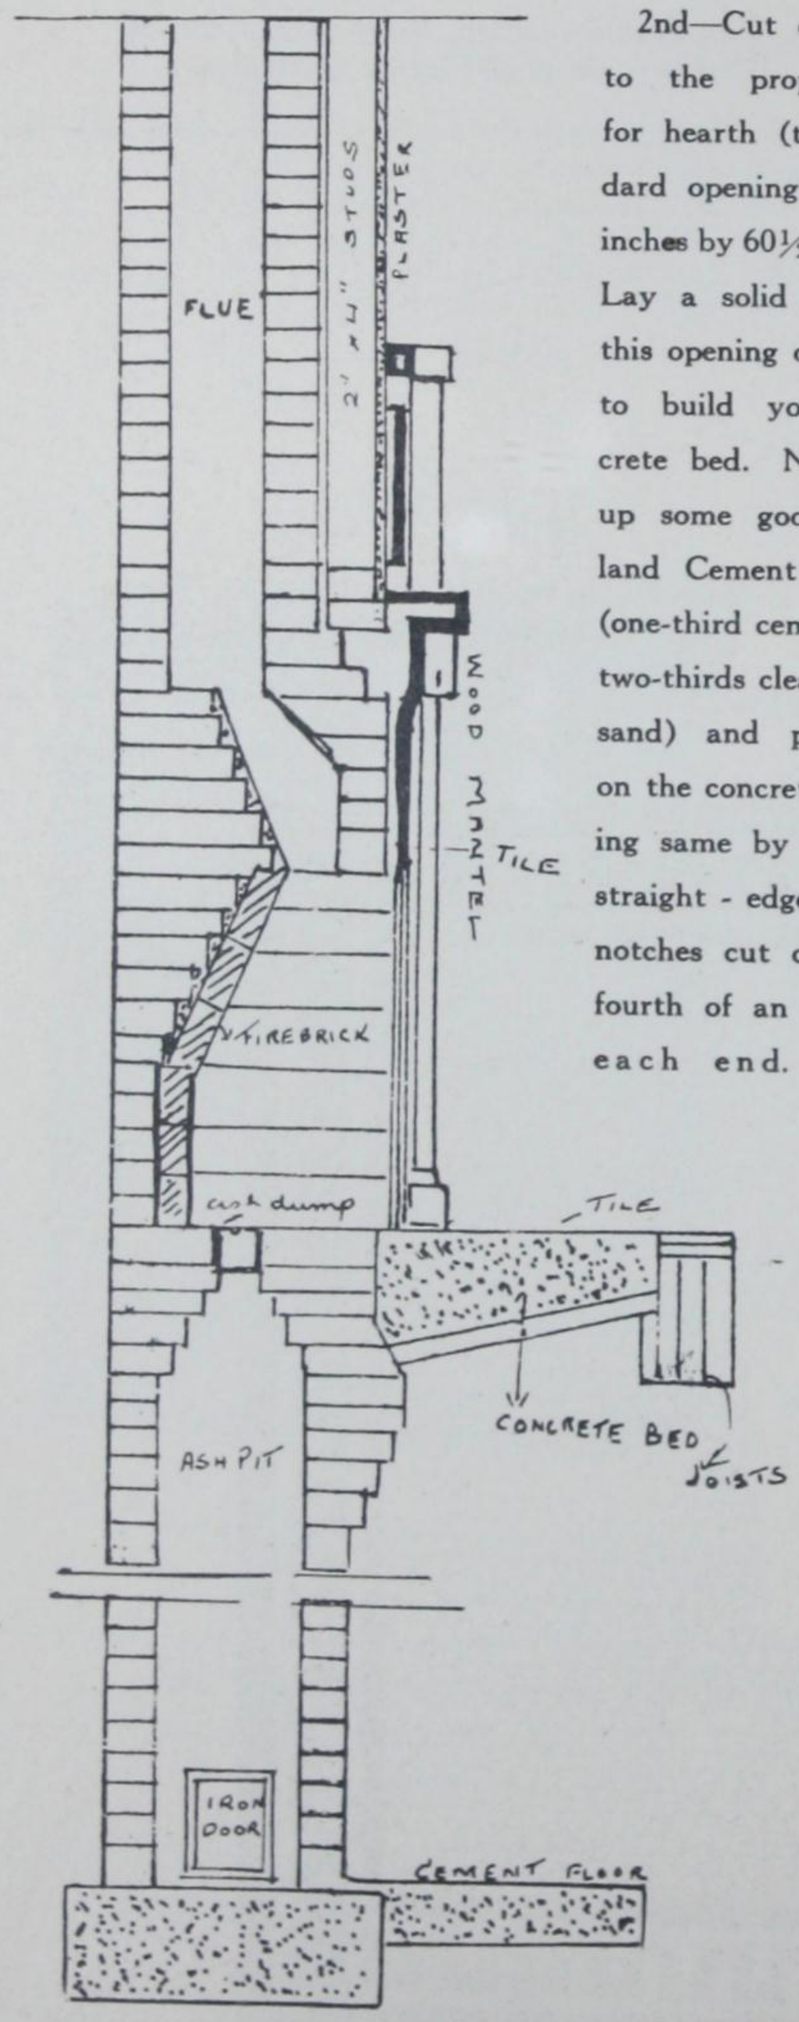

2nd—Cut out floor to the proper size for hearth (the standard opening is 18¼ inches by 60½ inches). Lay a solid floor in this opening on which to build your concrete bed. Now mix up some good Portland Cement Mortar (one-third cement and two-thirds clean sharp sand) and put this on the concrete, leveling same by using a straight - edge with notches cut out one-fourth of an inch at each end. This straight - edge should be three inches longer than the hearth. Now commence at back of hearth and draw the straight-edge forward and backward until cement is perfectly level, a quarter of an inch below floor-line. Lay in the tile, commencing at the front, and taking care to follow whatever pattern is to be used. After the tiles are all laid and fitted nicely to place, level and evenly spaced, mix up a little pure Portland cement quite thin and wash it over the surface, working it into the joints where needed. After this has partially set, wipe the tile perfectly clean with sawdust or damp sponge. All of the cement should be cleaned off the face of the tile as it is very difficult to remove after it is set.

After the hearth tiling is in place and thoroughly bedded, it is next in order to set the mantel. To do this, plugs are inserted in the wall at the proper places (top and bottom of each side). The mantel is then screwed fast to them. Before fastening mantel, see that legs are perfectly square and true. Now take the slabbed face tile and stand the two side pieces in their proper place; then place in the head-piece. Square these up properly to correct size of grate opening and then back-plaster the space between the tile slab and face of breast with Portland cement. Care must be taken to see that tile does not get out of line while doing this. When this has thoroughly set, the mantel can be unscrewed from the wall, and any spaces not filled with cement plastered up.

Next set in the grate to proper position, seeing that there is proper space allowed for dampers, etc., and level up floor underneath grate with cement which, when set, will hold grate in proper position. Ash dump to be inserted in floor when setting grate.

If it is necessary to cut tile, this can be done with an ordinary wheel glass cutter or cold chisel drawn across face of tile and then striking them on the back opposite the scratch with a light hammer. The edges can be ground smooth on a fire-brick or sandpaper

The accompanying illustration shows proper construction of chimney breast, flue and ash-pit.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

TILE

COVE SKIRTINGS.

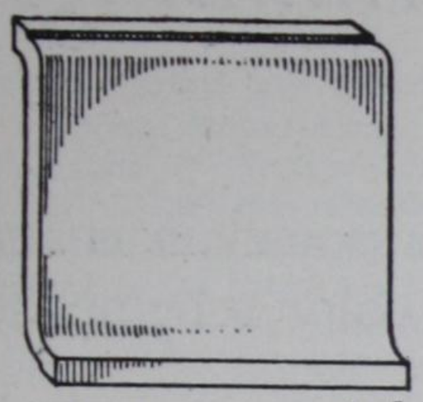
No. J.1. 6"X6"

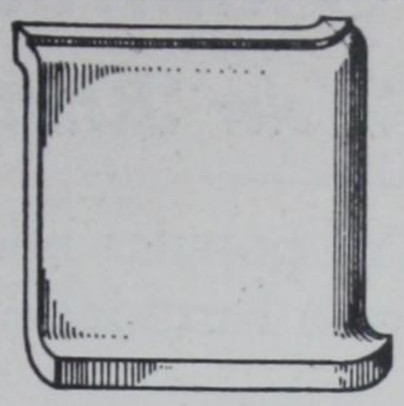
No. J.1. EXTERNAL

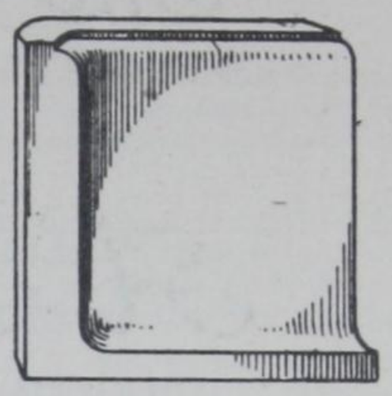
No. J.1. INTERNAL

CAPPINGS.


No. 2.N. 6"X2"

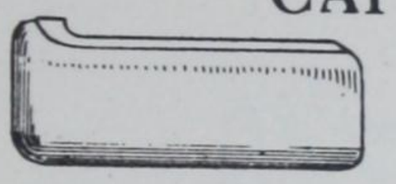
No. 2.N. EXTERNAL

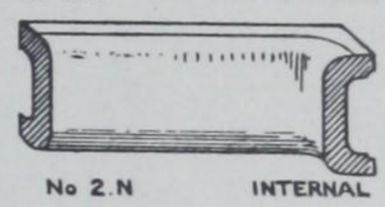
No 2.N INTERNAL


No 2.N. STOP RIGHT & LEFT

COVE BASE


No. 2.F 6"X2"


No 2.F. EXTERNAL


No. 2.F. INTERNAL

ANGLES.


6"X1¼"
EXTERNAL BEAD


No 1.T 4"X3"


No 1.U. 4"X3"

SINK TRIM


No 2.V REVEAL CORNER


No. 2.V. 6"X2"

and complete lines of wall and quarry

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Sno-Wite Bathroom Trimmings

Kolor Kraft Line

A DEVELOPMENT of popular priced vitreous porcelain enameled trimmings to harmonize with new color schemes in modern bathrooms.

PACKED in individual, neat cartons, an attractive package with no detail overlooked to relieve the jobber or dealer of repacking for distribution.

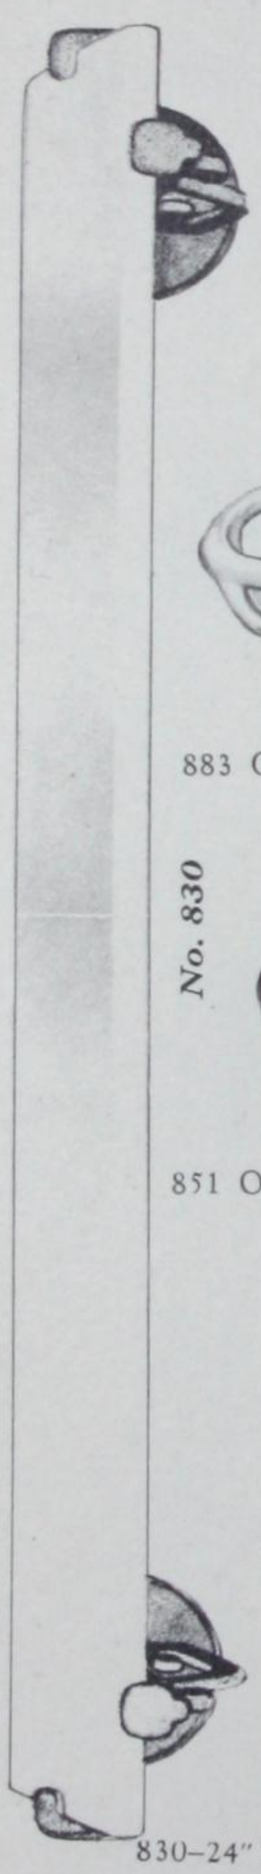

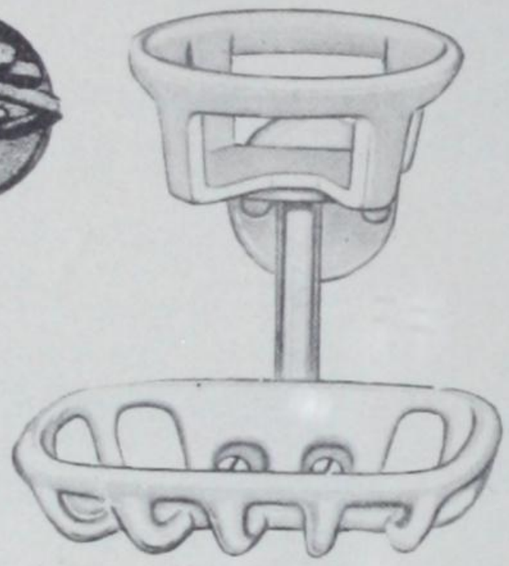

No. 883

883 Combination Tumbler and Soap Holder (No Opal Tray) each **$3.40**

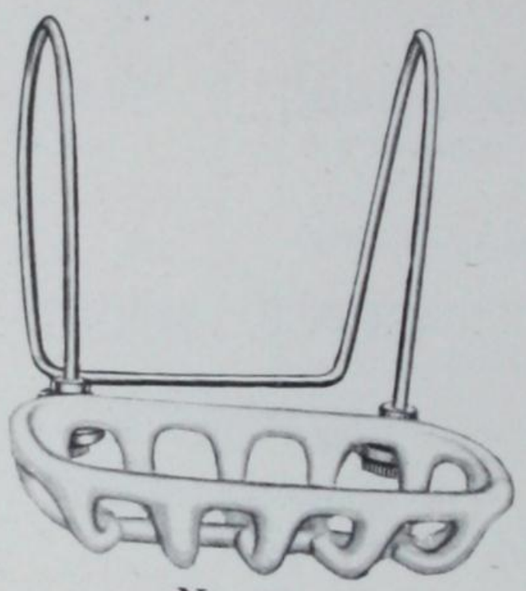

No. 853

853 Hanging Bath Soap Dish each **$2.90**

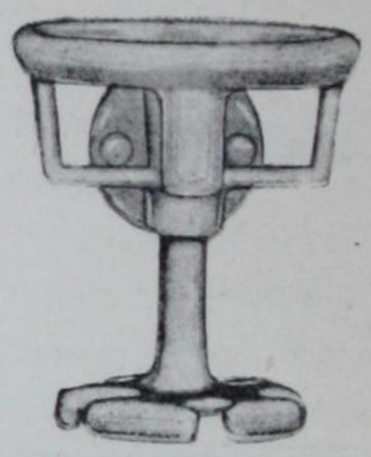

No. 884

884 Combination Tumbler and Tooth Brush Holder each **$2.50**

No. 830

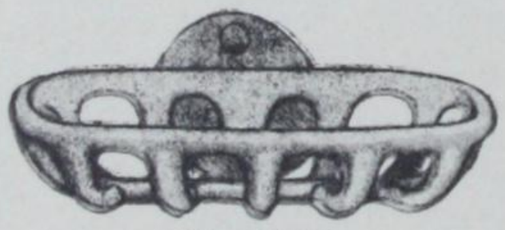

No. 851

851 Oblong Wall Soap Dish (No Opal Tray) each **$1.90**

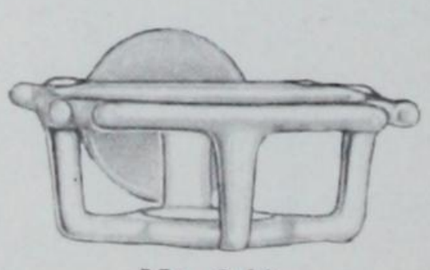

No. 849

849 Combination Tumbler and Tooth Brush Holder each **$1.40**

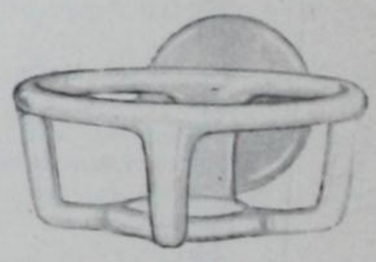

No. 850

850 Tumbler Holder each **$1.20**

No. 858

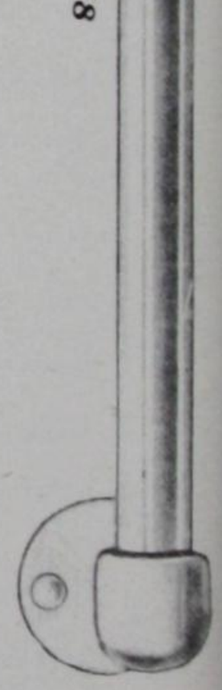

858–24″ x ¾″ Post End Bars each **$2.30**
858–30″ x ¾″ Post End Bars each **$3.20**

830–24″ x 5″ Opal or Crystal Glass Shelves each... **$6.30**

No. 863

863 Double Robe Hook each **.52**

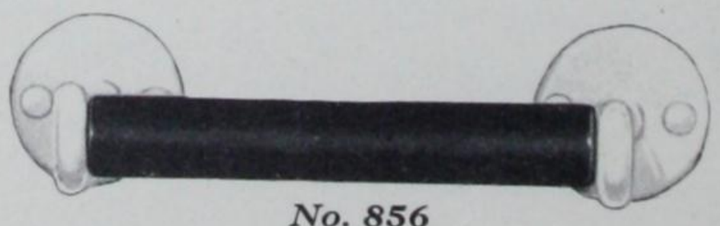

No. 856

856 Toilet Paper Holder each **.90**



No. 862

862 Razor Strop Hook each **.44**

COLORS—Rose, Light Blue, Light Green, Black or White.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Bathroom RECESSO HRT Fittings

"RECESSO" fittings are glazed porcelain accessories designed to serve as resting places for soap, sponge, towels, tooth-brushes and every other bathroom requisite. Their especial feature it that they are **built into** the wall, not fastened to it by means of nails or screws. They are not odds and ends **added to** the bathroom, but definitely **a part of it**—a fact which gives to the "RECESSO" bathroom a striking air of harmony, order and neatness.

Unquestionably the ideal receptacle for any bathroom requisite is one of porcelain built into the wall. Nothing could possibly be neater, more completely out of the way, more durable, more sanitary or more easily kept clean.

"RECESSO" fittings were primarily intended for use with tiles, but though tiles form their best and most natural setting, they are none the less completely at home in walls of any finish.

Originally produced in white glaze only, they can now be supplied in almost any colour, whether in bright or matt finish, and especially in glazes to harmonize perfectly with any of our very extensive range of tile colours and finishes.

It is true that "Recesso's" cost rather more than most types of bathroom fittings; but one glance at them—one moment's reflection on the fine material and craftsmanship which go to their making—will show that this could not be otherwise. They cost more because they are worth more; and their neat effectiveness, coupled with the life-long service they will give, renders the slight extra initial outlay a very small matter indeed.



No. 1. 6"x6" Soap Holder, with plain lip.

Each $3.60

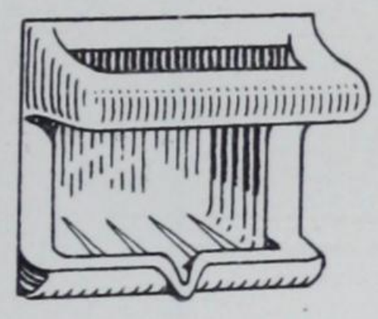

No. 20. 6"x6" Soap Holder, with grip and tongued lip.

Each $4.50



No. 3. 6"x6" Paper Holder, flush front, with spring roller.

Each $3.80

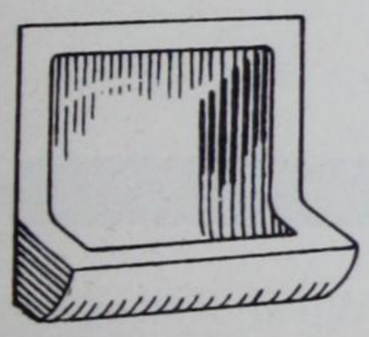

No. 6. 6"x6" Sponge Holder, without drip hole.
No. 6a. 6"x6" Sponge Holder, with drip hole.

Each $3.80

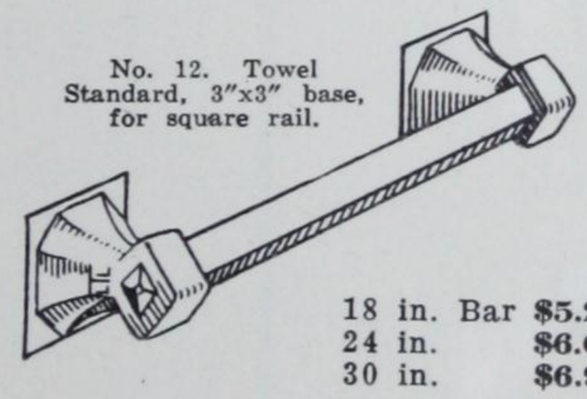

No. 12. Towel Standard, 3"x3" base, for square rail.

18 in. Bar **$5.20**
24 in. **$6.00**
30 in. **$6.90**

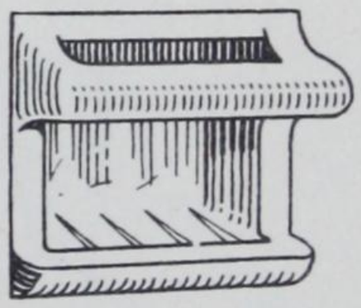

No. 2. 6"x6" Soap Holder with grip and plain lip.

Each $4.50



No. 8. 6"x3" Soap Holder, with plain lip.

Each $2.80



No. 9. 6"x3" Toothbrush Rack

Each $2.40

CRYSTAL OR CLEAR GLASS TOWEL BARS

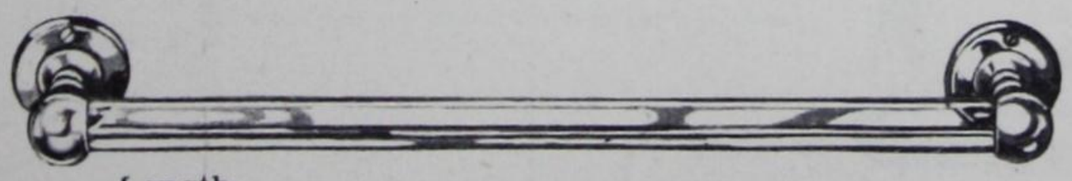

	Length C to C	5/8 dia.	3/4 dia.	Each
Complete with Solid Brass, Nickel Plated End Posts, and screws.	18"	CC518		$2.00
	24"		CC324	$2.50
	30"		CC330	$2.70

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BATHROOM FIXTURES

Each Article Made from Solid Brass and Finished in Highest Grade Nickel Plate.
Screws Furnished with Each Fixture



A187 Each **$1.60**

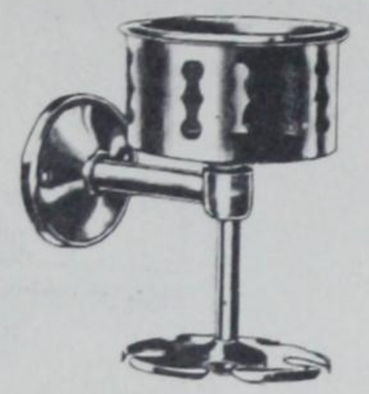

D192 Each **$2.40**

B137 Each **$4.00**

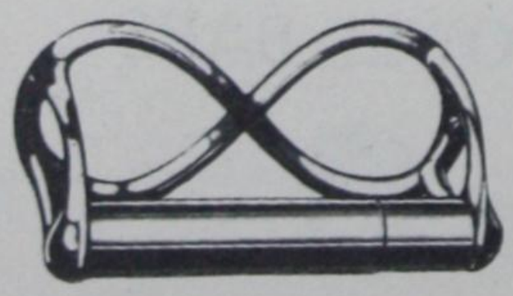

385 Metal Roll Each **.70**

260 Each **.40**



164 Each **.90**

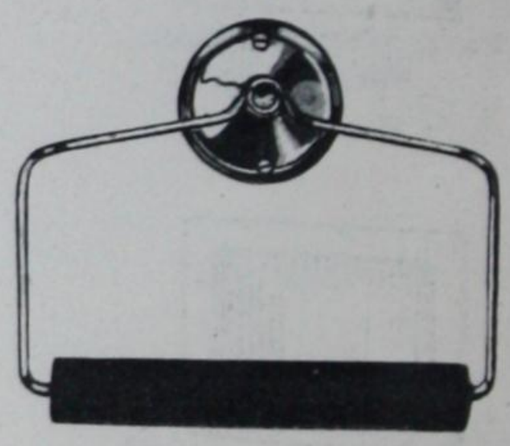

384 Wood Roll Each **.50**

B155 Light spun cups
Each **$6.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Bathroom Fixtures

Each article made from Solid Brass and Finished in Highest Grade Nickel Plate. Screws furnished with each fixture.



129 Each **$1.60**



547 Brackets
Pair **$3.80**

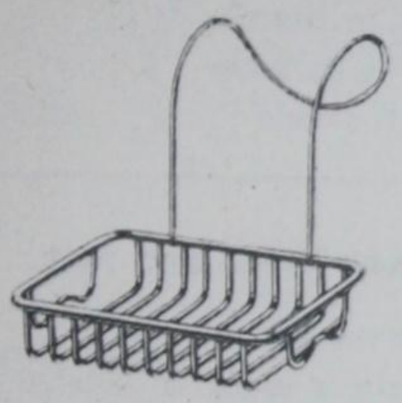

91 Each **$1.90**

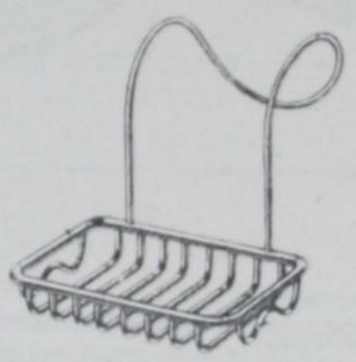

90 Each **$1.40**



	TOWEL BAR	Each
P118	½" x 18"	$1.30
P124	½" x 24"	$1.50
P130	½" x 30"	$1.80



	TOWEL BAR	Each
P524	⅝" x 24"	$1.70
P530	⅝" x 30"	$2.00

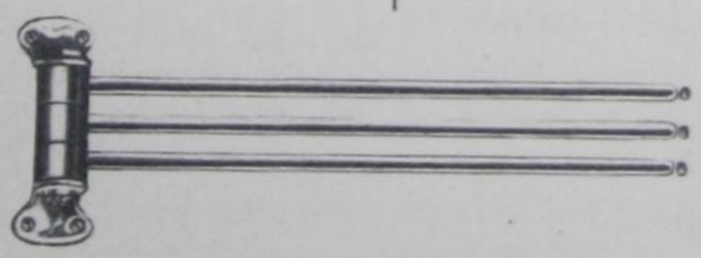

43 Arms 5/16 dia. x 15" **Each $3.00**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WEATHER STRIP

Anti-Frost Felt ..... **Doz. $9.60**

38 ft. in Box
For Doors or Windows

Swan Felt for Windows ..... **Doz. $4.56**

25 ft. in Bundle
Size ½ in. wide

Swan Wood and Felt.

Swan Weather Strip is made of selected Fir, nicely finished. The felt is manufactured specially and is of lasting quality, color green. Holes are drilled to prevent splitting. Nails are supplied with every set. A set for a door consists of two pieces 7 feet long for the door and two pieces 3 feet long for top and bottom.

Swan Weather Strip— - - - per set **$2.00**

Ten Sets in a Bundle, Weighing 15 lbs.

Regal Felt

10 ft. Sleeves ⅝" Wide per doz. pkgs. **$1.68**
22 ft. Sleeves ⅞" Wide per doz. pkgs. **$4.10**

CANADIAN

Supplied in 200 Foot Reels With Stand

Supplied in 500 Foot Reels With Stand

CANADIAN WEATHER STRIP

An effective and durable weatherstrip for doors and windows. The round insulation core is covered with special rubberized fabric, maroon color, and has a two ply tacking flap. The cushion effect absorbs and prevents the noise of rattling windows, slamming doors, and auto doors. Assures weather-tight contact at all times. Easy to apply—simply tack on—turn the corners.

In reels of - - - -	200 Feet	500 Feet
Weight per reel, lbs. - - -	9	23
Per reel - - - -	**$9.60**	**$22.00**

One Reel in a Carton, With Tacks

Canadian Weatherstrip can be applied by any person, during all seasons of the year without taking out the doors and windows

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WEATHER STRIP

BRASS SPRING METAL

Lasts a Lifetime

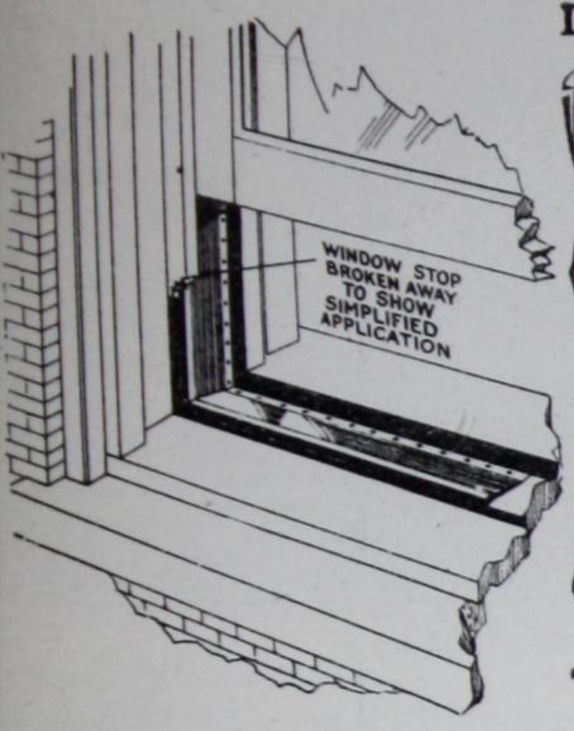

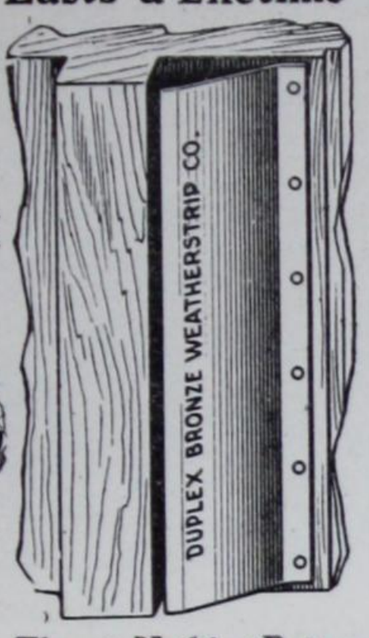

There's Nothing Better

Sectional View Showing Spring

For all outside doors and windows. Permanently prevents all draughty and rattling windows. Eliminates soot, dust, water, sticking doors and windows.

The nail indentations in the stripping ensure easy application. You can "Do your own."

IN 20½ FOOT LENGTHS

Width, ins.	1¼	1½
Wgt. doz., Cartons lbs.	13½	14
Per dozen cartons	**$14.30**	**$15.80**

IN 100 FOOT LENGTHS

Width inches, -	1¼	1½
Weight, carton, lbs.	4½	5
Per carton -	**$5.10**	**$5.80**

Note :—20½ ft. is sufficient for one door.

KICK PLATES

Made of Polished Brass — Thickness 16 B & S Guage

DISCOUNT **PRICE EACH INCLUDING SCREWS. SALES TAX EXTRA** **MARKET**

Width in Inches	Length in Inches													
	18	20	22	24	26	28	30	32	34	36	38	40	42	44
6	3.52	3.88	4.28	4.66	5.08	5.44	5.84	6.30	6.60	7.00	7.38	7.78	8.20	8.56
7	4.10	4.54	5.00	5.46	5.92	6.36	6.80	7.26	7.74	8.20	8.56	9.08	9.52	10.00
8	4.68	5.20	5.70	6.22	6.76	7.26	7.78	8.32	8.82	9.32	9.86	10.38	10.90	11.44
9	5.26	5.84	6.40	7.00	7.58	8.18	8.76	9.32	9.92	10.50	11.10	11.66	12.26	12.84
10	5.84	6.48	7.12	7.78	8.44	9.08	9.72	10.36	11.00	11.66	12.32	13.00	13.68	14.24
11	6.40	7.12	7.84	8.54	9.28	10.00	10.68	11.44	12.12	12.84	13.54	14.24	15.00	15.68
12	7.04	7.76	8.56	9.32	10.16	10.88	11.68	12.60	13.20	14.00	14.76	15.56	16.40	17.12
14	8.74	9.72	10.70	11.68	12.64	13.60	14.58	15.56	16.54	17.50	18.50	19.44	20.44	21.42
16	10.66	11.86	13.04	14.22	15.40	16.60	17.80	18.96	20.20	21.34	22.54	23.70	24.90	26.10
18	12.74	14.18	15.50	17.00	18.40	19.82	21.28	22.68	24.10	25.54	26.92	28.34	29.76	30.86

Intermediate Sizes not listed take price of next Larger Size.
For No. 14 B & S Guage add 15% to above List Prices.
For Beveled Edges add Four Cents per lineal foot of Edge.

PRICES FOR OTHER FINISHES

For Dull Brass add 10% to above list prices.
For Sand Blast finish in Brass add 20% to above list prices.
For Polished Bronze add 15% to above list prices.
For Dull Bronze or Statuary Bronze add 25% to above list prices.
For "Dead Black" Bower- Barff finish on steel, deduct 25% from above list prices

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

FUR FARM FENCING

Fur Farming has in recent years become a full fledged business and is regarded as one of the finest and most profitable out-of-door occupations. With the expansion of the industry there has been created a large demand for special Fencing and it would appear that this demand will continue and increase for years to come, thereby presenting an additional source of revenue for the progressive wide-awake merchant.

The two styles of Fencing listed below have proven equal to all demands of fur ranchers and we offer them to our trade confidently believing that they represent the best value obtainable in their class.

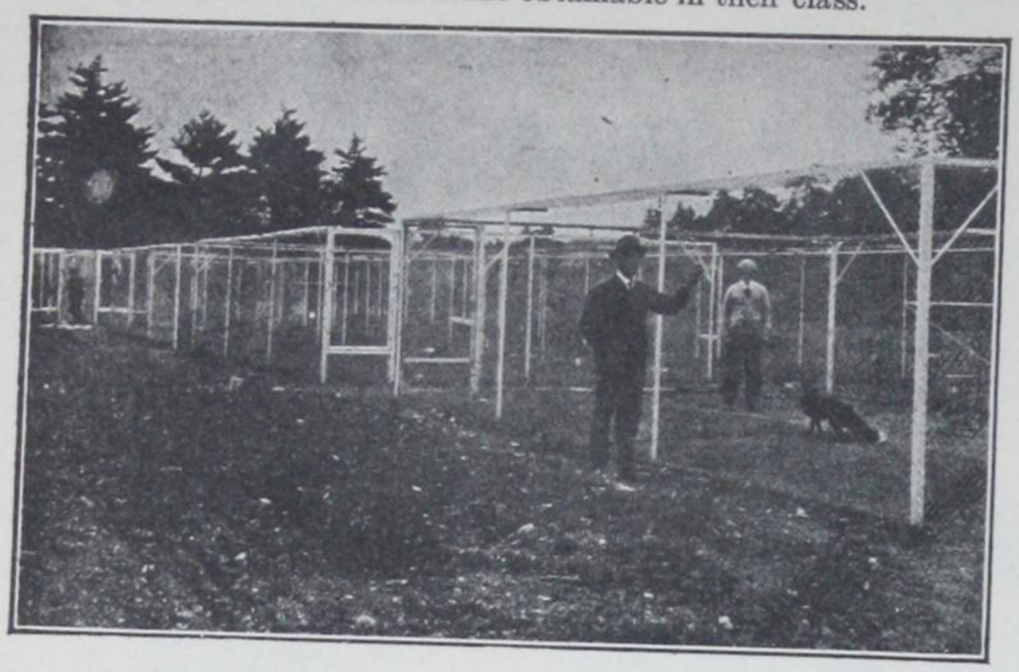

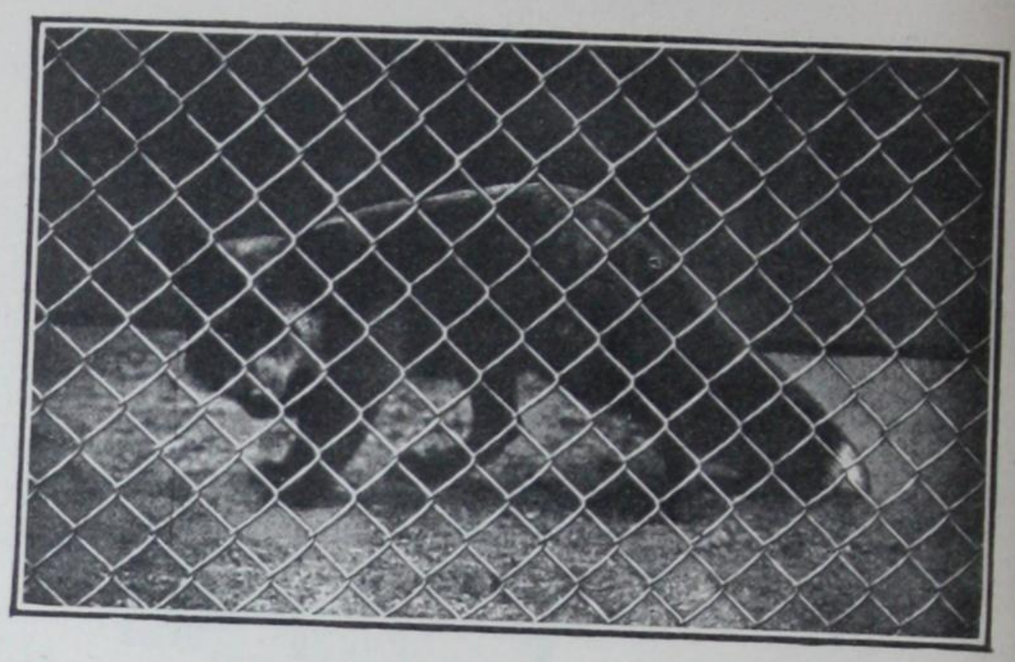

FROST CHAIN LINK FENCE

The secret of the outstanding success of Frost Chain Link Fabric lies in its remarkable strength and flexibility. It is impossible for a fox to make holes in this fence as every joint acts as a hinge and no amount of working the wire back and forth can break it through. The Galvanizing will not crystallize and crack as it does on solid joint netting.

The flexibility of the Fabric enables it to stand up perfectly flat and straight on the frame work without sagging or bulging. It is adaptable to either Steel or Wooden Frameworks and conforms easily to any slope or angle of the ground.

It is unnecessary to cut Frost Chain Link Fabric when separating or splicing it. Simply open, with a pair of pliers, the two ends of a spiral wire and withdraw it with a cork-screw motion.

For splicing the procedure is reversed. This makes it possible to have a continuous stretch of Fence without any weakening or disfiguring splices.

Frost Chain Link Fence may be secured in two grades, viz:—Woven from Standard Galvanized Wire and Woven from the same wire and Galvanized again after weaving.

CHAIN LINK FOX FABRIC
14 Gauge Wire; 1½ in Mesh

Width, in.	**18**	**24**	**36**	**48**	**60**	**72**	**84**	**96**	**120**	**144**
Weight Roll, lbs.	50	60	90	120	150	180	210	240	300	360
Per Roll	**Prices on Application**									

CHAIN LINK MUSKRAT FABRIC
15½ Gauge Wire; 1 in. Mesh

Width, in.	**24**	**36**	**48**	**60**	**72**
Weight Roll, lbs.	66	100	132	165	198
Per Roll	**Prices on Application**				

All above 100 Lineal Ft. in Roll

Industrial Fencing

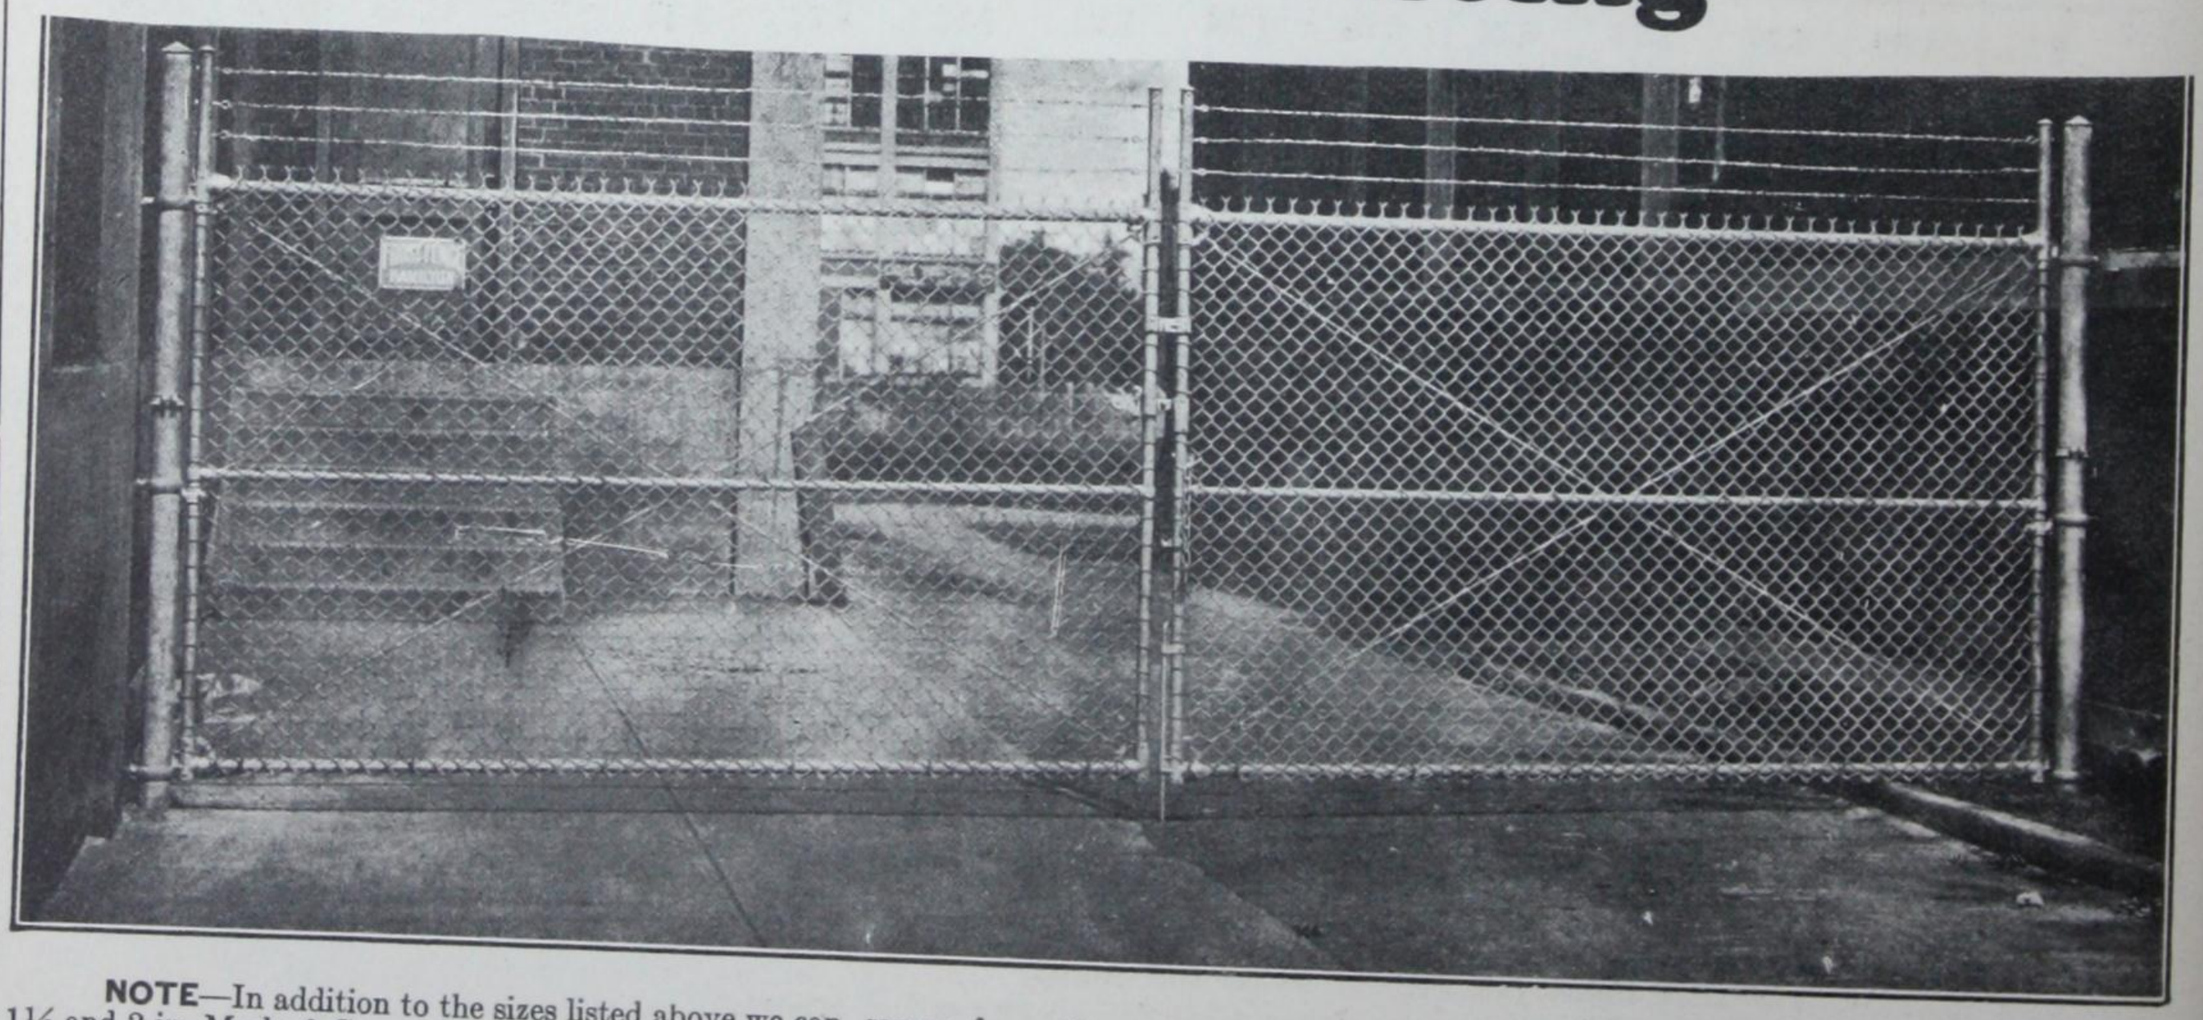

NOTE—In addition to the sizes listed above we can secure from the factory, in widths from 18 to 144 in., Frost Link Chain Fabric 12 Gauge 1½ and 2 in. Mesh; 9 Gauge 1½ and 2 in. Mesh and 6 Gauge 2 in. Mesh; These heavier sizes are coming more and more into demand for Industrial Fencing, Schools and Playgrounds, for enclosing Tennis Courts, Parks, Private Estates, etc., as well as for City Homes.

Prices on Application.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

REINFORCED STUCCO NETTING

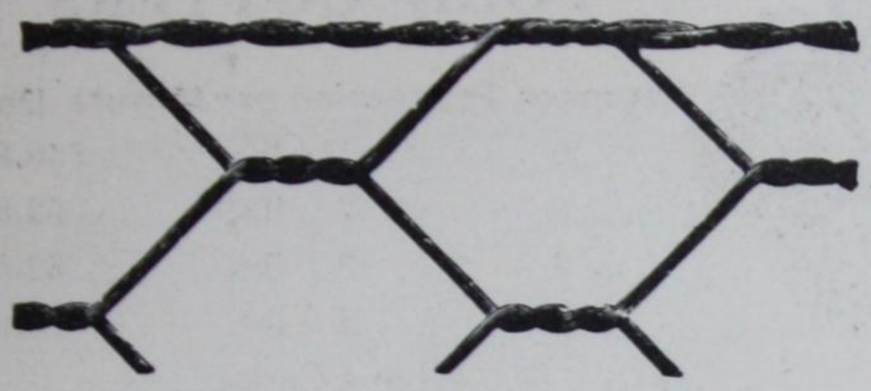

1" Mesh All Wires No. 20 Gauge.

Used on the outside of Buildings for holding Stucco Finish. Galvanized before weaving and made with special re-inforcing Wires 6 in. apart.

1 in. Mesh; 20 Gauge Wire

Width Roll, in.	**.36**
Weight Roll, lbs.	**.50**
Per Roll	**$11.50**

150 Lineal Feet in Roll

CLOTHES LINE REELS

Complete with Clothes Line

IDEAL



A very satisfactory clothes line reel. Affords protection to the line from dust and dirt; is always ready for immediate use but is never in the way. Case is stamped metal, assorted colors. Each reel complete with 30 feet of good quality braided cotton line, and hooks and screws for attaching.

Ideal No. 2—Weight per dozen 6½ lbs.
- - Assorted **per dozen $8.00**

One in a carton

SPOONS AND FORKS

MEDALLION TINNED

Made from Selected Durable Steel heavily Plated with finest Tin;
Flat Handle; Ornamental Tipped Pattern.

CAFE SPOONS

		Per Gross
No. 1410	Length 5¾ in.	**$8.00**

Weight 7½ lbs. Gross
Quarter Gross in Box

Table Spoon

		Per Gross
No. 140	Length 8¼ in.	**$12.00**

Weight 12 lbs. Gross
One-Sixth Gross in Box



FORKS

		Per Gross
No. 111	**Medium**; Length 7⅜ in..	**$10.00**

Weight 10½ lbs. Gross
One-Sixth Gross in Box

SAND SCREEN

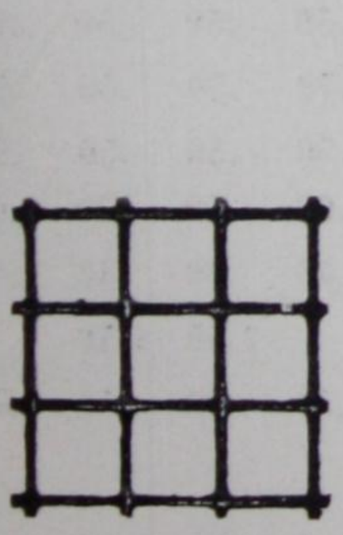

3 x 3 Mesh

Width, ins.	30"	36"
Wire Gauge	19	19
Meshes per inch	4	4
Weight per 100 lin. ft.	90	100
Per lin. Yd.	**$1.70**	**$2.00**

100 lin. ft. in a roll

SAND SCREEN, GALVANIZED

Width ins.	30"	36"	30"	36"
Wire Gauge	19	19	18	18
Meshes per inch	4	4	3	3
Wght. per 100 lin. ft.	90	100	90	100
Per lin. Yd.	**$1.30**	**$1.50**	**$1.20**	**$1.40**
No. of sq. ft. in lin. yd.	7½	9	7½	9

100 lin. ft. in a roll

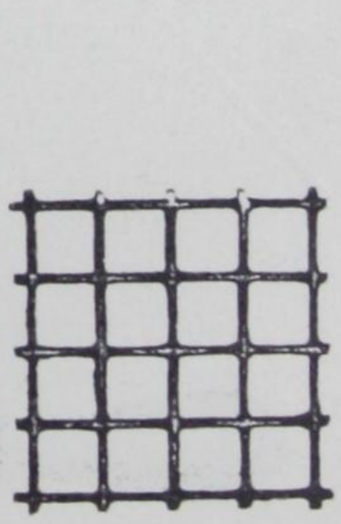

4 x 4 Mesh

We Will Cut Any Length, but Cannot Accept the Return of Cut Lengths.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

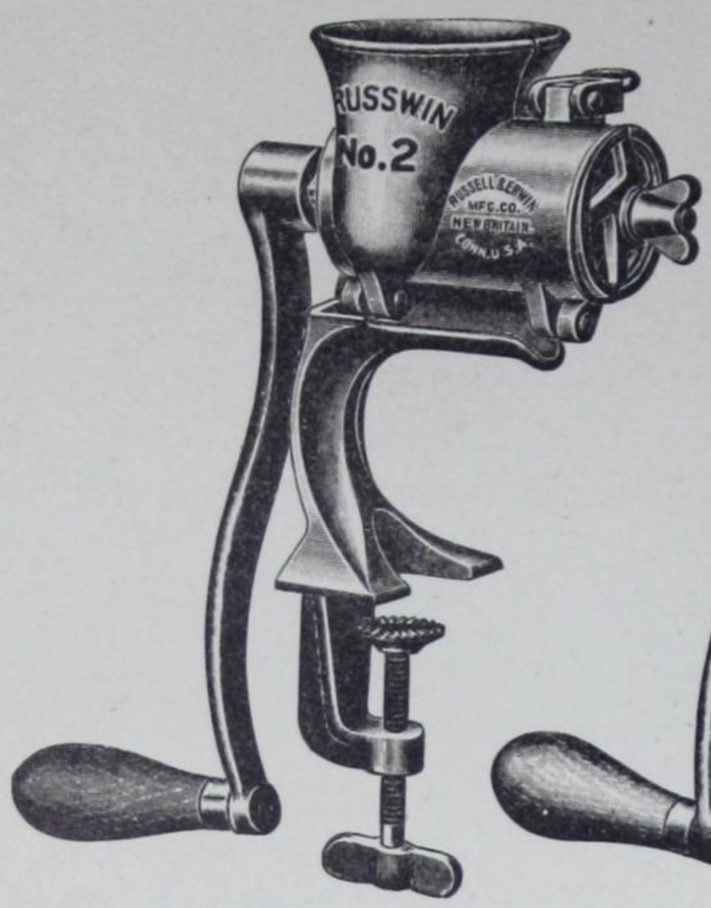

Closed
Ready for Use

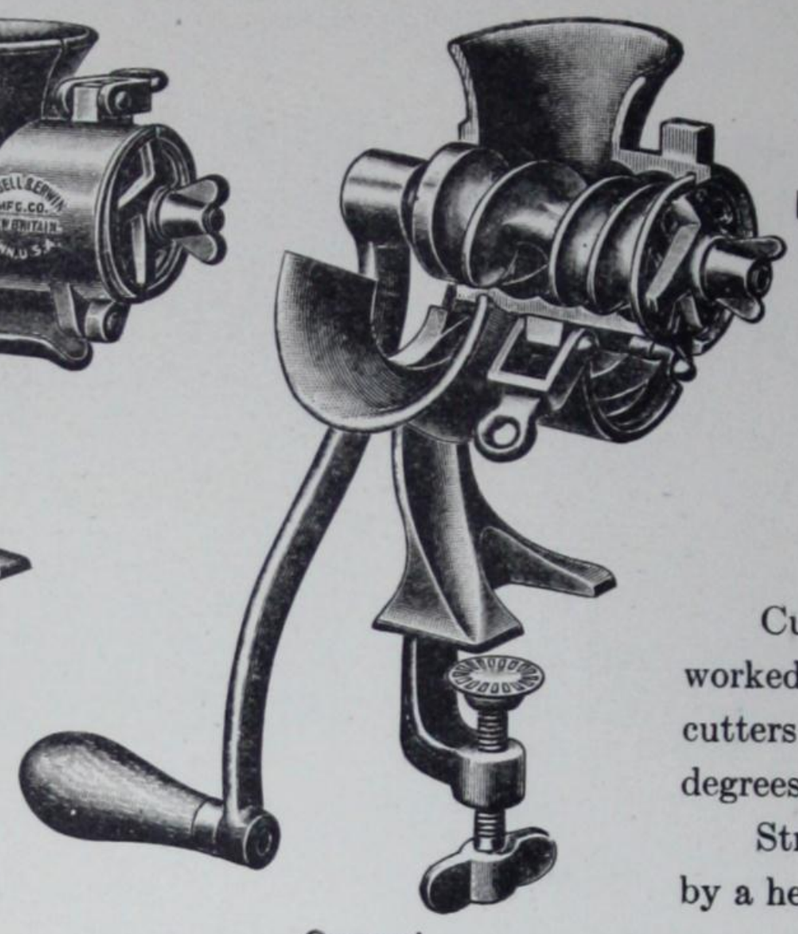

Opened
Ready for Cleaning

RUSSWIN FOOD CUTTERS

Number	Production per Minute	Doz.
0	1½ lbs.	$40.80
1	2 lbs.	52.00
2	3 lbs.	62.00
3	5 lbs.	79.00

One in a Carton
½ Doz. in a Case

Cuts clean, cuts fast, does not drip. Easily worked, easily cleaned. Four self-sharpening cutters with each machine, mincing to various degrees of fineness

Strongly made and protected against rust by a heavy coat of tin

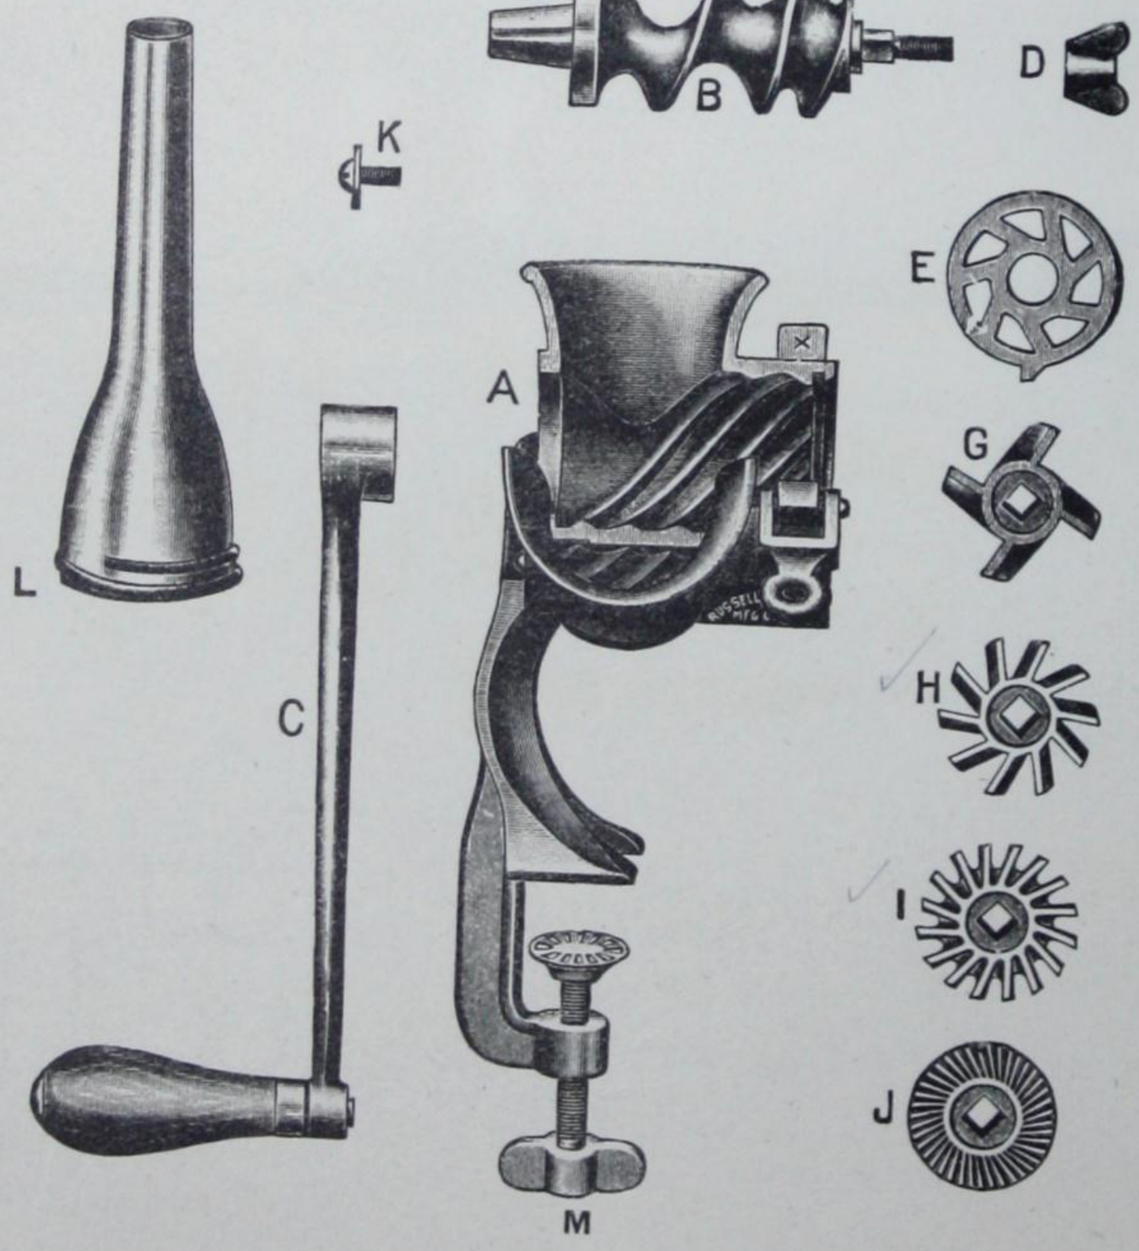

FOOD CUTTER PARTS

	Each	FOR CUTTER 0	1	2	3
A	Case	$2.70	$2.90	$3.30	$5.50
B	Roll	1.00	1.60	1.60	2.10
C	Crank	.60	.70	.70	1.00
D	Winged Nut	.40	.40	.40	.40
E	Disc	.70	.70	.70	1.30
G	4 Tooth Cutter	.50	.50	.50	.90
H	10 Tooth Cutter	.50	.50	.50	.90
I	16 Tooth Cutter	.50	.50	.50	.90
J	Nut Butter	.60	.60	.60	1.00
K	Screw and Washer	.40	.40	.40	.40
L	Stuffing Attachment		1.50	1.50	
M	Clamp Screw	.50	.50	.50	.70

Note :—Part "L" is made for No. 1 and 2 cutters ONLY

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STANLEY GARAGE DOOR OUTFIT

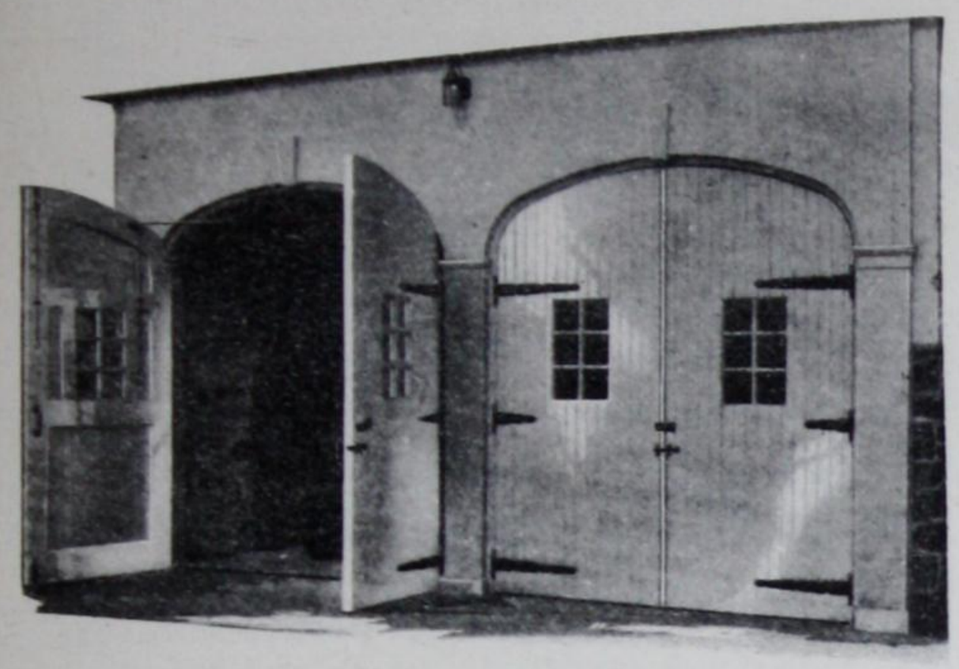

1785

Set No. 1785 consists of:

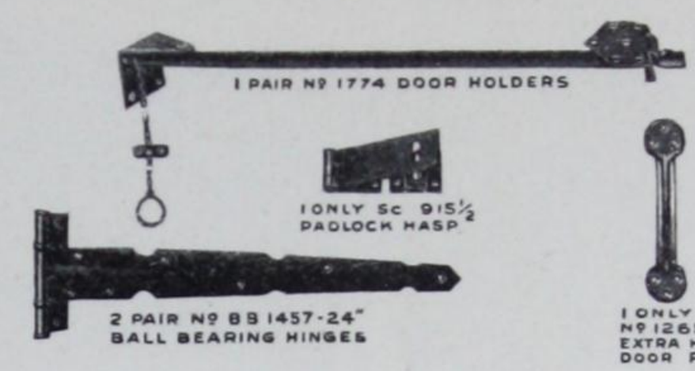

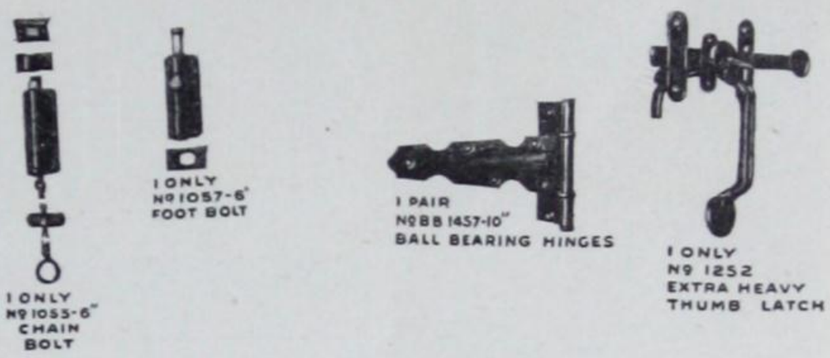

No. 1785, Japanned, Wrought Steel.....Set $31.50 1 Set in Box. Weight 32 lbs.

R-W No10 "Swingtite"

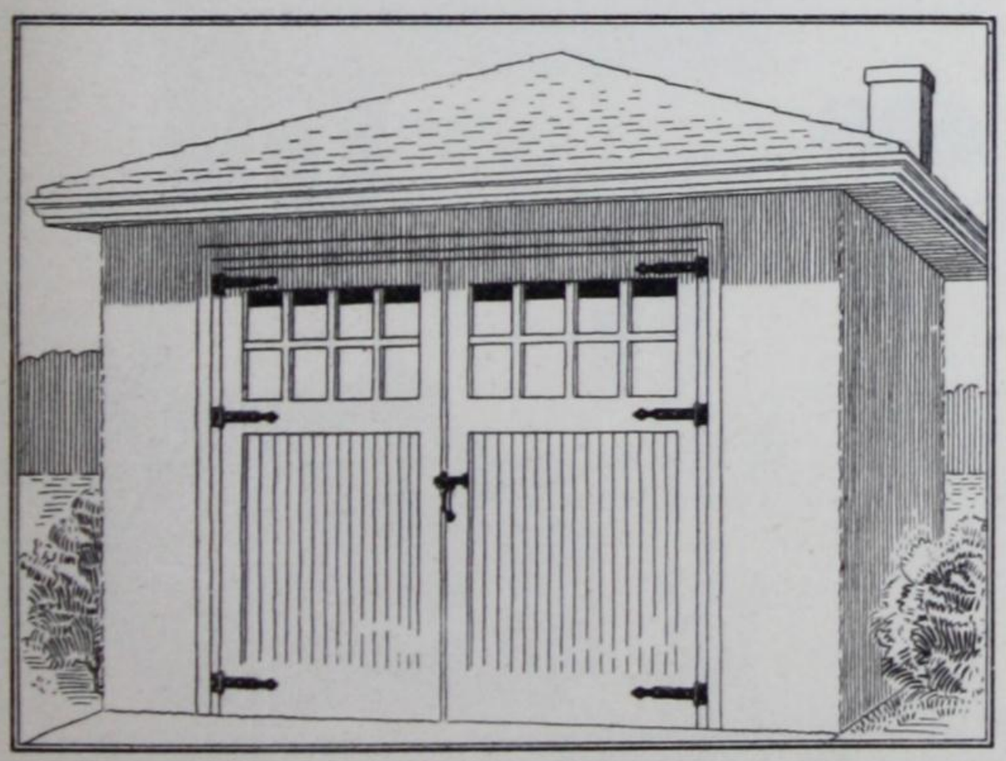

With No. 03 x 0 x 12-inch Hinges with Surface Pintles

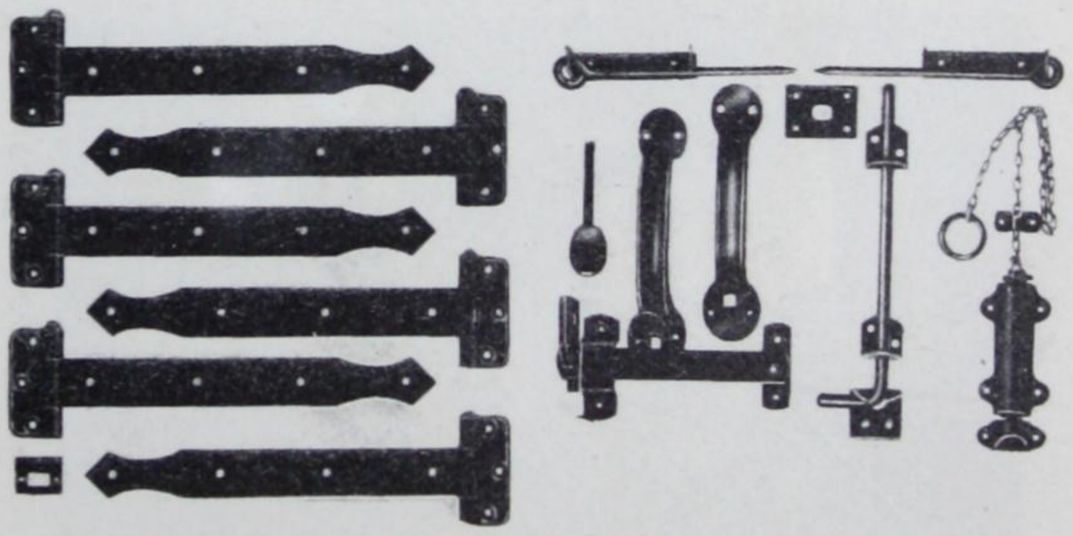

Specifications

No. 10 Swingtite

No. 514 Top Spring Bolt—Bolt steel, 7-inch, housing grey iron 5½ ins. long. Chain 24-inch.

No. 524 x 0 Bottom Cane Bolt Half-inch diameter; 12 ins. long. **Price $12.00**

No. 03 x 0 x 12-inch Hinges—3 pairs. Surface pintles malleable iron. Steel strap. Pin ⅜-inch.

No. 227G Double Grip Latch—Latch bar 10-inches long and handle 10½ inches long. Strong jamb and door plates for padlock.

No. 10 Swingtite complete (weight 22 lbs.)

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SLIDETITE GARAGE DOOR OUTFITS

THREE DOOR OUTFIT

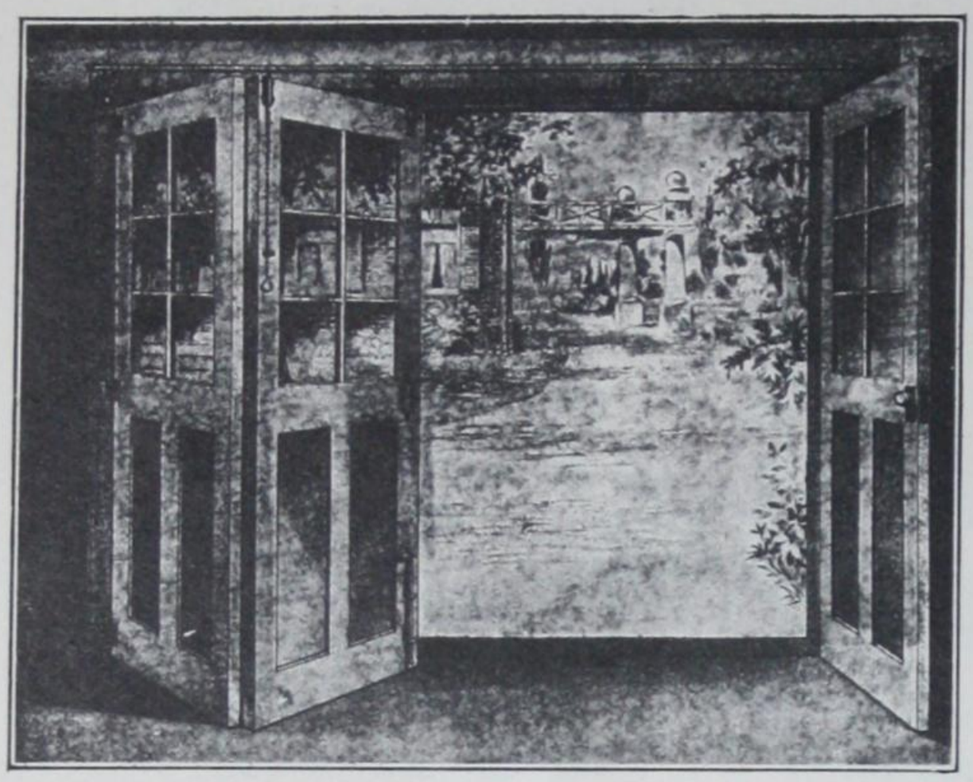

331A Half-Open—Two Doors Fold—One Door Swings

Everything is inside out of the way of wind and weather. Snow and ice cannot interfere—not like pushing a swing door out against a pile of snow.

A perfectly clear opening is afforded—no posts in the way. No obstructions on the floor. No sag because the hangers carry the weight—no warp.

For 1¾ in. Doors
Set consists of:

One 435 x 31 Hanger, one each 435 x 31C, 435 x 31I and 435 x 31E Brackets, 4½ Pr. Butts, 4 x 3½ in., one chain Bolt, one No. 524 Bottom Bolt, one Door Pull, 7 feet, 31 Track. Screws and Direction Sheet.

1 Set in Box. Weight with Track 40 lbs.
An ideal Three Door Outfit for single car Garage Doors will fold flat against wall if space permits

R.W. 331A, Three Door Outfit.....Set $21.60

FOUR DOOR OUTFIT

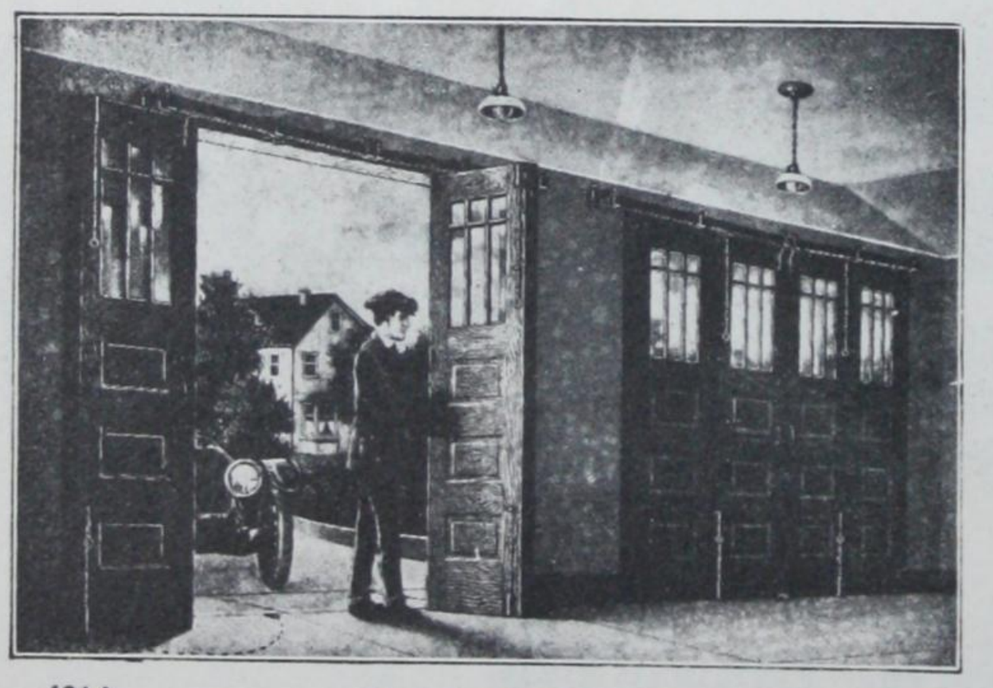

431A Four-door Outfit—Interior View

Four doors hinged together in pairs make an ideal arrangement, one pair folding to each side. Doors fit perfectly tight, are weather-proof and cannot sag. The four door outfit locks regularly from the inside.

No. 435
Hanger

No. 435-C
Centre Bracket



No. 435-I
Intermediate Bracket



435E
End Bracket

For 1¾ in. Doors
Set consists of:

Two 435 x 31 Hangers, one 435 x 31C, 435 x 31I and 435 x 31E Brackets, 6 Pr. Butts 4 x 3½ in., one Door Pull, one Floor Guide, four Bumper Shoes, 14 feet 31 Track, two Chain Bolts and two No. 524 Bottom Bolts, Screws and Direction Sheet.

1 Set in Box. Weight with Track 65 lbs.

R.W. 431A, Four Door Outfit.....Set $43.60

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

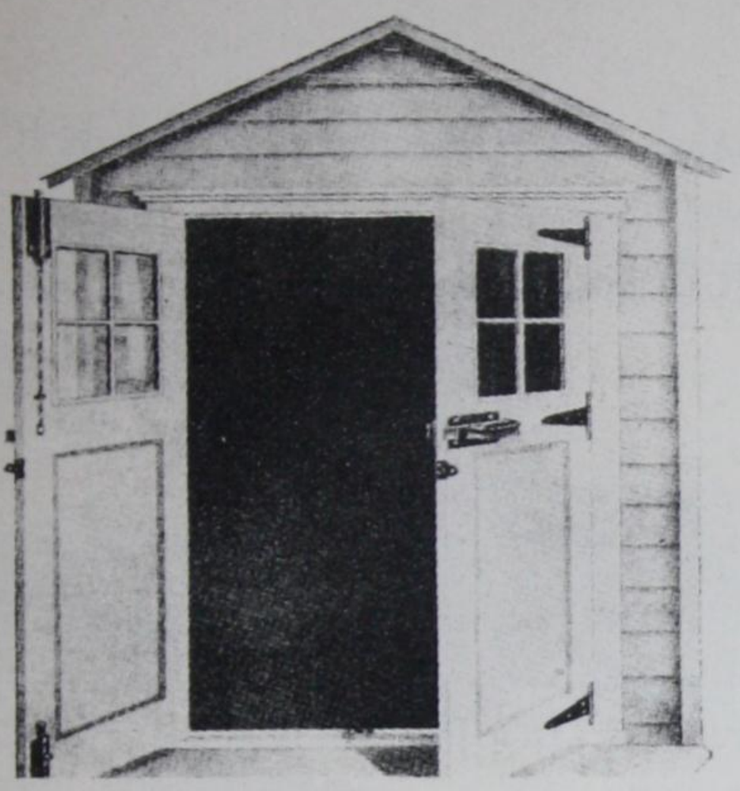

Universal

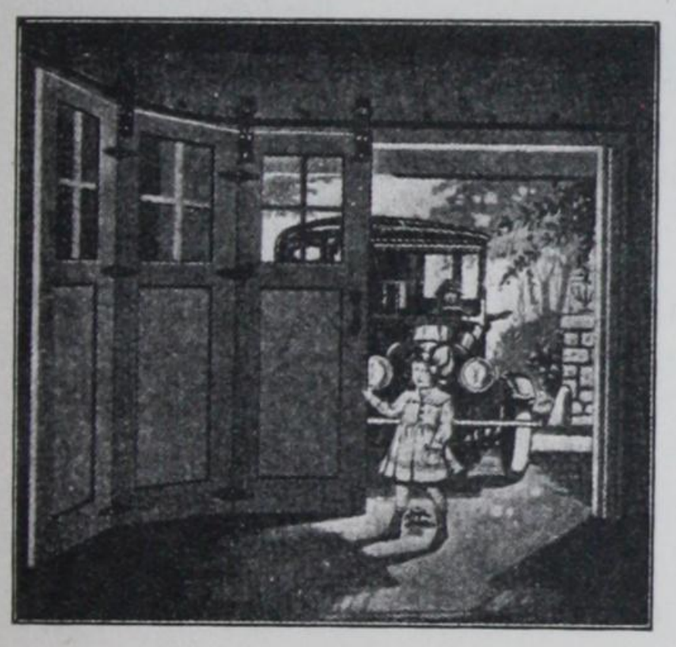

Hatch

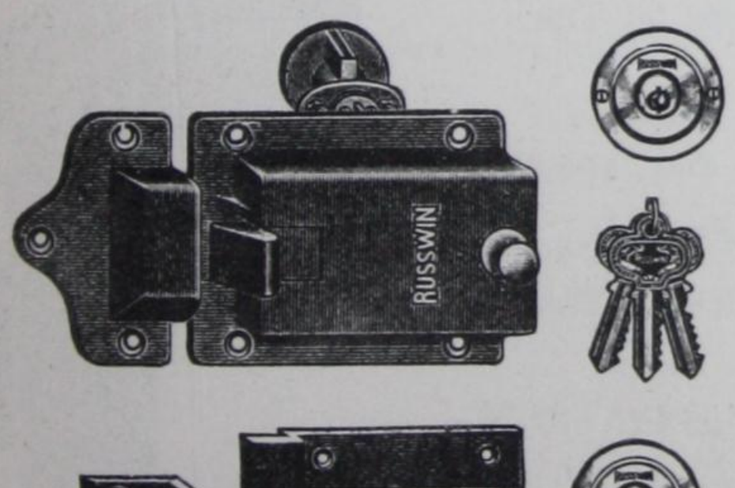

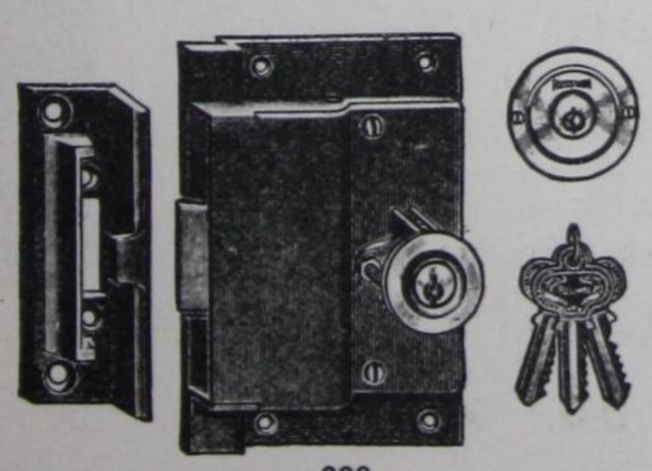

300

UNIVERSAL GARAGE DOOR SET

For Swinging Doors

Japanned Wrought Steel ..... **Set** $ 6.50

Set consists of—
- 3 Pair 8 in. Heavy Tee Hinges.
- 1 only 1055 x 6 in. Chain Bolt.
- 1 only 1056 x 6 in. Foot Bolt.
- 1 only 1240, Door Latch.
- 2 only Padlock Eyes.
- 1 Set in Box with Screws.
- Weight 10 lbs.

HATCH GARAGE DOOR OUTFITS

For Sliding Doors

Japanned Wrought Steel ..... **Set** 13.40

Set consists of—
- 3 Swivel Door Hangers.
- 22 ft. Track.
- 3 Pair Strap Hinges.
- 3 Stay Rollers (Floor Guides).
- 2 Door Pulls.
- 1 Safety Hasp.
- 1 Hook and Eye.

1 Set in Box, complete with Bolts and Screws, one 6 ft. and two 8 ft. lengths Track.

GARAGE DOOR LOCKS

For Mill, Warehouse and Garage Doors

No. 200, Dead Black ..... **Each** 6.50

For Swinging Doors.
Cast Iron Case, 4½ x 4⅝ in.
Russwin Unit Type.
Backset 3 in.

Self Latching Hinged Latch Bolt, for right or left hand doors, 1 in to 2¼ in., opening out. Reversible.

3 Keys, Bronze Cylinder, Bolt and Stop. Operation by key from outside and Thumb Latch inside. Stop can be set to hold bolt retracted. One in Box.

No. 300, Dead Black ..... **Each** 12.00

For Sliding Doors.
Cast Iron Case 5⅝ x 4 in.
Russwin Unit Type.
Backset 3 in. For Doors 1¾ to 2¾ in.

Self Latching, Malleable Iron, Hinged Latch Bolt. Reversible.

3 Keys, Bronze Cylinder, Protected Strike.

Operation, by key from outside, by lever inside. When Latch is withdrawn by key it remains retracted until key is withdrawn.

Latch can be held retracted by stop.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BARN DOOR HANGERS AND TRACK

1 x 232 Bracket

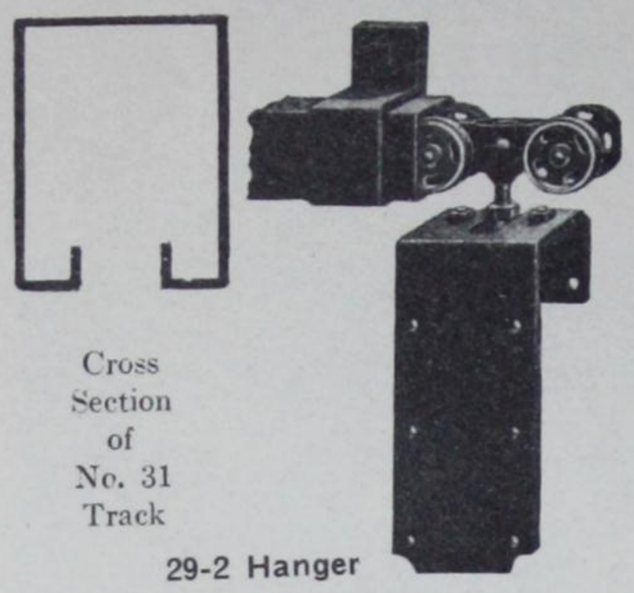

Cross Section of No. 31 Track

29-2 Hanger

BARN DOOR HANGERS

R.W. 29-2 ..... Pair $10.40

Wheels 3 in. Diameter. Apron 9 in. Long x 4 in. Wide x 3/16 in. Thick, for Doors 2¼ in. to 2¾ in. Thick, up to 600 lbs. Weight 16 lbs. Pr. Balance same as No. 321 see above.

BARN DOOR TRACK

No. 232 ..... Per 100 Ft. $11.20

Use with 29-2 Hangers. 14 Gauge Steel. 6, 8 and 10 ft. Lengths. Weight 3 lbs. ft. 4 Lengths in Bundle.

TRACK BRACKETS

Centre 1 x 232 ..... Each $1.12

End 2 x 232 ..... Each $1.10

Brackets should be used at Each end, at Every joint, and intermediate Brackets not over two feet apart. Weight 2 lbs. Each.

1 x 31 Bracket

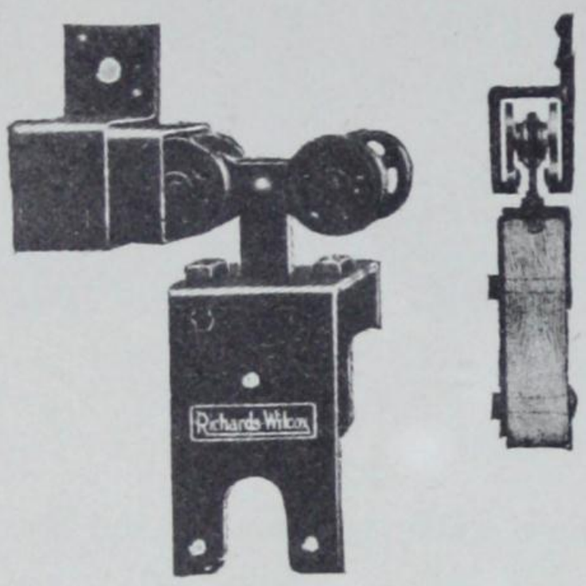

321 Hanger

R.W. 321 ..... Doz. Prs. $48.50

Wheels Grey Iron, 2⅛ in. Diameter Bearings Heavy Steel Rollers, Flexible Joint allowing Door to swing in the wind.

Hinge Pin is removable.

Clevis allows for lateral adjustment to make a tight fit against the Building. Apron 6 in. Long, 3½ in. Wide for Doors 1¾ in. to 2½ in. Thick up to 300 lbs. Weight 7 lbs. Pair. 1 Pr. in Box with Bolts and Blinds to make end Brackets.

BARN DOOR TRACK

No. 31 ..... Per 100 Ft. $42.50

Use with 321 Hanger. 16 Gauge Steel. Furnished in 6, 8 and 10 ft. Lengths. 6 Lengths in Bundle. Weight 1⅔ lbs. ft.

DOUBLE TRACK BRACKETS

22 x 31 Bracket

TRACK BRACKETS

1 x 31 ..... Doz. $3.60

Brackets should be used at each end, at every Joint; and intermediate Brackets, not over three feet apart. Weight 12 lbs. Doz. 4 Doz. in Carton with 7/16 x 2½ in. Lag Screws.

22 x 31 ..... Each $1.50

For use with No. 31 Track to allow two Doors to pass each other.

BARN DOOR HANGERS

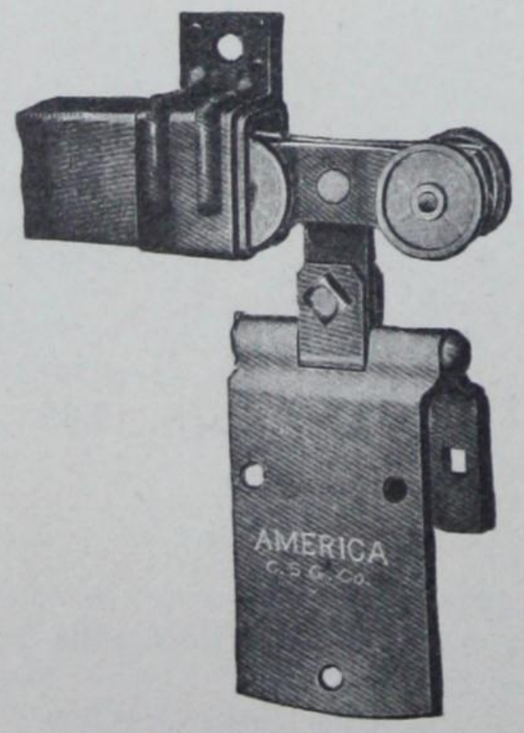

America

America, Japanned ..... Doz. Prs. 40.00

Wrought Steel Apron 6 in. Long x 3¼ in. Wide
Wheels Roller Bearing
1 Pr. in Box with Bolts and end Caps for Track Brackets
Weight 80 lbs. Doz. Prs.

Hatch, Japanned ..... Doz. Prs. $24.50

Wrought Steel Apron 6 in. Long x 3 in. Wide
Wheels Roller Bearing
1 Pr. in Box with Bolts and end Caps for Track Brackets
Weight 50 lbs. Doz. Prs.

Hatch Barn Door Track ..... Per 100 Ft. 37.50

Japanned Wrought Steel
4, 6, 8, 10 ft. Lengths
8 Lengths in Bdle.
Weight per ft. 1⅔lbs.
Used with Hatch and America Hangers. Brackets should be used at each end and at every joint. Intermediate Brackets not over three feet apart

Hatch Track Brackets ..... Doz. 3.40

Japanned Wrought Steel
Corrugated
With Lag Screws weight Doz. 9 lbs.

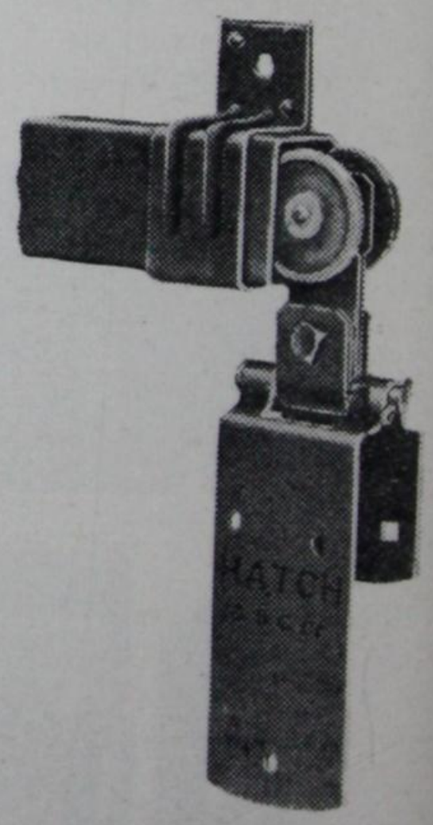

Hatch

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

No. 77 Barn Door Hanger and Track

For doors weighing approximately 300 pounds

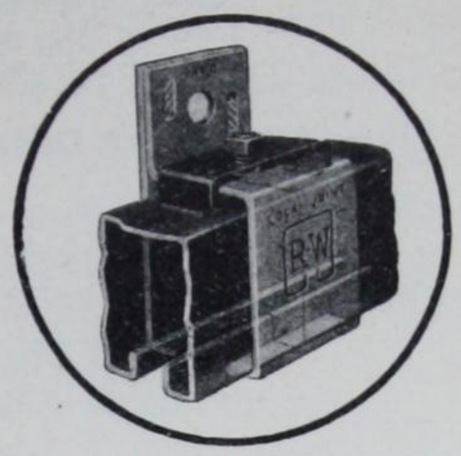

Exclusive Features of R-W Track
Lock Joint Bracket and Copper Steel Track

Flexibility—Allows door to swing in the wind without breaking off.

Double Adjustment—Adjustment in and out to make perfect fit to the building—adjustment up and down to make proper fit at the floor line.

Self-Draining Track—Keeps the runway clear, regardless of water, snow or sand.

Track—Is 14-gauge—This is two gauges heavier than ordinary track. The track is unusually strong, stiff and durable. Note the truss at the bottom of the track which doubles the strength of the runway.

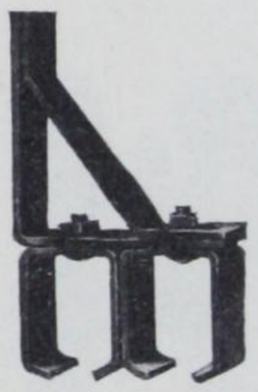

No. 22 x 77
Centre Bracket

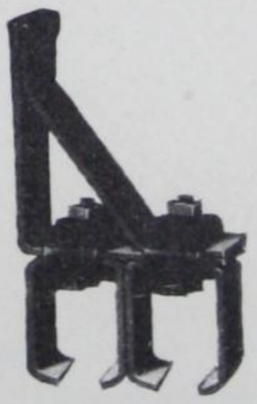

No. 21 x 77
Lock Joint Bracket

Wheels—Lathe turned—run smoothly and true. Malleable frame and clevis. Heavy roller bearings.

Packed—One pair in box with bolts and blinds for end brackets.

Weight—Hangers, per pair, 7 pounds; Track, per foot, 2 pounds; brackets each with lag screws, 1 pound.

See further description, page 82. For other brackets see pages 99-103. Brackets should be spaced on 30 inch centres.

Prices

	List
No. 77 Hangers, per dozen pairs	$23.20
No. 77 Track, 6, 8 and 10 foot lengths (six lengths in bundle) per foot	.22
No. 1 x 77 Brackets, with lag screws, per dozen (4 dozen in carton)	$1.76
No. 22 x 77 Centre Brackets (no lags) for Double Track, each	.64
No. 21 x 77 Lock Joint Brackets, each	.64

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

TROLLEY BARN DOOR HANGERS

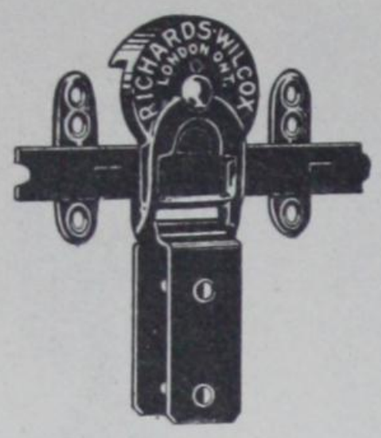

No. R. W. 843, King ..... **Doz. Prs.** $29.00

Malleable Iron Hood, Steel Apron
Roller Bearings. Runs on Flat Track No. **50**
1 Pr. in Box with Bolts. Weight 65 lbs. Doz. Prs.

No. RW 50, Barn Door Track ..... **Per 100 Feet** 23.00

Wrought Steel 1¼ x $\frac{3}{16}$ in.
Brackets 12 in. apart
Use with No. **843** Hangers
6, 8, 10 ft. lengths. Weight 110 lbs per 100 ft.
10 lengths in Bdle.

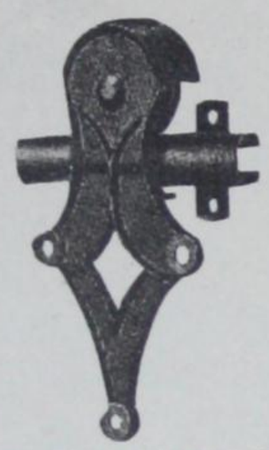

RED COAT HANGERS

No. R.W. 544, Redcoat ..... **Doz. Prs.** 44.00

Malleable Iron Hood and Apron
Roller Bearing
Runs on Track No. **543**
1 Pr. in Box with Bolts, Track Coupler
and End Brackets. Weight 92 lbs. Doz. Prs.

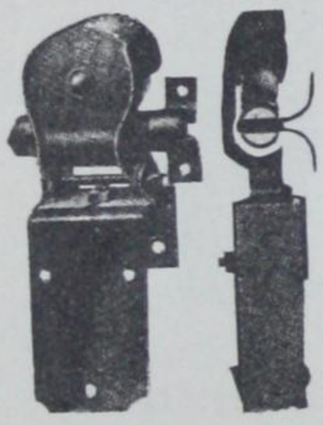

No. R.W. 543, Red Runner ..... **Doz. Prs.** 47.20

Malleable Iron Hood
Hinged Steel Apron 6 x 3½ in.
Can be adjusted for doors 1¾ to 2½ in. thick
1 Pr. in Box with Bolts, Track Coupler
and End Brackets. Weight 115 lbs. Doz. Prs.
Runs on Track No. **543**

No. R.W. 543, Track, Wrought Steel ..... **Per 100 Feet** 27.20

$1\frac{5}{16}$ in. Diameter. Steel Brackets
rivetted 18 in. apart
6, 8, 10 ft. lengths
10 lengths in Bdle. Weight 100 lbs. per 100 ft.
Used with Nos. **543** and **544** Hangers, see above

BARN DOOR STAY ROLLERS



No. 55, Japanned Iron

Wheel 2 in. Diameter
Screw $\frac{7}{16}$ x 6 in. Long

Doz. $2.40



No. 57, Japanned Iron

Wheel 2 in. Diameter
Screw $\frac{7}{16}$ x 6 in. Long

Doz. 2.40



Wrought Steel, Japanned

4½ x 1½ in.
Wheel 1⅞ in. Diameter
1 Doz. in Box

Doz. 4.50



No. 153, Japanned.

Steel Frame
Iron Wheel 2½ in. Diameter
Adjustable

Doz. 9.00

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

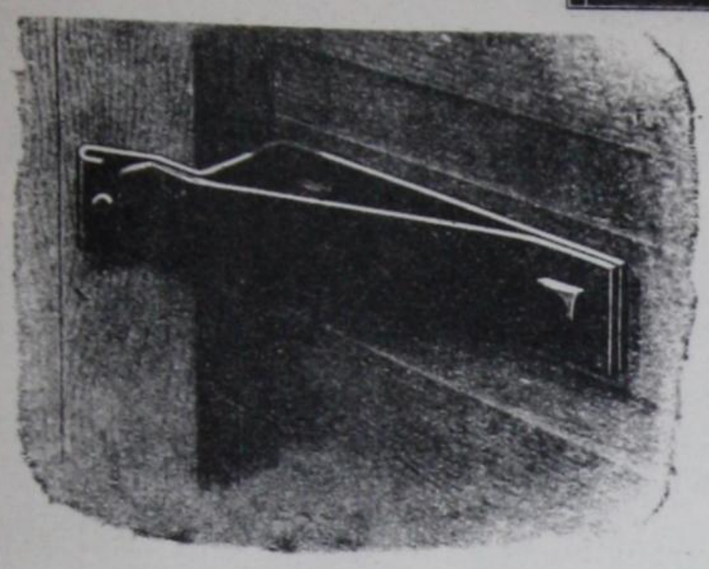

88

DOOR BINDERS AND STOPS

No. 88, Japanned Wrought Steel ..... **Doz. $ 5.60**

For 1¾ in. Doors
Use 7/16 in. Lag Screws, not included

No. 89, Japanned Wrought Steel ..... **Doz. 6.40**

Adjustable for doors 1¾ to 3 in.
Use 7/16 in. Lag Screws, not included

Operates with your foot

R. W. DOOR DOGS

Can be applied quickly — guard against broken doors and fenders.

(1 pair). They hold the door open safely.

Per single dozen 4.80

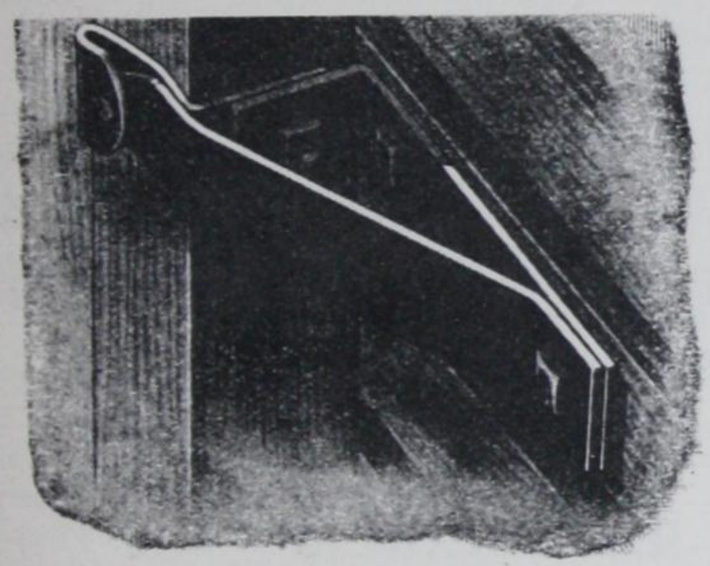

89

GRAVITY DOOR CATCH

No. 129, Japanned Iron ..... **Doz. 2.10**

Plate 3½ in.

Designed to fasten to side of building to hold door or window open.

1 Doz. in Box

129

GABLE DOOR FIXTURES

No. 278, Japanned ..... **Set 23.20**

Set consists of:
Two pairs Hangers
Eight Track Brackets
Four Pulley Brackets for Guide
40 feet—3/16 in. Cable
Bolts and Screws
1 Set in Box
Weight 50 lbs.

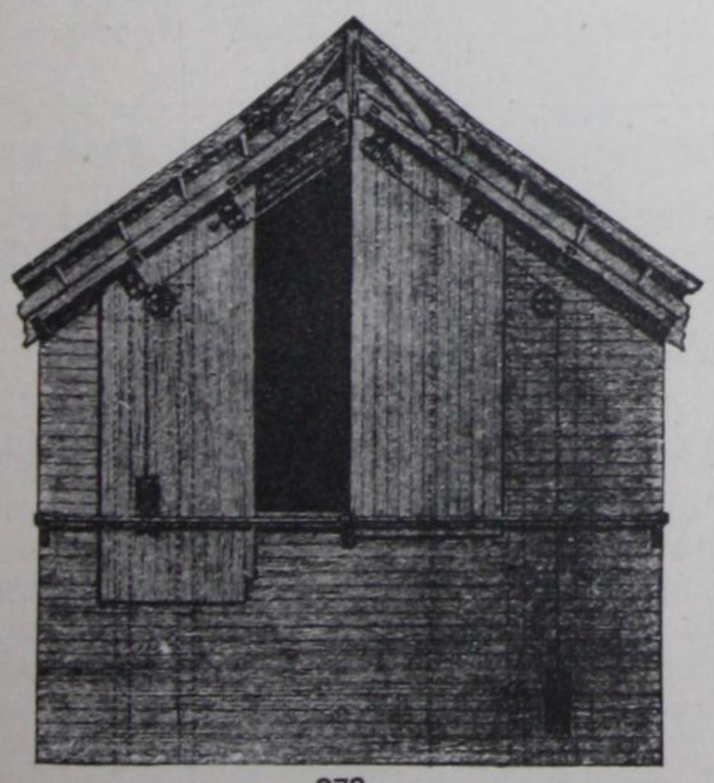

278

Gable Door Guide, No. 278 ..... **Foot .34**

10 Foot Lengths

Holds bottom of doors against building when closed and acts as guide and stop in opening doors.

For a ten foot gable door opening the following is required
1 set gable door fixtures No. 278
2 lengths gable door guide No. 278 x 10 ft.
2 lengths barn door track 31 x 10 ft.

Counterbalance weights are usually made of concrete on the job.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PARLOR DOOR HANGERS

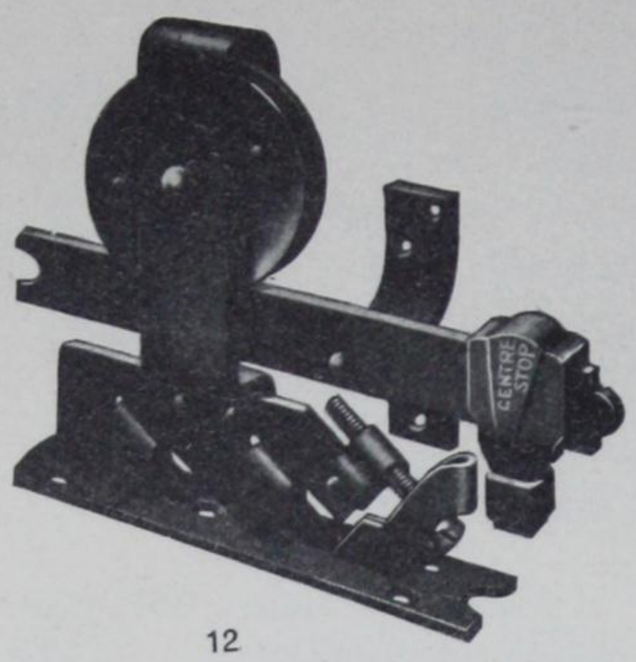

12

No. 12

Single Set with 8 ft. Track..... Set $5.30

Double Set with 14 ft. Track..... Set $10.40

All Steel Roller Bearing Wheels with Fibre tread. Hard Steel Bushings. Runs on Steel Track

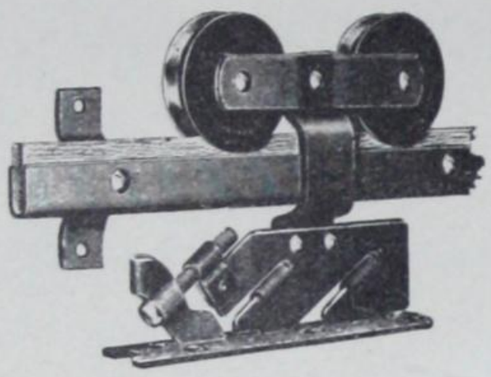

VELVET

R.W. No. 11, Velvet, Single Set with 8 ft. Track.. Set $6.40

R.W. No. 11, Velvet, Double Set with 14 ft. Track. Set $11.80

Steel Wheels with Fibre tread. Brass Bushed Bearings. End adjustment without removing stop.

Track: Smooth Maple strip in Steel channel

Weight Single Set 9 lbs.
Weight Double Set 18 lbs.

BALL BEARING

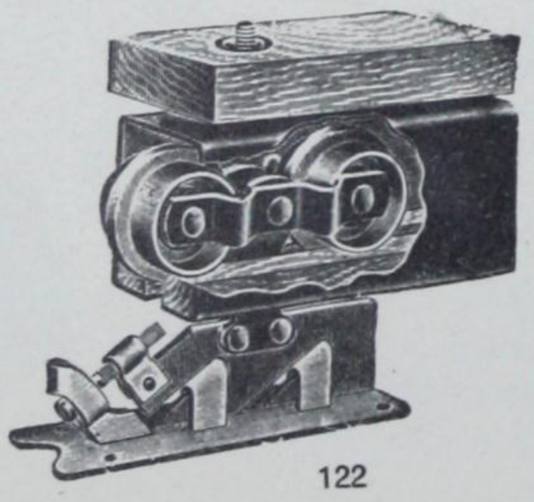

122

FOR SINGLE DOORS

TRACK

No. 122 x 14 for 4 ft. opening, 1-8 ft. length.. Set $12.80
No. 122 x 14½ for 4½ ft. opening, 1-9 ft. length.. Set $14.80
No. 122 x 15 for 5 ft. opening, 1-10 ft. length.. Set $16.00

FOR DOUBLE DOORS

No. 122 x 25 for 5 ft. opening, 2-5 ft. length.. Set $22.40
No. 122 x 25½ for 5½ ft. opening, 2-5½ ft. length.. Set $22.40
No. 122 x 26 for 6 ft. opening, 2-6 ft. length.. Set $22.40

Average Weight Single Set 18 lbs.
Average Weight Double Set 25 lbs.

Perfectly noiseless. Hard Maple Runway. Ball Bearing Wheels. Adjustment in both Hanger and Track. Wood Header Furnished with Track.

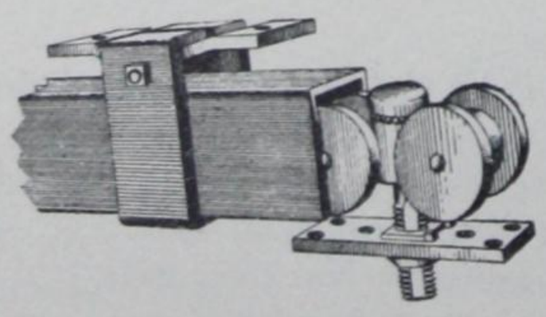

135

R.W. Accordion Folding Door Hangers, 135-01. Each $5.60

For folding sliding partition doors. Drop forged frame. Vertical screw adjustment. Ball bearing swivel pendant. For 1¾ in. doors. Ball bearing metal wheels 1⅞ in. Diameter

Weight 2 lbs. each

Track Brackets, 3 x 31 in..... Doz. $12.25

Use **31** Track see Page 147 for description. In ordering state number of full sized Doors and Half Doors, Thickness of Doors and width of opening. Use one Hanger on every other Door beginning with Door furthest from Half Door. Track should be as long as opening is wide less 8 in. Brackets should be placed 2 to 2½ feet apart. Doors should not exceed 3 feet in width

Weight 2 lbs. each

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DOMINION COAL CHUTES

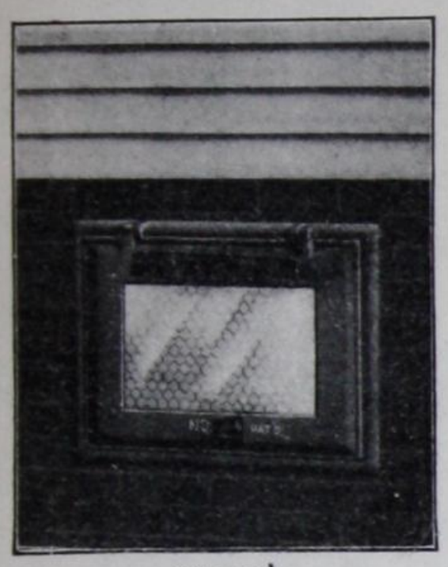

Closed

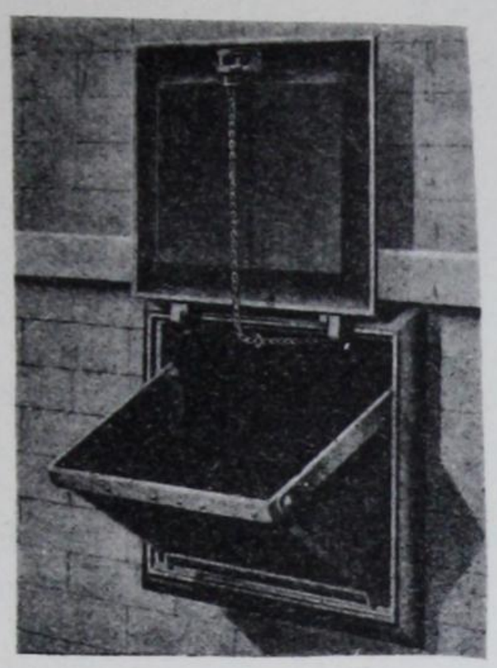

Open

No. 1A with Wired Glass Panel ..... **Each $22.40**

Cast Iron Frame 19½ in. High by 25½ in. Wide
Wrought Steel Body 22 in. Wide, 19 in. High, 12 in. Deep
The Door is fitted with ¼ in. Wired Glass 10½ x 16½ in.
Steel Shield to protect Glass when Door is open
When closed Door locks automatically
Weight 85 lbs.

No. 1B with Steel Panel instead of Wired Glass Panel ..... **Each 19.50**
Weight 75 lbs.

ROUND COAL CHUTES

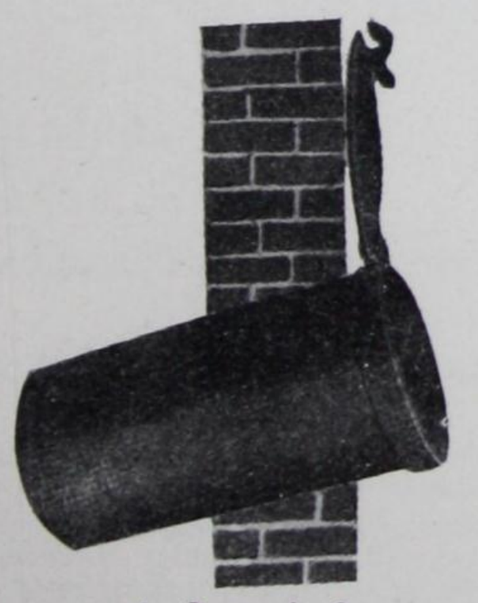

1 2 and 3

Number	Opening	Length	Weight	Each
1	18 in.	24 in.	85 lbs.	31.00
2	18 in.	30 in.	90 lbs.	33.00
3	24 in.	30 in.	155 lbs.	51.00

Cast Iron Door and Frame
Wrought Steel Body. Automatic Lock

MAJESTIC COAL CHUTES

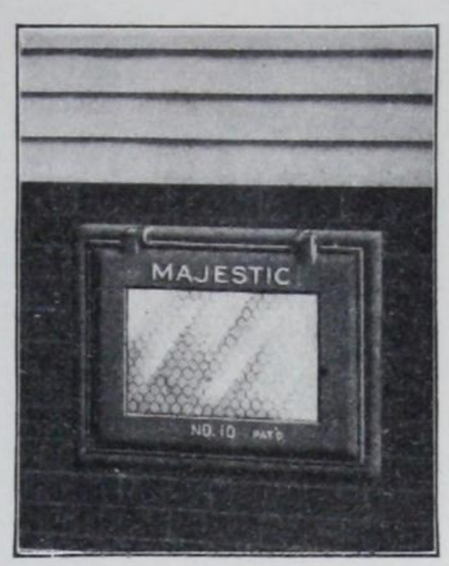

10A and 20A Closed

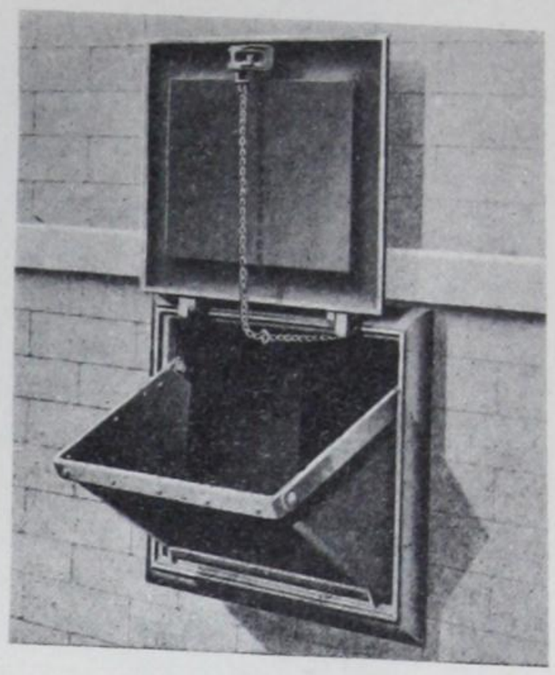

10A and 20A Open

No. 10A with Wired Glass Panel ..... **Each $31.00**

Cast Iron Frame 19½ in. High by 25½ in. Wide
Wrought Steel Body 22 in. Wide, 19 in. High, 12 in. Deep
The Door is fitted with ¼ in. Wired Glass 10½ x 16½ in.
Steel Shield to protect Glass when Door is open
When closed Door locks automatically
Weight 85 lbs.

No. 20A with Wired Glass Panel (From Factory Only) ..... **Each 39.00**

Cast Iron Frame 24½ in. High by 34½ in. Wide
Wrought Steel Body 23 in. High by 30 in. Wide, by 18 in. Deep.
The Door is fitted with ¼ in. Wired Glass 14 x 24 in.
Balance same as **No. 10A** see above
Weight 100 lbs.

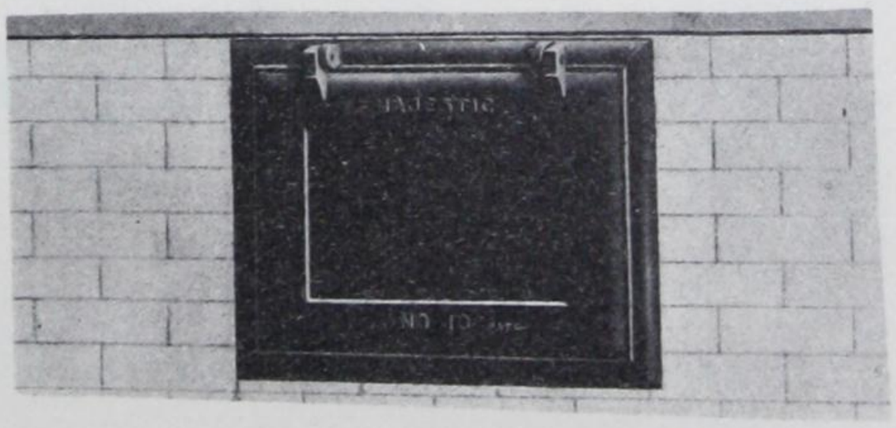

10B and 20B

No. 10B with Steel Panel instead of Wired Glass Panel ..... **Each 29.00**
Weight 75 lbs.

No. 20B with Steel Panel instead of Wired Glass Panel (From Factory Only) ... **Each 37.00**
Weight 90 lbs.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RUSSWIN KEY CUTTING MACHINE

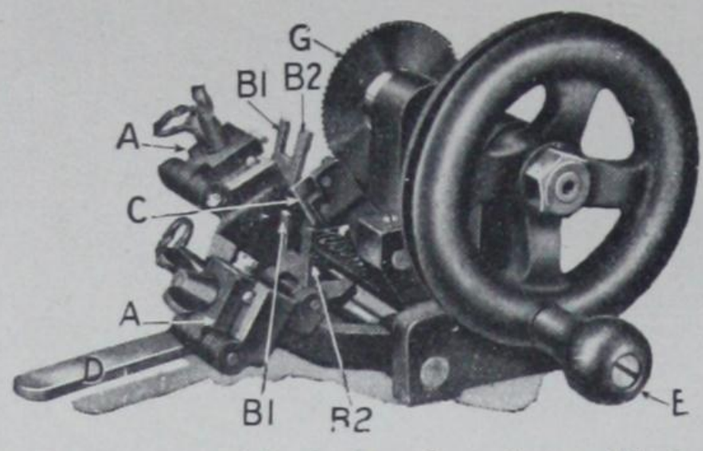

Equipped with Cutter Saw for cutting all Keys except Pin Tumblers.

Will cut duplicates of all makes, of pin tumbler, cylinder, flat double bit, solid or hollow barrel or stem keys, by changing the cutter and gauge.

The hinged vises A, hold both original and blank in rigid and correct position.

A shelf on the end of each vise supports the bow on the cylinder key.

On each vise is a hinged stop which serves both as a top shoulder stop B1 and as a setting stop B2.

The top shoulder stop is indispensable when cutting cylinder keys, as all cutting from the original cylinder keys should be started from the top shoulder.

The setting stop (B2) gives the correct distance from the cutter and the shoulder of the other stop B2 against the gauge (C)

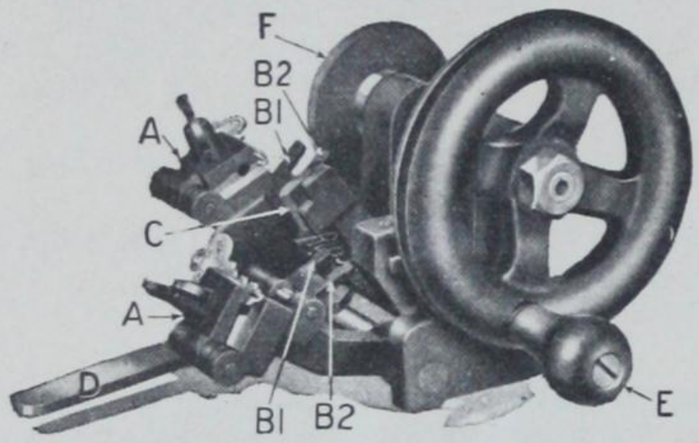

Equipped with Milling Cutter for cutting Pin Tumbler Keys

Two gauges (C) one for cylinder and one for other types of keys, are furnished with the machine. After the original key and the blank to be cut are placed in position, raise lever (D) with the left hand, turning handle (E) until cutter (F or G) engages and cuts into blank to be duplicated. May be operated by hand or driven by power.

One in Wooden Box, Weight 12 lb.

Russwin Key Cutting Machine..... **Each $110.00**

No. 50, Complete with Saw and Cutter

FROM FACTORY ONLY

DUMB WAITER OUTFITS

DAISY

Fixtures Only

Consisting of the necessary Castings, Wheels, Brackets, Pulleys, Pulley Housing, Thimbles and Guides to construct a low-priced Serviceable Dumb Waiter.

In these Sets there is not provided the Woodwork for Cab and Enclosure, the Safety and Hoisting Ropes or Cab and Counterbalance Weights.

For Hoisting Rope use ½ in. pliable Cotton Rope; For Safety Rope use ⅜ in. Cotton Rope. Car Guides should be ⅞ x 1¼ in. deep and coated with Black Lead to reduce friction.

Counterbalance Weights can be supplied 6 in. wide by 1¼ in. thick, 36 lbs. each together with 1½ lb. additional Sections can be supplied at additional Cost if desired.

SET OF FIXTURES

Capacity 50 to 75 lbs. for Well Hole 24 x 24 in. or less consisting of:

1 Car Brake complete; 7 Guide Wheels and Brackets; 1 Safety Rope Counterbalance Weight with Pulley, Pulley Housing and Weight Complete; 7 Rope Thimbles; 4 Car Guides; 1 Brass Rope Ring; 1 W.I. Ring; 1 Wood Screw and Diagram for Installation.

No. 1, —Daisy Fixtures, Weight per Set 64 lbs. Per Set..... **$47.50**
—Counterbalance, Weight 36 lbs. ..... Per lb..... **.28**
—Sectional Counterbalance, Weight 2½ lbs., Per lb.... **.28**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SCREEN WIRE CLOTH

Black

Galvanized

Bronze

Black, 12 x 12 Mesh ..... Per 100 Sq. Ft. $4.80

Galvanized, 14 x 14 Mesh ..... Per 100 Sq. Ft. $7.00

100 Lineal feet in Roll

Width	18 in.	20 in.	22 in.	24 in.	26 in.	28 in.	30 in.	32 in.
Square feet in Roll	150	166⅔	183⅓	200	216⅔	233⅓	250	266⅔
Weight per Roll, lbs	16	17½	19	21	23	24	26	28
Black per Lineal Yard 12 x 12 Mesh	**$.22**	**$.24**	**$.27**	**$.29**	**$.31**	**$.34**	**$.36**	**$.39**
Width	34	36	38	40	42	44	46	48
Square feet in Rolls	283⅓	300	316⅔	333⅓	350	366⅔	383⅔	400
Weight per Roll, lbs	30	32	36	38	40	42	44	46
Black per Lineal Yard 12 x 12 Mesh	**$.41**	**$.43**	**$.46**	**$.48**	**$.51**	**$.53**	**$.55**	**$.58**

Black Wire Cloth, 14 x 14 Mesh ..... Per 100 Sq. Ft. $6.20

Bronze Wire Cloth, 14 x 14 Mesh ..... Per 100 Sq. Ft. $17.50

Special Note: The above lineal yard prices on black wire cloth are figured on the basis of the 100 sq. ft. quotation shown and in that retailers sell wire cloth on the lineal yard basis we will invoice in that manner for their convenience unless instructed otherwise

Note:—We can bring forward from factory the following:—

Bronze Wire Cloth, 16 x 16 Mesh ..... Per 100 Sq. Ft. $18.70

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STANLEY FOUR-SQUARE TOOLS

FOR HOUSEHOLD USE

STANLEY Household Tools are packed in artistic individual containers in keeping with the general character of the tools. This gives the customer the tool packed as it originally left the factory—no additional wrapping is necessary. Each carries its own retail price either on a tag or the container enclosing it.

HOUSEHOLD SCREW DRIVERS



Round steel blades. A rivet through the ferrule, handle and shank securely fastens the blade in the handle. Tapered and fluted handles, dull black, especially designed to fit the hand.

Blade Length, in.	Over All, in.	Diam., in.	Wt. per doz., lbs.	Price, Each
1½	3¼	⅛	½	**$0.29**
2½	6½	7/32	1¾	**.40**
4	9	¼	2¾	**.53**
5	10½	5/16	4	**.60**

Packed, 1½ inch 6 in a box; 2½, 4 and 5 inch each in an envelope, 6 in a box.

HOUSEHOLD VISES

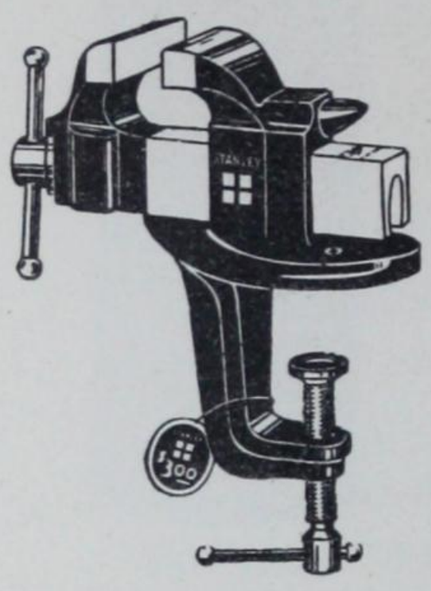

The jaws are ground and carefully fitted. Width of jaws, 2 inches. Vise screw with square lathe cut thread working in long malleable nut. Patented split washer under head of screw to take up wear. Body of vise, dull black. This vise will withstand severe usage. Weight each, 4½ lbs.

Price - - each **$3.90**

Packed One in a Box

HOUSEHOLD CHISELS

Socket, pocket bevel edge. Blades 3¼ inches long. Dull black handles, leather capped.

Blade	Wt. per doz., lbs.	Price, Each
⅜ inch	3	**$1.24**
½ inch	3¼	**1.30**
¾ inch	4½	**1.44**
1 inch	5	**1.62**

Packed One in a Box.

Six Boxes in a Carton.

HOUSEHOLD BIT BRACES

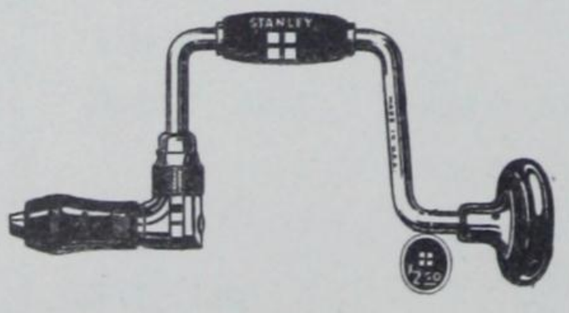

Open ratchet. Nickel plated. Shell, hardwood head, and handle, dull black. Alligator jaws. 8 inch sweep. Weight, 4½ lbs. to box of two.

Price - - - - - - each **$3.30**

Packed Each in a Separate Wrapper, Two Braces in a Box.

HOUSEHOLD AUGER BITS

Solid center, extension lip, double cutter. Correctly tempered. Accurate for size. Highly finished throughout. Shank end of bit, dull black.

Size in 16ths	Wt. per doz., lbs.	Price, Each
4	1	**$0.67**
6	1½	**.67**
8	2	**.76**
10	2¾	**.91**
12	3¼	**1.06**
16	4¾	**1.44**

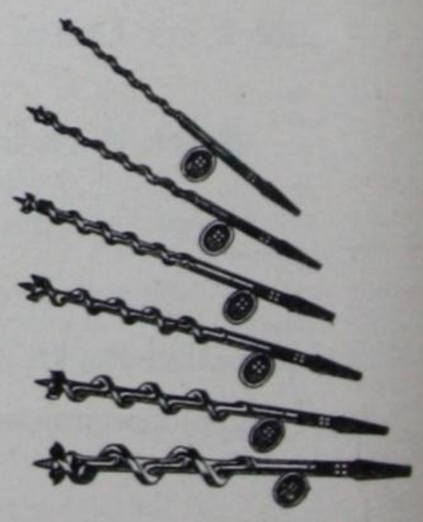

Packed 4, 6 and 8-16ths one each in an envelope, 6 envelopes in a box; 10, 12 and 16-16ths, one each in a box, 6 boxes in a carton.

All Prices Subject to Change Without Notice

FOUR-SQUARE STANLEY TOOLS FOR HOUSEHOLD USE

STANLEY Household Tools are packed in artistic individual containers in keeping with the general character of the tools. This gives the customer the tool packed as it originally left the factory—no additional wrapping is necessary. Each carries its own retail price either on a tag or the container enclosing it.

HOUSEHOLD JACK PLANES

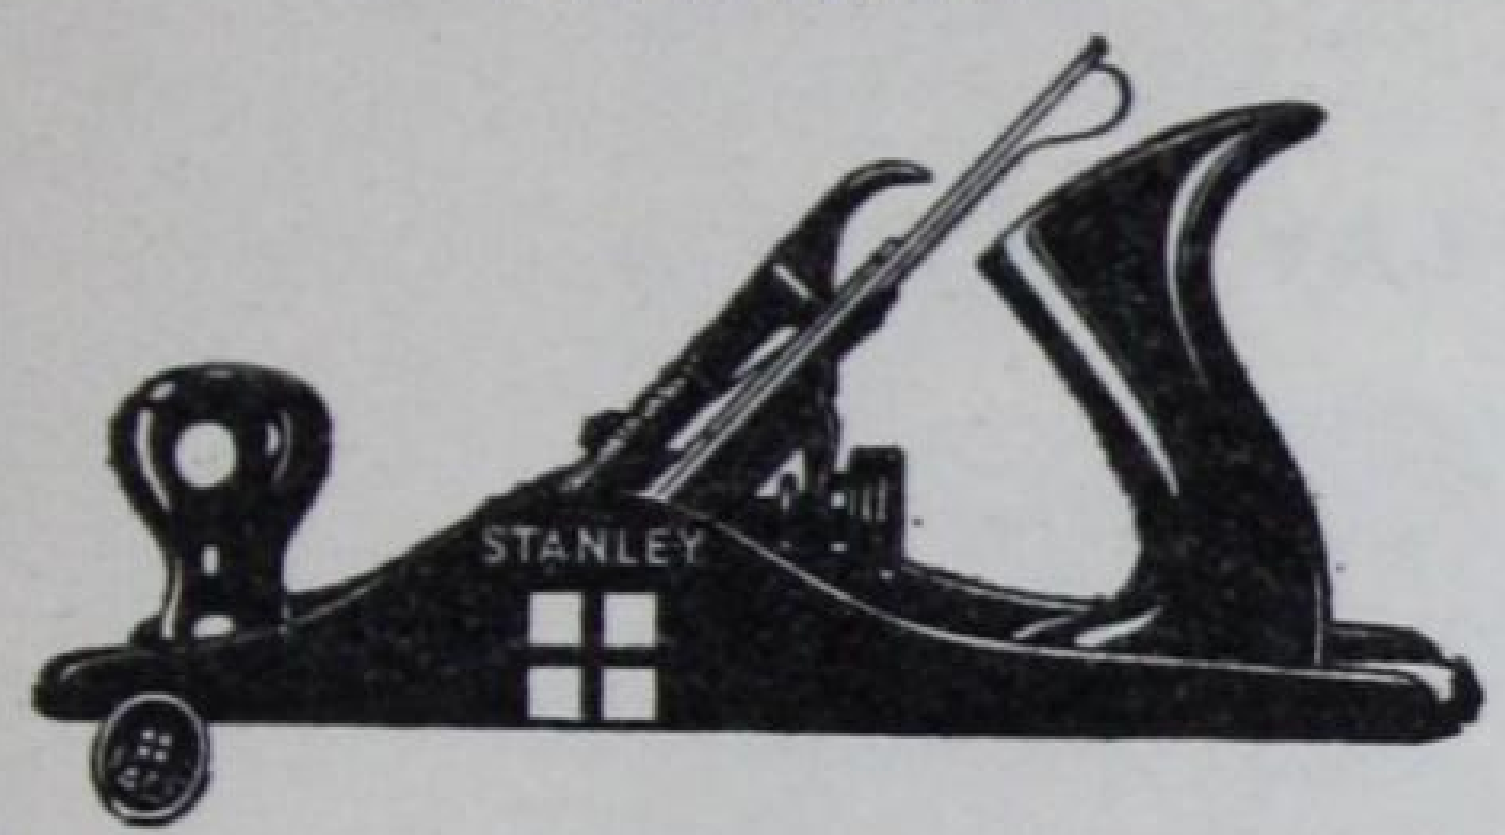

Hardwood handle and knob, dull black. Sides, dull black. Cutter adjustable endwise and sidewise. Length 11½ inches. Cutter, 1¾ inches. Weight each, 4 lbs.

Price - - each $6.50

Packed One in a Box

HOUSEHOLD BLOCK PLANES

Lever cap and sides, dull black. Cutter, screw adjustment. Lever screw, lever cam, adjusting wheel and screw, nickel plated. Length, 6½ inches. Cutter, 1⅝ inches. Weight each, 1½ lbs.

Price - - each $2.40

Packed One in a Box

HOUSEHOLD PUTTY KNIVES

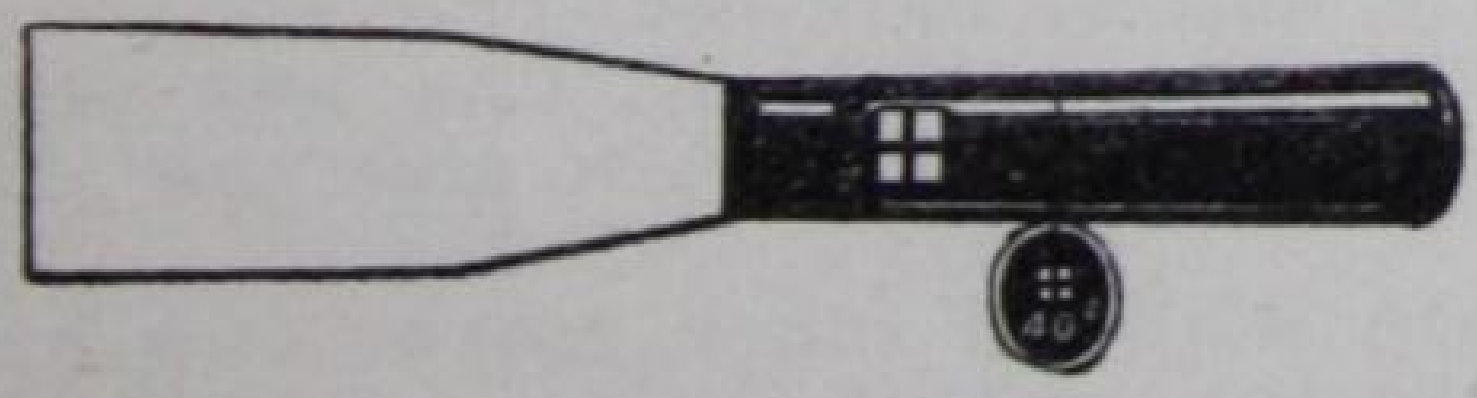

Dull black, hardwood handle. Crucible steel blade 1⅜ inches wide, 3¾ inches long. Half elastic. Weight per dozen, 1¼ lbs.

Price - - each $0.52

Packed Each in an Envelope, 6 Envelopes in a Box

HOUSEHOLD HAMMERS

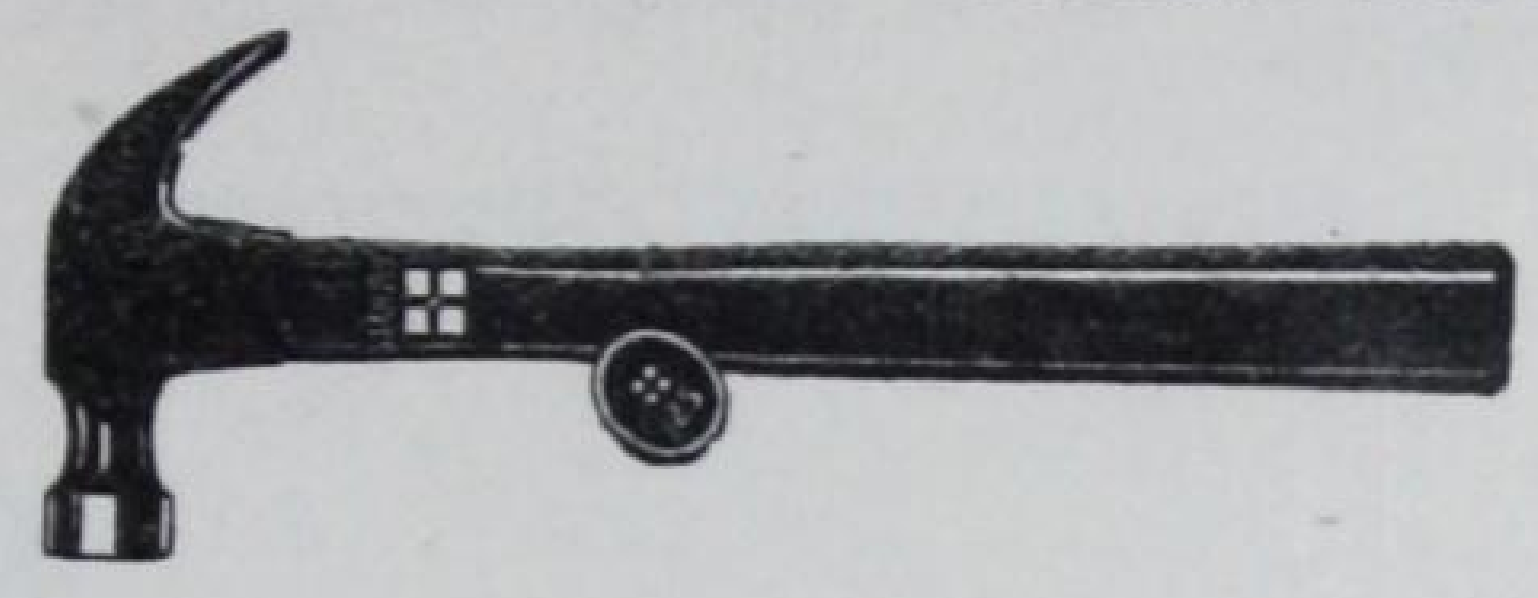

Made of a special steel, carefully forged, hardened and tempered. Bell face; round neck and poll; curved claw which easily pulls any size of nails and brads. Face, poll and top of claw are polished, rest of head dull black. Sound hickory handle, dull black. 13 inches over all. Weight without handle 14½ ounces. Weight packed, 1½ lbs.

Price - - each $1.74

Packed One in a Box

HOUSEHOLD SAWS

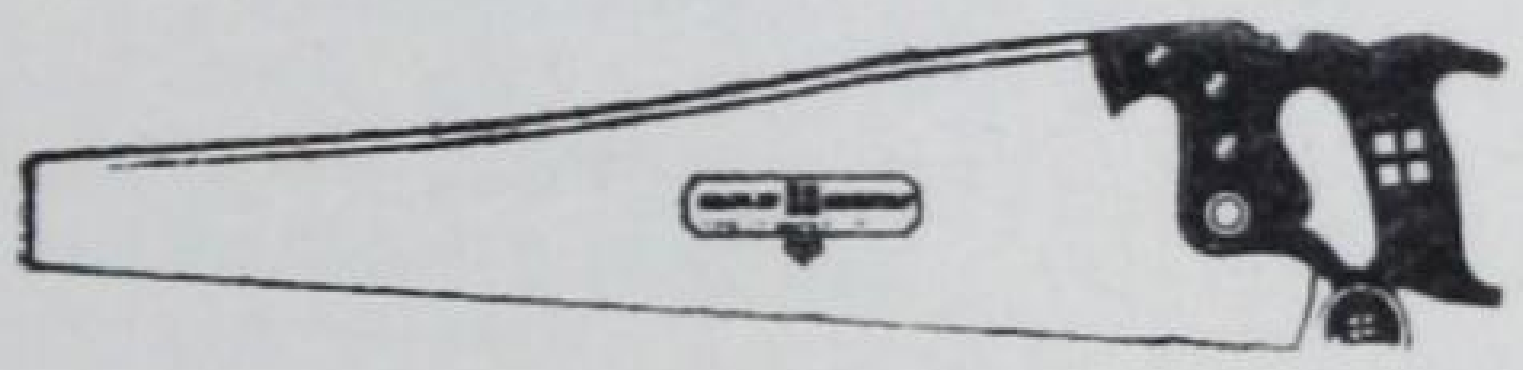

Thin back, highly polished crucible steel blade. Handle dull black, with four nickel plated brass screws. 24 inch, hand skew-back, 8 point. Weight each, 1¾ lbs.

Price - - each $3.80

Packed One in a Box

HOUSEHOLD HAND AXES

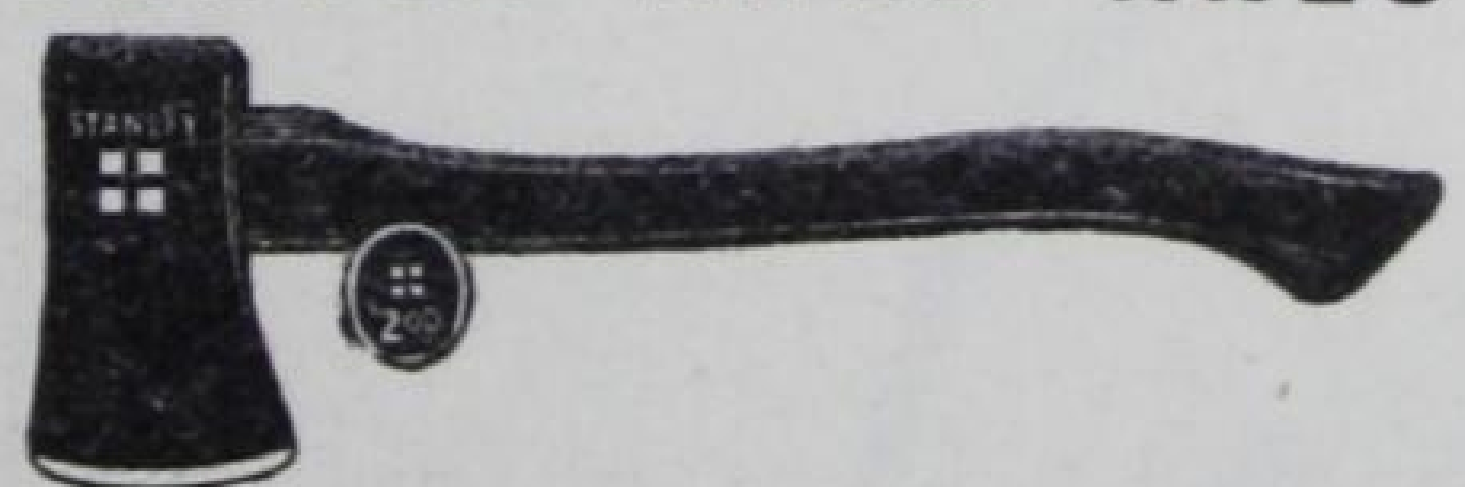

Made from one piece tool steel, hand tempered in oil. Cutting edge, polished and honed. Head, black lustrous finish, deep etched. Sound hickory handle, dull black, 18 inches over all. Weight without handle, 2¼ lbs.

Price - - each $2.80

Packed, Each Head Carefully Protected with a Cardboard Sheath. Weight, 3 lbs.

Open Stock

HOUSEHOLD BOXWOOD RULES

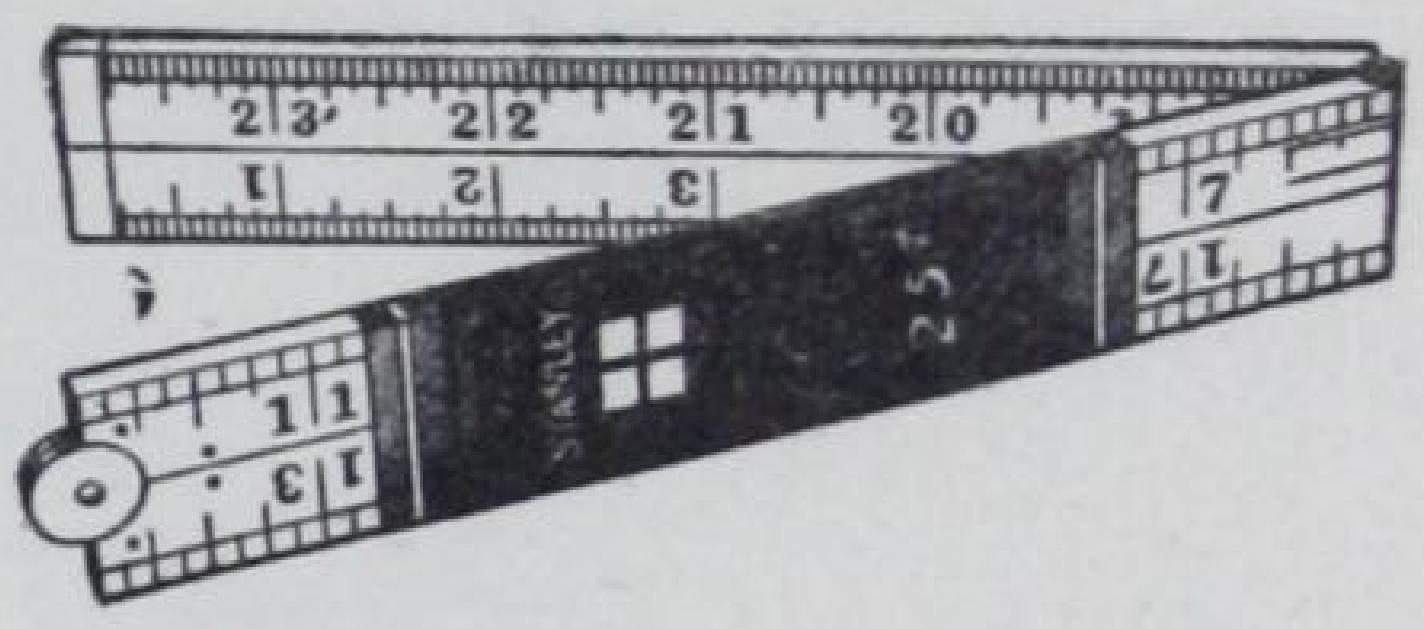

Two Foot. Four Fold. 1 inch wide. Round joint. Middle plates. Heavy figures. Graduated in 8ths and 16ths inches. Weight per dozen, 1 lb.

Price - - each $0.35

Packed 12 in a Box

HOUSEHOLD TRY AND MITRE SQUARES

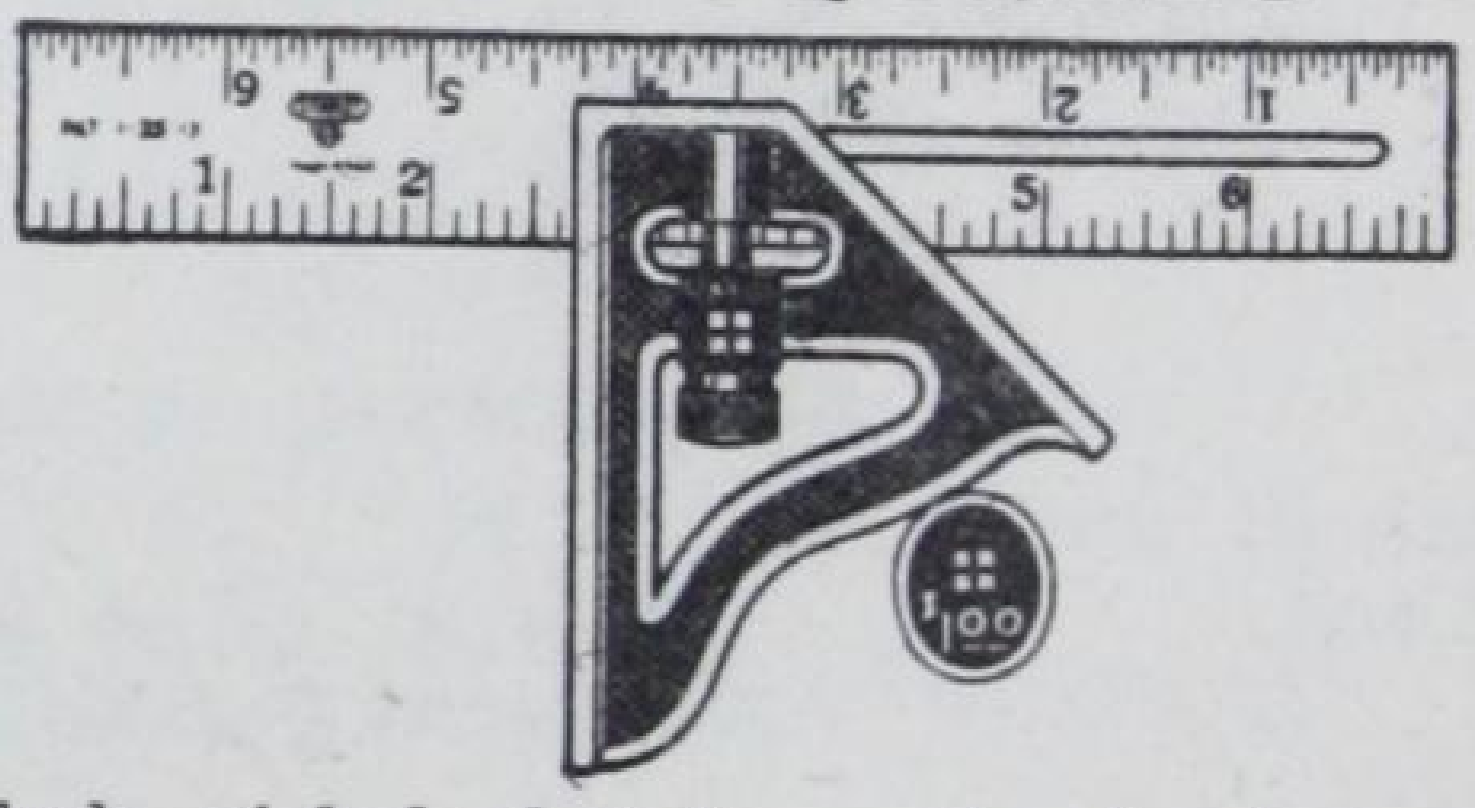

Blade nickel plated, can be firmly locked at any point. Edges machined and squared inside and out. Graduated in 8ths and 16ths. Iron handle, dull black. 7 inch blade; 2⅝ inch handle. Weight each, ½ lb.

Price - - each $1.40

Packed One in a Box

HOUSEHOLD PLUMB AND LEVEL



Selected hardwood, carefully seasoned; 2⅜ inches x 1¼ inches stock, 18 inches long. Proved glasses, non-adjustable. Dull black handy grip. Weight each, 1¼ lbs.

Price - - each $2.10

Packed One in a Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Non-Skid Screw Driver

DRIVES SCREWS EASIER

Until you've tried it yourself, you can't believe how much easier it is to drive a screw with the Non-Skid Screw Driver. You don't push—you only *turn* the Non-Skid Screw Driver.

TURNS RUSTED SCREWS

The Non-Skid "bites" those battered and rusted screws that a smooth blade screw driver hasn't even a chance to "start."

SPEEDS OVERHEAD WORK

On overhead jobs and in angling positions, where it is difficult to exert pressure, the Non-Skid Screw Driver speeds up work.

PREVENTS INJURIES

A slipping, skidding, jumping screw driver is a menace to man's feelings and flesh. Skinned and gouged hands are no joke. The Non-Skid Screw Driver is the *great preventive!*

No. 1

The blade runs clear through the handle.

No. 1	Each
3—4″	.72
2—5″	.80
3—6″	.86
1—8″	$1.06

No. 2

Blade, handle and ferrule are riveted securely together. The *best* in its price class.

No. 2	Each
4—4″	.48
2—5″	.58
4—6″	.64
1—8″	.86

POULTRY NETTING

HEXAGON MESH

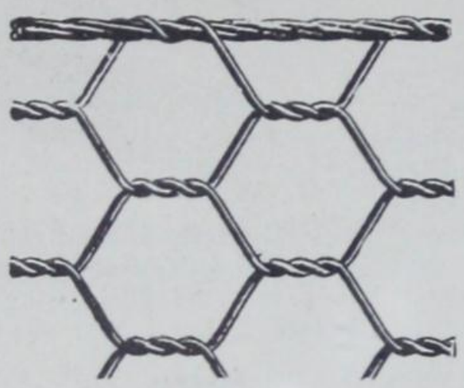

Galvanized before weaving. Steel wire, double twisted. Two strand selvedge.

1 in. MESH, 20 GAUGE WIRE

Width, ins.	24	30	36	48
Weight per roll, lbs.	33	40	50	66
Per roll of 50 yards	$7.80	9.40	11.00	16.30

50 Yards in a Roll.

2 in. MESH, 19 GAUGE WIRE

Width of wire, ins.,	24	30	36	48	60	72
Per roll,	$4.20	$5.60	$6.50	$8.60	$10.70	$12.80

150 Lineal Feet in a Roll.

"LAY FLAT"

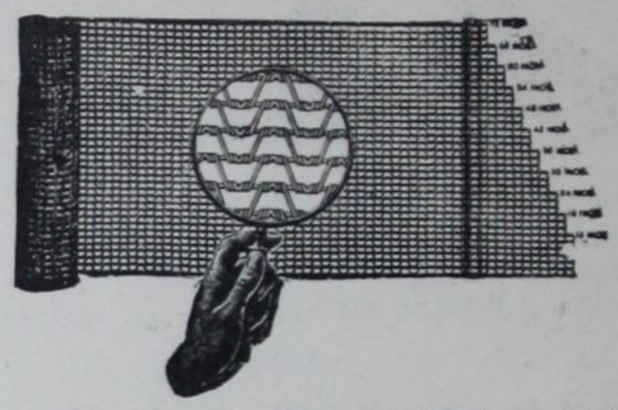

Illustration Showing Magnified View of Weave.

This netting is woven over a form, each wire being of the same length and tension, making a perfect fabric with all the meshes of uniform size. The hinge joint at the points of intersection is a good feature.

Lay Flat Netting is strong and stiff and when unrolled is straight and flat. It requires only corner posts and the tighter it is stretched the better it looks.

Easily adapted for Coops, Fowl Runs, Tree Guards, and Concrete reinforcing.

Galvanized before and after Weaving.

2 in. MESH, 19 GAUGE WIRE

Width of wire, ins.,	24	30	36	48	60	72
Wgt. per roll approx. lbs.	23	28	33½	43	53	68
Per roll -	$4.60	5.40	6.20	8.30	10.40	12.40

150 Lineal Feet in a Roll.

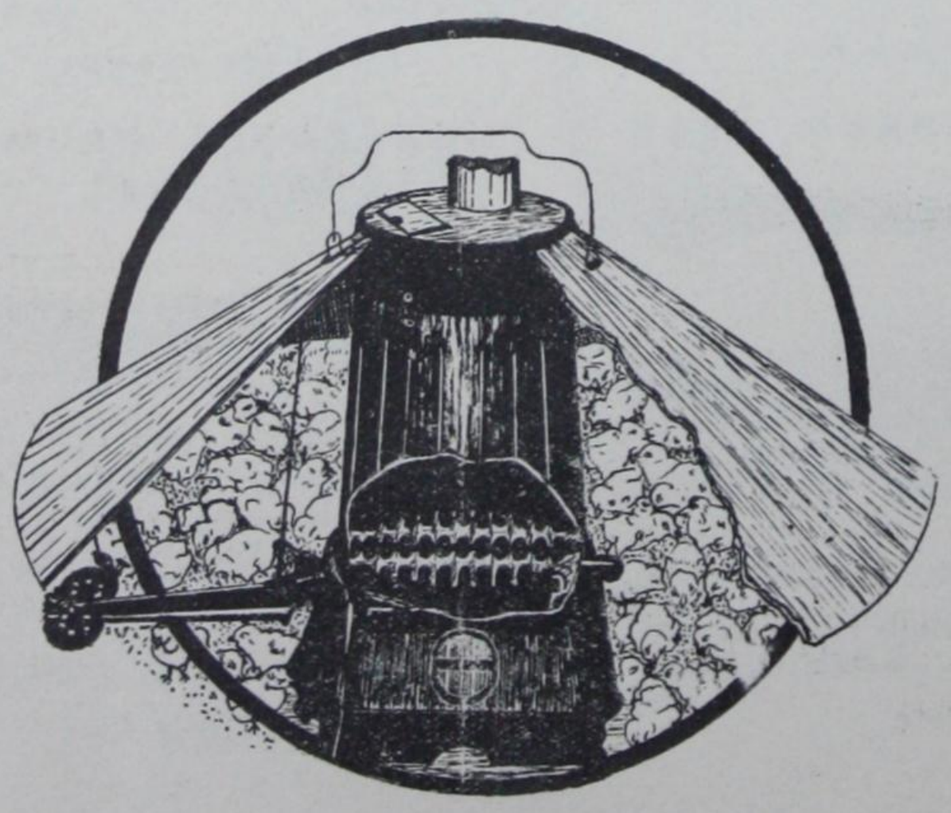

RAINBOW CHICKEN BROODERS

By Their Continuous Rays of Heat Keep Chicks Cosy and Warm, Thereby Assuring Profitable Returns

SIMPLICITY in itself with all useless frills disposed of.
DURABLE in that it is made of best materials possible to insure long continuous service.
FUEL—Chestnut size, soft or hard coal or coke.
PERFORMANCE will give everything that any other brooder on the market in its class will give and then some.
CAPACITY—Compare with all other makes and note generous allowance in this respect.
Stove—Superior heavy construction throughout.
Grates—Heavy flat type, revolving.
Shaker—To fit above.
Base—Two piece, rigid, with removable slide door.
Thermostat—Lever arm detachable.
Canopy—Made of heavy gauge galvanized sheet, complete with top, handle, pulley and rope for raising and lowering.

A Brooder Without an Equal at its Price,
Supplied Complete, Ready to Go to Work.

Size 450 Chick **$22.00** each. Shipping weight 80 lbs.
Size 900 Chick **$26.50** each. Shipping weight 105 lbs.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Poultry Supplies

Prices Net

This Page Only

Jar Fountain or
Feeder
Galvanized
G20—5¼" Doz. .91
Charcoal Tin
T21—5¼" Doz. .91



Feeding Trough
Galvanized
G30—16 holes—14 Doz. $2.73
G32—24 " —20" Doz. $3.19
G34—32 " —26" Doz. $4.12
Charcoal Tin
T36—16 holes—14" Doz. $2.73
T38—24 " —20" Doz. $3.19
T40—32 " —26" Doz. $4.12



Galvanized Large
Capacity Hopper
No. 240—24" Doz. $13.75
No. 360—36" Doz. $20.63

Galvanized
Pail Fountain
No. 120—2 Gallon
Doz. $10.63

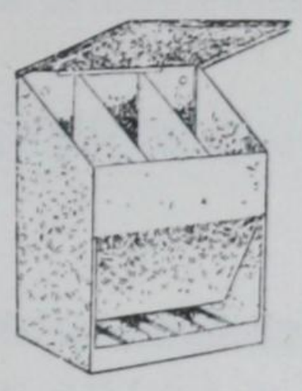

Galvanized Grit
and Shell Box
G80—
3 Compartments Doz. $17.43



Galvanized Chick
Feeding Trough
G42—18½" long Doz. $2.31

Galvanized Fountain
Oil Heater
No. 150 Doz. $9.15

Galvanized Insulated
Fountain or
Waterer
No. 140—5 Gallons
Doz. $85.80



No. 100

No. 105
Galvanized Symplex
Feeding Trough
and Stand
60" long, 22" wide,
12" high. Doz. $43.74
Galvanized Symplex
Feeding Trough
Only
8" wide, 5" deep. Doz. $20.59
48 Feeding Sections

Galvanized Handy
Fountain
No. 130—1 Gallon Doz. $6.88

Round Chick
Feeders
Galvanized
G10—9 Hole—6" Doz. $1.76
G15—14 " —8½" Doz. $2.64
Charcoal Tin
T11—9 Hole—6" Doz. $1.76
T16—14 " —8½" Doz. $2.64



Galvanized Bottom
Fill Fountain
No. 45—2 Pint Doz. $4.12
No. 55—5 Pint Doz. $5.50

Galvanized
Feed Hopper
G60—14 Holes Doz. $7.97

Galvanized Double
Wall Fountains
No. 2—2 Gallon Doz. $15.12
No. 4—4 Gallon Doz. $22.88
No. 8—8 Gallon Doz. $38.90

No. 5 Galvanized Egg Tester $2.29 dozen

Note "We do not supply
Jars with fountains."

Successful poultry raising demands the best Poultry Supply Equipment—and here it is.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

HARTWELL HANDLES

Hickory Gradings

PERFECT — Choice, Immaculate White Hickory of heavy weight.

PATHFINDER — Carefully selected White Hickory of good weight.

PACEMAKER — Good medium selection of average weight Hickory running to white stock.

PIONEER — Clean, straight grained Hickory, average weight of part brown wood.

PROVINCIAL — Mixed Hickory with blemishes, which do not injure utility of handle or seriously affect appearance.

DONALD SMITH—Unusually choice, 2nd growth hickory (less than 10% handles manufactured are suitable for Donald Smith quality.)

HICKORY



SINGLE BITTED, OVAL BENT
Lengths 32, 34 and 36 in.

Pathfinder	$10.80
Pacemaker	$9.50
Pioneer	$8.40
Provincial	$6.50



DOUBLE BITTED, OVAL
Lengths 32, 34 and 36 in.

	Per Doz.
Perfect	$13.80
Pathfinder	$10.80
Pacemaker	$9.50
Pioneer	$8.40

ADZE EYE HAMMER
Length 14 in.

	Per Doz.
Donald Smith	$4.00
Perfect	$3.30
Pacemaker	$2.30
Pioneer	$1.90

SINGLE BITTED, OVAL BENT BOYS' SPECIAL
Length 28 in.

	Per Doz.
Pacemaker	$7.50
Pioneer	$6.30

RAILROAD PICK AND MATTOCK
Length 36 in.

	Per Doz.
Pacemaker	$13.00
Pioneer	$10.00
Provincial	$8.00

MACHINISTS

Length 14 in.	Per Doz.
Donald Smith	$4.00
Perfect	$3.30
Pacemaker	$2.30
Length 16 in.	
Donald Smith	$4.40
Perfect	$3.80
Pacemaker	$2.50
Length 18 in.	
Perfect	$4.30

SHINGLING HATCHET
Length 14 in.

	Per Doz.
Perfect	$3.40

SLEDGE
Swell End; Heavy Oval Eye

	Per Doz
Length 36 in.	
Perfect	$11.60
Pacemaker	$8.90
Pioneer	$6.40
32 in.	
Perfect	$10.30
Pacemaker	$7.60

BROAD OR BENCH AXE
Length 16 in

	Per Doz.
Donald Smith	$4.40
Perfect	$2.80

OAK



SINGLE BITTED, OVAL BENT
Length

32	34	36	Per Doz.
Pioneer			$6.60
Canadian Northman			$11.20

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BOXWOOD RULES

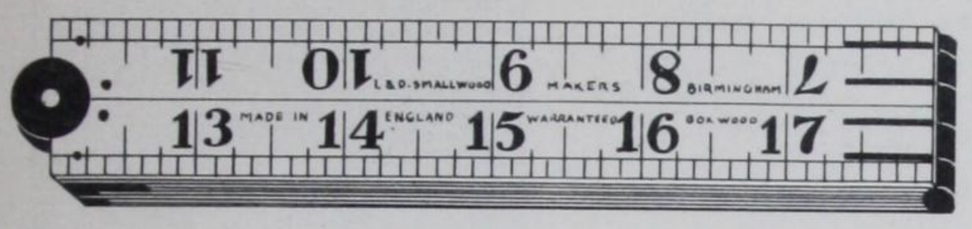

No. 830 Boxwood Rule 4 fold 1" wide, marked inches and 8ths.

No. 6 as above but ¾" wide and light type figures 2' only

	2 ft.	3 ft.
Price No. 830	**$6.00**	**$8.30** per doz.
" " 6	**$5.80** per doz.	

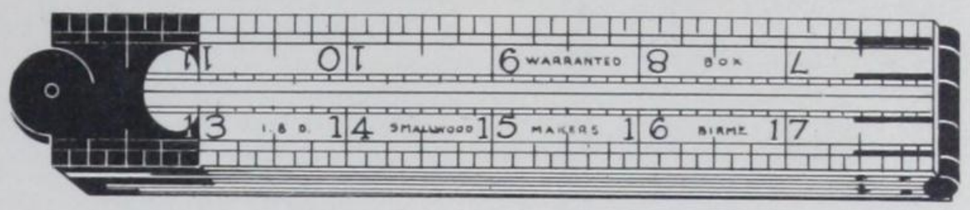

No. 51½ Boxwood Rule 4 fold arch joint, 1" wide, Inches into 8ths, 16ths

	2 Ft.	3 Ft.
Price per doz.	**$10.00**	**$13.00**

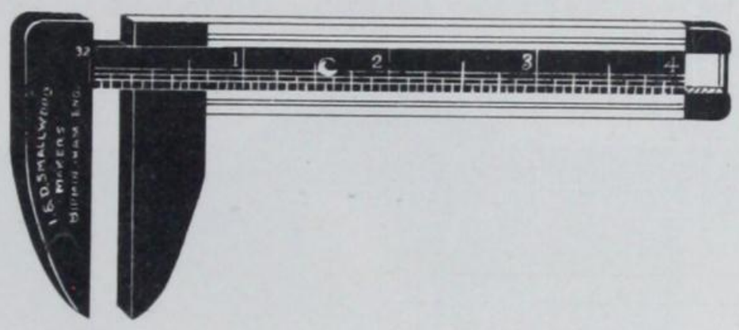

No. 105BB Boxwood Calliper Gauge Rule x 4" long
Brass slide and mounts inches into 8ths, 16ths and 32nds
Price per doz. **$18.50**

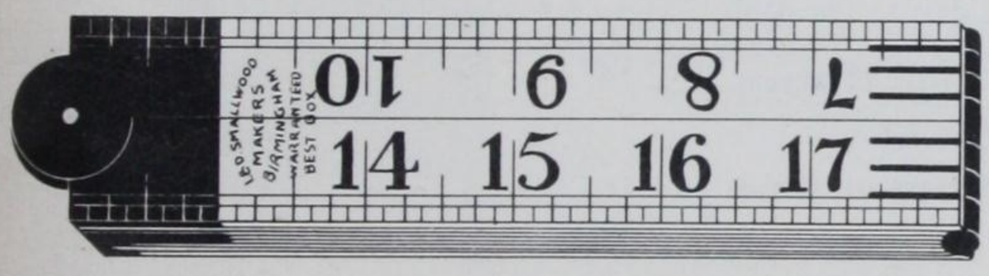

No. 454 Boxwood Rule, 4 fold, 1⅜" wide, inches into 8ths, 16ths. Extra Bold Type.

	2 Ft.	3 Ft.
Price per doz.	**$14.50**	**$18.30**

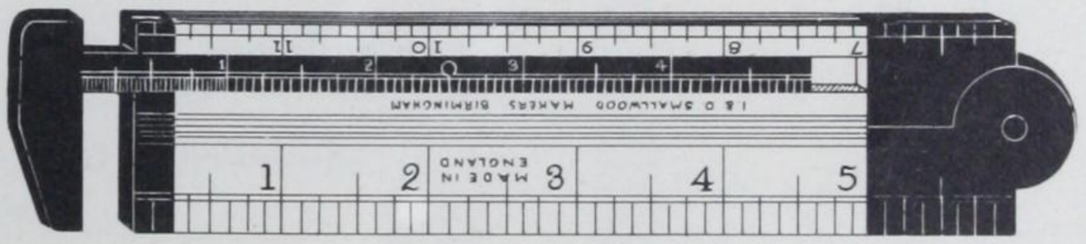

No. 930 Boxwood Calliper Gauge Rule—1 Foot x 2 Fold x 1⅜" wide with brass slide. Inches into 8ths, 16ths, 32nds and 10ths.
Price per doz. **$21.00**

SURE CUT

Is both a can opener and bottle cap lifter combined. Two tempered steel cutters, nickel plated frame. Assorted colored handles. One dozen on a card.

Sure Cut—Weight per dozen, 3 lbs.,
- - - per dozen **$4.00**
One Dozen in a Box.

SAFETY ROLL

Opens all sizes and shapes of cans having standard rims with marvellous ease. Works right or left handed. Nickel plated. Packed one dozen on a display card. Weight 1¾ lbs.

Safety Roll Can Openers— per doz. **$3.60**

CAN OPENERS

BLUE STREAK MASTER

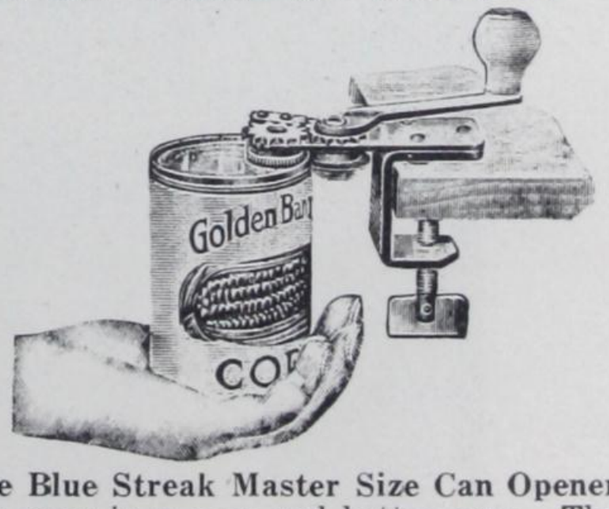

The Blue Streak Master Size Can Opener opens cans in a new and better way. The Blue Streak quickly removes the top from any size or shape can, leaving a clean cut edge. Clamps to the edge of table. Packed in an individual carton. Weight per dozen, 15½ lbs.

Blue Streak Master Can Openers— - - per dozen **$39.70**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BATHROOM CABINETS

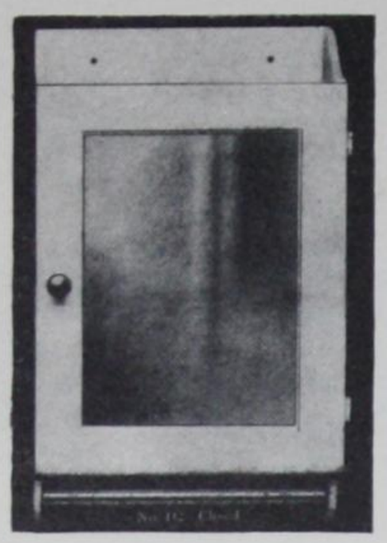

No. 112 Price $7.50 each

Outside Sizes :—Height 21", Width 12½", Depth 5".

Nickel-Plated Hardware,

Wooden Shelf and Towel-Bar. Fitted 9" x 12".

Mirror in Door.

Shock or Plain British Mirror Plate.

White "Duco" Enamel Finish.

Solid Wooden Backs.

Three Wooden Shelves

Nickel Plated Hardware.

British Mirror Plates.

Outside Sizes :— Height 20¾", Width 14¾" Depth 5".

Mirror Size 12" x 18".

No. 115 Price $13.00 each

120-S

POLYCHROME MIRRORS

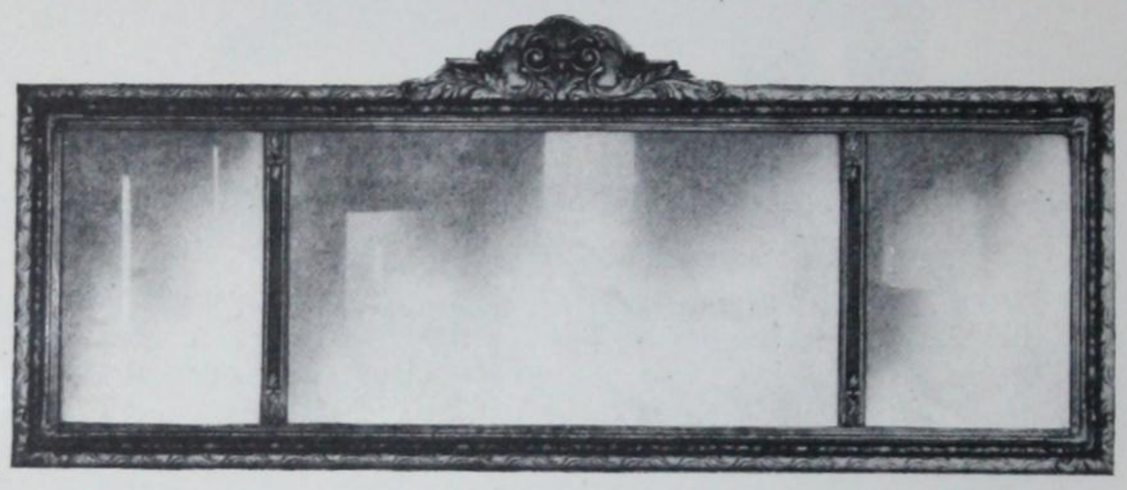

H 9047½

Centre Mirror 14 x 26" Side Mirrors 10 x 14"

Over all size 19 x 50"

Supplied in Gold or Silver or Blue

130

MODERNE MIRRORS

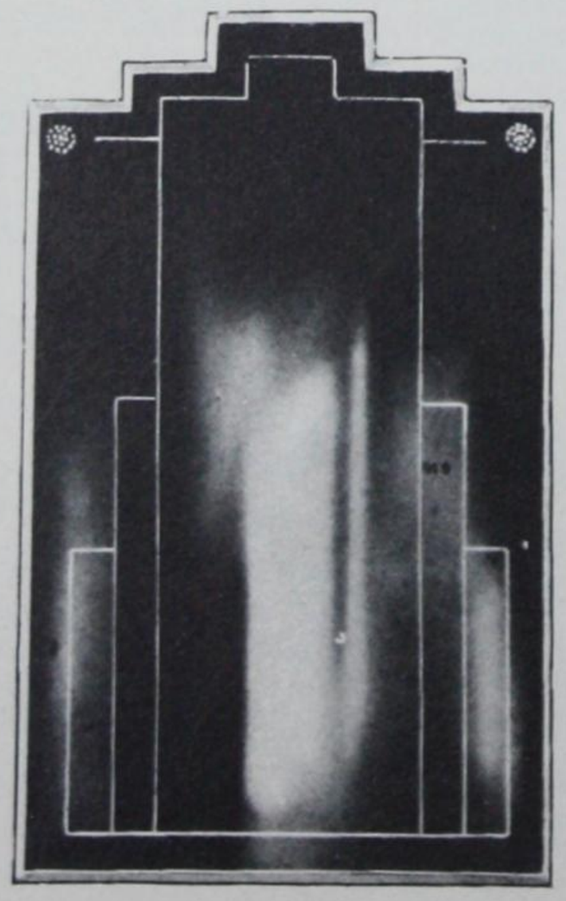

H M/111

PRICES ON APPLICATION

VENETIAN MIRRORS

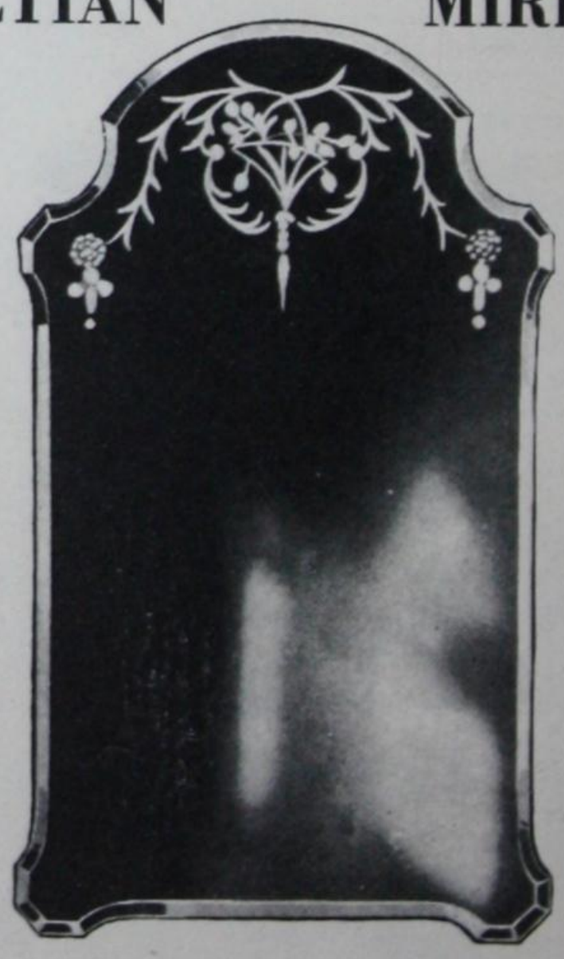

HV/106

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BATHROOM CABINETS

RECESSED MODELS

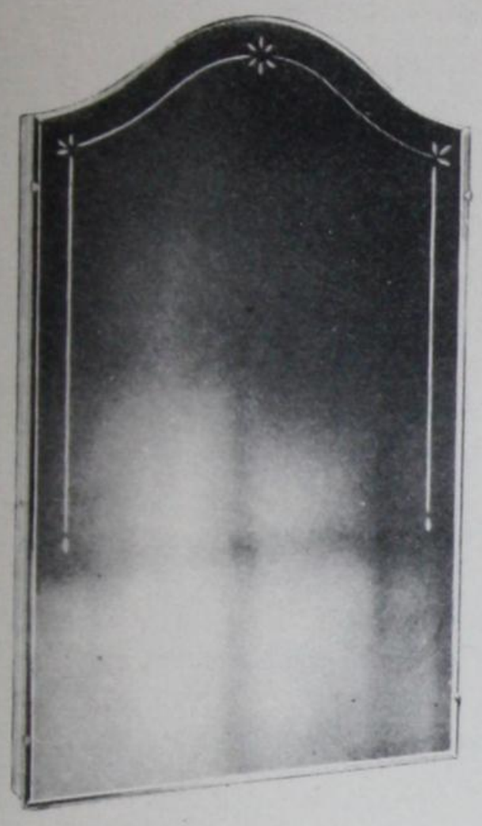

Model 750-VH
Model 710-VH
Model 700-VH

THE cabinets shown are all-glass Venetian models so designed that they resemble unusually handsome mirrors hung flush on the wall as there is no knob, hardware or portion of the body visible to indicate that a spacious cabinet is hidden behind the door.

SPECIFICATIONS

Model	750-V	710-V	700-V	690-V
Mirror	18″ x 28″	16″ x 26″	14″ x 22″	14″ x 18″
Overall	18″ x 28″	16″ x 26″	14″ x 22″	14″ x 18″
Inside	15″ x 21″	13″ x 19″	11″ x 15″	11″ x 15″
Opening	16″ x 22″	14″ x 20″	12″ x 16″	12″ x 16″

All Wall Openings are 3⅞″ deep

PRICE LIST

750 V.H.	**$42.00**
710 V.H.	**37.50**
700 V.H.	**30.00**
690 V.H.	**22.50**

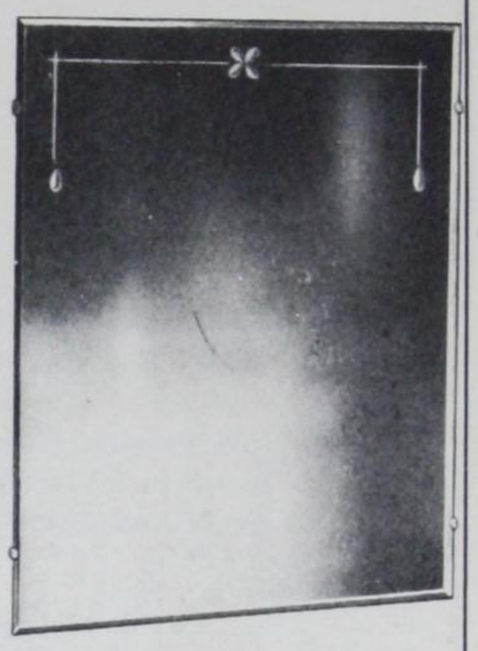

Model 690-VH

THE COLONIAL

REGULAR EQUIPMENT:—Three adjustable bulb edge glass shelves. Full length piano hinge.

FINISH:—Cabinet body in white Crystal Snow and door panel in black. White door will be furnished if desired or at a small additional charge door can be finished to match any color.

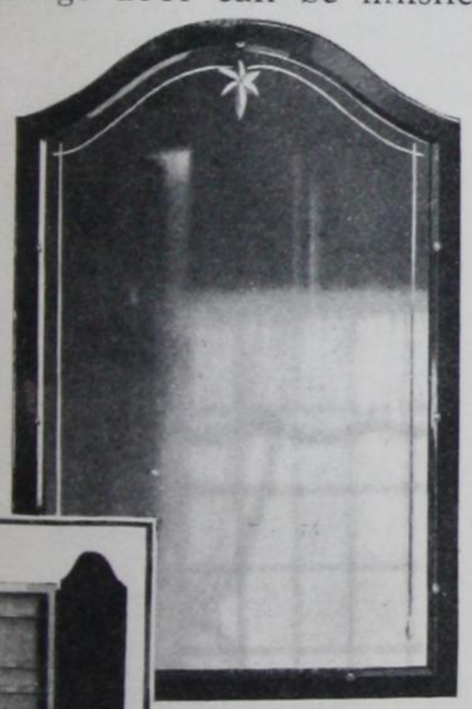

OPTIONAL MIRROR DESIGNS:—In addition to mirror shown, this cabinet can be had with an entirely plain mirror or the handsome "AB" design.

SPECIFICATIONS

Mirror	14″ x x22″
Overall	15¾″ x 23¾″
Inside	12¾″ x 16¾″
Opening	13½″ x 17½″ x 3½″

Price $36.00

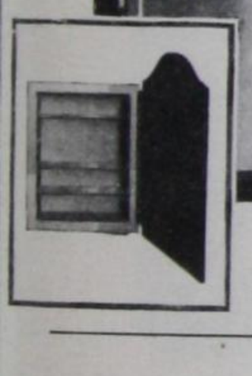

The COLONIAL
Model 400-V

MODELS 300, 400

Regular specifications include Crystal Snow finish, plain plate mirrors and three adjustable bulb edge glass shelves. Beveled mirrors may be substituted at a slightly higher price.

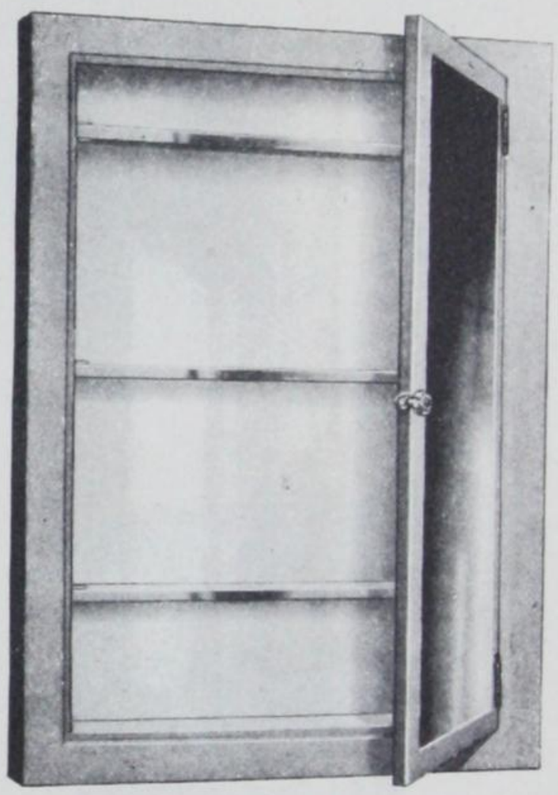

SPECIFICATIONS

Model	300	400
Mirror	14″ x 18″	12″ x 16″
Inside	15″ x 19″	13″ x 17″
Overall	18¾″ x 22¾″	16¾″ x 20¾″
Wall Opening	15½″ x 19½″	13½″ x 17½″

All Wall Openings are 3⅞″ deep.

Models 300 and 400

PRICE

300	**$27.00**
400	**18.00**

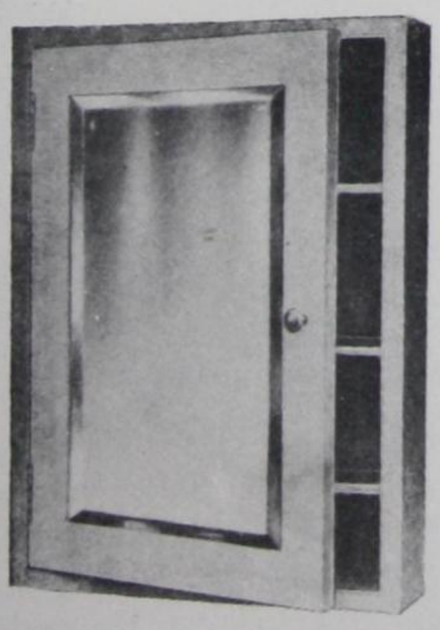

24 in. High x 18 in. Wide, 4 in. Deep

Fitted With

12 x 18 in. plain Plate Mirror
Three Plate Glass Shelves
Nickel-plated Trimmings

One in Carton

No. 100, White Enamel Each $18.00

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MAIL BOXES

TUDOR MAILTAINER

"RUST-PROOF"

Tudor Mailtainer is extremely practical and serviceable, as well as attractive. The door is easily opened from the bottom and is kept closed at all times by gravity. The wrought iron scroll work forms an ideal receptacle for magazines and newspapers.

Tudor Mailtainer is furnished in Wrought Iron

Size—Body, 13 in. high, 8½ in. wide. Total height, including scroll, 18 in. Depth, 3½ in.

Material—Body of rust resisting material.

Equipped with Dualock.

Weight—Approximately 60 lbs. to the dozen.

Each in a substantial carton, six to the case.

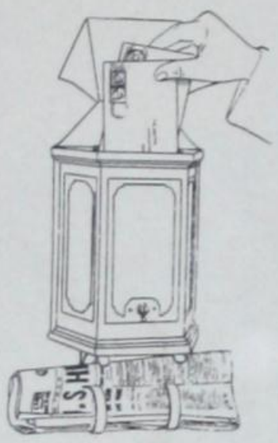

Easy to put in mail.

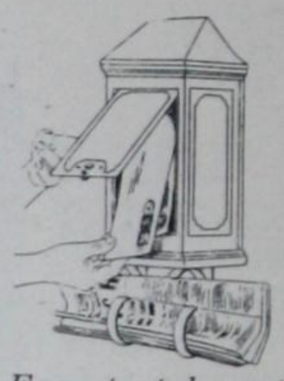

Easy to take out mail

Each $8.00

No. 18 — Semi-gloss black enamel finish, baked at high temperature on twenty-six galvanized open hearth sheet steel, not rust-proof.

Each $1.50

No. B-180—Finished in brushed brass on galvanized steel. Rust-proof.

Each $2.00

No. 180—Aluminum bronze finish, on heavy galvanized stock.

Each $2.00

No. **2406L Steel,** black enameled.

Size 10½ inches high, 5¼ inches wide, 3 inches deep.

Doz. $16.80

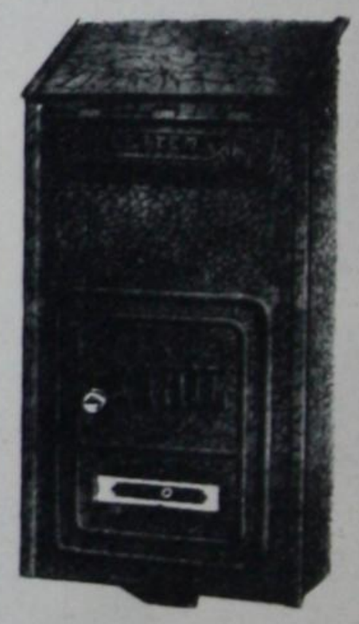

No. BC-180—*Finished in a very beautiful crackle brown on heavy galvanized steel. Rust-proof.*

Each $3.00

No. GC-180—*Finished in beautiful crackle green enamel, galvanized steel. Rust-proof.*

Each $3.00

No. 0180— *Finished in new imitation oxidized copper finish, our own patented process, galvanized steel. Rust-proof.* **Each $2.00**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CAST IRON AND BRONZE METAL HINGE PLATES
DEAD BLACK FINISH REGULARLY SUPPLIED ON CAST IRON

CAST IRON
No.
302
$3.00

CAST BRONZE
No.
302½
$15.00

Nos. 302-302½
20½ in. x 5¾ in.

500
$3.80

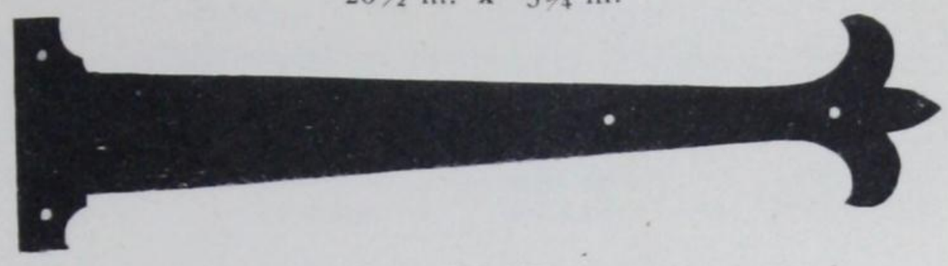

500½
$18.90

Nos. 500-500½
21 in. x 5½ in.

420
$4.50

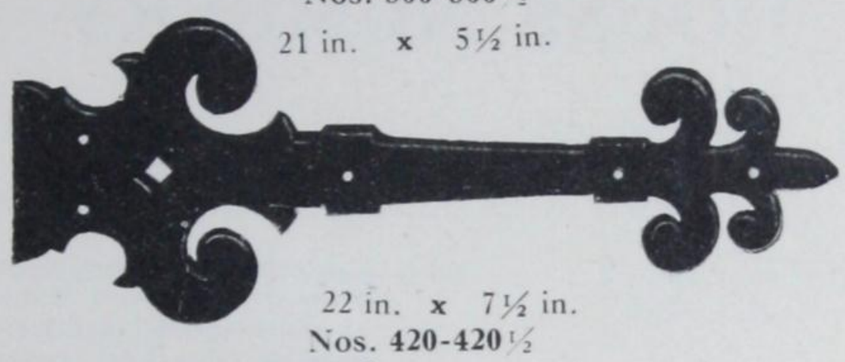

420½
$36.00

22 in. x 7½ in.
Nos. 420-420½

303
$6.00

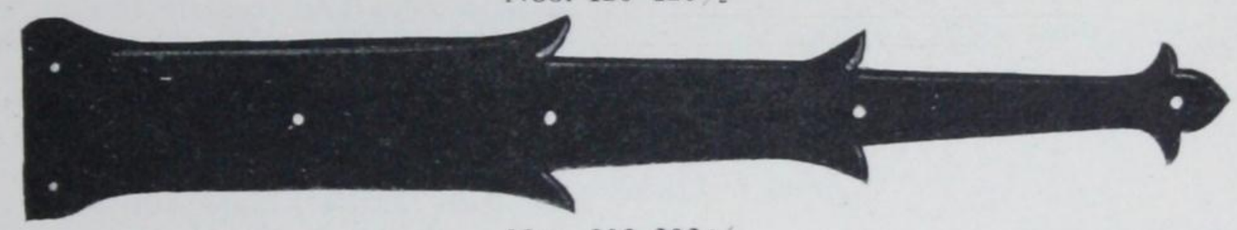

303½
$30.00

Nos. 303-303½
30 in. 5 in.

430
$7.50

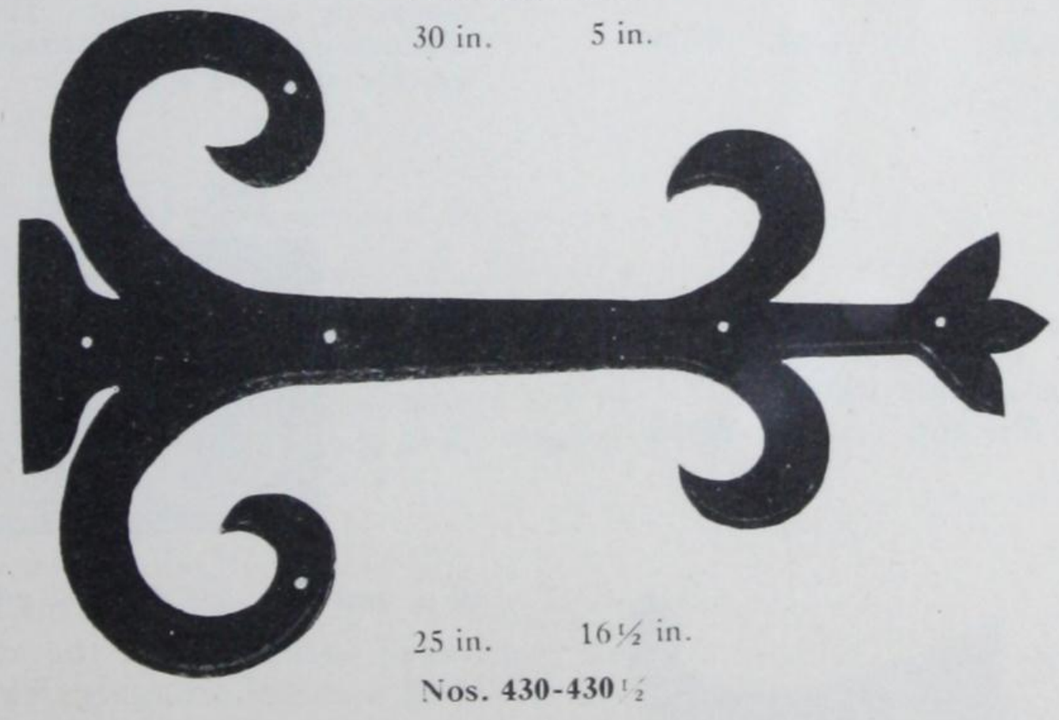

430½
$48.00

25 in. 16½ in.
Nos. 430-430½

NAILS AND STUDS

Nos.
3135-3136

Nos.
3137-3138

Fastened to wood with nail projecting from the back.

No.			Size of head		
3137	PRICED	Cast Iron square	¼ **$3.50** ½ **$5.20** ¾ **$6.10**	1 in **$7.20**	
3138	Per	Cast Brass square	¼ **$4.50** ½ **$6.50** ¾ **$7.50**	1 in. **$9.00**	
3135	Doz.	Cast Iron round (grooved)		1 in. **$5.80**	1½ in. **$6.30**
3136		Cast Brass round (grooved)		1 in. **$7.20**	1½ in. **$7.90**

When ordering give Finish.

Prices Given are for Black.
Add 10% for other Finishes.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

LETTER BOX PLATES

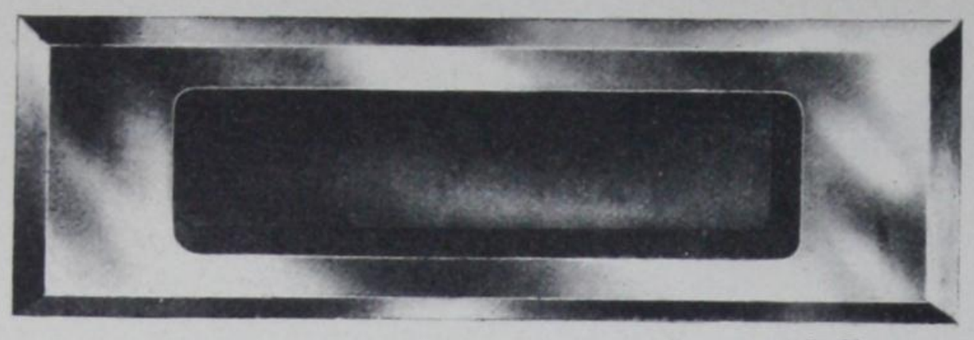

No.	Size	Opening	Metal	Finish	Doz.
5290	7x2¼ in.	4⅝x1⅛ in.	Wrt. Brass	Dull Brass	$8.20
5590	7x2¼ in.	4⅝x1⅛ in.	Wr't. Steel	" "	$7.10
0993	8x2⅞ in.	6x2 in.	Cast Brass	" "	$32.00
W 0993			Wr't. Brass	" "	$16.00

LETTER BOX BORDERS

No.	Size	Opening	Metal	Finish	Doz.
5291	7x2¼ in.	4⅝ x 1⅛ in.	Wr't. Brass	Dull Brass	$4.10
5591	7x2¼ in.	4⅝x1⅛ in.	Wr't. Steel	" "	$3.60
0994	8x2⅞ in.	6x2 in.	Cast Brass	" "	$16.00
W0994			Wrt. Brass	" "	$8.00

HOUSE NUMBERS

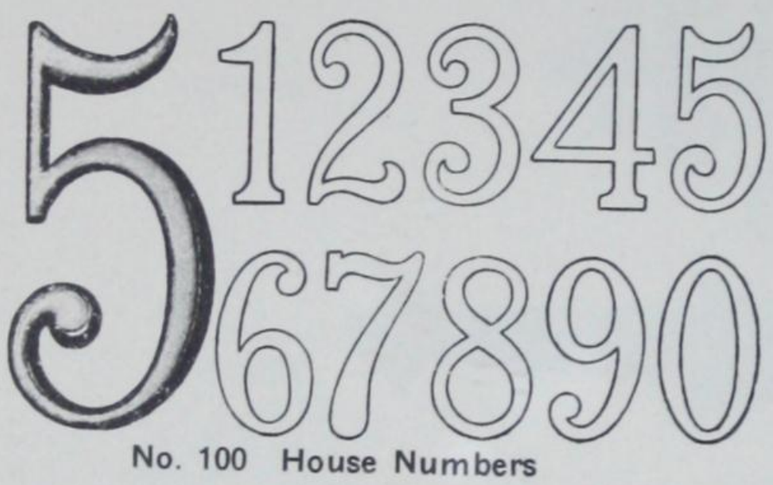

No. 100 House Numbers

No. 100 x 11, Cast Bronze ..... **Doz. $9.00**

Size 3 in. One Doz. in Box

Hy-Caste House Numbers

Hy-Caste numbers are stamped from brass polished and lacquered, and because of their special design with flat face and beveled edge look exactly like an expensive solid cast number when attached to the door or building. Yet, due to large and efficient production, they can be sold at a price as low as some of the cheapest makeshifts on the market. Hy-Caste Numbers are 4" high, but of attractive narrow design, so they arrange neatly and compactly on the house. Their size and distinctive appearance attract attention quickly and they sell fast.

(Reduced Size)

Doz. $2.40

2⅝ inches high, 2 inches wide
Glass on aluminum and black.
Fit together tightly.
No. 500. Per doz. **$3.50**

5 inches High.
Rustproof.
Old Iron Finish.
No. 200. Each **70c.**

DE LUXE NUMBERS

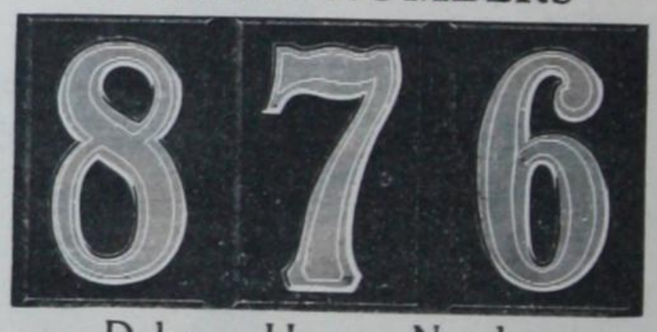

Deluxe House Numbers have been made particularly to meet the demand for a thoroughly legible and distinctive House Number at a reasonable price. Their rich design harmonizes with buildings of any color and all types of homes, yet their low price makes them available to all classes of buyers.

Doz. $2.20

Screen Numbers

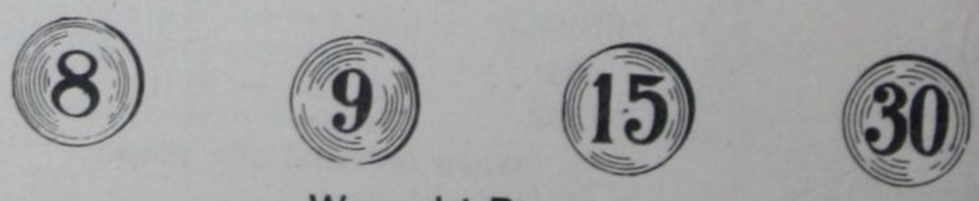

Wrought Brass.

Screen Numbers ..... Per Doz. .34

Size ½ in. Diameter. 100 in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Juno Design

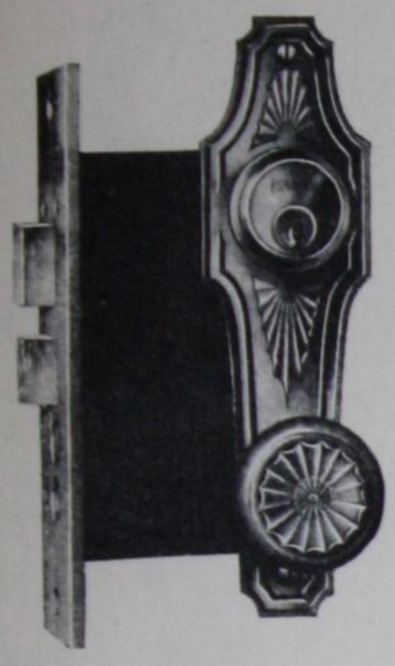

11248

WROUGHT BRASS

Front Door Lock Set 11248 Juno x 9c ..... Each $19.50

Description—

Lock 11248
Knobs 2 in. one piece
Spindle $\frac{5}{16}$ in. Simplex
Escutcheons outside 8⅛ x 2½ in.
Escutcheons inside 6½ x 2⅛ in.
With Thumb turn
1 Set in Box. Weight 4 lbs.

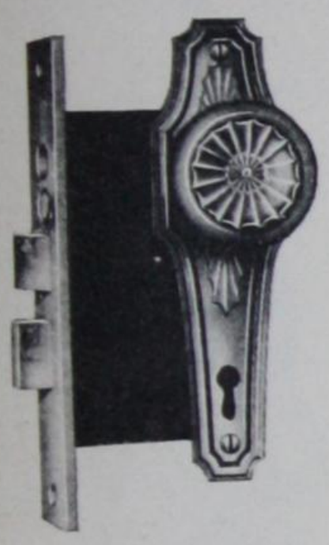

7122

WROUGHT STEEL

Front Door Lock Sets 7122 Juno x 9c ..... Each $6.00

Description—

Lock 7122
Knobs 2 in. one piece
Spindle $\frac{5}{16}$ in.
Escutcheons 6½ x 2⅛ in.
1 Set in Box. Weight 3 lbs.

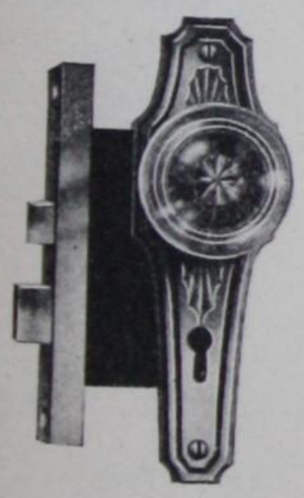

731 GA 1

Inside Set 731 Cy 1—Juno x 9c ..... Each $2.00

Description—

Lock 731
Knobs 2 in. steel one piece
Escutcheon 6½ x 2 in.
1 Set in Box. Weight 2 lbs.

Inside Set 731 GA 1—Juno x 9c ..... Each $2.50

Knobs plain glass 2110
Balance as 731 Cy 1

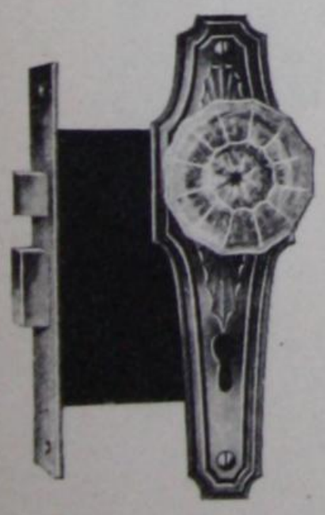

731 PA 1

Inside Set 731 PA 1—Juno x 9c ..... Each $2.50

Knobs crinkly glass 2150
Balance as 731 Cy 1

NOTE

This design can also be procured in Wrought Brass.
Special from Factory.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

No. 7070 x 32

Windsor Design

Cylinder Front Door Set. Cast Brass.

7070 Windsor x 32 ..... Each **$20.40**

Bit Keyed Front Door Set

971 Windsor x 32 ..... Each **6.80**

Outside Escutcheon Cast Brass Balance Steel.

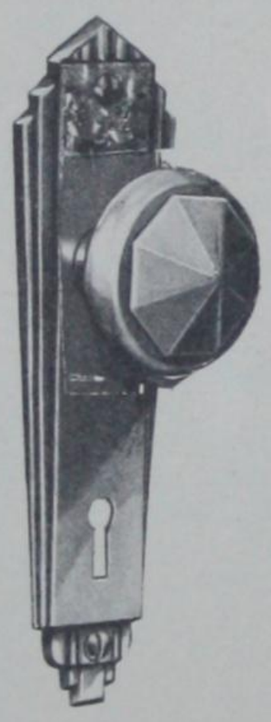

No. 990 x 32

Inside Set Steel

990 Windsor x 32 ..... Doz. **$25.20**

Inside Set Steel

With Glass Knob No. 2152.

991 Windsor x 32 ..... Doz. **31.50**

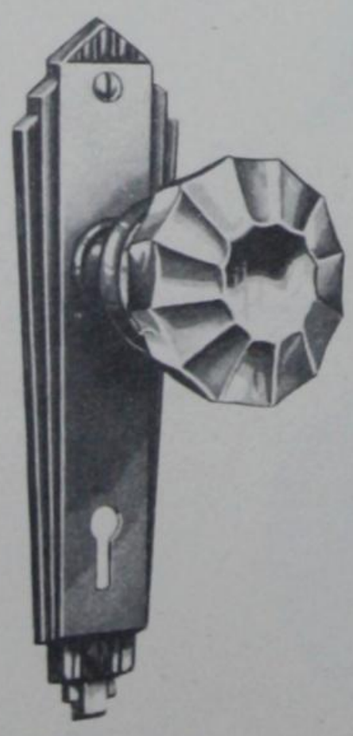

No. 991 x 32

Closet Latch Sets Steel

01030 Windsor x 32 ..... **23.10**

Packed with Mortise Latch 01030.

NOTE—

32 Finish is Dull Nickel, Oxydized and Relieved.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

MODERNE DESIGN

7070 x 9C

Cylinder Front Door Set Wrot Brass

7070 Moderne x 9C ..... Each $21.90

Bit Keyed Front Door Set Steel

961 Moderne x 9C ..... Each 5.30

Inside Set Steel With Steel Knob

990 Moderne x 9C ..... Doz. 25.20

Inside Set Wrot Brass With Glass Knob No. 2152

791 Moderne x 9C ..... Doz. 31.50

Closet Latch Set Steel

01030 Moderne x 9C ..... Doz. 23.10

Push Plate 7615 Moderne x 9C ..... Doz. 6.30

NOTE—

Sets 990-791 Packed with lock 990.

961 x 9C

990 x 9C

791 x 9C

See Page of
Sectional Designs
To Match
Moderne Design

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

GRAND DESIGN

CAST IRON

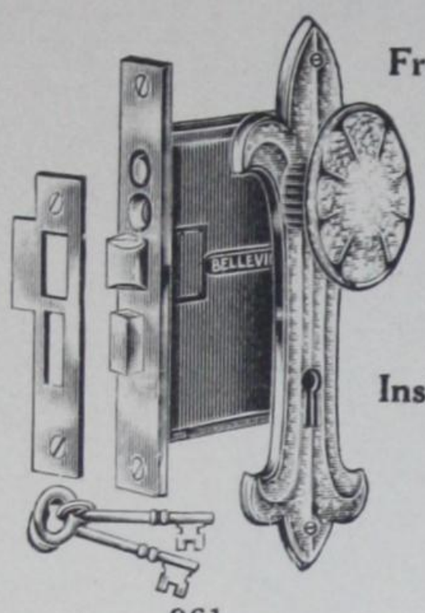
961

Front Door Lock Sets 961 Grand x 9C ..... Each $6.30

Description—
Lock No. 961,
Knobs, Oval 2⅜ x 1⅜ in.,
Spindle, Simplex No. 22

Escutcheons, Outside 7⅝ x 2¼ in.
Escutcheons, Inside 6½ x 2 in.
1 set in Box. Weight 3 lbs.

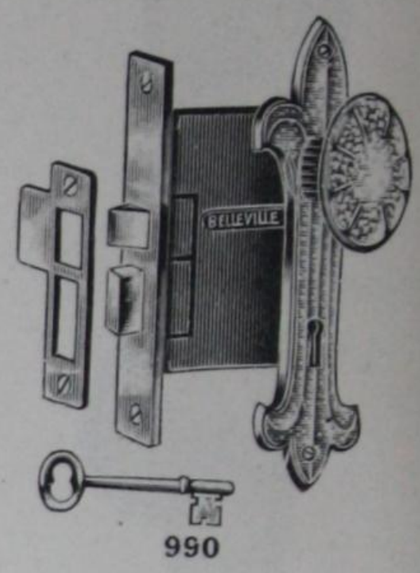
990

Inside Door Lock Sets, 990 Grand x 9C ..... Doz. $28.80

Description—
Lock 990,
Knobs, Oval, one piece

Escutcheons, 6½ x 2 in.
One Set in Box. Weight 2 lbs.

COLONIAL DESIGN

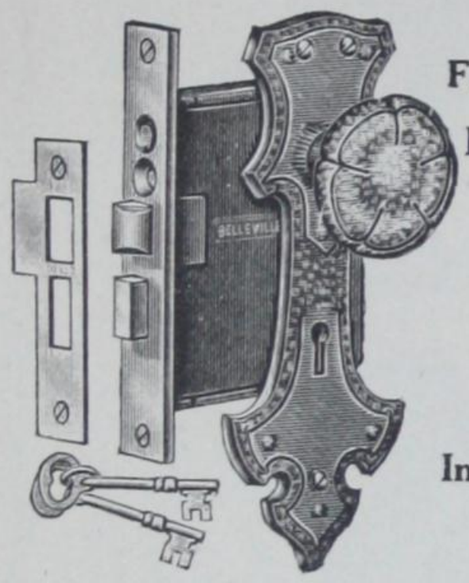
961

Front Door Lock Sets, 961 Colonial x 9C ..... Each $6.30

Description—
Lock No. 961,
Knobs 2¼ in. One Piece.
Spindle, Simplex

Escutcheons, Outside 8 x 3 in.
Escutcheons, Inside 6½ x 2 in.
One Set in Box. Weight 3 lbs.

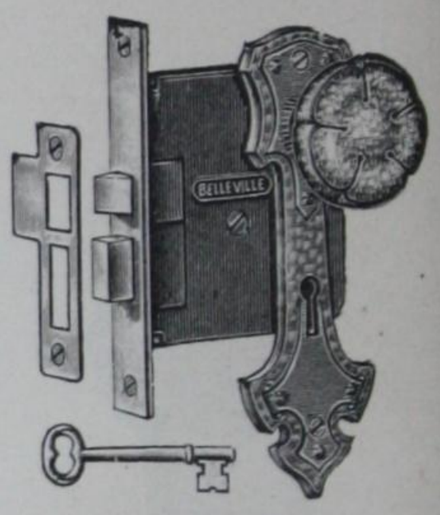
990

Inside Door Lock Sets, 990 Colonial x 9C ..... Doz. $28.90

Description—
Lock 990,
Knobs 2¼ in. One Piece.
Escutcheons, 6½ x 2 in.
One Set in Box. Weight 2 lbs.

RENOWN DESIGN

Inside Sets Only

CAST IRON

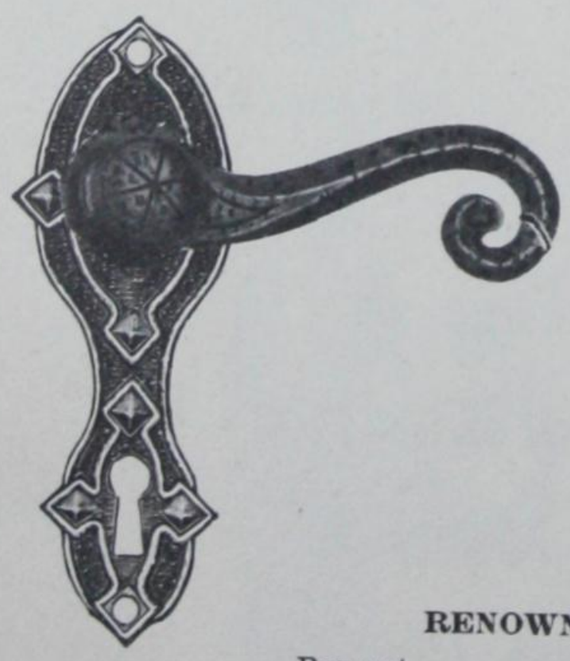
1090 x 32

RENOWN 1090 x 32

Per set $4.00

Lever handles both sides
Lock No. 109.32 Finish
Escutcheon—Cast Iron
5 x 1¾
Simplex Spindle

RENOWN 990 x 9C.

Per dozen $21.00

Description:—

Lock 990 See page 59
Knobs 6140, 2 inches
Spindle, Simplex
Escutcheons 5 x 1¾ inches
1 set in box. Weight 2 lbs.

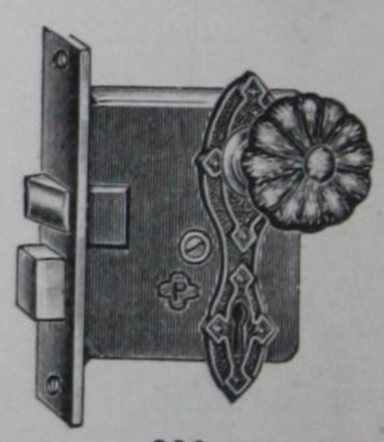
990

RENOWN 992 x 9C Each $2.00

Description:—

Knobs, Glass 2112
Balance same as 990 Set.

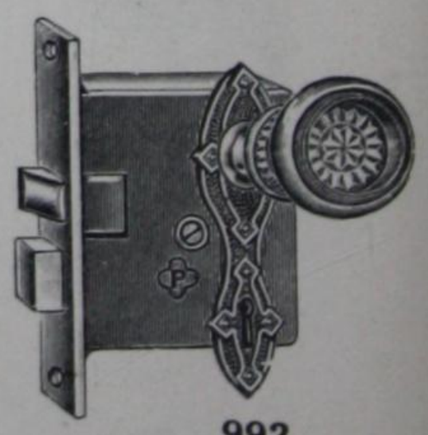
992

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RUSSWIN REGENT DESIGN

WROUGHT BRASS

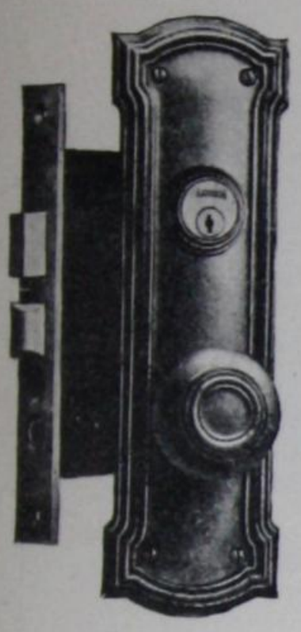

11248

Front Door Lock Sets 11248 Regent x 9C ..... **Each $23.00**

Description—
Lock 11248
Knobs 2¼ in. one piece
Spindle ⅜ x 5/16 in. Swivel

Escutcheons, outside 10½ x 3¼ in.
Escutcheons, inside 7½ x 2⅝ in.
With Thumb turn
1 Set in Box. Weight 4 lbs.

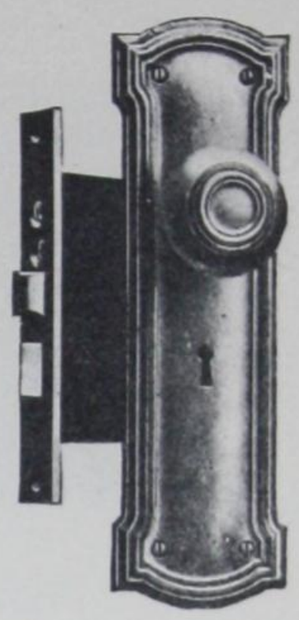

0122 and 7122

Front Door Lock Sets 0122 Regent x 9C ..... **Each $10.00**

Description—
Lock 0122
Knobs 2¼ in. one piece
Spindle 5/16 in. Swivel

Escutcheons, outside 10½ x 3¼ in.
Escutcheons, inside 7½ x 2⅝ in.
1 Set in Box. Weight 3 lbs.

Inside Door Lock Sets 734 Regent x 9C ..... **Doz. $63.00**

Description—
Lock 734
Knobs 2¼ in. one piece

Escutcheons, 7½ x 2⅝ in.
1 Set in Box. Weight 2 lbs

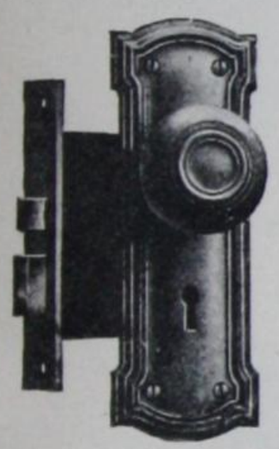

734 and 731

Mortise Latch Sets 01041½ Regent x 9C ..... **Doz. $60.00**

Description—
Latch 01041½
Knobs 2¼ in. one piece

Escutcheon 4 x 1½ in.
1 Set in Box. Weight 1 lb.

01041½ and 01030

WROUGHT STEEL

Front Door Lock Sets 7122 Regent x 7½ ..... **Each $6.00**

Description—
Lock 7122
Balance as 0122 see above

Inside Door Lock Sets 731 Regent x 7½ ..... **Doz. $20.00**

Description—
Lock 731
Balance as 734 see above

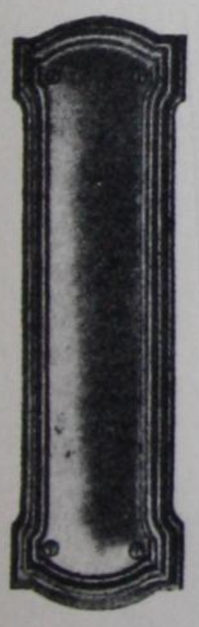

615 and 7615

Mortise Latch Sets 01030 Regent x 9C ..... **Doz. $18.00**

Mortise Latch Sets 01030 Regent x 7½ ..... **Doz. $18.00**

Description—
Latch 01030
Balance as 01041½ see above

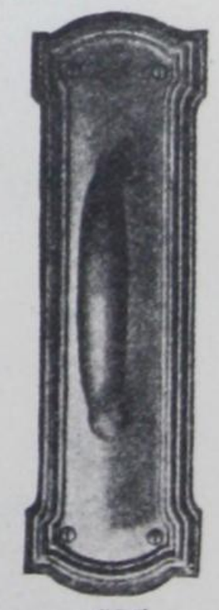

625

WROUGHT BRASS

Push Plates 615 Regent x 9C ..... **Each $1.60**

10½ x 3¼ in.

Door Pulls 625 Regent x 9C ..... **Each $7.10**

10½ x 3¼ in. **From Factory Only**

WROUGHT STEEL

Push Plates 7615 Regent x 9C ..... **Doz. $10.00**

Push Plates 7615 Regent x 7½ ..... **Doz. $10.00**

10½ x 3¼ in.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RUSSWIN RECO DESIGN

WROUGHT BRASS

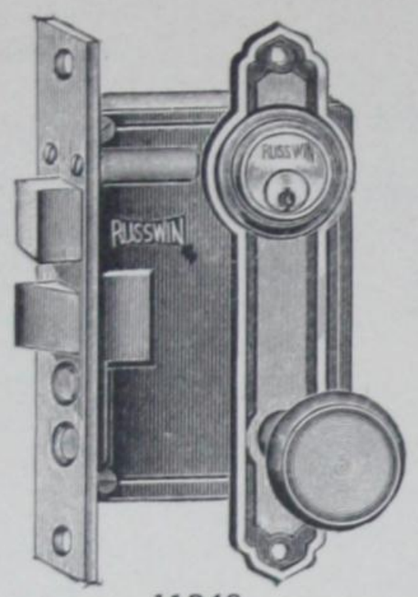

11248

Front Door Lock Sets11248 Reco x 9C ..... **Each $17.20**

Description—
Lock 1248
Knobs one piece 2 in.
Spindle $\frac{5}{16}$ in. Simplex No. 20
Escutcheons, outside $8\frac{1}{8}$ x $2\frac{1}{4}$ in.
Escutcheons, inside 6 x $1\frac{7}{8}$ in.
With Thumb turn.
1 Set in Box. Weight 4 lbs.

Front Door Lock Sets 0122 Reco x 9C ..... **Each $9.20**

Description—
Lock 0122
Knobs 2 in. one piece
Spindle $\frac{5}{16}$ in.
Escutcheons 6 x $1\frac{7}{8}$ in..
1 Set in Box. Weight 3 lbs.

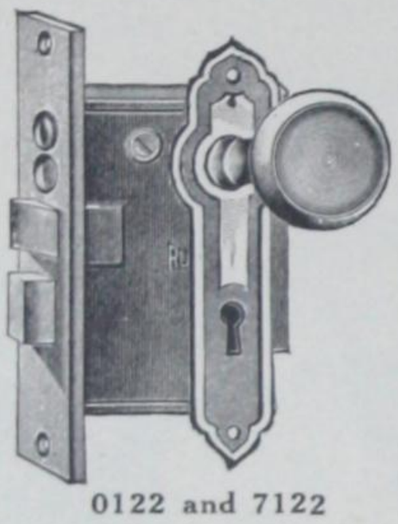
0122 and 7122

Inside Door Lock Sets 734 Reco x 9C ..... **Each $3.50**

Description—
Lock 734
Knobs 2 in. one piece
Escutcheons 6 x $1\frac{7}{8}$ in..
1 Set in Box. Weight 2 lbs.

Inside Door Lock Sets 1534 Reco x 9C ..... **Each $2.70**

Description—
Lock 734
Knobs, Glass No. 2112
Escutcheons 6 x $1\frac{7}{8}$ in..
1 Set in Box. Weight 2 lbs.

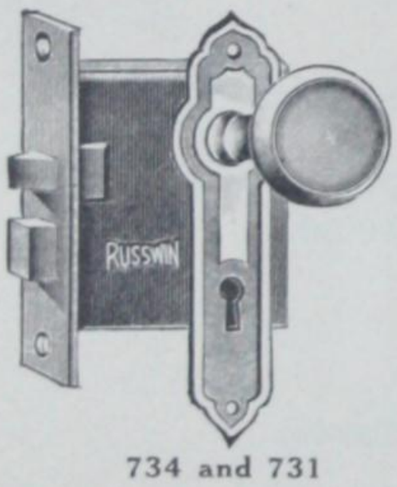

734 and 731

Inside Door Lock Sets 1834 Reco x 9C ..... **Each $2.70**

Description—
Lock 734.
Knobs, Glass 2152
Escutcheons 6 x $1\frac{7}{8}$ in.
1 Set in Box. Weight 2 lbs.

WROUGHT STEEL

Front Door Lock Sets 7122 Reco x 9C ..... **Each $6.00**

Description—
Lock 7122
Balance as 0122 see above

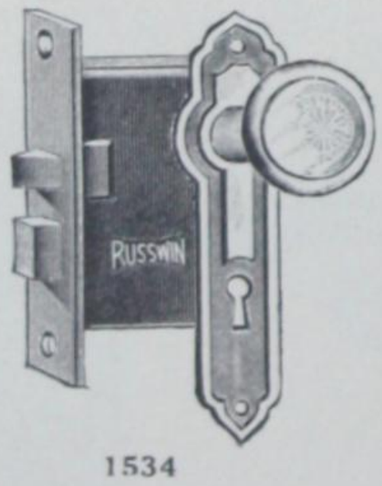

1534

Inside Door Lock Sets Reco x 9C ..... **Doz. $24.00**

Description—
Lock 731
Balance as 734 see above

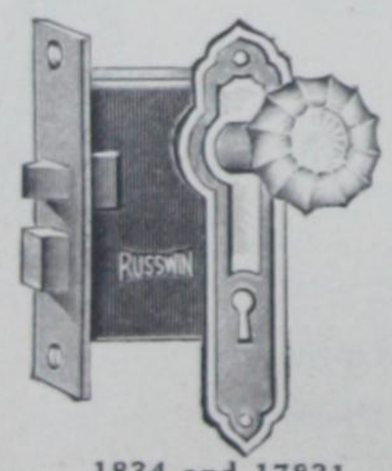

1834 and 17831

Inside Door Lock Sets 17831 Reco x 9C ..... **Each $2.50**

Description—
Lock 731
Balance as 1834 see above.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RUSSWIN CLEO DESIGN

WROUGHT BRASS

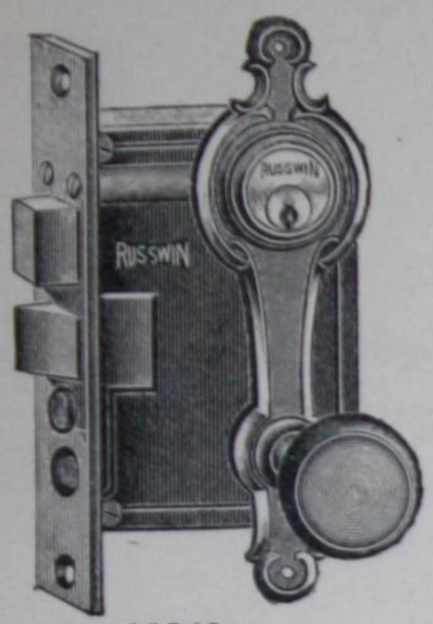

11248

Front Door Lock Set 11248 CLEO x 09B ..... **Each $24.00**

Description—
Lock 1248
Knobs 2 in. one piece
Spindle $\frac{5}{16}$ in. Simplex No. 20
Escutcheons, outside $8\frac{1}{8}$ x $2\frac{1}{2}$ in.
Escutcheons inside $6\frac{1}{2}$ x $2\frac{1}{8}$ in.
With Thumb turn
1 Set in Box. Weight 4 lbs.

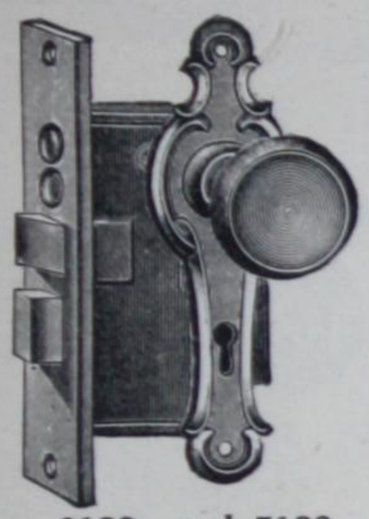
0122 and 7122

Front Door Lock Sets 0122 Cleo x 09B ..... **Each $10.50**

Description—
Lock 0122
Knobs 2 in. one piece
Spindle $\frac{5}{16}$ in. Simplex No. 20
Escutcheons $6\frac{1}{2}$ x $2\frac{1}{8}$ in.
1 Set in Box. Weight 3 lbs.

Inside Door Lock Sets 734 QYI Cleo x 09B ..... **Each $5.00**

Description—
Lock 734 See
Knobs 2 in. one piece
Escutcheons $6\frac{1}{2}$ x $2\frac{1}{8}$ in.
1 Set in Box. Weight 2 lbs.

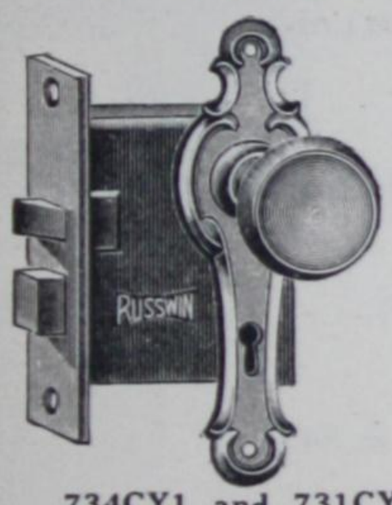

734CY1 and 731CY1

Inside Door Lock Sets 734 VYI Cleo x 09B ..... **Each $3.80**

Description—
Knob, Glass 2112
Balance as 734 QYI. See above.

Inside Door Lock Sets 734 ZYI Cleo x 09B ..... **Each $3.80**

Description—
Knob, Glass 2152
Balance as 734 QYI. See above.

WROUGHT STEEL

Front Door Lock Sets 7122 Cleo x 09B ..... **Each $6.50**

Description—
Lock 7122
Balance as 0122 see above

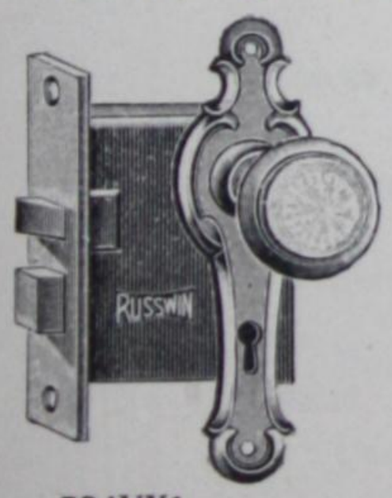

734VY1

Inside Door Lock Sets 731 CYI Cleo x 09B ..... **Doz. $24.00**

Description—
Lock 731
Balance as 734 QYI See above.

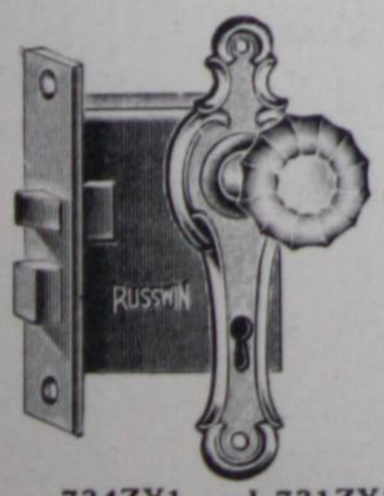

734ZY1 and 731ZY1

Inside Door Lock Sets 731 ZYI Cleo x 09B ..... **Each $2.50**

Description—
Knob, Glass 2152
Balance as 731 CYI. See above.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BELLEVILLE BEAVERTON DESIGN

CAST BRASS

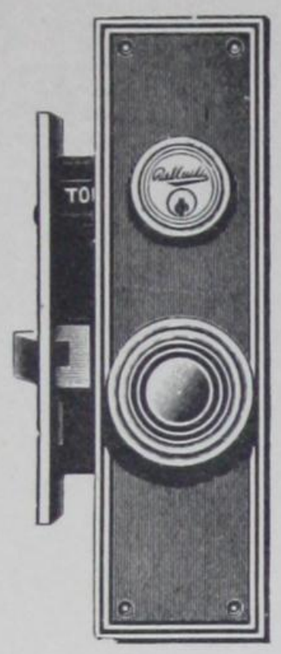

7070

Front Door Lock Sets 7070 Beaverton x 9C ..... **Each $32.30**

Description—

Lock 7070.
Knobs outside 2½ in.
Knobs inside 2¼ in.
Spindle $\frac{5}{16}$ in. Swivel

Escutcheons outside 11 x 3 in.
Escutcheons inside 7¼ x 2½ in.
(with thumb turn.)
1 set in Box. Weight 6 lbs.

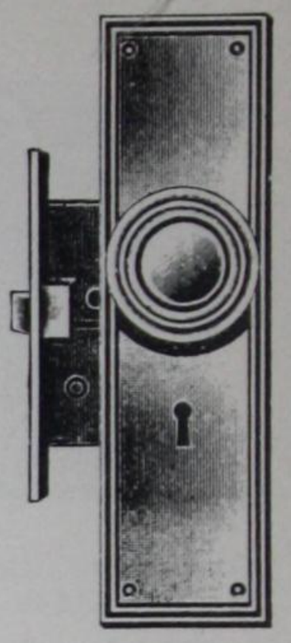

761

Front Door Lock Sets 761 Beaverton x 9C ..... **Each $21.00**

Description—

Lock 761.
Knobs 2¼ in.
Spindle $\frac{5}{16}$ in. Swivel

Escutcheons outside 11 x 3 in.
Escutcheons inside 7¼ x 2½ in.
1 set in Box. Weight 4 lbs.

601

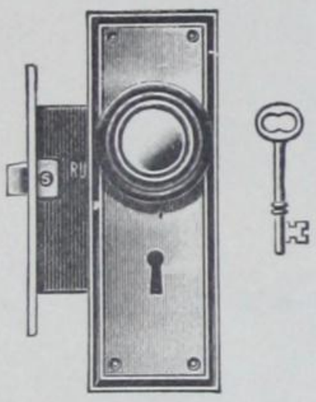

7114

Inside Lock Sets 7114 Beaverton x 9C ..... **Each $14.00**

Description—

Lock 7114.
Knobs 2¼ in.

Escutcheons 7¼ x 2½ in.
1 set in Box. Weight 3 lbs.

454

Push Plates 615 Beaverton x 9C ..... **Each $5.30**
11 x 3 in.

625 and 626

Push Plates 616 Beaverton x 9C ..... **Each $8.00**
15 x 3½ in.

Door Pulls 625 Beaverton x 9C ..... **Each $9.70**
11 x 3 in. **From Factory Only.**

Door Pulls 626 Beaverton x 9C ..... **Each $12.90**
15 x 3½ in. **From Factory Only.**

Push Buttons 601 Beaverton x 9C ..... **Each $1.80**
3⅛ x 1½ in.

Flush Sash Lifts 454 Beaverton x 9C ..... **Doz. $21.80**
3⅛ x 1½ in.

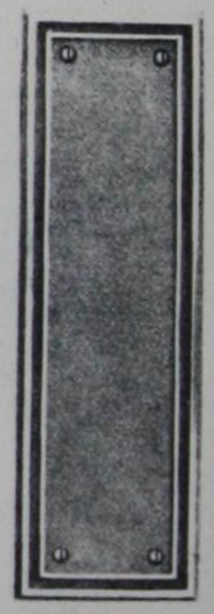

615 and 616

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RANDOLPH DESIGN

CAST BRASS

7070

Front Door Lock Sets, 7070, Randolph x 9.....Each $25.20

Description—
Lock No. 7070.
Knobs Outside 2½ in.
Knobs Inside 2¼ in.
Spindle 5/16 in. Swivel
Escutcheons Outside 10 x 2¾ in.
Escutcheons Inside 6¾ x 2⅛ in. with Thumb Turn
1 Set in Box, Weight 6 lbs.

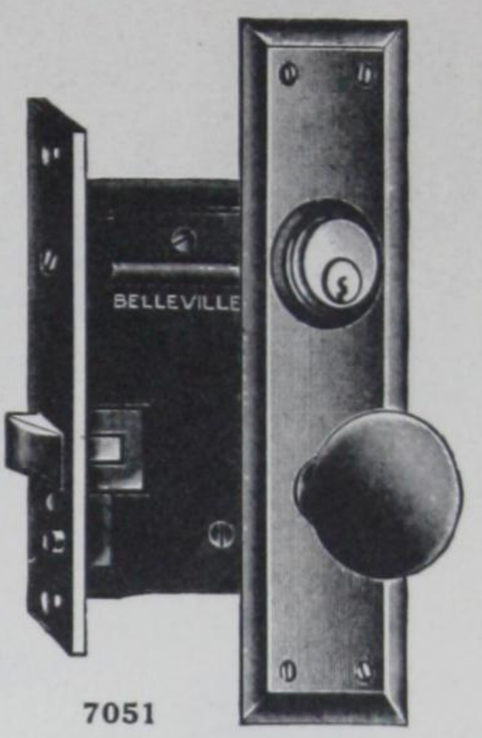

7051

Office Door Lock Sets, 7051, Randolph x 9.....Each $23.60

Description—
Lock No. 7051.
Knobs 2¼ in.
Spindle 5/16 Swivel.
Escutcheons Outside 8 x 2½ in.
Escutcheons Inside 6¾ x 2⅛ in.
1 Set in Box, Weight 5 lbs.

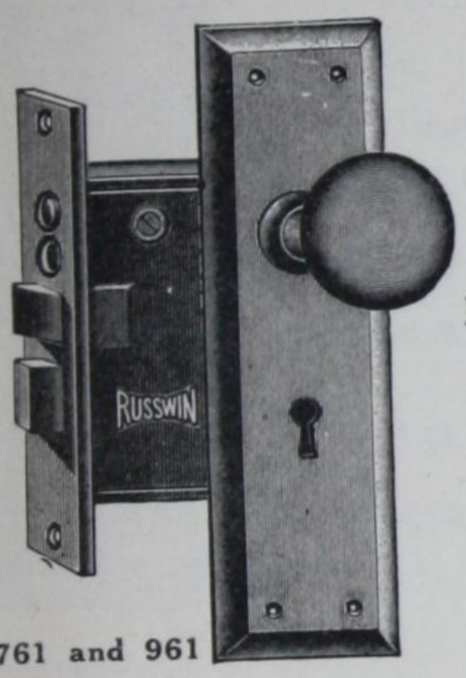

761 and 961

Front Door Lock Sets, 761, Randolph x 9.....Each $16.60

Description—
Lock No. 761.
Knobs 2¼ in.
Spindle 5/16 Swivel.
Escutcheons Outside 10 x 2¾ in.
Escutcheons Inside 6¾ x 2⅛ in.
1 Set in Box, Weight 5 lbs.

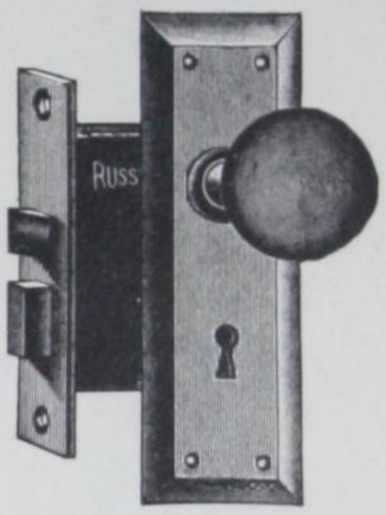

7114

Inside Door Lock Sets, 7114, Randolph x9 .....Each $9.10

Description—
Lock No. 7114.
Knobs 2¼ in.
Escutcheons 6¾ x 2⅛ in.
1 Set in Box, Weight 3 lbs.

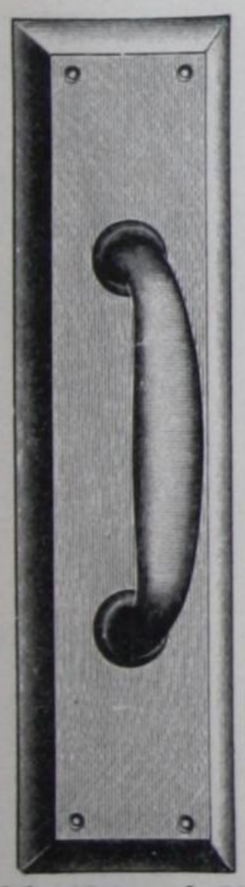
625, 626 and 627

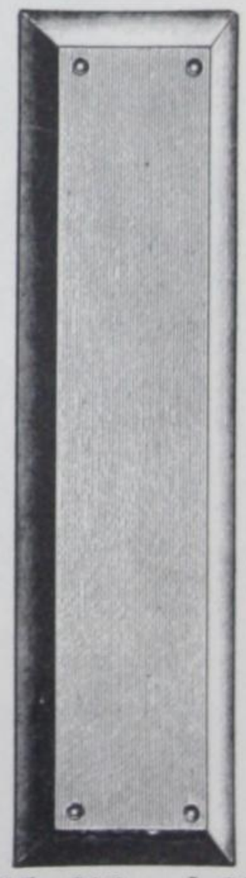
615, 616 and 617

Push Plates, No 615, Randolph x9, 12 x 3 in.....Each $3.00

Push Plates, No. 616, Randolph x 9, 14 x 3 in.....Each $4.20

Push Plates, No. 617, Randolph x 9, 16 x 3½ in.....Each $5.00

Door Pulls, No. 625, Randolph x9, 12 x3 in.....Each $6.20

Door Pulls, No. 626, Randolph x 9, 14 x 3 in.....Each $8.70

Door Pulls, No. 627, Randolph x 9, 16 x 3½ in.....Each $9.90

Push Buttons, No. 601, Randolph x 9, 4¾ x 2⅝ in.....Each $3.50

Flush Sash Lifts, No. 454, Randolph x9, 1¾ x 3¾ in.....Doz. $15.50

601


454

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RUSSWIN CARLTON DESIGN

CAST BRASS

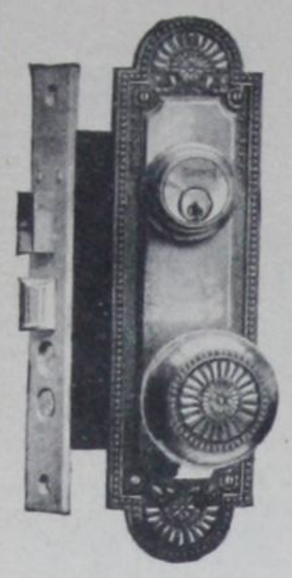

11248

Front Door Lock Sets 11248 Carlton x 9c ..... **Each $52.00**

Description—

Lock 11248
Knobs outside 2½ in.
,, inside 2¼ in.
Spindle ⅜ x 5/16 Swivel

Escutcheons. outside 10 x 2¾ in.
,, Inside 8 x 2½ in.
,, With Thumb turn
1 set in Box. Weight 6 lbs.

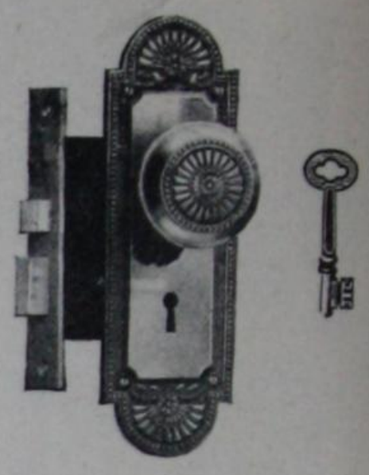

0370

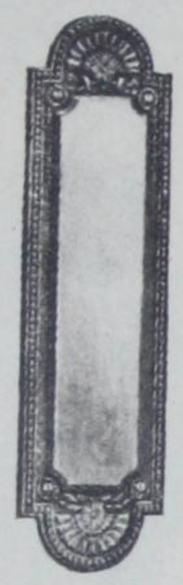

615 and 616

Inside Door Lock Sets 0370 Carlton x 9c ..... **Each $29.00**

Descripton—

Lock 0370
Knobs 2¼ in.

Escutcheons, 8 x 2½ in.
1 Set in Box. Weight 3 lbs.

Push Plates 615 Carlton x 9c ..... **Each $13.60**
10 x 2¾ in.

Push Plates 616 Carlton x 9c ..... **Each $18.00**
16¾ x 3¼ in. **From Factory Only**

Door Pulls 625 Carlton x 9c ..... **Each $17.00**
10 x 2¾ in. **From Factory Only**

Door Pulls 626 Carlton x 9c ..... **Each $22.00**
16¾ x 3¼ in. **From Factory Only**

625 and 626

RUSSWIN MONICA DESIGN

CAST BRASS

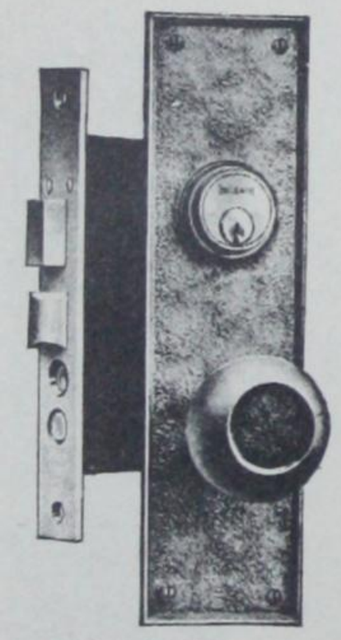

11248

0370

Front Door Lock Sets 11248 Monica x 09c ..... **Each $45.00**

Description—

Lock 1248
Knobs outside 2½ in.
,, inside 2¼ in.
Spindle ⅜ x 5/16 in. Swivel

Escutcheons, outside 10⅜ x 2⅞ in.
,, inside 7¾ x 2⅛ in.
With Thumb turn
1 Set in Box. Weight 6 lbs.

625

Inside Door Lock Sets 0370 Monica x 09c ..... **Each $21.40**

Description—

Lock 0370
Knobs 2¼ in.

Escutcheons 6¼ x 2⅛ in.
1 Set in Box. Weight 3 lbs.

Push Plates 615 Monica x 09c ..... **Each $9.70**
10⅜ x 2⅞ in.

Door Pulls 625 Monica x 09c ..... **Each $13.50**
10⅜ x 2⅞ in. **From Factory Only**

615

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

1248

RUSSWIN ALAMO DESIGN

(FROM FACTORY ONLY)

CAST BRASS

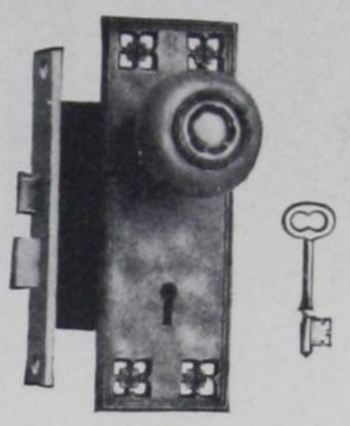

0370

Front Door Lock Sets 11248 Alamo x 09c ..... **Each $47.00**

Description

Lock 1248
Knobs outside 2½ in.
„ inside 2¼ in.
Spindle ⅜ in. x 5/16 in. Swivel

Escutcheons, outside 12 in. x 3½ in.
„ inside 7 in. x 2¼ in.
With Thumb turn

1 Set in Box. Weight 7 lbs.

Inside Door Lock Sets 0370 Alamo x 09c ..... **Each $22.50**

Description

Lock 0370
Knobs 2¼ in.

Escutcheons, 7 in. x 2¼ in.

1 Set in Box. Weight 3½ lbs.

625

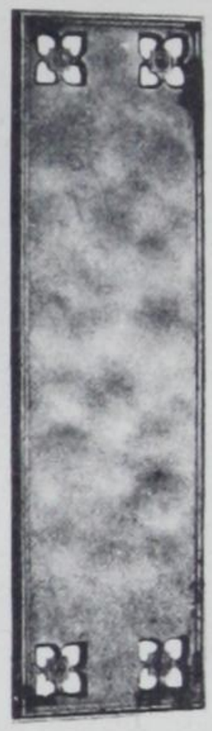

615

Push Plates 615 Alamo x 09c ..... **Each $11.20**
12 x 3½ in.

Door Pulls 625 Alamo x 09c ..... **Each $20.80**
12 x 3½ in.

BELLEVILLE SHERWOOD DESIGN

CAST BRASS

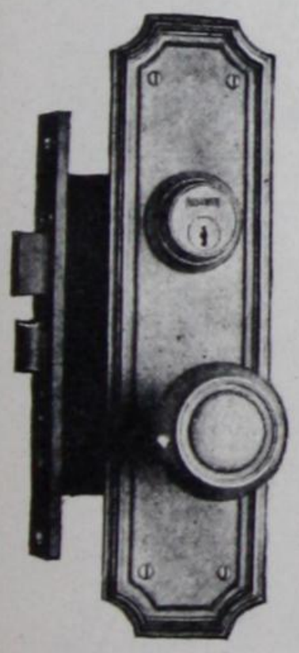

7070

Front Door Lock Sets 7070 Sherwood x 9c .....**Each $32.30**

Description—

Lock 7070
Knobs outside 2½ in.
Knobs Inside 2¼ in.
Spindle 5/16 in. Swivel

Escutcheons outside 11 x 3 in.
Escutcheons Inside 7 x 2½ in
With Thumb turn
1 Set in Box. Weight 6 lbs.

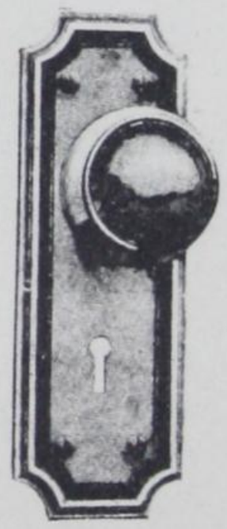

7114

Inside Door Lock Sets 7114 Sherwood x 9c .....**Each $14.50**

Description—

Lock 7114
Knobs 2¼ in.

Spindle 5/16 in. Swivel
Escutcheons 7 x 2½ in.
1 Set in Box. Weight 3 lbs.

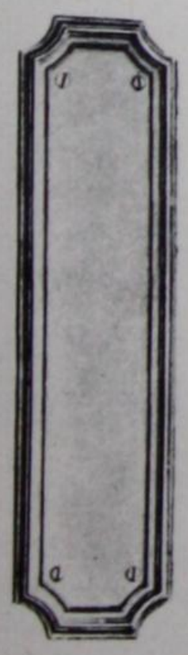

615

Push Plates 615 Sherwood x 9c ..... **Each $5.30**
11 x 3 in.

Door Pulls 625 Sherwood x 9c ..... **Each $9.70**
11 x 3 in. **From Factory Only**

625

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BELLEVILLE HAIG DESIGN

WROUGHT BRASS

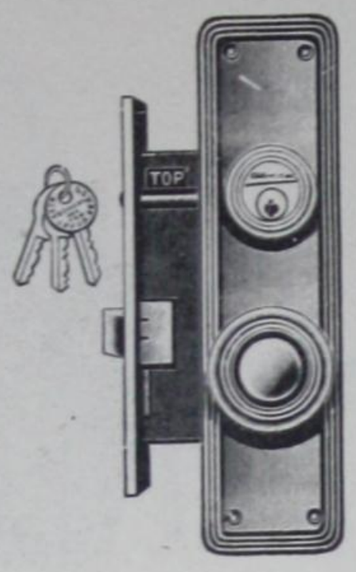

7070

Front Door Lock Sets, 7070 Haig x 09B ..... **Each $20.00**

Description—

Lock 7070.
Knobs 2¼ in. one piece
Spindle $\frac{5}{16}$ in. Swivel
Escutcheons, outside, 10 x 2¾ in.
Escutcheons, inside, 7½ x 2¼ in.
with thumb turn.
One set in box, Weight 4½ lbs.

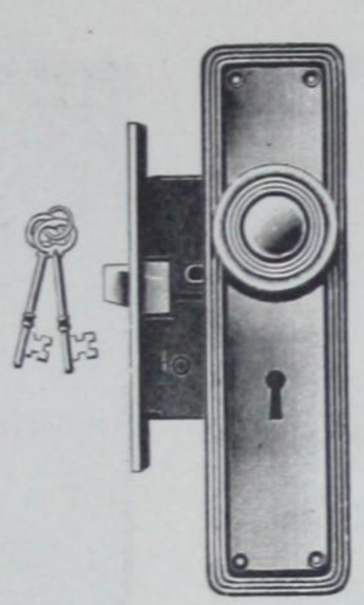

761 and 961

Front Door Lock Sets, 761 Haig x 09B ..... **Each $7.90**

Description—

Lock 761.
Knobs 2¼ in. one piece
Spindle $\frac{5}{16}$ in. Swivel
Escutcheons, outside, 10 x 2¾ in.
Escutcheons, inside, 7½ x 2¼ in.
One set in box. Weight 2 lbs.

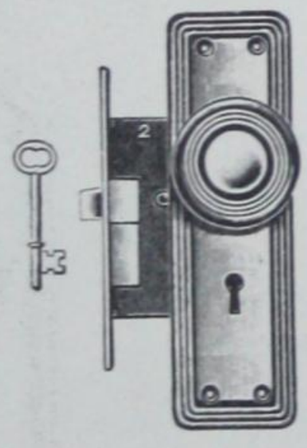

790 and 990

Inside Door Lock Sets, 790 Haig x 09B ..... **Each $5.00**

Description—

Lock 790.
Knobs 2¼ in., one piece
Escutcheons, 7½ x 2¼ in.
One set in box. Weight 2 lbs.

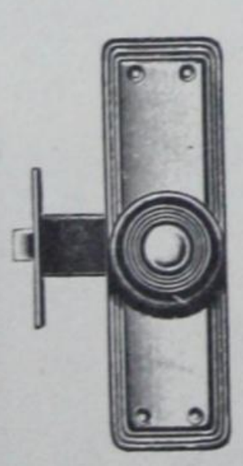

01041½ and 01030

Mortise Latch Sets, 01041½ Haig x 09B ..... **Each $4.50**

Description—

Latch 01041½.
Knobs 2¼ in. one piece
Escutcheons, 7½ x 2¼ in.
One set in Box. Weight 1½ lbs.

Push Plates, 615 Haig x 09B ..... **Each $2.00**

10 x 2¾ in.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WIPCO DESIGN

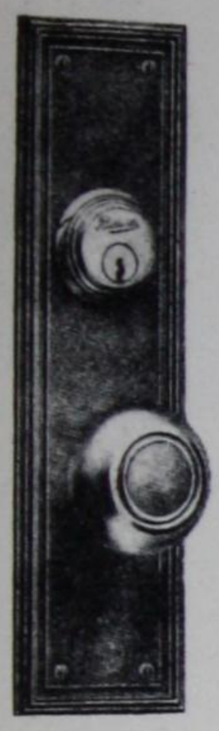

7070

CAST BRASS

Front Door Lock Sets 7070 Wipco x 9C ..... **Each $20.00**

Description—

Lock 7070
Knobs 2¼ in., one piece
Spindle, Simplex No. 22,
Escutcheons, outside 10½ x 2⅞ in.
Escutcheons, inside 7½ x2½ in.
with thumb turn
1 set in Box. Weight 4 lbs.

CAST IRON

Front Door Lock Sets 961 Wipco x 9C ..... **Each $6.50**

Description—

Lock 961
Knobs 2¼ in., one piece
Spindle, Simplex No. 22,
Escutcheons, outside 10½ x 2⅞ in.
Escutcheons, inside 7½ x 2½ in.
1 set in Box. Weight 3 lbs.

961

Inside Door Lock Sets 990 Wipco x 9C ..... **Doz. $20.60**

Description—

Lock 990
Knobs 2¼ in., one piece
Escutcheons, 7½ x 2½ in.
1 Set in Box. Weight 2 lb.

Mortise Latch Sets 01030 Wipco x 9C ..... **Doz. $18.00**

Description—

Latch 01030
Knobs 2¼ in., one piece
Escutcheon 4⅞ x 1½ in.
1 Set in Box. Weight 1 lb.

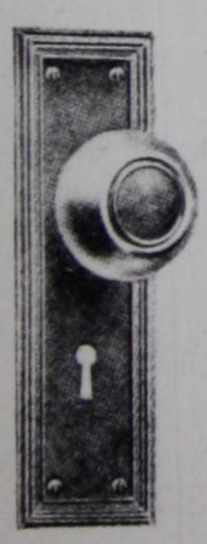

990

Push Plates, 7615 Wipco x 9C ..... **Doz. $16.00**

10½ x 2⅞ in.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BERKELEY DESIGN

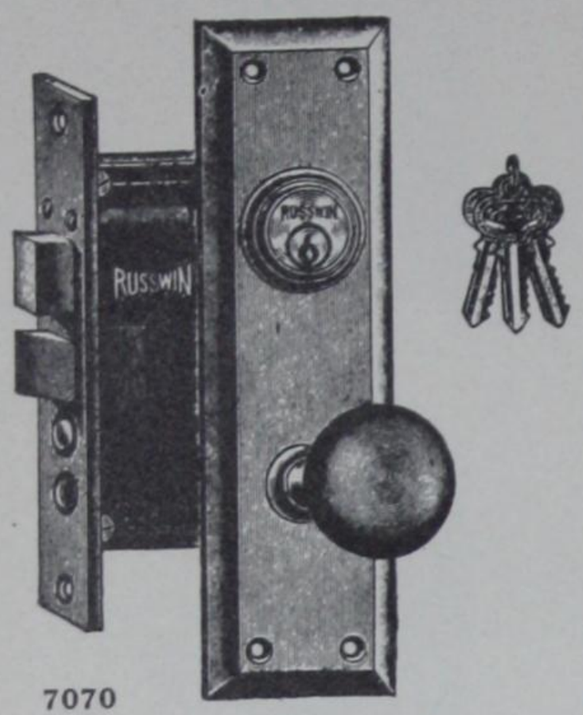

7070

WROUGHT BRASS

Front Door Lock Sets 7070 Berkeley x 9 ..... Each $17.80

Description—

Lock 7070
Knobs 2¼ in. one piece
Escutcheons, outside 10 x 2¾ in.
Spindle $\frac{5}{16}$ in. Swivel
Escutcheons, outside 10 x 2¾ in.
Escutcheons, inside 6¾ x 2⅛ in.
with thumb turn.
1 Set in Box. Weight 4 lbs.

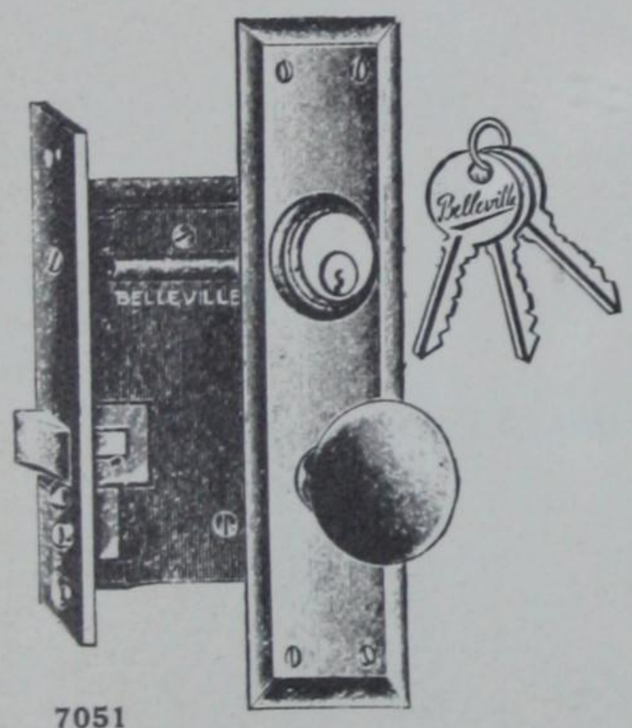

7051

Office Door Lock Sets 7051 Berkeley x 9 ..... Each $16.80

Description—

Lock 7051
Knobs 2¼ in. one piece
Spindle $\frac{5}{16}$ in. Swivel
Escutcheons, outside 8 x 2½ in.
Escutcheons, inside 6¾ x 2⅛ in.
1 Set in Box. Weight 4 lbs.

Front Door Lock Sets 761 Berkeley x 9 ..... Each $6.60

Description—

Lock 761
Knobs 2¼ in. one piece
Spindle $\frac{5}{16}$ in. Swivel
Escutcheons, outside 10 x 2¾ in.
Escutcheons, inside 6¾ x 2⅛ in.
1 Set in Box. Weight 3 lbs.

WROUGHT STEEL

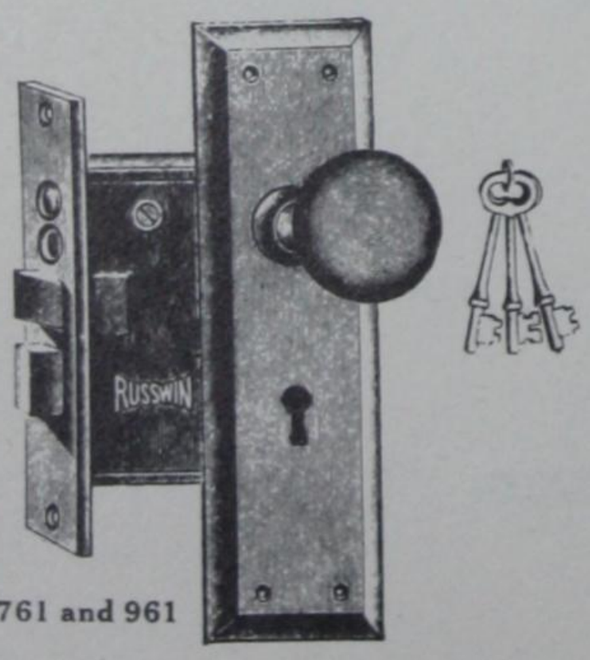

761 and 961

Front Door Lock Sets 961 Berkeley x 9 ..... Each $4.50

Front Door Lock Sets 961 Berkeley x 7½ ..... Each $4.50

Description—

Lock 961
Balance as 761 see above

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BERKELEY DESIGN

WROUGHT BRASS

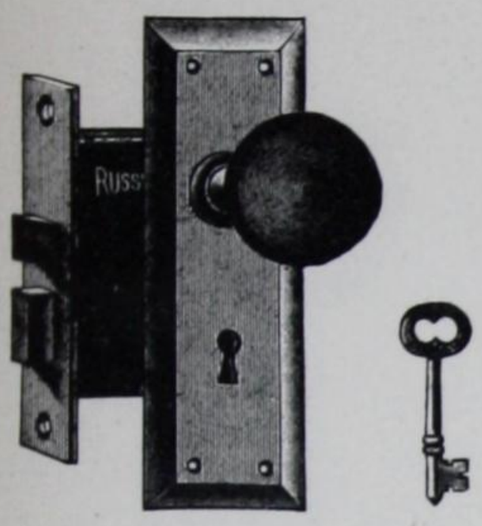

790, 990 and 7114

Inside Door Lock Sets 790 Berkeley x 9 ..... **Doz. $39.90**

Description—
Lock 790
Knobs 2¼ in. one piece
Escutcheons, 6¾ x 2⅛ in.
1 Set in Box. Weight 2 lbs.

Inside Door Lock Sets 7114 Berkeley x 9 ..... **Each $3.90**

Description—
Lock 7114 Cast Brass Face 5¼ x ⅞ in. See Page 61.
Balance as 790 above.

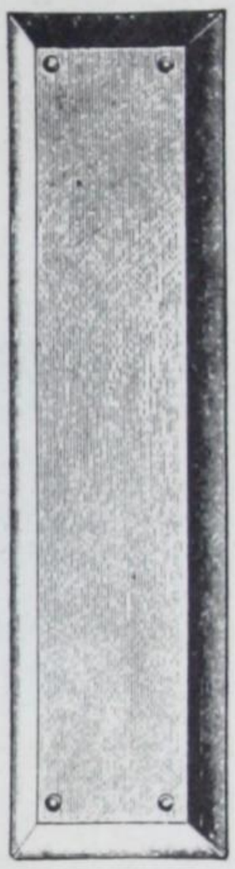

615, 616A and 7615

Mortise Latch Sets 01041½ Berkeley x 9 ..... **Doz. $37.80**

Description—
Latch 01041½
Knobs 2¼ in. one piece
Escutcheons 5½ x 2 in.
1 Set in Box. Weight 1½ lbs.

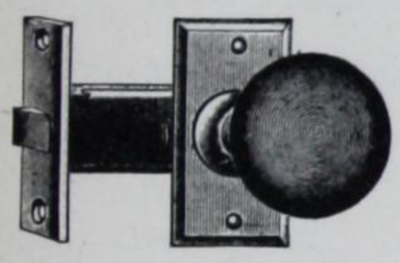

01041½ and 01030

Single Sliding Door Lock Sets 001331½ Berkeley x 9 ..... **Each $6.30**

Double Sliding Door Lock Sets 001331 Berkeley x 9 ..... **Each $10.50**

Description—
Locks 01331½ and 01331
Escutcheons, Single Two 6¾ x 2⅛ in.
Escutcheons Double Four 6¾ x 2⅛ in.
1 Set in Box. Single weight 2 lbs.
1 Set in Box. Double weight 3½ lbs.

WROUGHT STEEL

Inside Door Lock Sets 990 Berkeley x 9 ..... **Doz. $17.80**

Inside Door Lock Sets 990 Berkeley x 7½ ..... **Doz. $17.80**

Description—
Lock 990
Balance as 790 see above

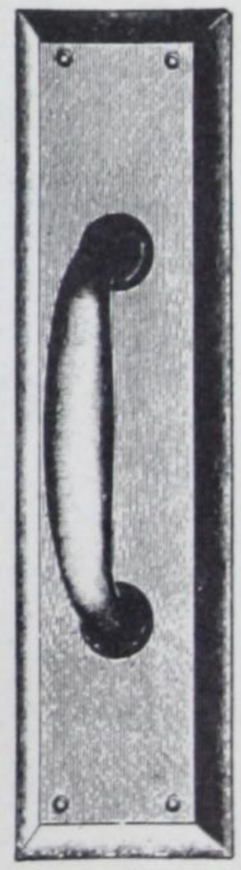

625 and 626A

Mortise Latch Sets 01030 Berkeley x 9 ..... **Doz. $16.80**

Mortise Latch Sets 01030 Berkeley x 7½ ..... **Doz. $16.80**

Description—
Latch 01030
Balance as 01041½ see above

WROUGHT BRASS

Push Plates 615 Berkeley x 9 ..... 10 x 2¾ in. ..... **Doz. $10.50**

Push Plates 616A Berkley x 9 ..... 14 x 3 in. ..... **Doz. $26.40**

Door Pulls 625 Berkeley x 9 ..... 10 x 2¾ in. ..... **Each $3.20**

Door Pulls 626A Berkeley x 9 ..... 14 x 3 in. ..... **Each $4.40**

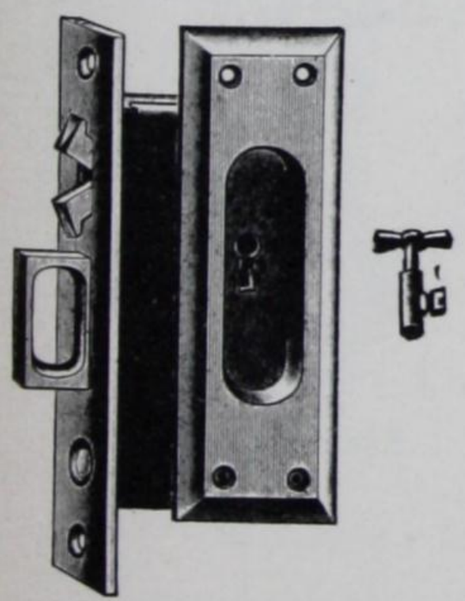

001331½ and 01331

WROUGHT STEEL

Push Plates 7615 Berkeley x 9 ..... **Doz. $5.80**

Push Plates 7615 Berkeley x 7½ ..... 10 x 2¾ in. ..... **Doz. $5.80**

Push Plates 7615 Berkeley x 4 ..... **Doz. $6.30**

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ROXBURY DESIGN

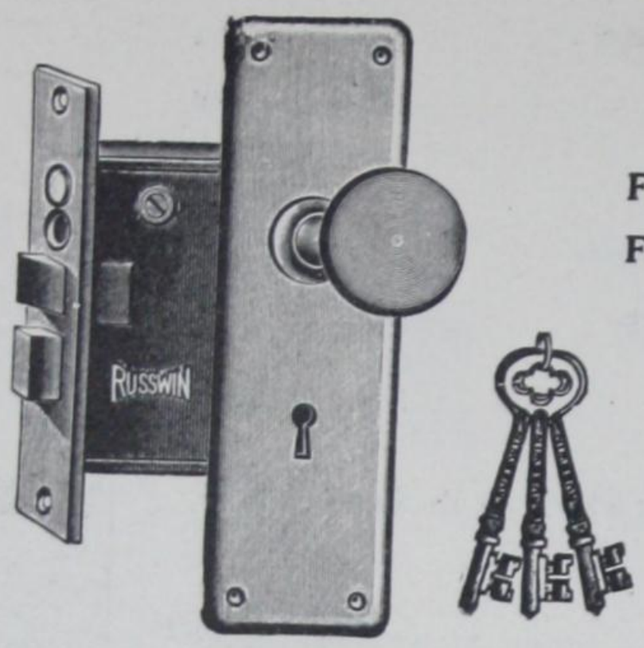

1243

WROUGHT STEEL

Front Door Lock Sets, 1243 x 9 ..... **Each** **$4.80**

Front Door Lock Sets, 1243 x 7½ ..... **Each** **$4.80**

Description—
Lock 961.
Knobs 2¼ in. one piece
Spindle $\frac{5}{16}$ in. Swivel
Escutcheons, outside, 10 x 2¾ in.
Escutcheons inside, 6 x 2⅛ in.
One set in Box. Weight 3 lbs.

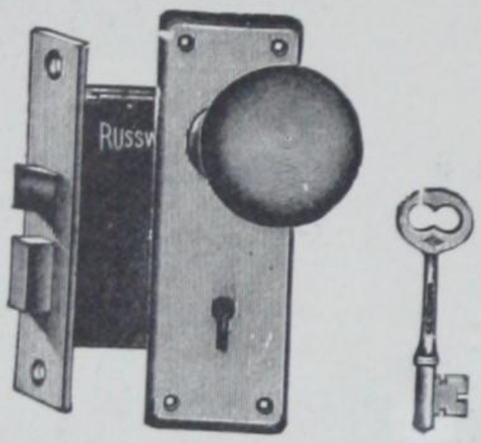

07102

WROUGHT BRASS

Inside Door Lock Sets, 07102 x4 ..... **Each** **$4.00**

Inside Door Lock Sets, 07102 x 46 ..... **Each** **$4.00**

Description—
Lock 790.
Knobs 2¼ in., one piece
Escutcheons, 6 x 2⅛ in.
One set in Box. Weight 2 lbs.
Suitable for Kitchen Doors.

1159

WROUGHT STEEL

Inside Door Lock Sets, 1159 x 7½ ..... **Doz.** **$12.60**

Inside Door Lock Sets, 1159 x 9 ..... **Doz.** **$12.60**

Inside Door Lock Sets, 1159 x 46 ..... **Doz.** **$31.50**

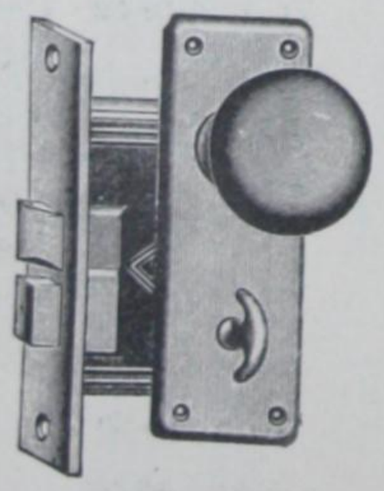

07115

WROUGHT BRASS

Bath Room Lock Sets, 07115 x 4 ..... **Each** **$3.20**

Description—
Lock 3¾ x 3¼ x $\frac{9}{16}$ in.
Wrought Brass front, 5½ x ⅞ in.
Back set 2½ in., spacing 2¼ in.
Knobs ½ pair one piece
One Escutcheon with thumb turn, 6 x 2 in
Dead bolt is operated with thumb turn from inside.
One set in Box. Weight 2 lbs.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DEVON DESIGN

961 x 9C

FRONT DOOR SET
Steel
961 Devon x 9C
Each **$5.30**

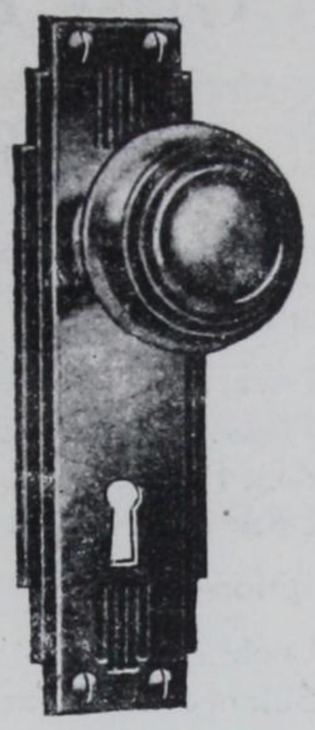

INSIDE SET
Steel
990 Devon x 9C
Dozen **$25.20**

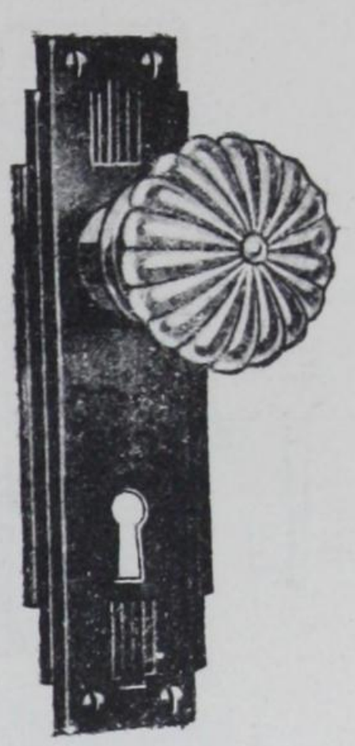

INSIDE SET
Steel with Glass Knob
993 Devon x 9C
Dozen **$31.50**

NILE DESIGN

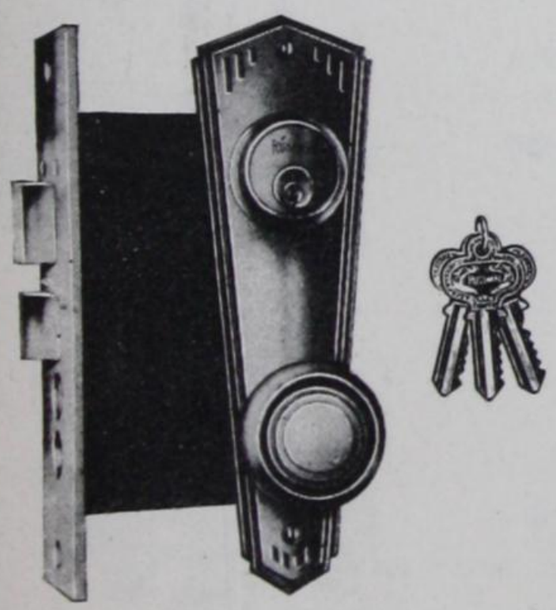

11248Qy2 x 9C

CYLINDER FRONT DOOR SET
Wrot Brass
11248 Nile x 9C
Each **$25.00**

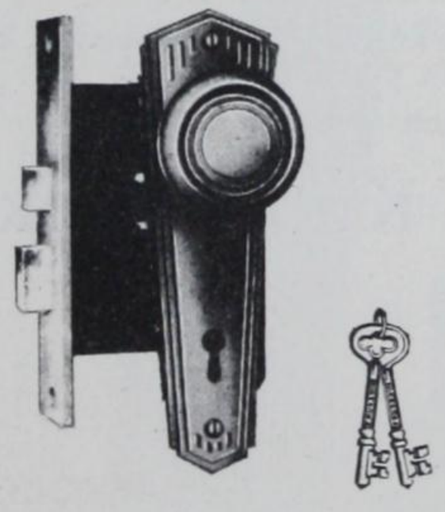

734Qy1 x 9C

INSIDE SET
Wrot Brass
734Qy1 Nile x 9C
Dozen **$53.00**

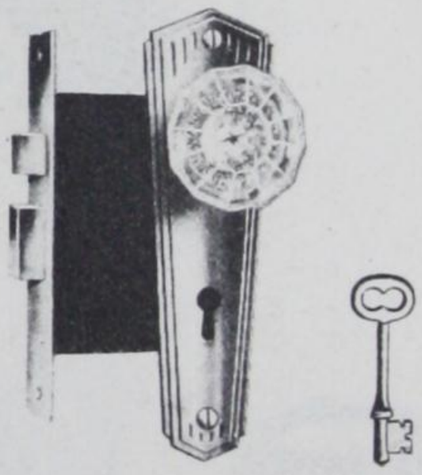

734PA1 x 9C

INSIDE SET
Wrot Brass
734PA1 Nile x 9C
Dozen **$46.00**

See Page of Sectional Sets to Match These Designs.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

INSIDE DOOR LOCK SETS
with Glass Knobs

SECTIONAL TYPE

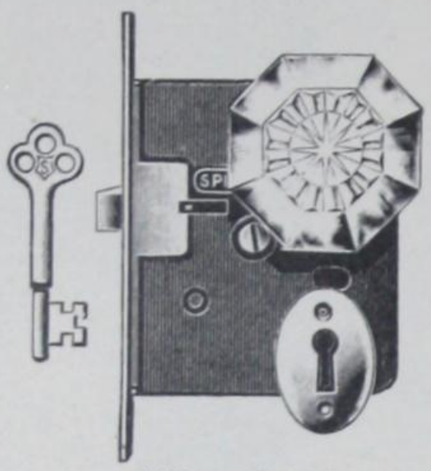

100 and 104

Inside Door Lock Sets, 100 x 9 ..... **Each $3.10**

Description—

Lock 790. See page 61.
Pressed Glass Knobs D1140.
Key Plates, two. 70032

Inside Door Lock Sets, 104 x 9 ..... **Each $2.70**

Description—

Lock 990.
Balance Same as 100. See above.

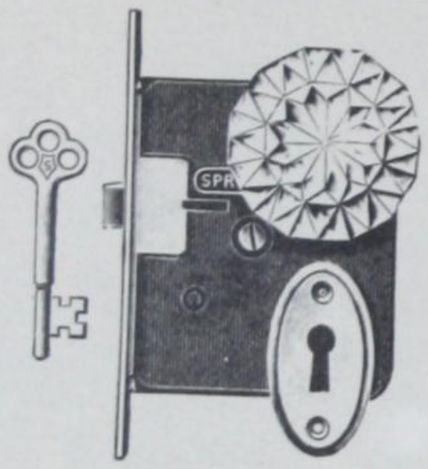

200

Inside Door Lock Sets, 200 x 9 ..... **Each $7.20**

Description—

Lock 790.
Cut Glass Knobs D1116½.
Key plates, two 7904.

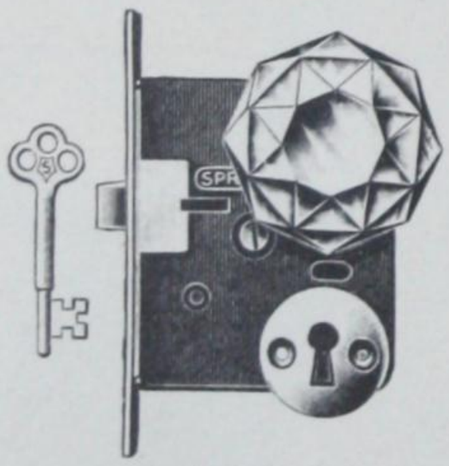

300

Inside Door Lock Sets, 300 x 9 ..... **Each $7.20**

Description—

Lock 790.
Cut Glass Knobs 6452.
Key Plates, two 7902.

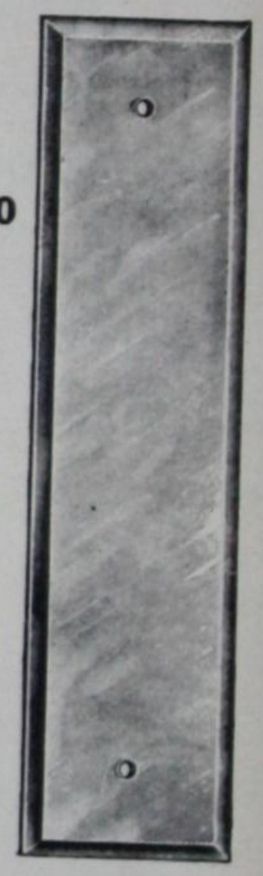

PUSH PLATES
PLATE GLASS BEVELED

No. 2300—Plate Glass Beveled, inches -	12x3
Weight per dozen, lbs.. - - -	15
Each - - - -	**$1.80**

Rim Knob Lock Sets

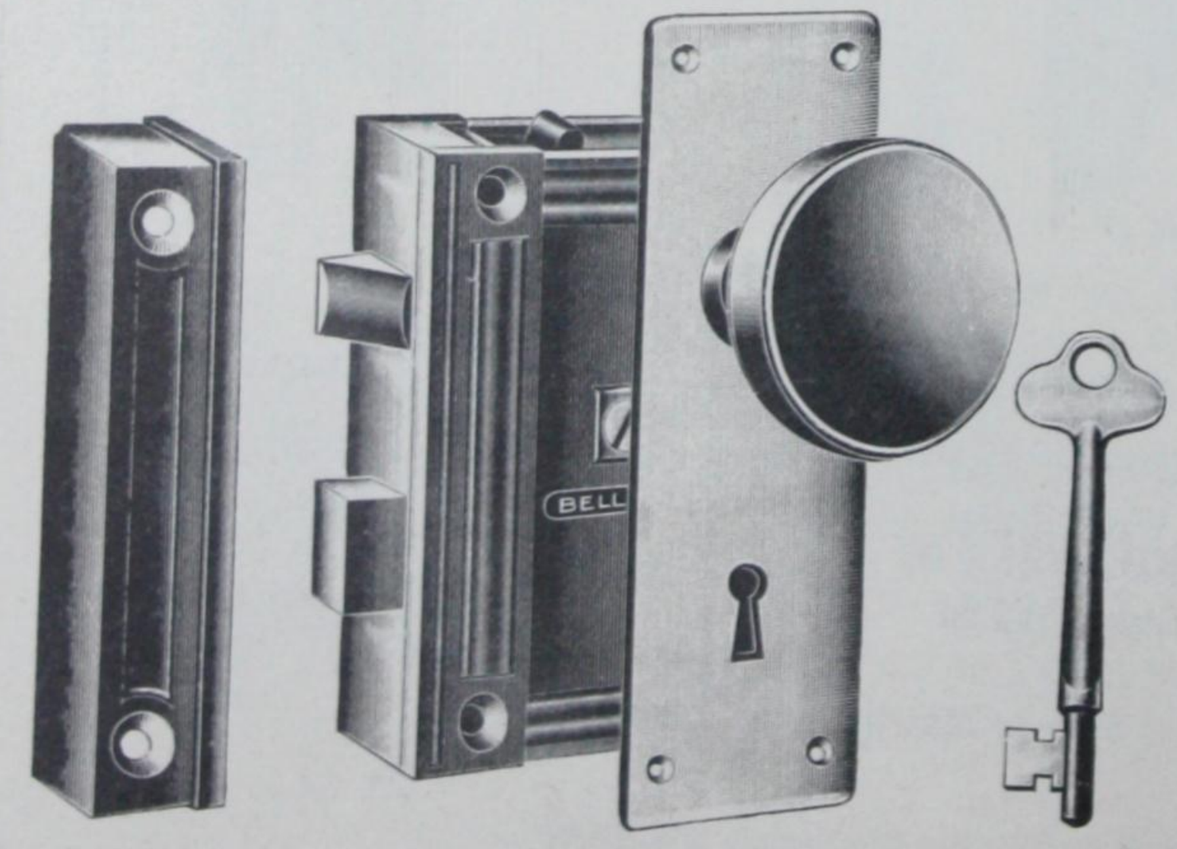

0404 6600

6600 x 7½ ..... **Doz. $18.00**

Description—

Lock: same as No. 500
Old Copper Finish
Knobs 2¼ in. one piece
Escutcheon 6 x 2 in.
1 Set in Box,

0404 x 7½ ..... **Doz. $12.60**
0404 x 9 ..... **Doz. $12.60**

Description—

Lock 1516,
Knobs 2¼ in. two piece
Escutcheon 6 x 2 in.
1 Set in Box, Weight 2 lbs.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Cylinder Residence Front Door Lock Sets

SECTIONAL TYPE

SINGLE GRIP—OPERATED ON INSIDE WITH KNOB

	Lock Number	Cylinder Collar Size	Top Plate Size	Bottom Plate Size	Size Grip	Knob	Set Each
7876 Nelson x 32	770	One piece as illustrated			17 x 4½	2¼	$28.20
7876 Nelson x 46	770	One piece as illustrated			17 x 4½	2¼	27.30
7876 Onslow x 32	770	2⅝ x 2⅝	One piece as illustrated		10¼ x 2⅝	2¼	23.10
7876 Onslow x 46	770	2⅝ x 2⅝	One piece as illustrated		10¼ x 2⅝	2¼	22.00
7876 Winnipeg x 9C	770	2 x 3¾	1⅞ x 3¼	1⅞ x 3¼	6½ in.	2¼	23.10
7876 DartmoorxZS21	8876	2½ x 2½	2½ x 3⅛	2⅛ x 2⅛	6¼ in.	2¼	24.10
7876 Colonial x 9C	7876	2⅝ x 2⅝	One piece as illustrated		10¼ x 2⅝	2¼	24.20

1 Set in Box, Weight 6 lbs.

NELSON

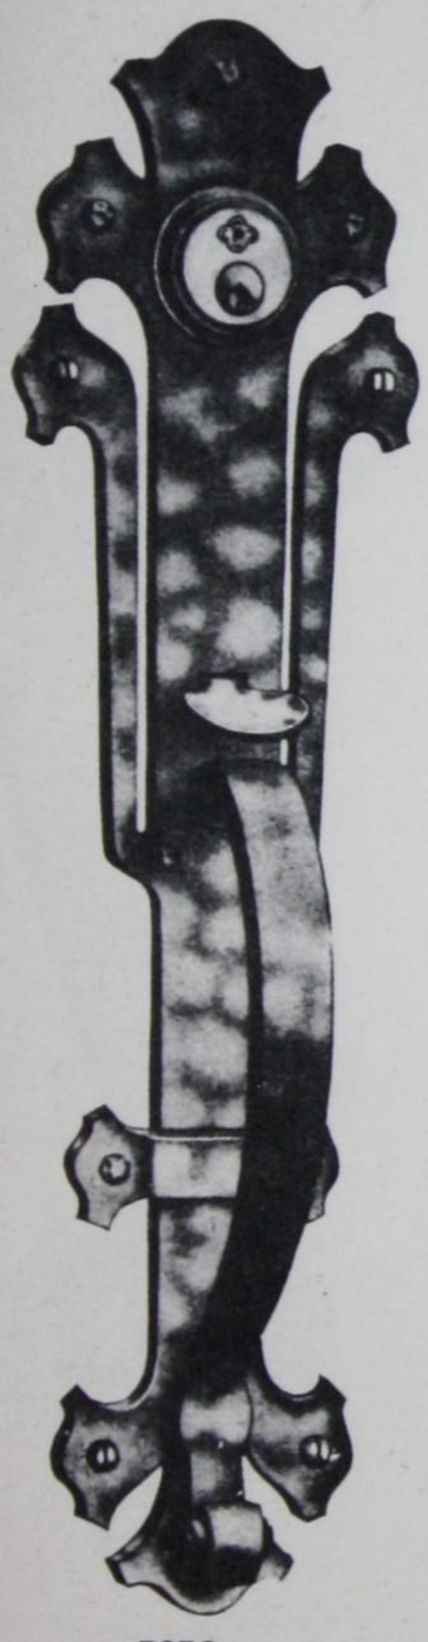

7876
08555½

ONSLOW

7876
08511½

WINNIPEG

7876

DARTMOOR

7876
08579½

COLONIAL

7876

CYLINDER STORE DOOR LOCK SETS

SECTIONAL TYPE

DOUBLE GRIP—OPERATED INSIDE AND OUTSIDE WITH GRIPS

Set Number	Lock		Weight	Set
08555½ Nelson x 32	855	1 Pair Handles	7 lb.	$38.80
08511½ Onslow x 32	855	1 Pair Handles	7 lb.	34.00
08579½ Dartmoor x ZS21	832½	1 Pair Handles	7 lb.	34.70

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Cylinder Residence Front Door Lock Sets

SECTIONAL TYPE

SINGLE GRIP—OPERATED ON INSIDE WITH KNOB

LOVAT S.



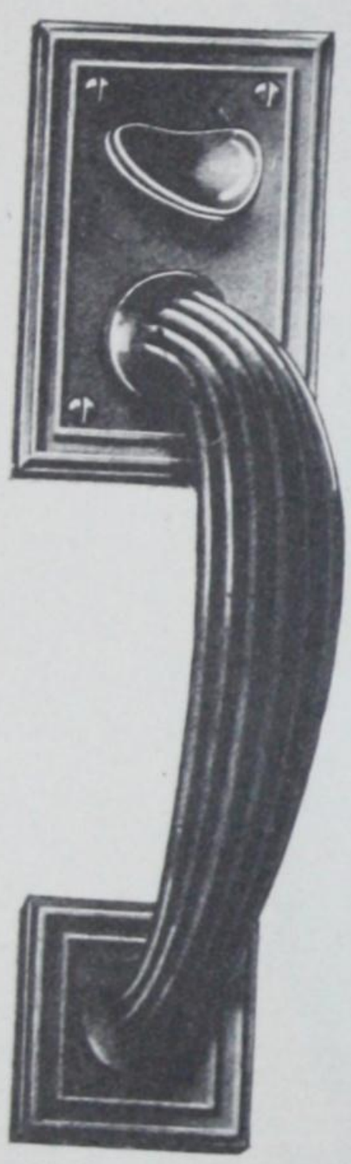

7876xSB 34

Short Grip

LOVAT L.



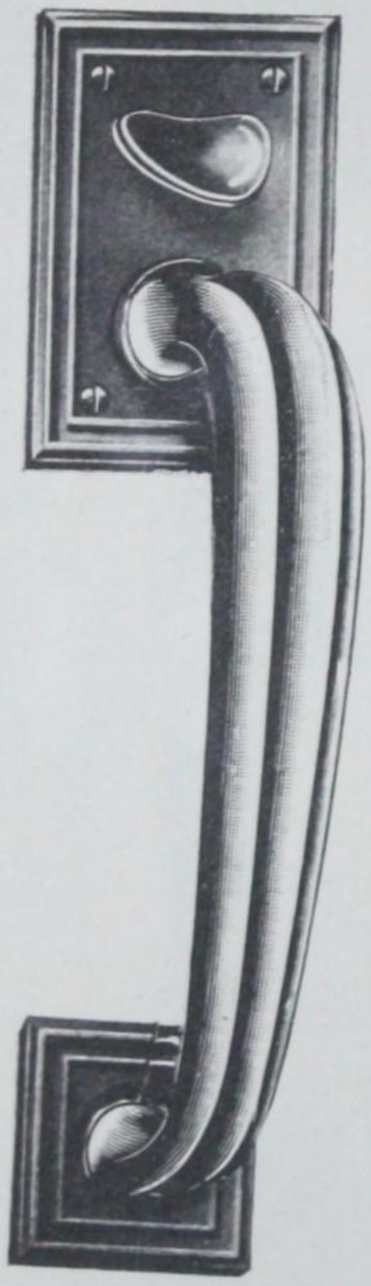

7876xSB 34

Long Grip

ROSEN

7876xSB 34

DEVON

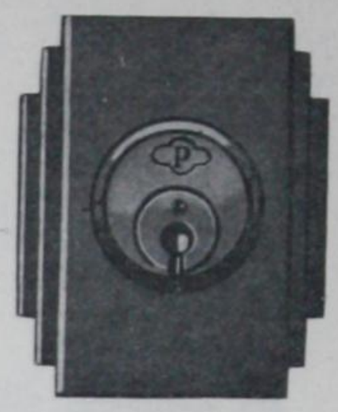

7876xSB 34

RALEIGH

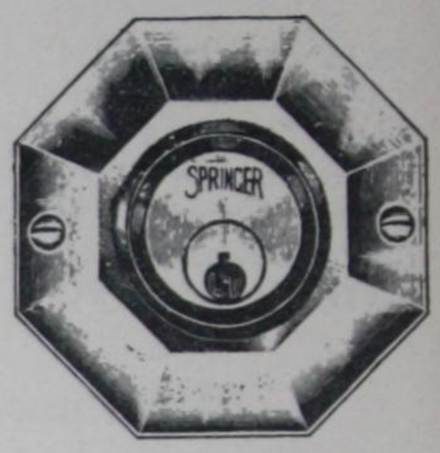

7876 x 9

	Lock	Grip Size	Knob Size	Price
Lovat S.	7876	6 ins.	2¼ ins.	$18.40 each
Lovat L.	7876	8⅛ ins.	2¼ ins.	19.40 "
Rosen	7876	6 ins.	2¼ ins.	27.00 "
Devon	7876	6 ins.	2¼ ins.	27.50 "
Raleigh	7876	7¾ ins.	2¼ ins.	23.40 "

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Cylinder Residence Front Door Lock Sets

SECTIONAL TYPE

SINGLE GRIP—OPERATED ON INSIDE WITH KNOB

		Lock Number	Cylinder Collar Size	Top Plate Size	Bottom Plate Size	Grip Size	Knob	Set Each
7876	Sherwood x9C	7876	2 5/16 x 2 5/16 in.	3 7/8 x 2 5/16 in.	2 3/8 x 2 3/8 in.	6 in.	2 1/4 in.	$23.10
7876	Beaverton x9C	7876	2 7/8 x 2 7/8 in.	3 3/8 x 2 7/8 in.	2 1/16 x 2 1/16 in.	8 1/4 in.	2 1/4 in.	23.10
7876	Majestic 32	7876	4 x 2 1/4 in.	3 x 2 in.	2 x 1 3/4 in.	6 3/8 in.	2 1/4 in.	24.10
7876	Randolph x9	7876	2 5/8 x 2 5/8 in.	3 1/2 x 2 5/8 in.	2 1/8 x 2 1/8 in.	6 1/4 in.	2 1/4 in.	18.90
7876	Randolph 46	7876	2 5/8 x 2 5/8 in.	3 1/2 x 2 5/8 in.	2 1/8 x 2 1/8 in.	6 1/4 in.	2 1/4 in.	17.80
7103	Randolph x9	Night Latch	2 5/8 x 2 5/8 in.	3 1/2 x 2 5/8 in.	2 1/8 x 2 1/8 in.	6 1/4 in.	2 1/4 in.	14.70
7876	Lincoln x46	7876	2 3/8 x 2 3/8 in.	2 3/8 x 3 in.	2 1/4 x 2 1/4 in.	6 in.	2 1/4 in.	21.00

1 Set in Box, Weight 6 lbs.

SHERWOOD

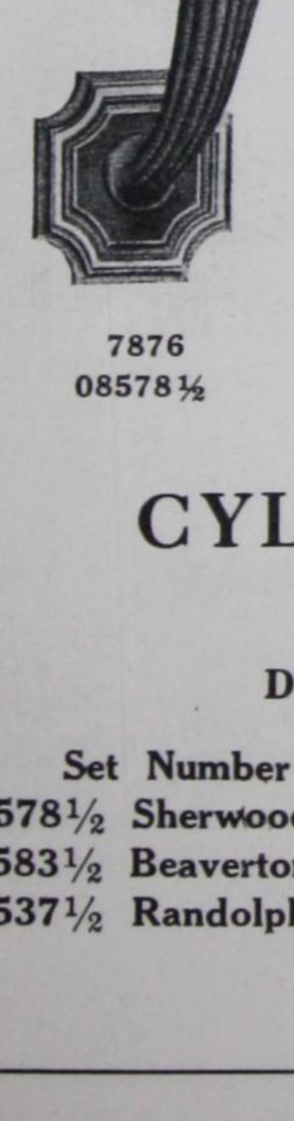

7876
08578½

BEAVERTON

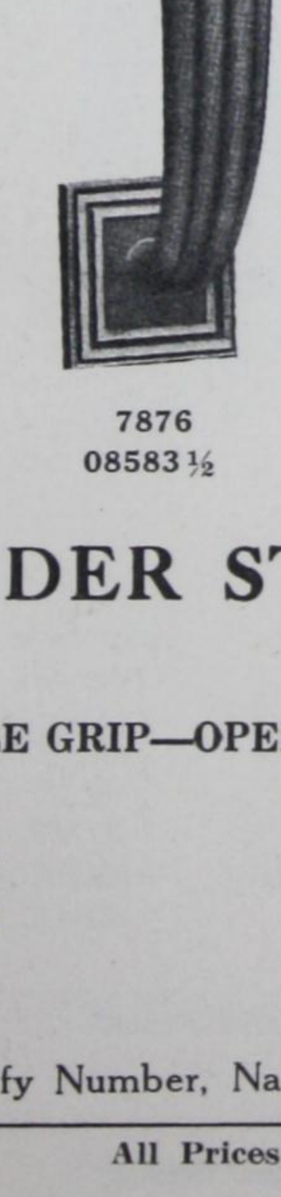

7876
08583½

RANDOLPH

7876
08537½
7103

MAJESTIC

7876

LINCOLN

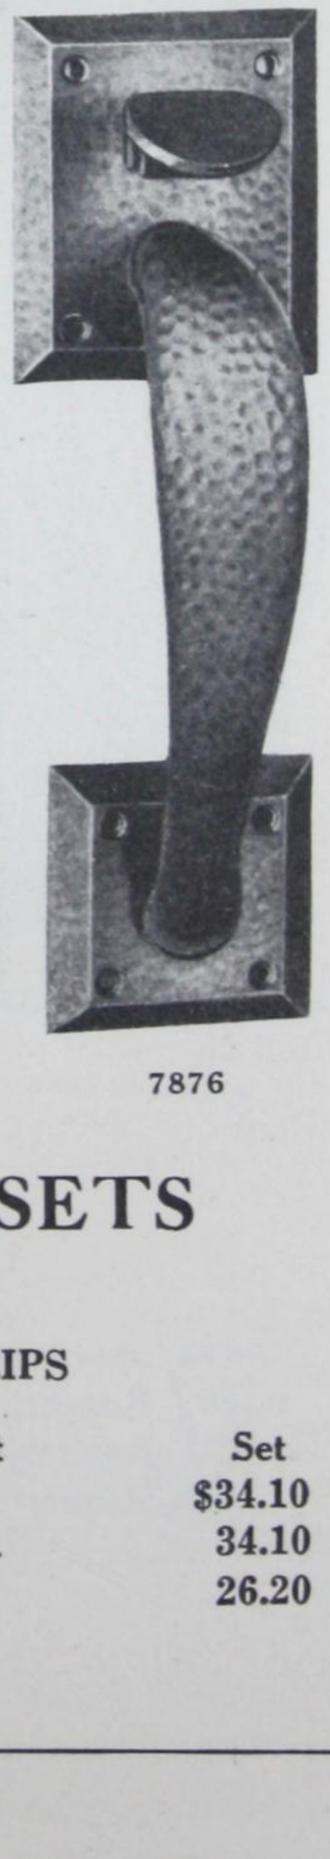

7876

CYLINDER STORE DOOR LOCK SETS

SECTIONAL TYPE

DOUBLE GRIP—OPERATED INSIDE AND OUTSIDE WITH GRIPS

Set Number		Weight	Set
08578½ Sherwood x9C	1 Pair Handles	7 lb.	$34.10
08583½ Beaverton x9C	1 Pair Handles	7 lb.	34.10
08537½ Randolph x9	1 Pair Handles	7 lb.	26.20

Specify Number, Name of Design and Finish

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CYLINDER STORE DOOR LOCK SETS

DOUBLE GRIPS—OPERATED ON INSIDE AND OUTSIDE WITH GRIPS

CAST BRASS

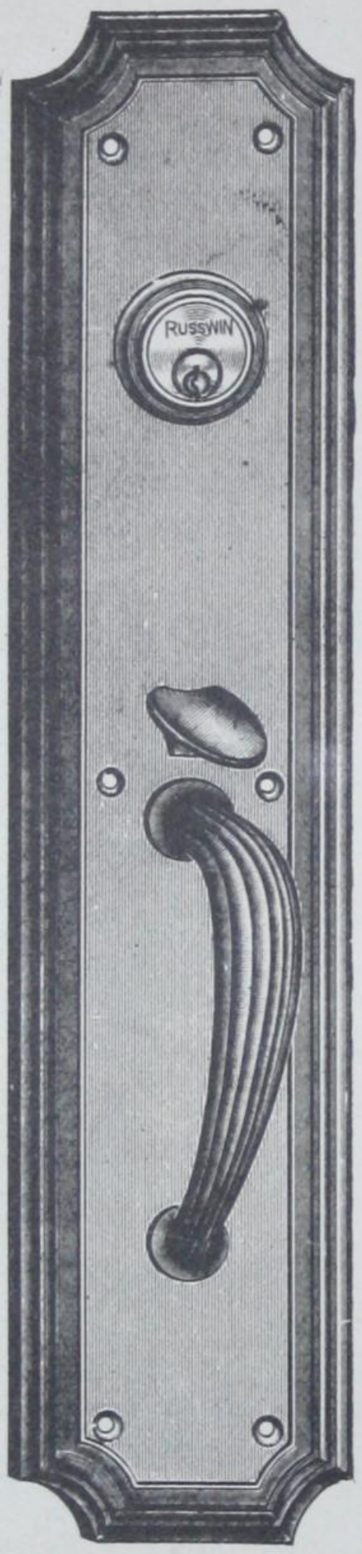

SHERWOOD

CAST BRASS

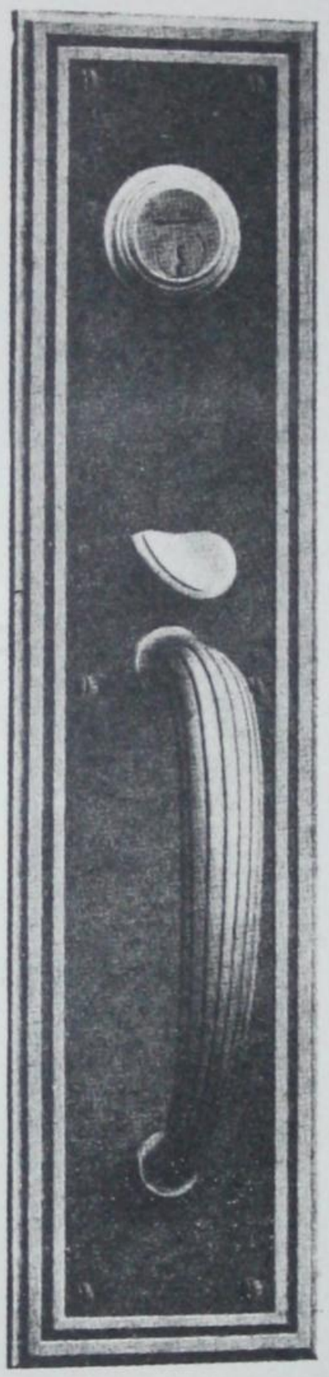

BEAVERTON

CAST BRASS

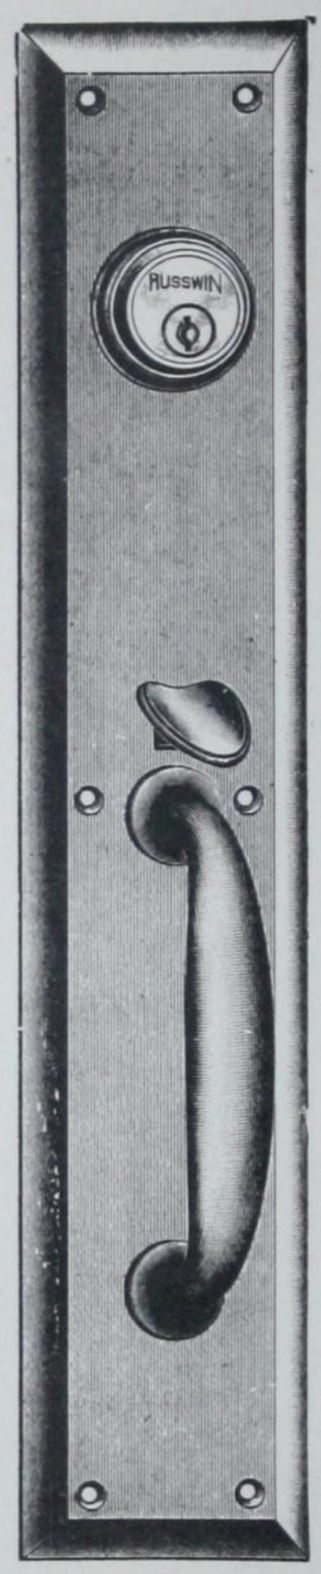

RANDOLPH

WROUGHT BRASS

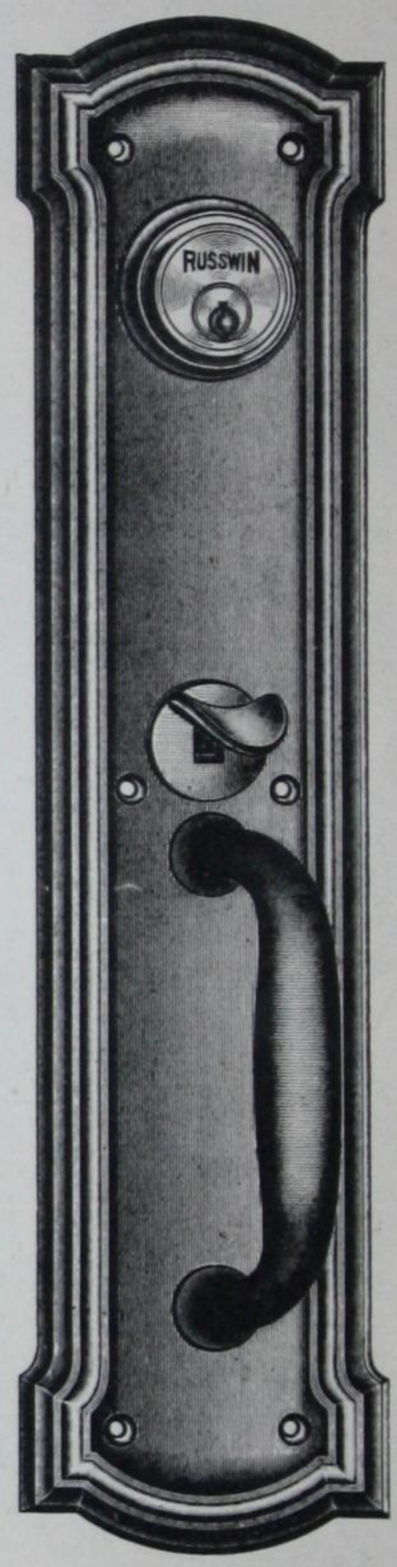

REGENT

	Lock	Plates Size	Grip Size Over-all	Weight	Each
08478 Sherwood x9C	708	16¾ x 4 in.	7¼ in.	9½ lb.	**$46.20**
08483 Beaverton x9C	708	15⅛ x 3⅜ in.	7¼ in.	9 lb.	**$46.20**
08437 Randolph x9	708	16 x 3½ in.	7 in.	9 lb.	**$42.00**
1098 Regent x9C	9098	15 x 3½ in.	5¼ in.	6 lb.	**$31.50**

Specify Number, Name of Design and Finish.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STORE DOOR LOCK SETS

WROUGHT BRASS

DOUBLE GRIPS—OPERATED ON INSIDE AND OUTSIDE WITH GRIPS

	Lock	Plates	Reversible Offset Grips Size over all	Weight	Each
1098 Berkeley x 9	**9098**	**14 x 3** in.	**5¼** in.	**6** lb.	**$25.20**
1139 Berkeley x 9	**139**	**14 x 3** in.	**5¼** in.	**4½** lb.	**$15.20**
1139 Regent x 9	**139**	**15 x 3½** in.	**5¼** in.	**4½** lb.	**$21.00**

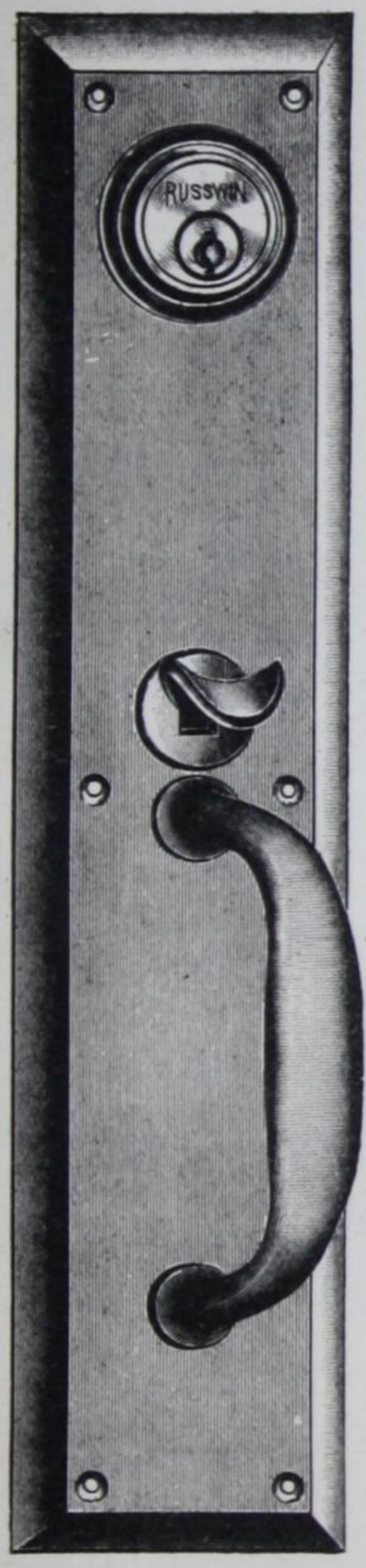

1098 Berkeley

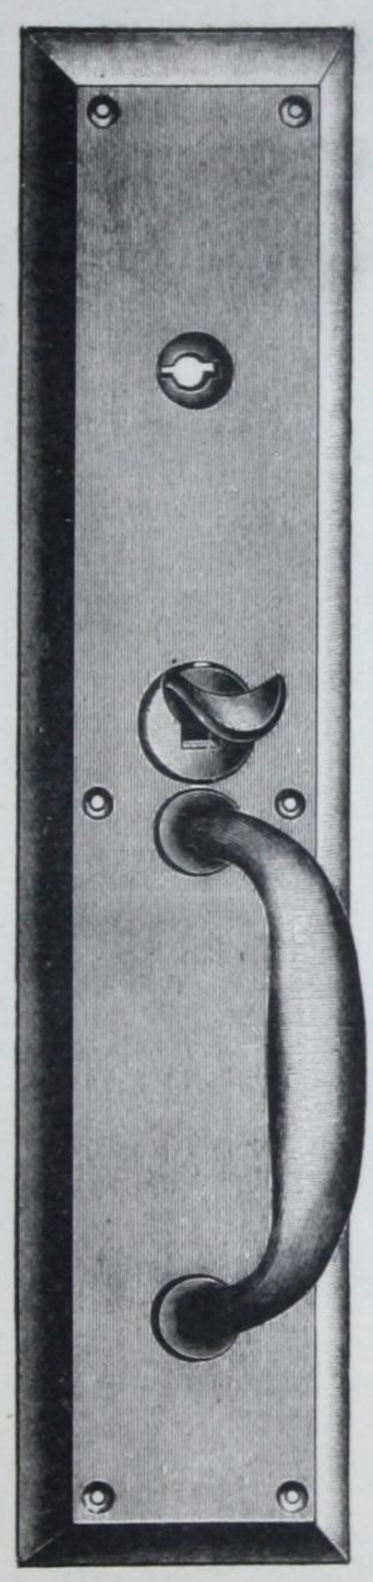

1139 Berkeley
7139 - - -

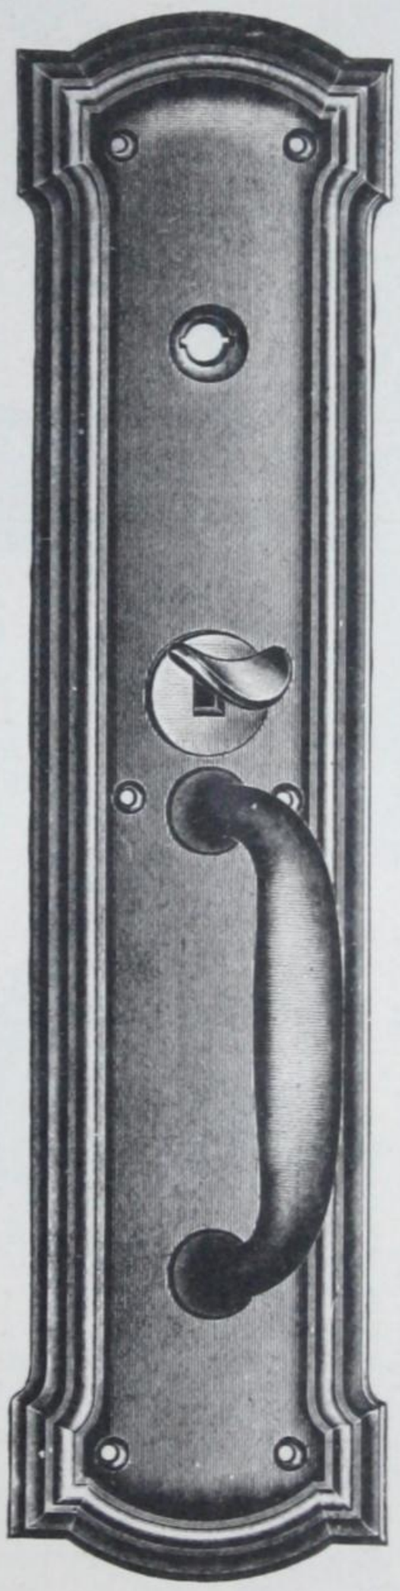

1139 Regent
7139 - - -

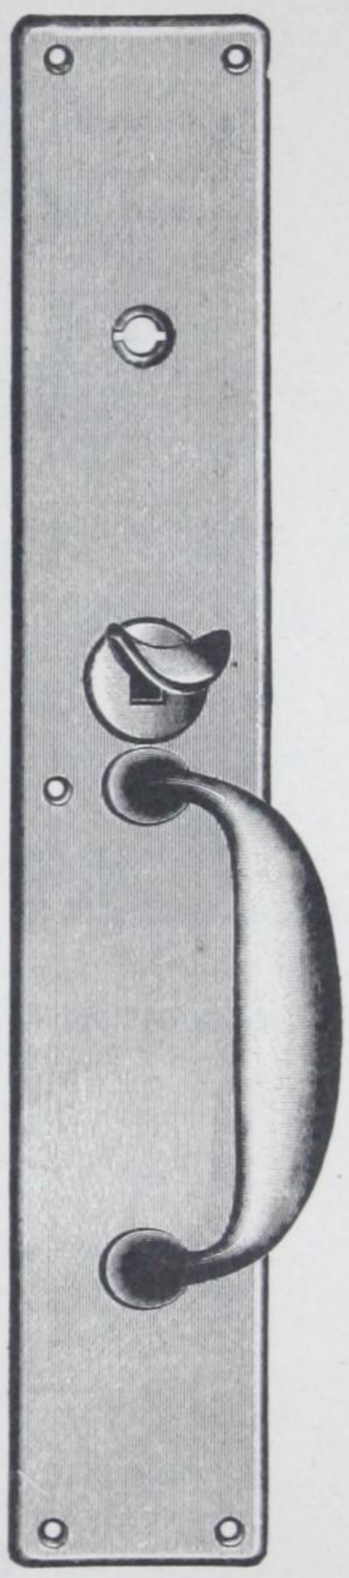

7139 Roxbury

WROUGHT STEEL

	Lock	Plates	Reversible Offset Grips Size over all	Weight	Each
7139 Berkeley x 9	**7139**	**14 x 3** in.	**6½** in.	**4½** lb.	**$8.90**
7139 Berkeley x 7½	**7139**	**14 x 3** in.	**6½** in.	**4½** lb.	**$8.90**
7139 Regent .. x 9C	**7139**	**15 x 3½** in.	**6½** in.	**4½** lb.	**$13.10**
7139 Roxbury x 9	**7139**	**14 x 2⅜** in.	**5⅛** in.	**4** lb.	**$8.50**
7139 Roxbury x 7½	**7139**	**14 x 2⅜** in.	**5⅛** in.	**4** lb.	**$8.50**

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

THIS PAGE ILLUSTRATES THE OPERATION OF SECTIONAL LOCKSETS

Front Door Cylinder Rim Night Latch Set

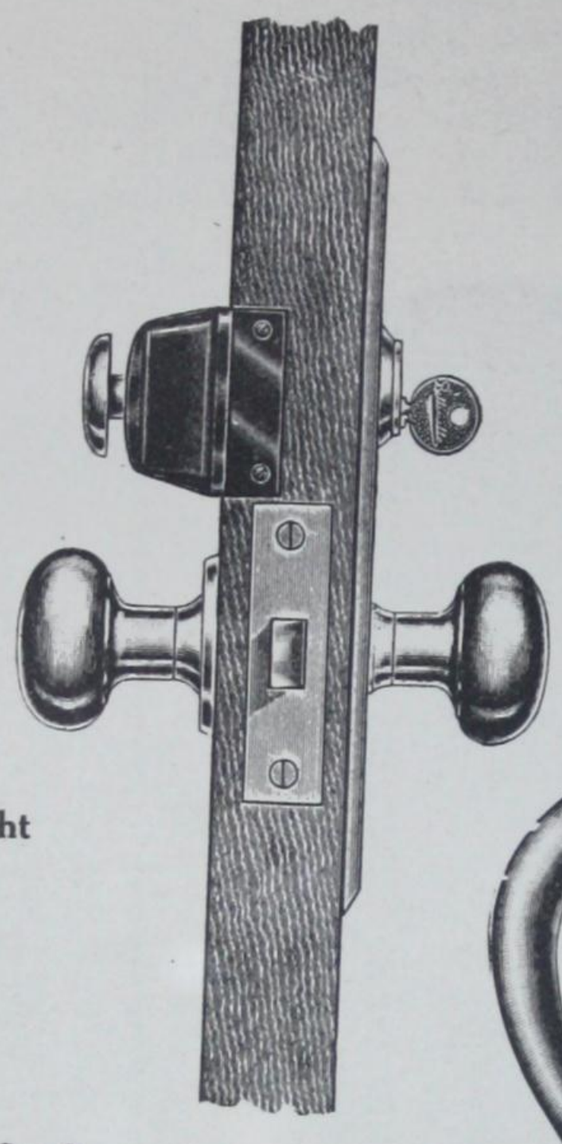

Wrought Brass

Berkeley 7103 x 9 Each $8.00

Sectional Cylinder Rim Night Latch Set

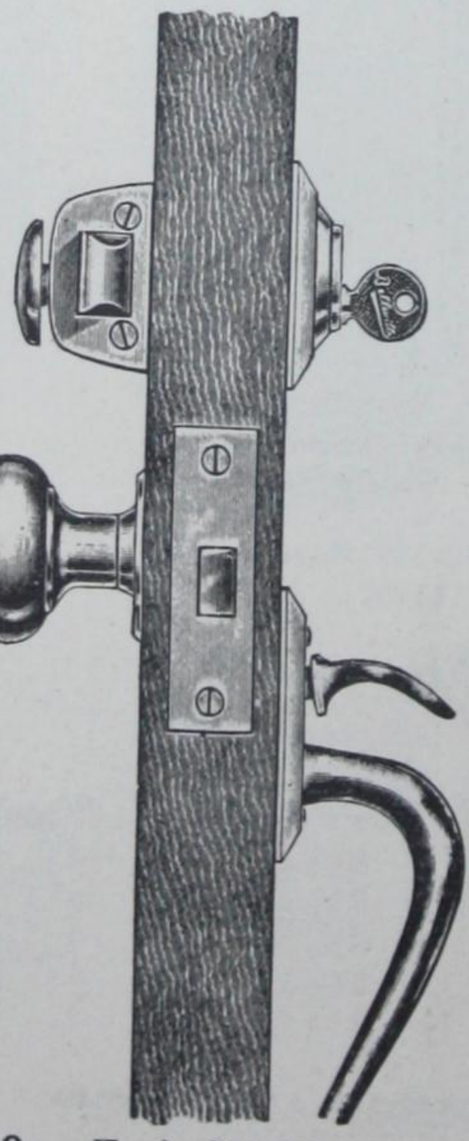

Cast Brass

Randolph 7103 x 9 Each $14.70

Double Grip Sectional Store Door Lock Set

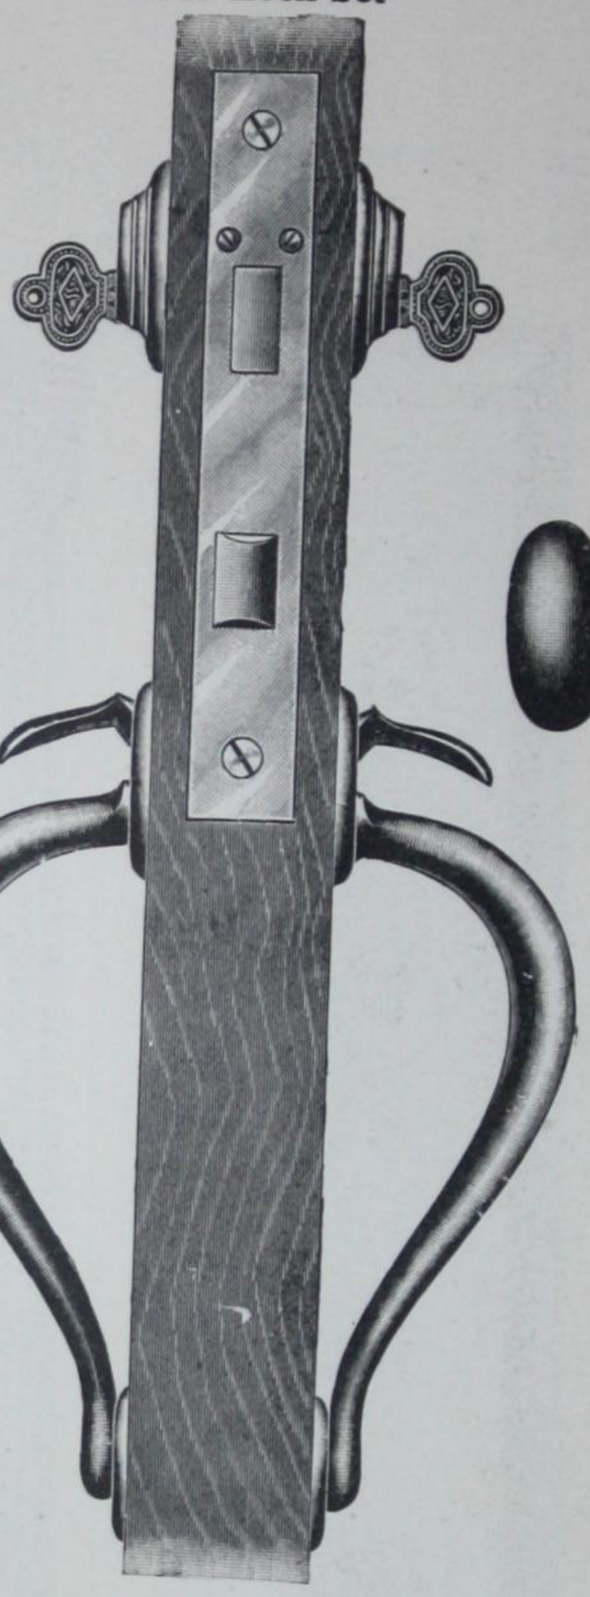

Single Grip P Residence Sectional Front Door Lock Set

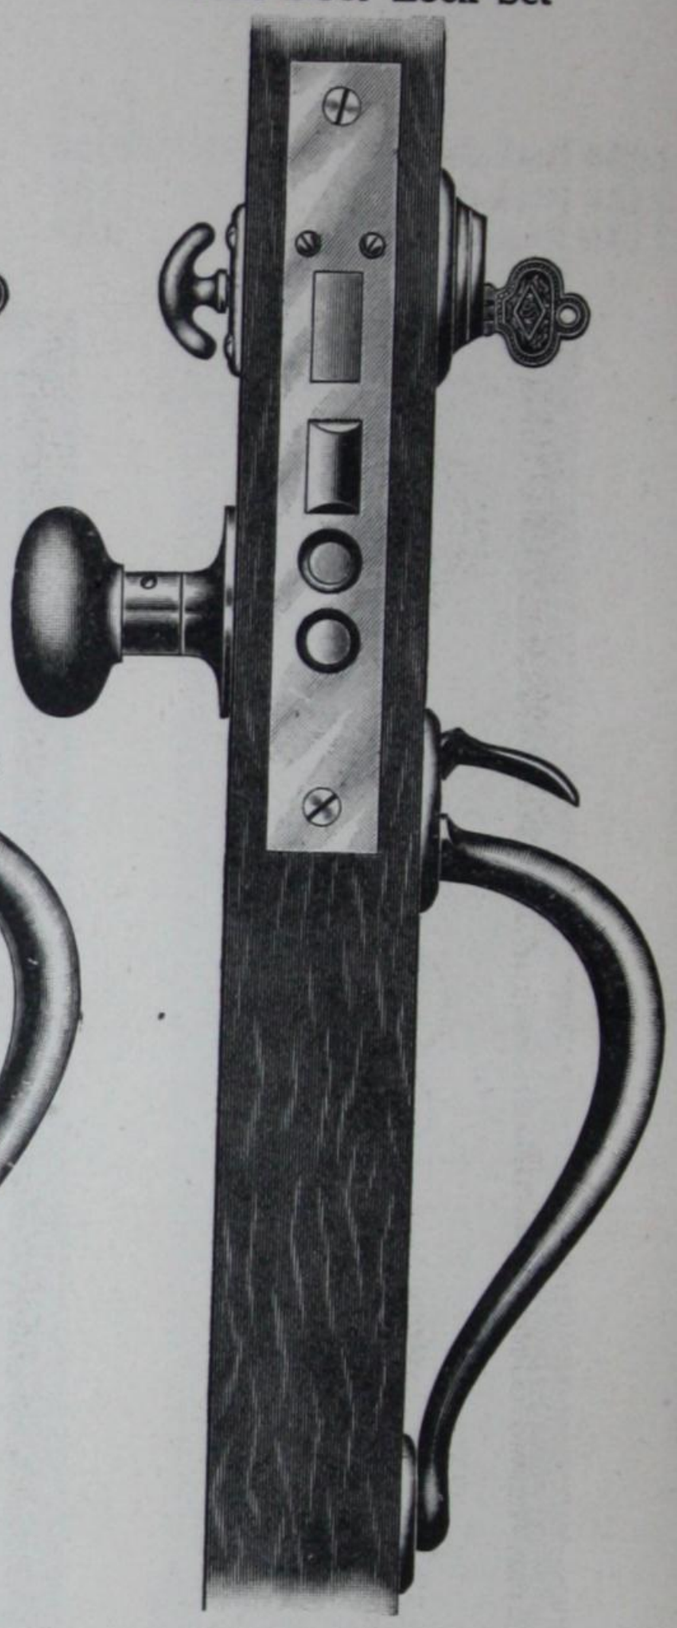

If store door sets are desired with night locks, to dead lock outside thumbpiece, substitute lock **9118** for lock **9098,**

Sectional store door sets packed with lock **9118** are also very desirable for Residence Front Doors.

SPECIFY NUMBER, NAME OF DESIGN AND FINISH

CYLINDER RIM NIGHT LATCHES

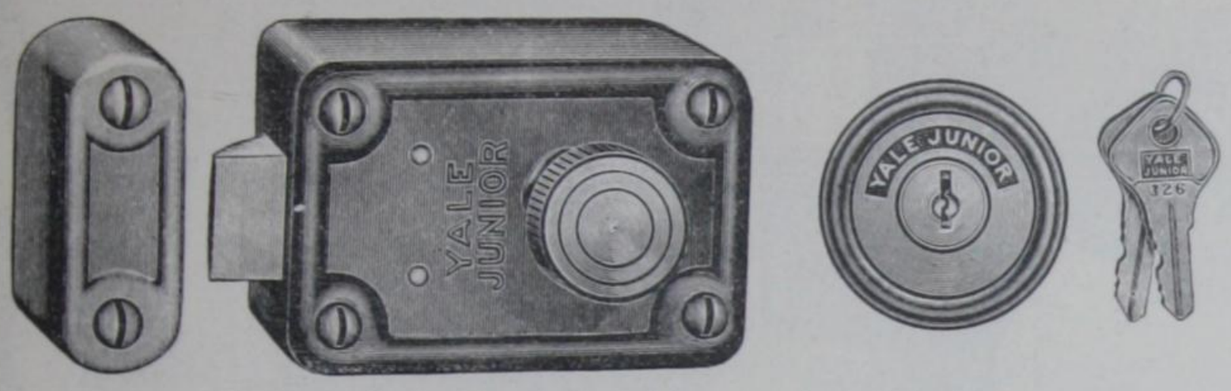

No. 23 Springlatch
Disc-Tumbler Cylinder

Case, 2¼ x 3⅜ x ⅞ in.
Cylinder No. 1700, die cast. Five disc-tumblers.
Bolt, iron, brass plated; ½ in. throw.
Keys, two, List No. 713; changes, 250.
Backset, 2¼ in.
For Doors, 1 to 2 in. thick, either right or left hand.
Operation: From outside by key, from inside by knob. Bolt may be held back by turning knob to the left.

No.	Case	Strike	Turn Knob
23	ressed steel, japn'd	Rim	Die cast, brass plated

Each $1.70

Not master-keyed. Packed: Each in a box, complete with screws; weight, each, 1 1/16 lbs. 150 in a case; weight, 171 lbs.

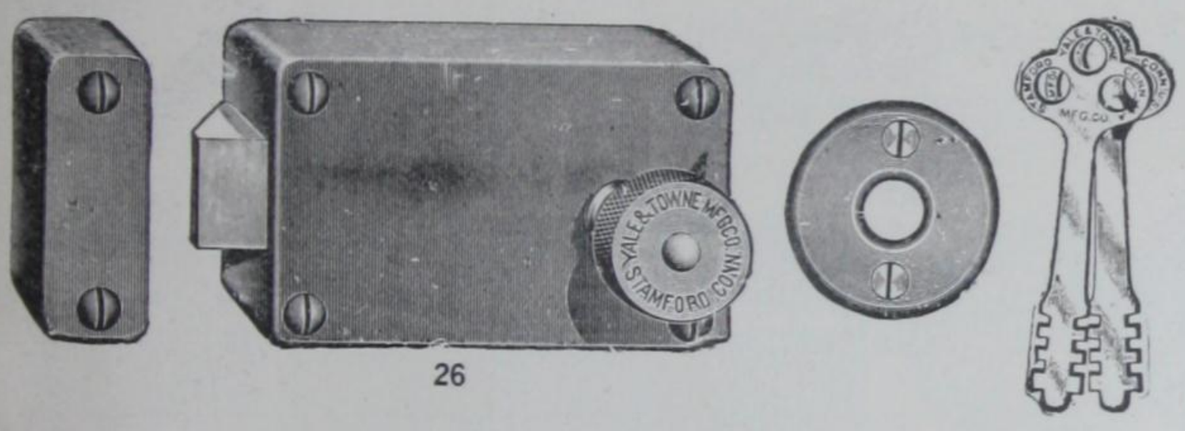

26

No. 26, Japanned Cast Iron

2 x 3¼ in.
Backset 2½ in.
Reversible for doors up to 1¾ in.
Two keys.
Bronze plated bolt and knob. Bolt may be held retracted by half turn of knob to left.

One in Box. **Each $1.26**

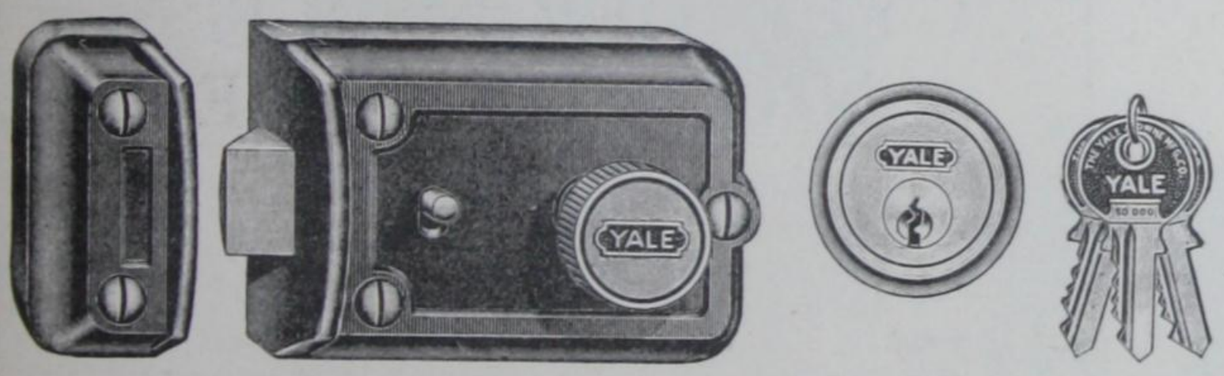

No. 36 Springlatch

Case, 2¼ x 3¼ x ⅞ in.
Cylinder No. 1153¾. Four pin-tumblers.
Keys, three, List No. 10½; changes, 1500.
Backset, 2 in.
For Doors, ⅞ to 1¾ in. thick, either right or left hand.
Operation: From outside by key, from inside by knob. Bolt may be held back by stop.

No.	Case	Strike	Iron Bolt
36	Iron, japanned	Rim	Brass plated

Each $2.74

Not master-keyed. Packed: Each in a box, complete with screws; weight, each 1 lb.

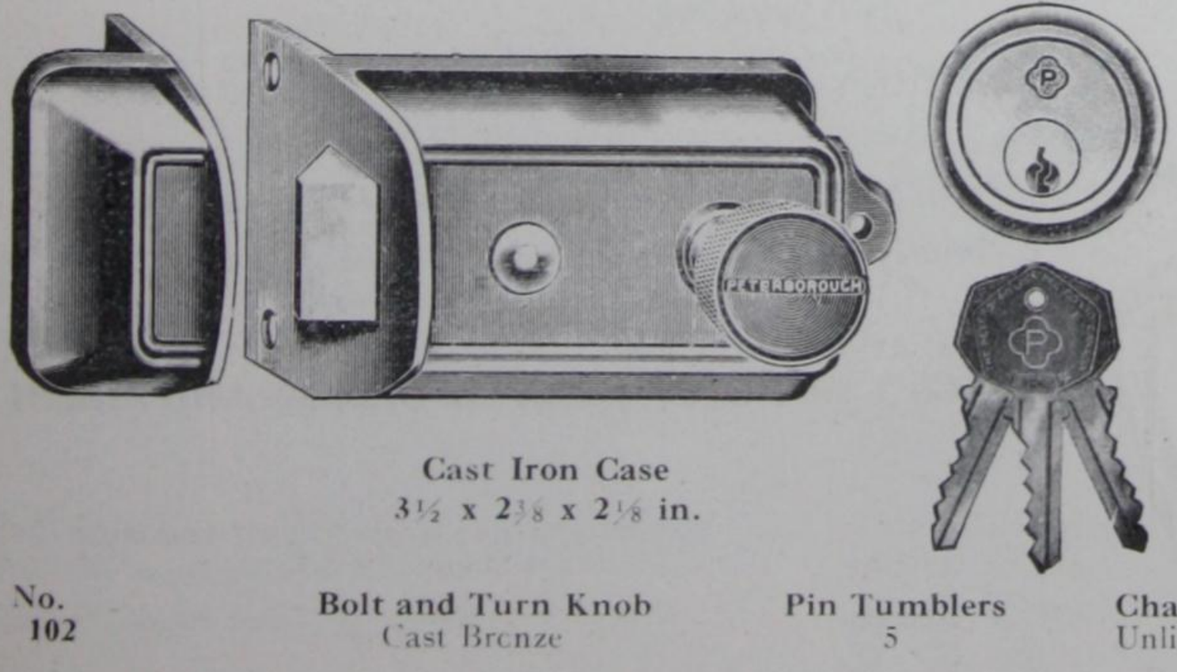

Cast Iron Case
3½ x 2⅜ x 2⅛ in.

Backset	2½ in.
For Doors	⅞ x 3 in.
Cylinder	Cast Bronze
Keys	German Silver

OPERATION

From outside by key. From inside by knob. Bolt may be held back by stop. D102 and D103 may be deadlocked by stop so that the latch cannot be operated from the outside by the key.

Each $2.94

No.	Bolt and Turn Knob	Pin Tumblers	Changes	Three Keys	Finish
102	Cast Bronze	5	Unlimited	108	Japanned

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CYLINDER RIM NIGHT LATCHES

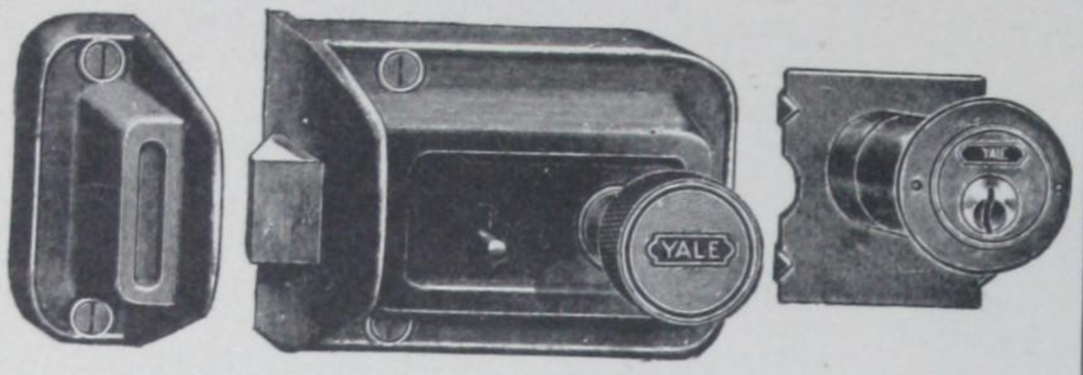

No. 33, Japanned Cast Iron
Each **$2.36**

33

2¼ x 3 in.
Backset 2 in.
Reversible for doors ⅞ to 1½ in.
Three keys.
Bronze cylinder, bolt and knob, stop can be set to hold bolt retracted.

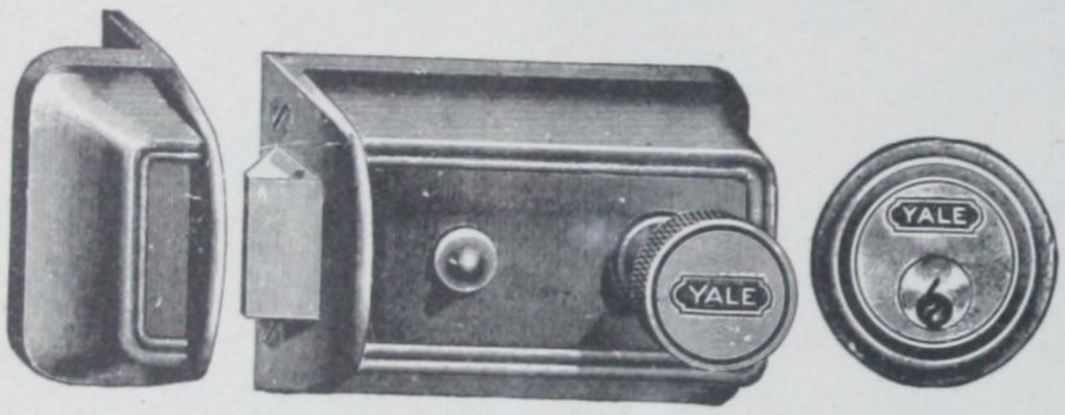

No. 42, Antique Copper.
Each **$4.10**

42

Cast Iron.
2⅜ x 3½ in.
Back set 2⅜ in.
Reversible for doors ⅞ to 2½ in.
Three keys.
Bronze cylinder, bolt and knob, stop can be set to hold bolt retracted.

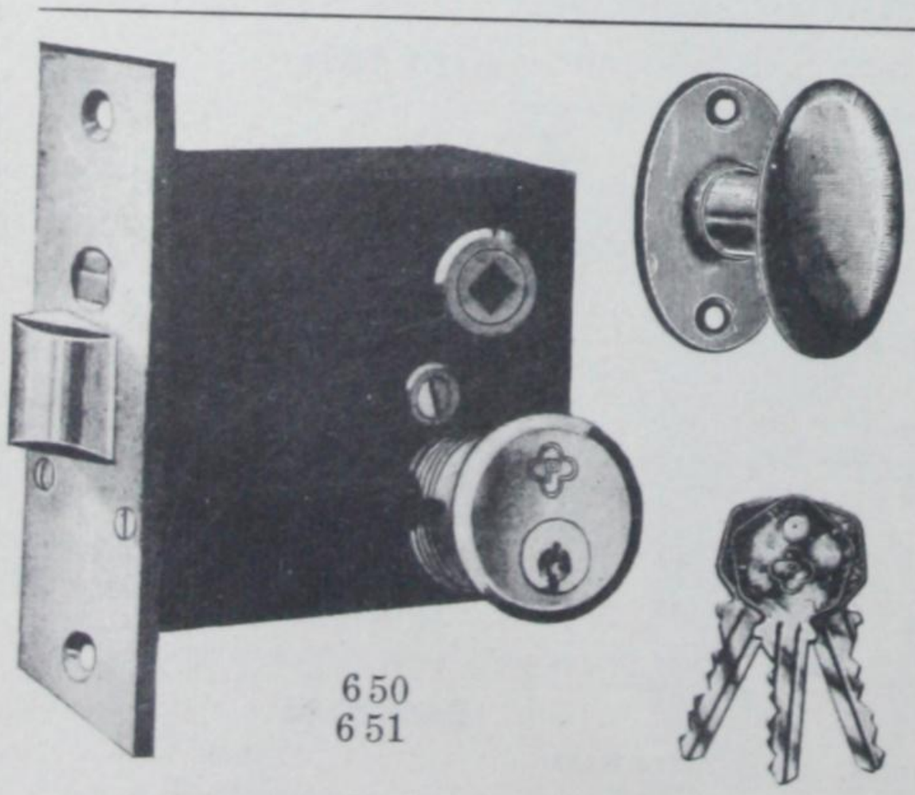

650
651

No.	Each	Cylinder	Three Keys	Front and Bolt	Changes
650	**$13.00**	1	108	Cast Brass	Unlimited
651	**$16.00**	2	108	Cast Brass	Unlimited

MORTISE NIGHT LATCHES

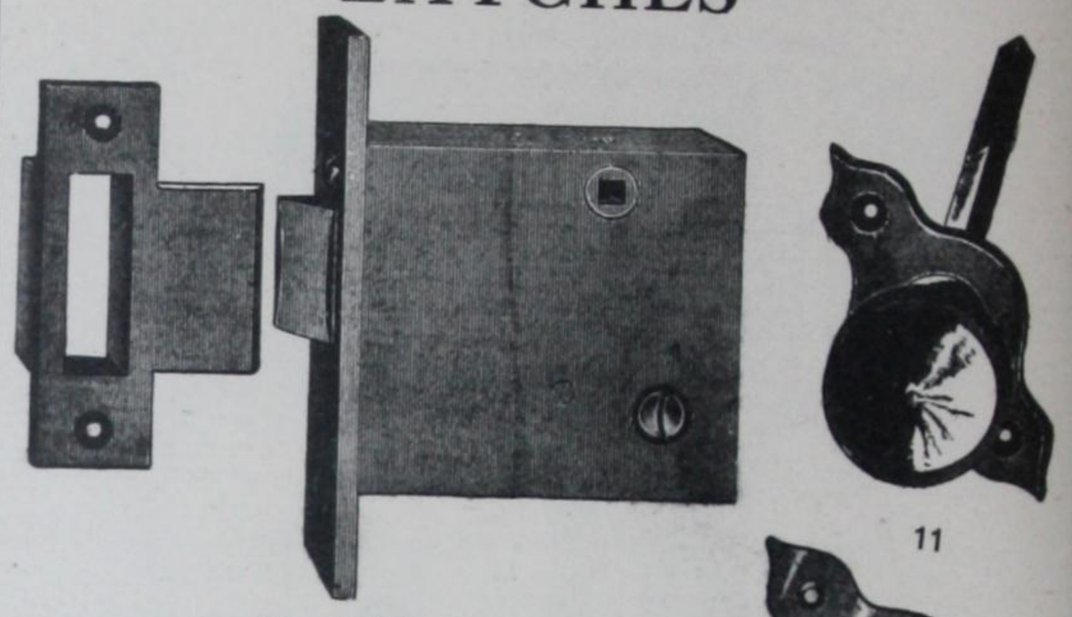

No. 11F Each **$9.80**

Bronze case 2½ x 3 x ⅝ in.
Bronze face 4⅛ x 1 in.
Backset 2⅜ in.
Three flat keys, four tumblers.
Bronze bolt and knob.

Operation by key from outside, by knob from inside.

Stop in face plate may be set to hold bolt retracted.

CYLINDER MORTISE NIGHT LATCHES

JAPANNED IRON CASE
3⅜ x 3½ x ¾ in.

Front	5⅛x1⅛ in.
Backset	2¾ in.
Rabbeted	2¾ and 2¼ in.
Brass hub for spindle	⅝ in.

Bronze Turn Knob.

Operation

No. 650—Latch bolt by key from outside and turn knob inside. Stop in face of latch may be set to hold back latch bolt.

No. 651—Latch bolt by key from either side. Stop in face of latch may be set to hold back latch bolt.

Master-Keying

Can be Master-keyed and Grand Master-keyed with other Peterboro Cylinder Locks.

FLAT FRONT—REVERSIBLE

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

PIN TUMBLER RIM NIGHT LATCHES

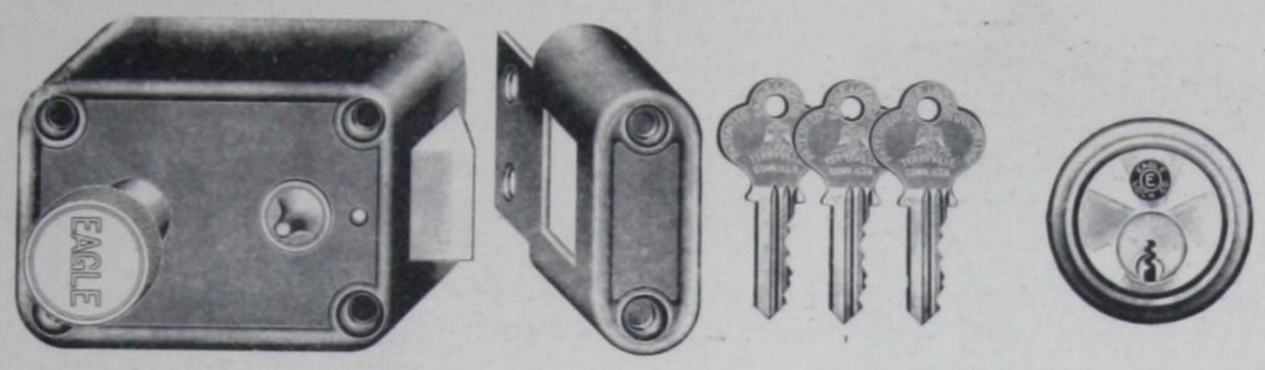

No. 3515. 3⅜ x 2⅜ inches. JAPANNED WROUGHT STEEL CASE AND STRIKE.

Brass Cylinder, Knob, Bolt and Ring. 2⅜ inches from edge of door to center of cylinder. **Reversible.** Adjustable to doors from ¾ to 2¾ inches thick. 3 Embossed Gold Plated **Milled Nickel** Silver Keys each. No two locks alike. Key Blank used No. 11309. **Bolt may be held back by setting stop and can also be fastened in the locked position, by setting stop, so that the bolt cannot be unlocked. Bolt can also be deadlocked with the key from the outside.**

Each **$3.84**

Changes practically unlimited.

Master Keyed to order at an additional price.

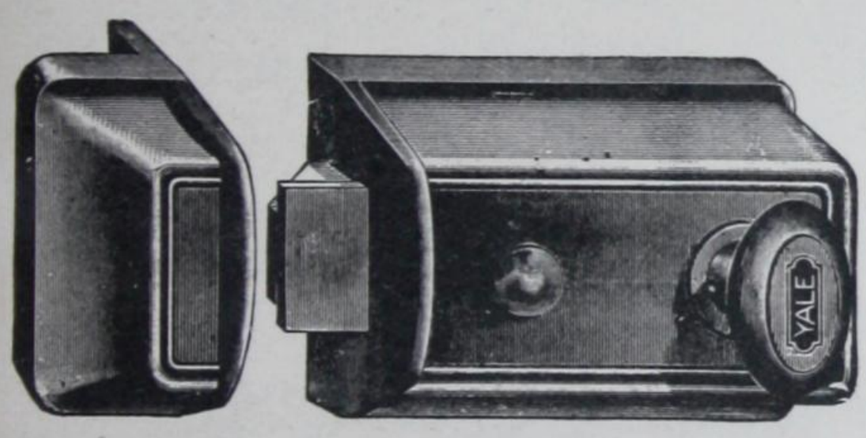

CYLINDER RIM NIGHT LATCHES

No. 44, Antique Copper, Cast Iron

Doz. $6.70

2⅜ x 3½ in.
Backset 2⅜ in.
For doors ⅞ to 2½ in.
Three keys.

Bronze cylinder, bolt and knob.
Stop can be set to hold bolt retracted.

One in Box.

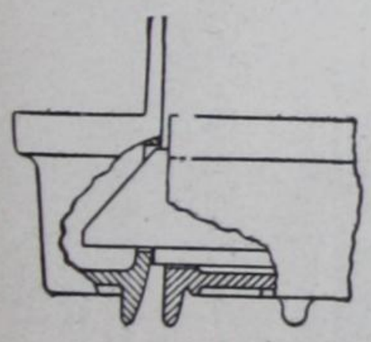

A new model with automatic dead-locking bolt. When door is closed the "protector" on back of bolt is held retracted as shown in outline drawing. It operates to positively deadlock the bolt against end pressure.

44

RUSSWIN UNIT NIGHT LATCHES

WITH RUSSWIN BALL-BEARING ADJUSTABLE CYLINDERS

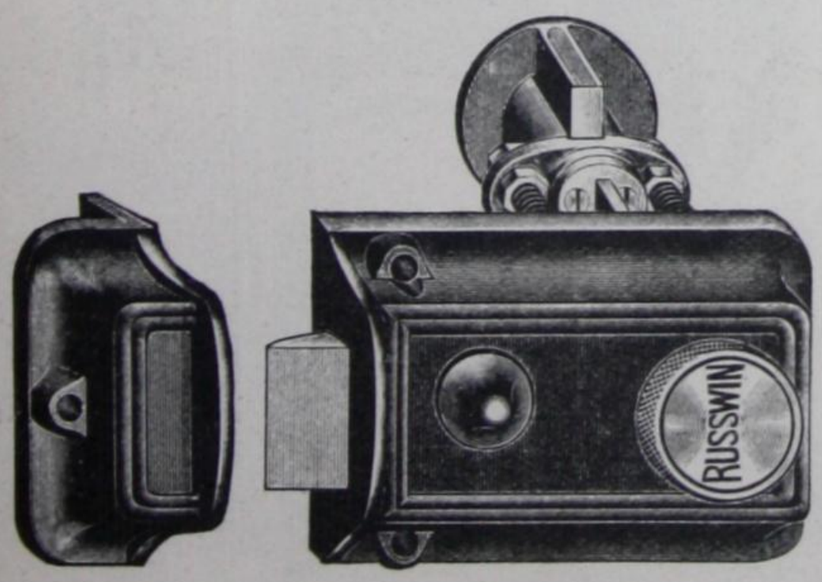

290 C

290C Antique Copper Cast Iron Each **$4.16**

2⅜ x 3⅝ in.
Backset 2½ in.
Reversible for doors 1 in. to 2¼ in.
3 Keys

Bronze Cylinder, Bolt and Knob.
Stop can be set to hold Bolt Retracted

One in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

RIM KNOB LOCKS

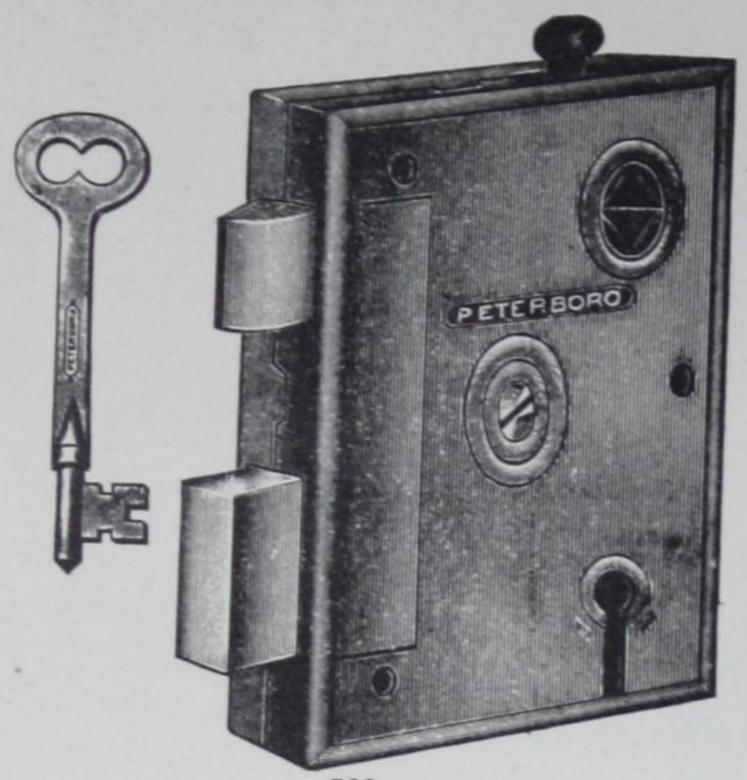

500

No. 500, Japanned Wrought Steel ..... **Doz $8.40**

Case 3¾ x 3⅛ in.
Backset 2½ in.

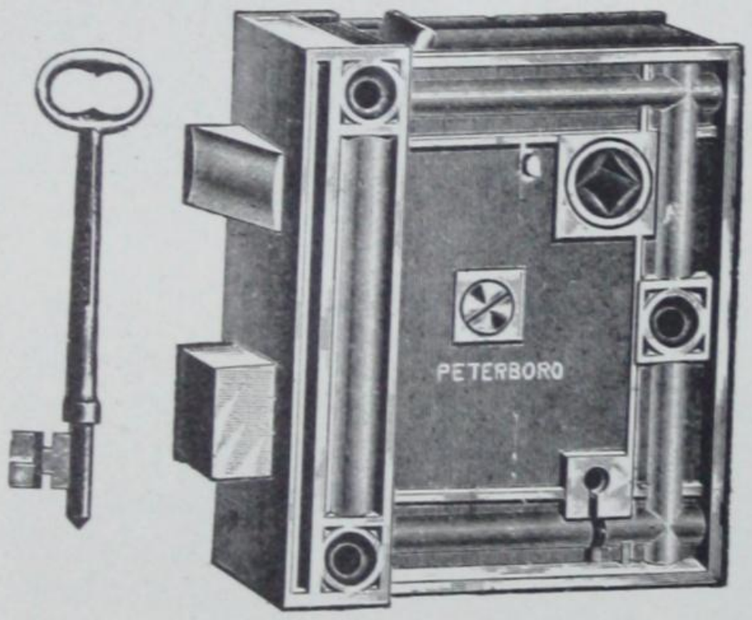

1516 and 1251

No. 1516, Japanned Cast Iron ..... **Doz. $5.50**

Case 4 x 3¼ x ¾ in. Backset 2½ in.
Iron Bolts.
Steel Key. Japanned Key Plate. Reversible. With stop to dead lock latch bolt.
½-Doz. in Box.

No. 1251, Japanned Cast Iron ..... **Doz. $29.40**

Case 5 x 4 x ¾ in.
Backset 3 in.
Iron Bolts. Reversible..
Steel Key.
Stop Dead Locks Latch Bolt
Japanned Key Plate
½-Doz. in Box.

RIM DEAD LOCKS

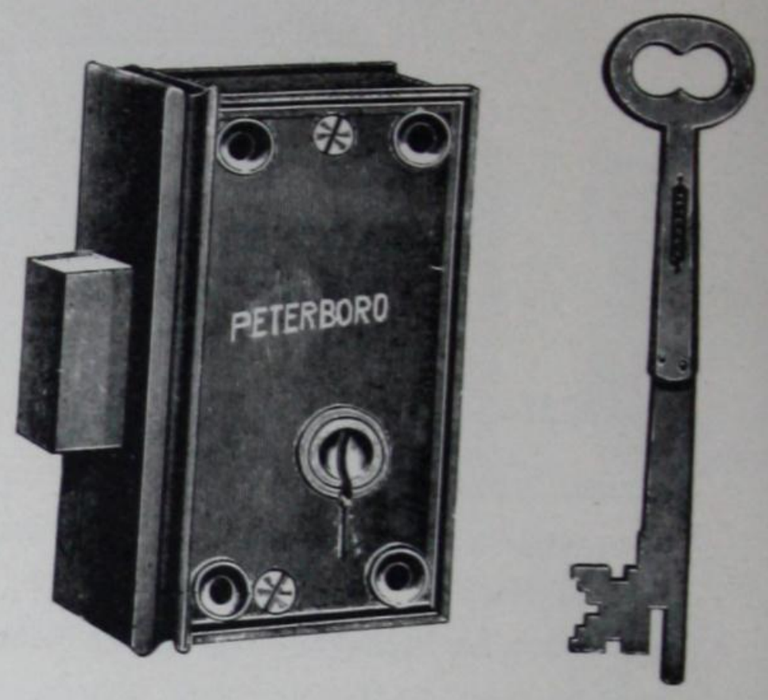

441

No. 441, Japanned Cast Iron ..... **Doz. $30.80**

Case 4 x 2½ x 15/16 in.
Backset 1½ in.
Nickel Plated Steel Key
One in Box.

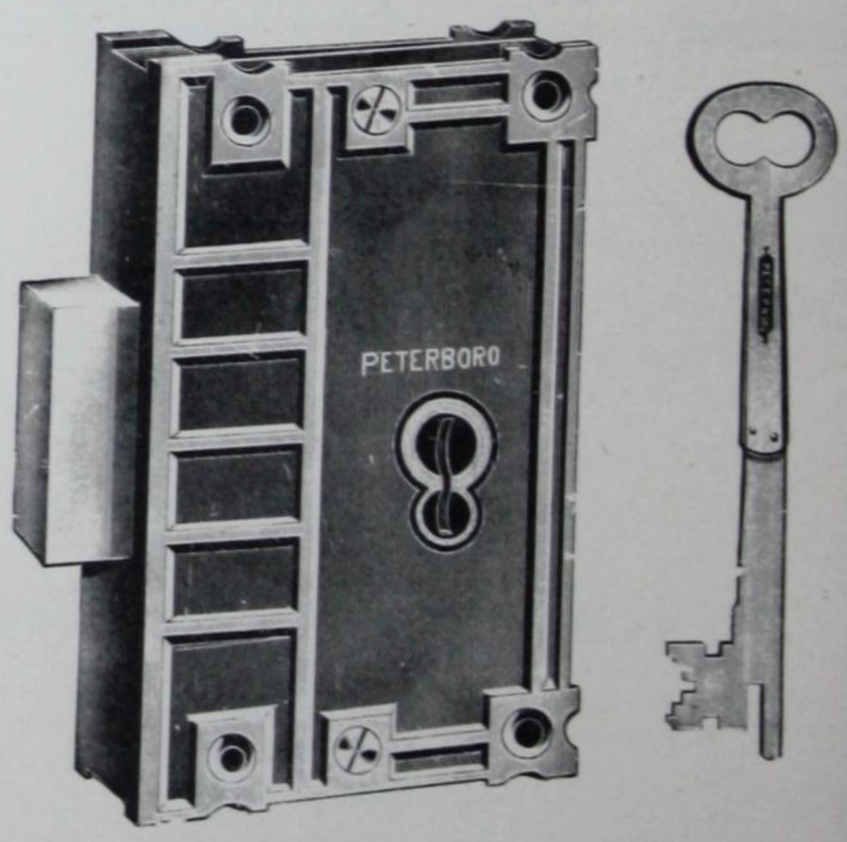

451

No. 451, Japanned Cast Iron ..... **Doz. $33.70**

Case 5 x 3 x 1 in.
Backset 2 in.
Nickel Plated Steel Key
Japanned Key Plate
One in Box.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

7070

CYLINDER FRONT DOOR LOCKS

No. 7070 x 9..... Each **$16.00**

Iron Case 5 x 3⅝ x ¾ in.
Cast Brass Front 7 x 1 1/16 in.
Cast Brass Bolts Reversible
Backset 2¾ in. Spacing 3 5/16 in.
Balance same as No. **1248**. See above

11248

No 11248 x 9..... Each **$17.00**

Case: 5½ x 3½ x ¾ in., Cast Iron, Japanned.
Front 7¾ x 1 in., Cast Brass or Bronze.
Hand: Reversible.
Backset: Regular, 2½ in., Special, none.
Spacing: 3⅝ x 2 7/16 in. Knob Hub: Brass for 5/16 x ⅜ in. Swivel Spindle.

Operation: The latch bolt can be operated by knobs from either side except when outside knob is set by stops in face of lock, then by key only from outside, and by knob from inside.
In addition this lock has a dead bolt operated by key from outside and by turn knob from inside.
Both Dead and Latch Bolt can be operated from outside by a continuous turn of key.

BIT KEYED FRONT DOOR LOCKS

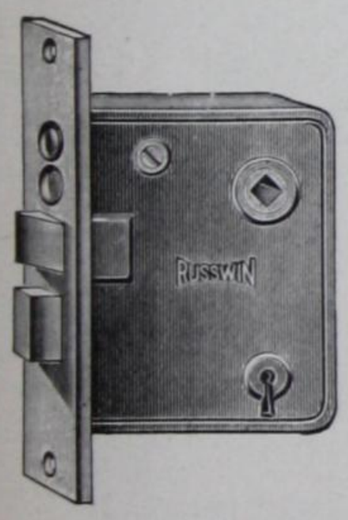

0122 and 7122

No. 0122 x 9..... Each **$5.20**

Iron Case 4½ x 3⅝ x ⅝ in.
Bronze Front 6½ x 1 in.
Bronze Bolts Reversible. Easy Spring
Backset 2¾ in. Spacing 2⅝ in.
Three Keys

Operation :

Latch Bolt by Key and Knob from outside
Dead Bolt by Key from either side
Outside Knob can be Dead Locked by stops in face of Lock

No. 7122 x 9..... Each **$3.20**

7122 x 7½..... Each **$3.20**

Iron Front and Bolts
Balance same as No. **0122**. See above

7051

CYLINDER OFFICE DOOR LOCKS

No. 7051 x 9..... Each **$16.00**

Iron Case 4¾ x 3½ x ¾ in.
Cast Brass Front 6½ x 1⅛ in.
Cast Brass Bolt Reversible
Backset 2¾ in. Spacing 3 5/16 in. Three Keys
By Knobs from both sides, by Key from outside
Outside Knob can be Dead Locked by stops in face of Lock

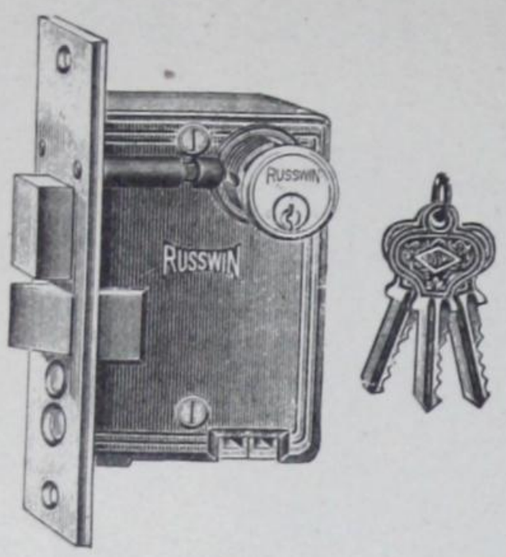

9118

139 and 7139

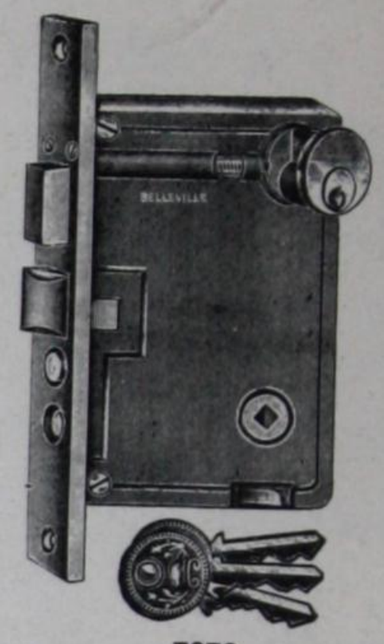

7876

9098

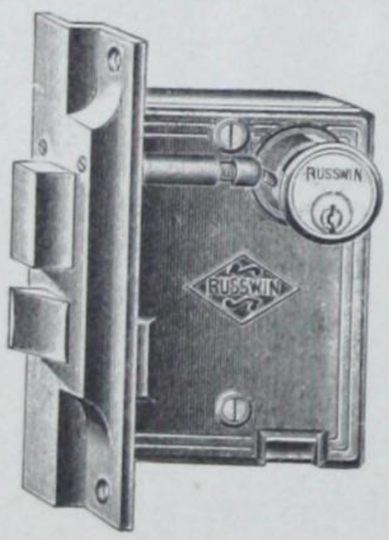

9098½

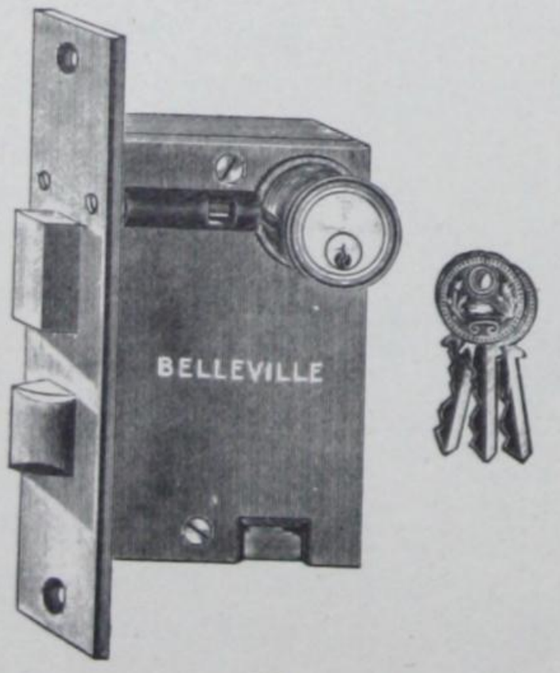

708

CYLINDER STORE DOOR LOCKS

No. 9118 x 9 (Russwin) ..... **Each $18.00**
Iron Case 5 x 3¾ x ¾ in.
Cast Bronze Front 7½ x 1¼ in.
Cast Bronze Bolts, Reversible
Backset 2¾ in.
2 Bronze Cylinders. 3 Keys

Operation:
Latch Bolt by Thumb Piece from either side except when outside Thumb Piece is set by stops in face of Lock. Dead Bolt from either side by Key and latch bolt from outside by Key.

No. 9098 x 9 (Russwin) ..... **Each $18.00**
Iron Case 5 x 3¾ x ¾ in.
Cast Bronze Front 7 x 1⅜ in.
Cast Bronze Bolts, Reversible
Backset 2¾ in. 2 Bronze Cylinders. 3 Keys

Operation
Latch Bolt by Thumb Piece from either side. Dead Bolt by Key from either side.

No. 9098½ x 9 (Russwin) ..... **Each $24.00**
With Rabbetted Front. Otherwise same as No. 9098. See above
Backset Short Side 2¾ in. Rabbet ½ in.

No. 708 x 9 (Belleville) ..... **Each $16.00**
Iron Case 5¼ x 3¾ x 1 in.
Cast Brass Front 7⅜ x 1 5/16 in.
Backset 2⅞ in.
Balance same as No. 9098. See above

FLAT KEYED STORE DOOR LOCKS

No. 139 x 9 (Russwin) ..... **Each $7.70**
Iron Case 4½ x 3½ x 11/16 in.
Backset 2½ in. Reversible. Two Keys
Bronze Front and Bolts. 3 Tumblers. 60 Changes

No. 7139 x 9 ..... **Each $5.00**

No. 7139 x 7½ ..... **Each $5.00**
Wrought Steel Front. Balance same as No. 139. See above

CYLINDER FRONT DOOR LOCKS

No. 7876 x 9 (Belleville) ..... **Each $16.00**
Iron Case 5¾ x 3¾ x 13/16 in.
Cast Brass Front 7¾ x 1¼ in. Reversible
Backset 2¾ in. Three Keys

Operation
Latch Bolt by Knob from inside and Thumb Piece and Key outside. Dead Bolt by Thumb Turn inside and Key outside, outside Thumb Piece can be Dead Locked by Stops in face of Lock.

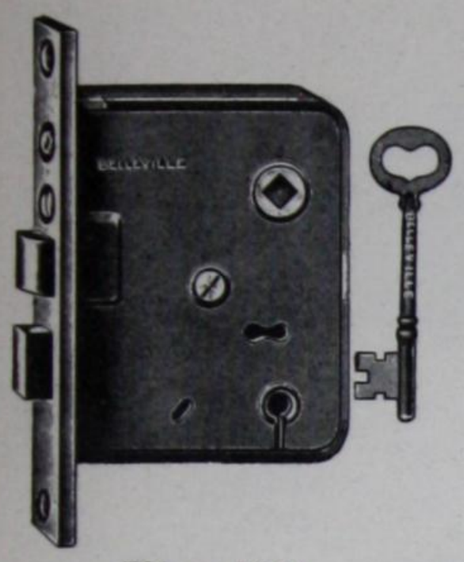
761 and 961

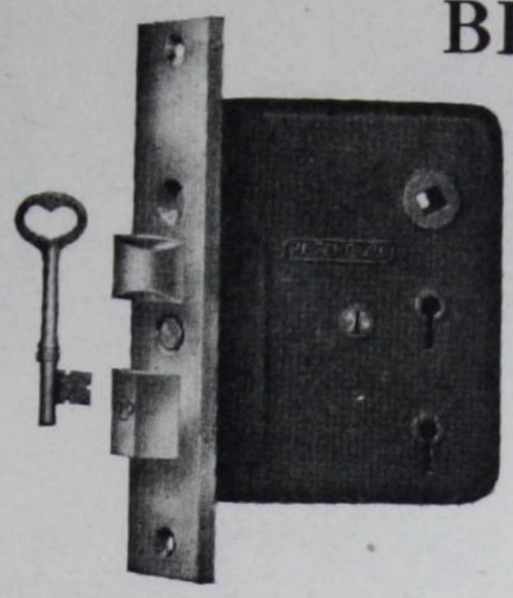
345

960

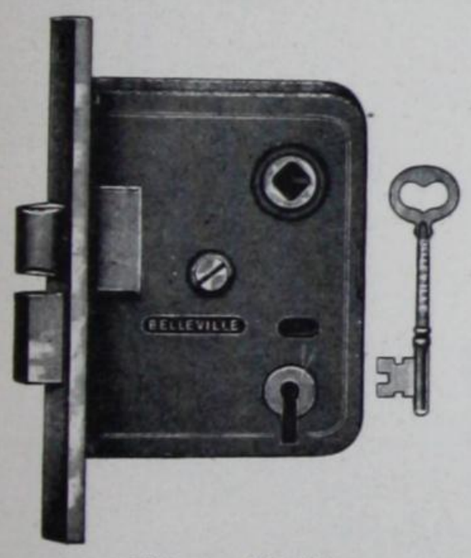
791 and 7913

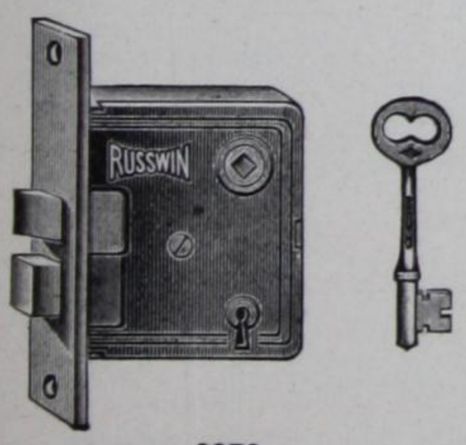
0370

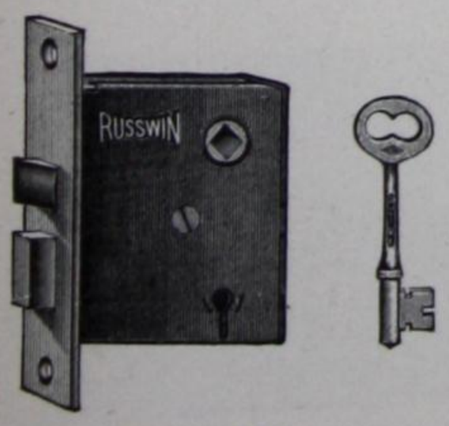
734

731

BIT KEYED FRONT DOOR LOCKS

No. 761 x 9.....**Each** ~~$4.30~~
Iron Case $4\frac{3}{8}$ x $3\frac{1}{2}$ x $\frac{5}{8}$ in.
Cast Brass Front $6\frac{1}{4}$ x $1\frac{1}{8}$ in.
Cast Brass Bolts Reversible
Backset $2\frac{3}{4}$ in. Spacing $2\frac{5}{8}$ in.
2 Keys
Operation:
Latch Bolt by Key and Knob outside, by Knob inside.
Dead Bolt by Key from either side
Outside Knob can be Dead Locked by stops in face of Lock

No. 961 x 9.....**Each** ~~$3.40~~
No. 961 x 7½.....**Each** ~~$3.40~~
Cast Iron Face and Bolts, Balance same as No. **761**. See above

No. 960 x 9.....**Each** ~~$3.40~~
No. 960 x 7½.....**Each** ~~$3.40~~
Iron Case $4\frac{3}{4}$ x $3\frac{3}{4}$ x $\frac{5}{8}$ in.
Iron Front $6\frac{1}{2}$ x $\frac{15}{16}$ in.
Backset $2\frac{3}{4}$ in. Spacing $1\frac{5}{8}$ and 3 in.
2 Keys for Latch Bolt, 1 Key for Dead Bolt
Operation same as No. **761**. See above

No. 345 x 9.....**Each** ~~$3.40~~
No. 345 x 7½.....**Each** ~~$3.40~~
Iron Case $4\frac{1}{2}$ x $3\frac{1}{2}$ x $\frac{5}{8}$ in.
Backset $2\frac{5}{8}$ in. Spacing $1\frac{5}{8}$ and 3 in.
2 Keys for Latch Bolt, 1 Key for Dead Bolt
Operation same as No. **761**. See above

MORTISE DOOR LOCKS

No. 0370 x 9.....**Doz.** ~~$27.00~~
No. 0370 x 09C.....**Doz.** ~~$27.00~~
Iron Case $3\frac{1}{2}$ x $3\frac{1}{4}$ x $\frac{5}{8}$ in.
Cast Bronze Front $5\frac{1}{2}$ x $\frac{7}{8}$ in.
Cast Bronze Bolts, Reversible, Easy Spring
Backset $2\frac{1}{2}$ in. Spacing $2\frac{3}{16}$ in.
1 Key
½ Doz. in Box

No. 734 x 9.....**Doz.** ~~$21.40~~
No. 734 x 09C.....**Doz.** ~~$21.40~~
Iron Case $3\frac{1}{2}$ x $3\frac{1}{4}$ x $\frac{9}{16}$ in.
Cast Bronze Front $5\frac{1}{2}$ x $\frac{7}{8}$ in.
Cast Bronze Bolts, Reversible, Compression Easy Spring
Backset $2\frac{1}{2}$ in. Spacing $2\frac{3}{16}$ in.
1 Key

No. 731 x 9.....**Doz.** ~~$11.00~~
No. 731 x 7½.....**Doz.** ~~$11.00~~
No. 731 x 09C.....**Doz.** ~~$11.00~~
Wrought Steel Front. Iron Bolts. Balance same as No. **0389**

No. 791 x 9 Mortise Hotel Locks.....**Doz.** ~~$32.30~~
Iron Case $3\frac{3}{4}$ x $3\frac{3}{8}$ x $\frac{5}{8}$ in.
Cast Brass Front $5\frac{5}{16}$ x $\frac{15}{16}$ in.
Cast Brass Bolts, Reversible, Easy Spring
Backset $2\frac{9}{16}$ in. Spacing $2\frac{3}{16}$ in.
1 Tumbler. 1 Key

No. 7913 x 9.....**Doz.** ~~$40.30~~
Three Tumblers; otherwise same as No. **791**
From Factory only

No. 7913MK x 9, Master Keyed.....**Doz.** ~~$48.30~~
From Factory only

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

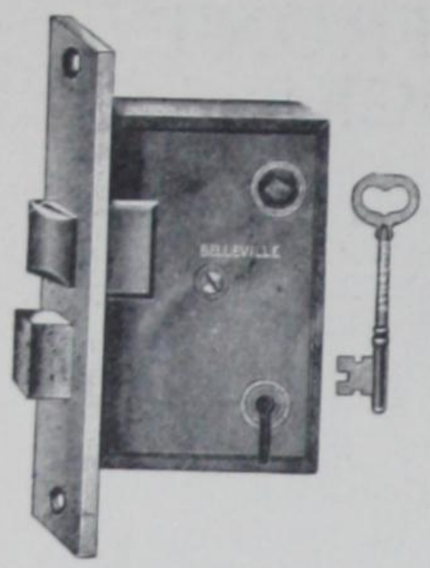

7114

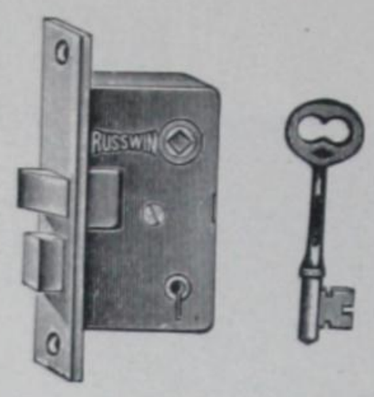

355

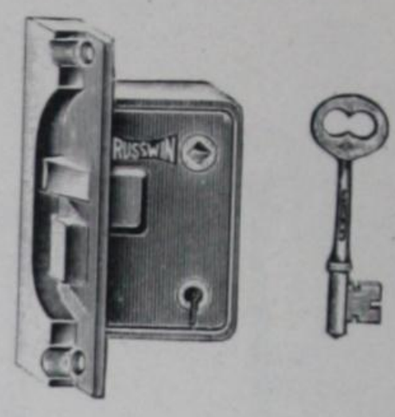

358

MORTISE LOCKS

No. 7114 x 9 ..... **Doz. $19.00**

Iron Case 3⅝ x 3¼ x 9/16 in.
Cast Brass Face 5¼ x ⅞ in.
Backset 2½ in.
Extra Heavy Bolts, Reversible, Spiral Spring
One Key

790 and 930

No.790 x 9 ..... **Doz. $14.00**

Iron Case 3½ x 3¼ x 9/16 in.
Wrought Brass Front 5¼ x ⅞ in.
Backset 2½ in.
One Key

No. 990 x 9 ..... **Doz. $11.00**

Wrought Steel Front
Balance same as No. **790**. See above

No. 900 x 9 ..... **Doz. $7.20**

Lacquered Face
Balance same as 990

FRENCH WINDOW LOCKS

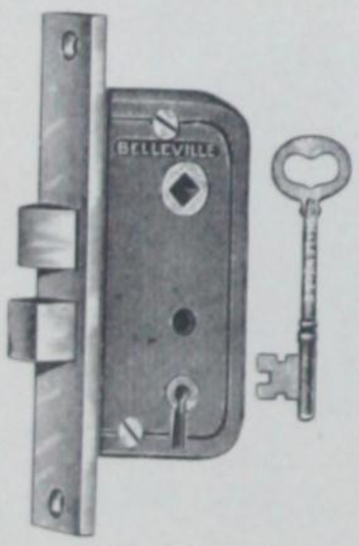

053 and 7053

No. 053 x 9 ..... **Doz. $44.00**

Iron Case 3⅝ x 2⅛ x ⅝ in.
Cast Brass Face 5¾ x 1 in. Backset 1¼ in.
Spacing 2⅛ in. Cast Brass Bolts. 3 Tumblers
One Key

No. 7053 x 9 ..... **Doz. $44.00**

Backset 1¾ in.
Balance same as No. **053**. See above

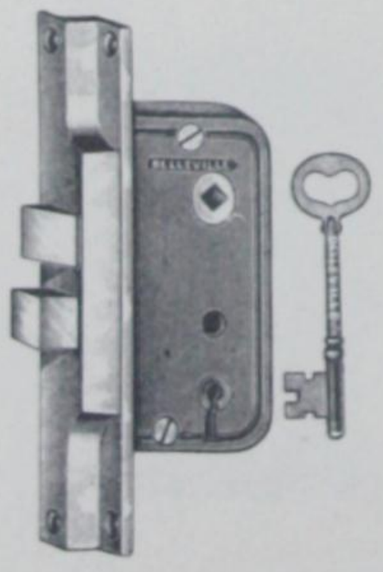

R053 and R7053

No. R053 x 9 ..... **Doz. $65.00**

With Rabbetted Front
Otherwise same as No. **053**. See above

No. R7053 x 9 ..... **Doz. $65.00**

With Rabbetted Front
Otherwise same as No. **7053**. See above

No. 355 x 9 ..... **Doz. $28.00**

Iron Case 3⅝ x 2¼ x ⅝ in.
Wrought Brass Front 5¼ x ⅞ in. Reversible
Backset 1½ in. Spacing 2 3/16 in. One Key

No. 358 x 9 ..... **Doz. $54.00**

With Rabbetted Front
Otherwise same as No. **355**. See above

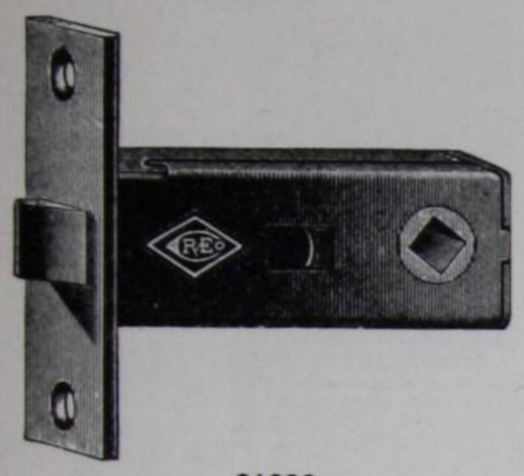

01030
01041½

MORTISE KNOB LATCHES

No. 01030 x 9 ..... **Doz. $6.30**

No. 01030 x 7½ ..... **Doz. $6.30**

Steel Case 1¼ x 3⅛ x ⅝ in.
Steel Front 3 x ⅞ in.
Backset 2½ in.
Reversible.

½ Doz. in Box.

No. 01041½ x 9 ..... **Doz. $9.20**

Wrought Brass Front 3 x ⅞ in.
Balance same as **01030**, see above.

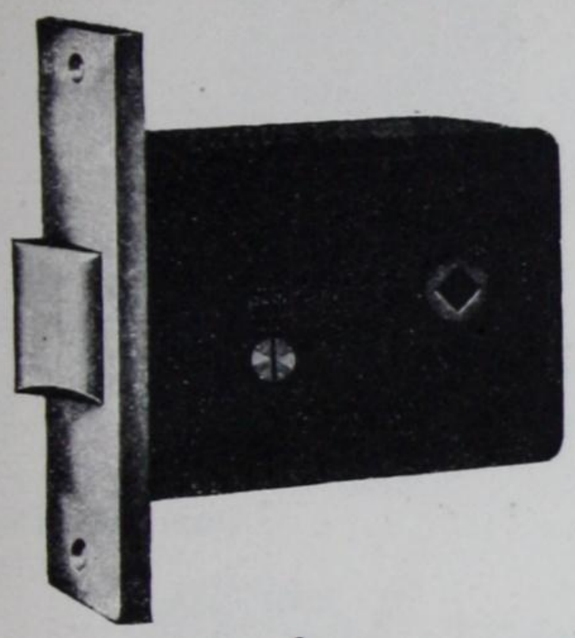

6

No. 6F ..... **Doz. $26.60**

Iron Case 2⅜ x 3½ x ⅝ in.
Cast Brass Front 4⅜ x 1⅛ in.
Backset 2¾ in.
Reversible.

One Doz. in Box.

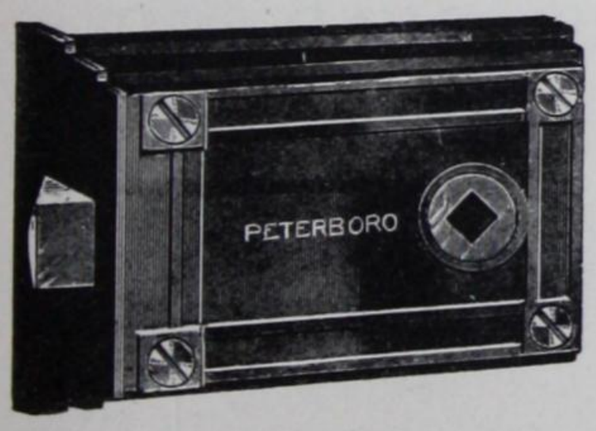

70

RIM KNOB LATCHES

No. 70 Japanned Cast Iron ..... **Doz. $6.30**

Case 2¾ x 3⅝ in.
Backset 2⅝ in.
Reversible.

One Doz. in Box.

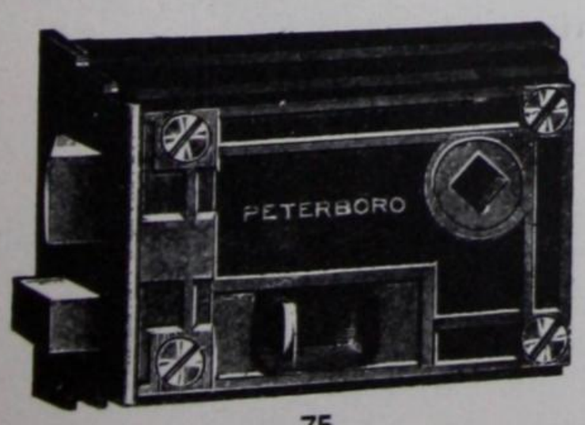

75

No. 75, Japanned Cast Iron ..... **Doz. $7.90**

Case 2¾ x 3⅝ x ¾ in.
Backset 2⅝ in.
Reversible.
Flush thumb piece operates dead bolt from inside.

One Doz. in Box.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

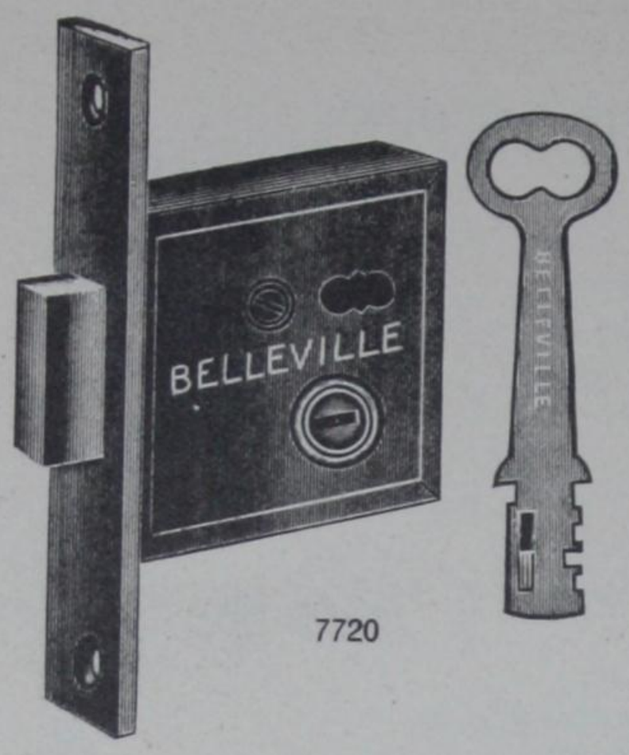

7720

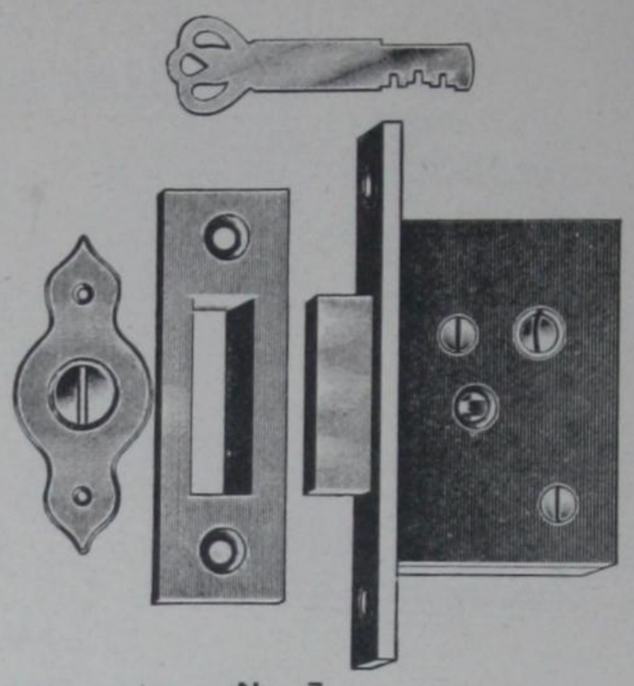

No. 7

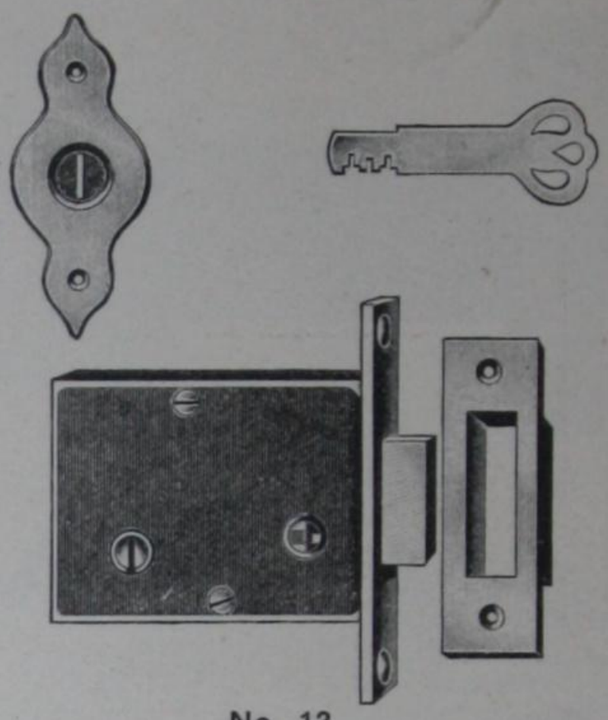

No. 13

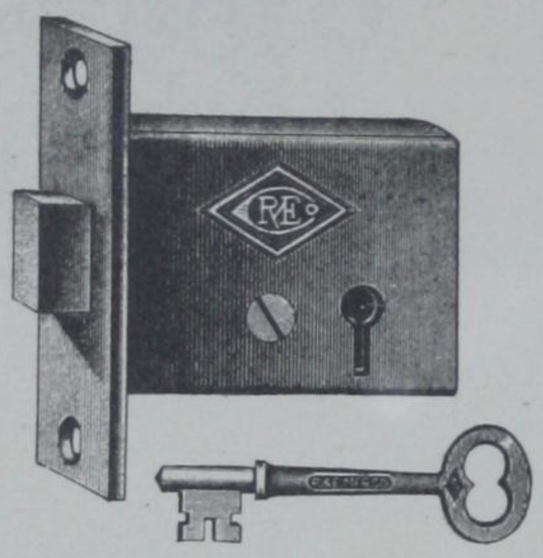

072½

MORTISE DEAD LOCKS

No. 7720 x 9 ..... **Doz. $33.00**

Case 3⅛ x 2½ x ⅝ in.
Cast Brass Face 4¾ x 1 1/16 in.
Backset 2¼ in. Two Flat Keys
½ Doz. in Box

No. 072½ x 9 ..... **Doz. $18.20**

Case 2 x 2¾ x ½ in.
Cast Iron Face 3¾ x ¾ in.
Backset 2 in. One Key
½ Doz. in Box

CYLINDER MORTISE DEAD LOCKS

No. 042 x 9, One Cylinder ..... **Each $8.80**

Case 3 x 3¼ x ¾ in.
Bronze Face 4¾ x 1¼ in.
Backset 2½ in. Three Keys
For Doors 1½ to 2¼ in.
1 in Box

No. 042½ x 9, Two Cylinders ..... **Each $12.30**

Otherwise same as No. 042

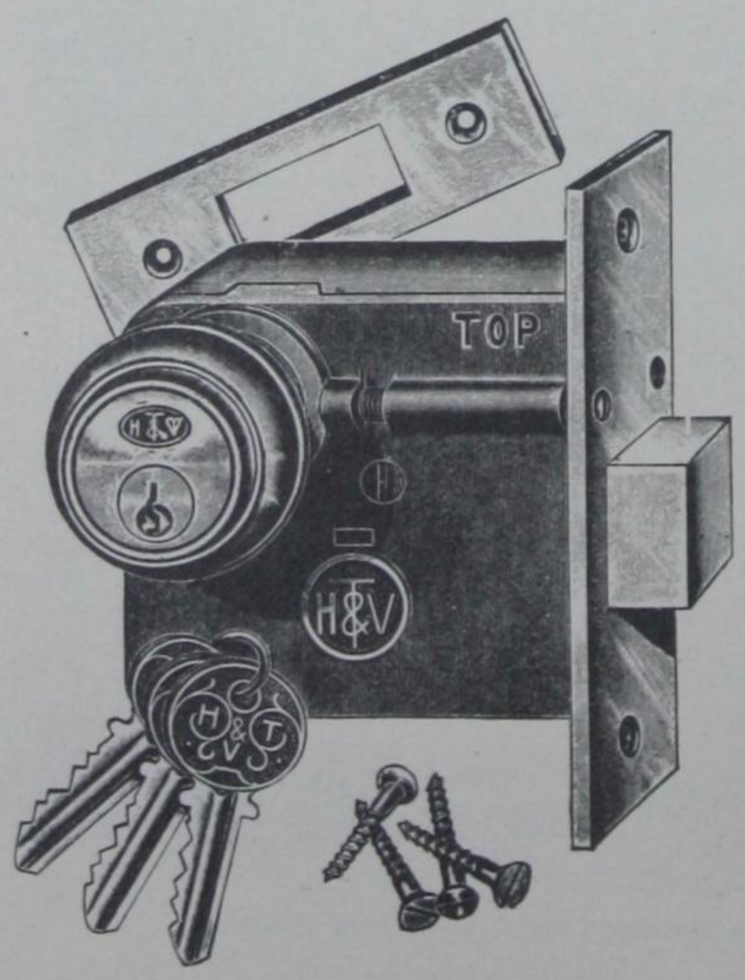

042 and 042½

MORTISE DEAD LOCKS

No. 7 x 9, Iron Case ..... **Each $9.90**

Case 2½ x 3⅜ x ¾ in.
Bronze Face 5 x 1⅛ in.
Backset 1⅝ in. Three Flat Keys
1 in Box

No. 13 x 9, Iron Case ..... **Each $8.00**

Case 3 x 2¼ x ⅝ in.
Bronze Face 3¾ x ⅞ in.
Backset 2¼ in. Three Flat Keys
1 in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

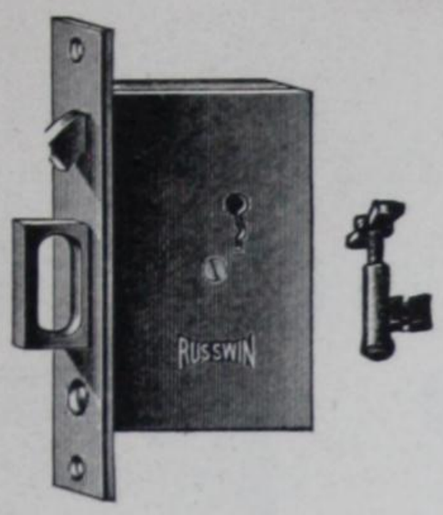

0031½

SLIDING DOOR LOCKS

No. 0031½ x 9 ..... **Each $5.50**

For Single Doors.
Japanned Iron Case 4¾ x 3⅝ x ½ in.
Cast Bronze Front 6¾ x 1 in.
Backset 2½ in.
One adjustable brass key for doors 1½ to 2½ in.

No. 0031 x 9 ..... **Each 7.60**

For Double Doors.
Balance same as **0031½**, see above.

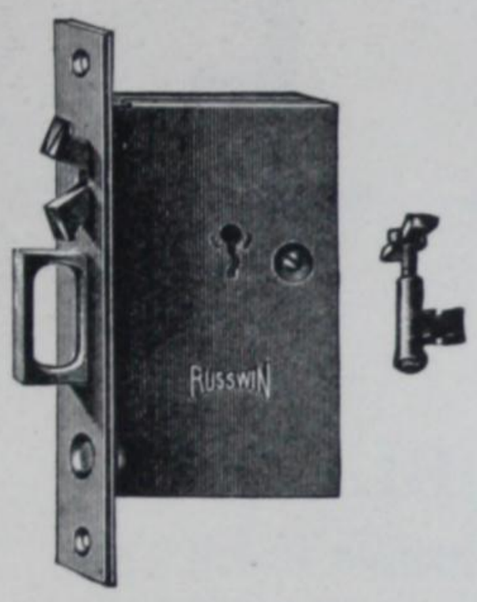

01331½

No. 01331½ x 9 ..... **Each 4.30**

No. 01331½ x 7½ ..... **Each 4.30**

For Single Doors.
Wrought Steel Case 5½ x 3½ x $\frac{7}{16}$ in.
Wrought Steel Front 7¾ x 1 in.
Backset 2½ in.
One adjustable brass key for doors 1⅜ to 2½ in.

No. 01331 x 9 ..... **Each 6.00**

No. 01331 x 7½ ..... **Each 6.00**

For Double Doors, balance of description same as **01331½**, see above.

4756

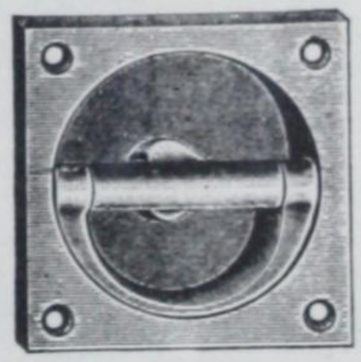

919

LEVER HANDLES

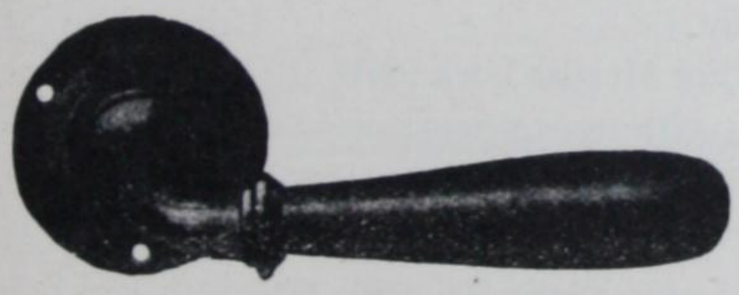

4768

No. 4756F, Cast Brass ..... **Each $4.20**

Plate 2 in. Diameter
Overall 4½ in.

No. 4768F, Cast Brass ..... **Each $2.40**

Plate 1¾ in. Diameter.
Overall 5 in.

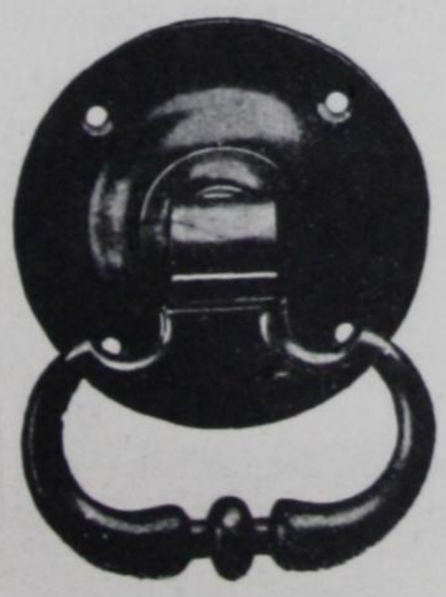

4925

Drop Ring Handles, 4925F, Cast Brass ..... **Each $3.50**

Width 2½ in.

Flush Ring Handles, 919F, Cast Brass ..... **Each $6.30**

Plate 3⅛ x 3⅛ in.
For $\frac{5}{16}$ in Spindle.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

No. 852

No. 752

No. 8

No. 540

No. 7792½B

7792½C

No. 11

No. 255

870

549


550

No. 3

No. 7


No.12

KEY BLANKS

No. 852, Russwin Cylinder..... **Doz. $1.68**
For New Style Russwin Cylinders

No. 752, Russwin Cylinder..... **Doz. $1.68**
For Old Style Russwin Cylinders.

No. 8, Yale Cylinder..... **Doz. $1.58**

No. 108, Peterboro Cylinder..... **Doz. $1.58**

No. 11, Belleville Cylinder..... **Doz. $1.58**

No. 255, Springer Cylinder..... **Doz. $1.58**

No. 870, Bit Key..... **Doz. $2.80**
For Front Door Lock **0122** and **7122**

No. 558, Bit Key..... **Doz. $2.20**
For Mortise Lock **0370**

No. 549, Bit Key..... **Doz. $2.20**
For Mortise Locks **0389** and **01001**

No. 3, Bit Key..... **Doz. $3.40**
For Mortise Locks **790, 990, 7113**

No. 7, Bit Key..... **Doz. $3.40**
For Mortise Locks **7114, 791, 053, 7053, 761**

No. 12, Bit Key..... **Doz. $4.60**
For Mortise Dead Lock **7720**

No. 540, Russwin..... **Doz. $2.80**
For Store Door Locks **139, 7139**

No. 7792½B..... **Doz. .74**
For Rim or Mortise Locks

No. 7792½C, Cut..... **Doz. .74**
For Rim or Mortise Locks

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CLOSET KNOB SPINDLES

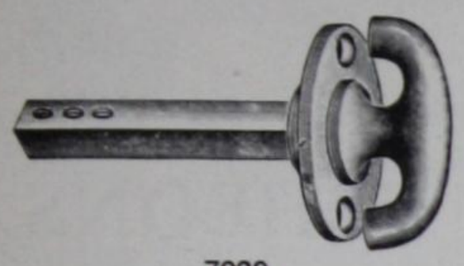

7039

CLOSET SPINDLES

No. 7039F ..... Doz. $7.00

No. 7039D2 ..... Doz. $7.00

Cast Iron Rose 1½ in. Diameter
$\frac{5}{16}$ in. Spindle

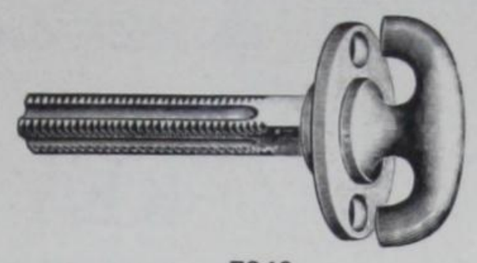

7049

CLOSET SPINDLES

No. 7049F ..... Doz. $7.00

No. 7049D2 ..... Doz. $7.00

Cast Iron Rose, 1½ in. Diameter
$\frac{5}{16}$ in. Spindle

KNOB SPINDLES

PLAIN SHANK



10

11

12

42

SIMPLEX SHANK

7239

KNOB SPINDLES

No. 10, $\frac{5}{16}$ in. Plain ..... Doz. $1.50

No. 11, $\frac{5}{16}$ in. Plain, Swivel ..... Doz $6.00

No. 12, $\frac{5}{16}$ x $\frac{3}{8}$ in. Dual Plain, Swivel Doz. $7.00

No. 42, $\frac{5}{16}$ in. Plain, Split ..... Doz. $7.00

No 7239 5/16 in. French Shank (Grooved) ... Doz. $4.00

SIMPLEX SHANK



20



20½

22

41

21

KNOB SPINDLES

No. 20, $\frac{5}{16}$ in. Simplex ..... Doz. $1.50

No. 20½, $\frac{5}{16}$ in. Simplex, Plain ..... Doz. $3.00

No. 22, $\frac{5}{16}$ x $\frac{3}{8}$ in. Dual Simplex, Swivel Doz. $7.00

No. 41, $\frac{5}{16}$ in. Simplex, Split ..... Doz. $7.00

No. 21, 5/16 in. Steel, Swivel ..... Doz. $6.00

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

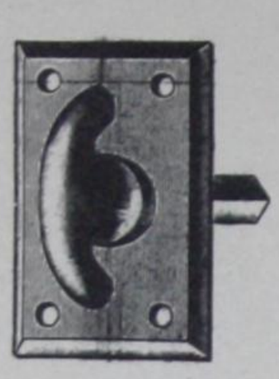

7003

7000

THUMB TURNS ON PLATES

No. 7000F, Cast Brass ..... **Each .60**

Plate 1½ in. Diameter, $\frac{3}{16}$ in. Spindle

No. 7003F, Cast Brass ..... **Each 1.30**

Plate 2¼ x 1⅜ in., $\frac{3}{16}$ in. Spindle

KEY PLATE ESCUTCHEONS

No. 70032F, Wrought Brass ..... **Doz. 2.50**

No. 70032N, Wrought Brass ..... **Doz. 2.70**

1¾ in. x 1⅛ in.

1 Doz. in Box

70032

7902

7904

No. 7902F, Wrought Brass ..... **Doz. 2.50**

1½ in. Diameter

1 Doz. in Box

No. 7904F, Wrought Brass ..... **Doz. 2.60**

2¼ in. x 1¼ in.

1 Doz. in Box

DOOR KNOBS

D1116½

D 1140

6452

No. D1116½F, Cut Glass ..... **Pair $5.40**

2¼ in. Diameter

Cast Brass Roses 2⅛ in., Simplex Spindle

1 Pair in Box

No. D1140F, Pressed Glass .. **Pair $2.20**

2¼ in. Diameter

Cast Brass Roses 2¼ in., Simplex Spindle

1 Pair in Box

No. 6452F, Cut Glass .... **Pair $5.40**

2¼ in. Diameter

Cast Brass Roses 2⅛ in., Simplex Spindle

1 Pair in Box

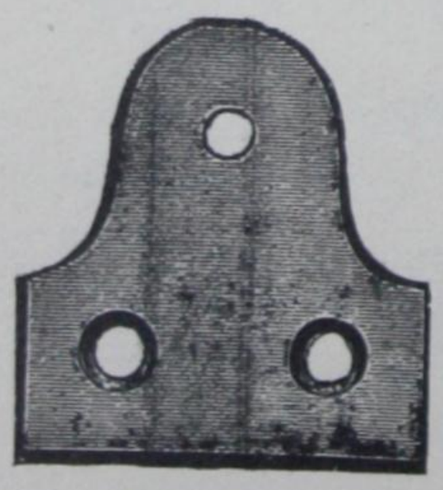

Mirror Plates

MIRROR PLATES

WROUGHT BRASS

	1 in.	1½ in.	2 in.
Per Doz.	**$ .80**	**$1.20**	**$2.00**

3 Doz. in Box without Screws

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Jet

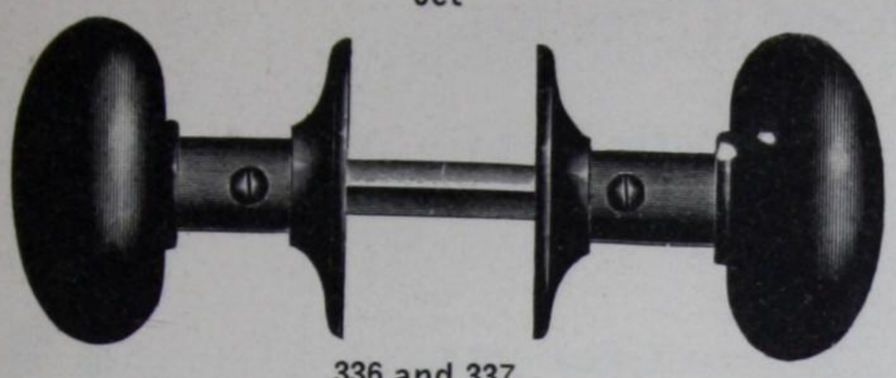

336 and 337

Mortise Door Knobs, 336 ..... **Doz. Prs. $5.60**

2¼ in. Jet
Two Japanned Iron Roses
½ Doz. Prs. in Box

Rim Door Knobs, 337 ..... **Doz. Prs. $5.60**

One Rose

Otherwise same as **336**

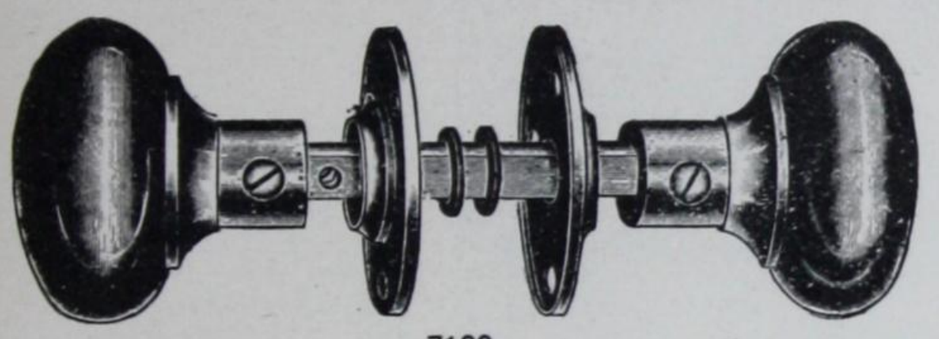

7100

Plain Spindle

Mortise Door Knobs, 7100F ..... **Doz. Prs. $18.50**

Mortise Door Knobs, 7100N ..... **Doz. Prs. $20.20**

2¼ in. Wrought Brass Shank Cast Brass
One Piece
2 Wrought Brass Roses 2¼ in.

Mortise Door Knobs, 2500WS

Simplex Spindle

Otherwise same as 7100

Price .....Per Doz. Prs. **$21.50**

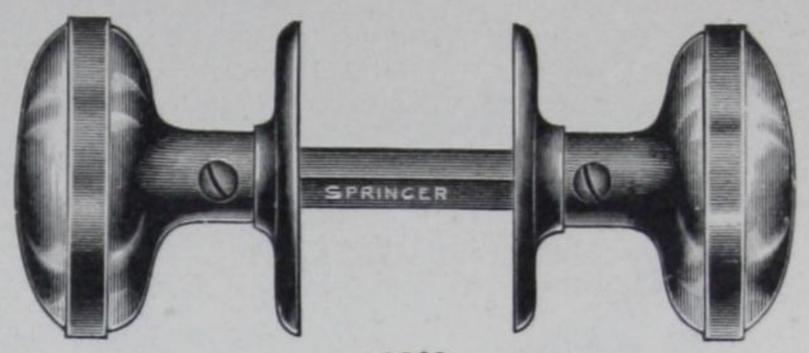

3300 7000

Mortise Door Knobs, 3300 M ..... **Doz. Prs. $5.40**

2¼ in. Wrought Steel
Kahala Finish
Two Wrought Steel Roses 2⅛ in.
½ Doz. Prs. in Box

Plain Spindle

Rim Door Knobs, 3300R ..... **Doz Prs. $5.40**

One Rose
Otherwise same as 3300M

Mortise Door Knobs, 7000M x D2 .. **Doz. Prs. $8.80**

Same as **3300 M** except Finish

Rim Door Knobs, 7000R x D2 ..... **Doz. Prs. $8.80**

Same as **3300 R** except Finish

Mortise Door Knobs S7000F

Simplex Spindle

Otherwise same as 7000M x D2 except finish

Price .....Per Doz. Prs. **$9.00**

2 in.

Fire Polished Glass Door Knobs

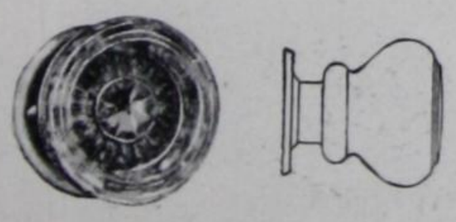

2112 G10

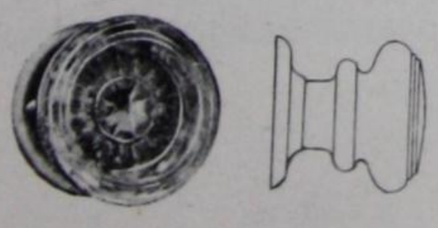

2110

G 8

Doz. Pairs $19.00

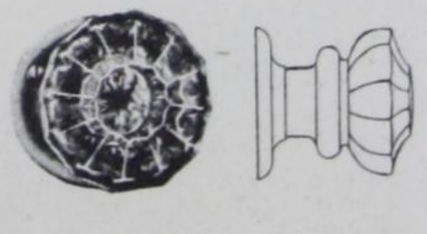

2150

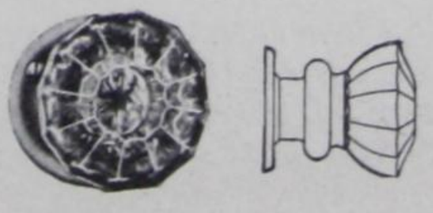

2152 G11

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Norton Liquid Door Checks

with Regular Arms

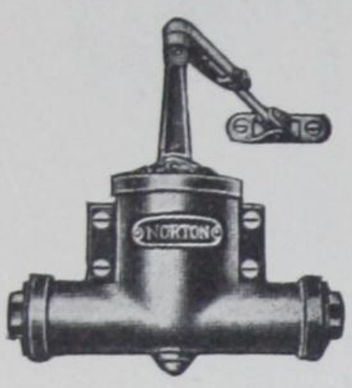

Size A Each	13.00
Size B Each	16.50
Size C Each	20.00
Size D Each	23.50
Size E Each	31.50
Size F Each	39.50

with Holder Arms

Size A Each	15.80
Size B Each	19.30
Size C Each	22.80
Size D Each	26.30
Size E Each	34.30
Size F Each	42.30

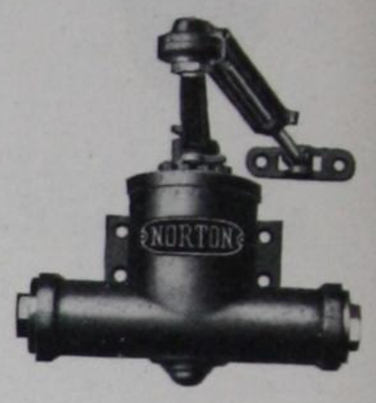

TABLE OF SIZES

Size A. For light inside doors
Size B. For doors 2′6″ x 7′ and not over 1¾″ thick
Size C. For inside doors 3′ x 7′ and not over 1¾″ thick
Size D. For heavy inside or light outside doors 3′ x 7′
Size E. For outside doors 3′ x 8′
Size F. For extra heavy outside doors

Soffit Bracket

Size A	$1.40
Size B	1.60
Size C	1.80
Size D	2.20
Size E	3.00
Size F	3.30

Use **soffit** brackets wherever there is room on the overhead jamb. This places the door closer in the proper position to do its best work.

Use **corner** brackets **only** when door opens to 180 degrees, or when the head room is low, as the corner bracket places the door closer too near the hinge to do its best work.

Corner Bracket

Size B	$2.80
Size C	3.20
Size D	4.00
Size E	5.00
Size F	5.20

NORTON DOOR CLOSER LIQUID

1 Gal.	9.90
½ Gal.	5.30
1 Quart	2.90
1 Pint	1.54

Specially manufactured for this territory to withstand extremes of heat and cold Norton checks can only be guaranteed to operate satisfactorily with Norton Door Closer Liquid.

HIGH GRADE NORTON STEEL SPRINGS

Made by the NORTON PROCESS—

	A	B	C	D	E	F
Norton	$1.50	$1.90	$2.50	$3.00	$4.80	$6.00

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Interior View and Parts of the Norton Door Closer

When ordering Parts be sure to state Year Model

1 Shell
2 Cover
3 End Plug
4 Ratchet
5 Shaft
6 Pinion
9 Key Pin
10 Packing Gland
11 Shaft Gland Nut
12 Steel Shaft Packing Washer
13 Shaft Packing
16 Top Nut
17 Piston
18 Ball Valve
19 Ball Valve Retainer
20 Main Arm
21 Pawl

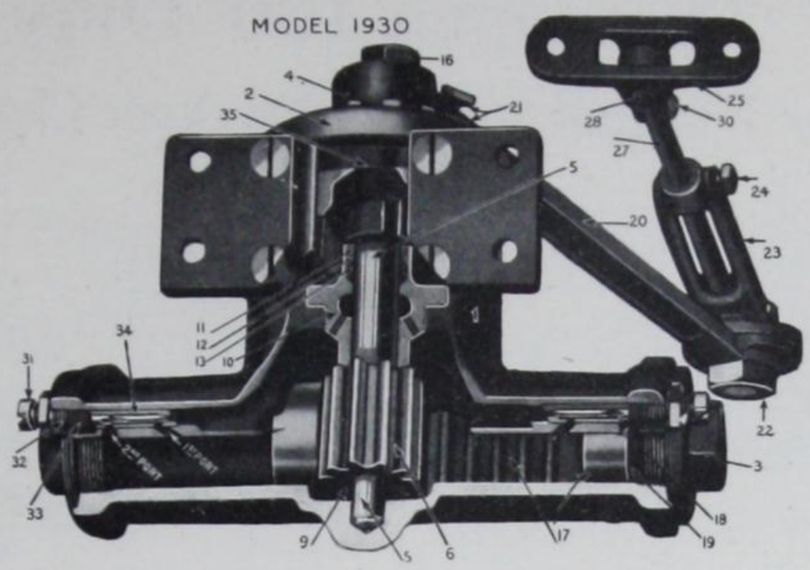

22 Arm Stud
23 Loop
24 Clamp Screw
25 Shoe
26 Shoe Connection
27 Connecting Rod
28 Shoe Rivet
29 Pawl Rivet
30 Shoe Connection Rivet
31 Regulating Screw
32 Regulating Screw Bushing
33 Regulating Screw Packing
35 Steel Spring
36 Name Plate
37 Name Plate Screws
38 Wrench

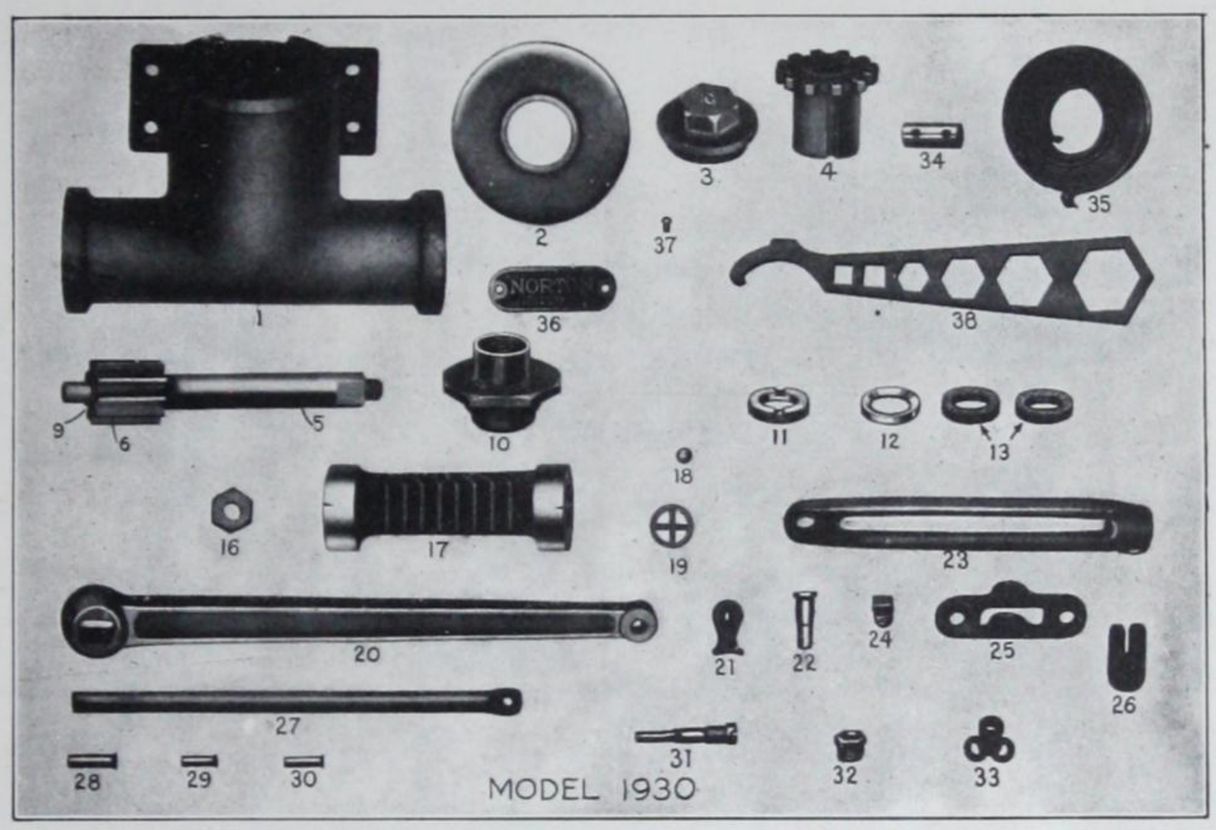

The Norton Holder Arm

The Norton Automatic Friction Head Holder Arm may be used in conjunction with the Norton Door Closer. It eliminates all floor stops, hooks, blocks, or other devices attached to any door and used to hold it open. The holder device itself is located in the end of the arms.

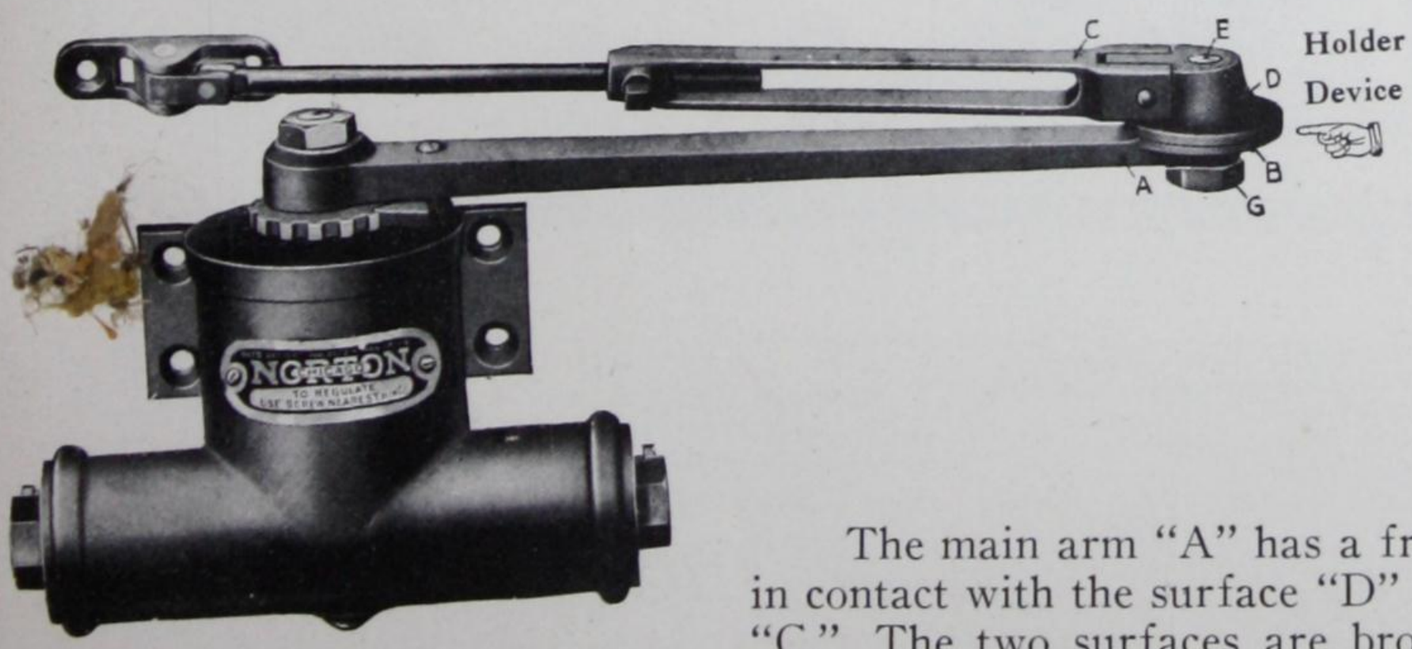

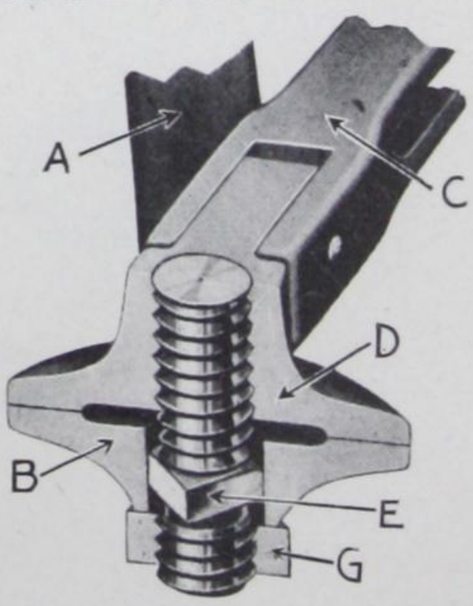

The main arm "A" has a friction surface "B" which comes in contact with the surface "D" attached to the loop or forearm "C." The two surfaces are brought together by a screw stud "E." The adjustment is made by the nut "G." A brass disk inserted between these two friction surfaces prevents corrosion.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

How to Install the Norton Door Closer on Doors That Open 100° Only

For Regular and Holder Arm Closers

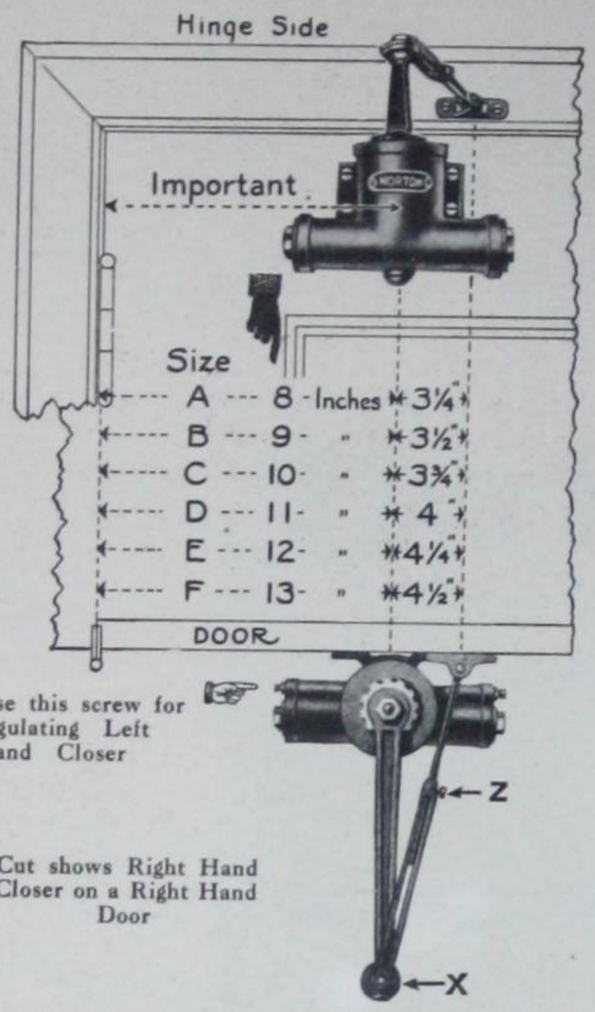

Use this screw for regulating Left Hand Closer

Cut shows Right Hand Closer on a Right Hand Door

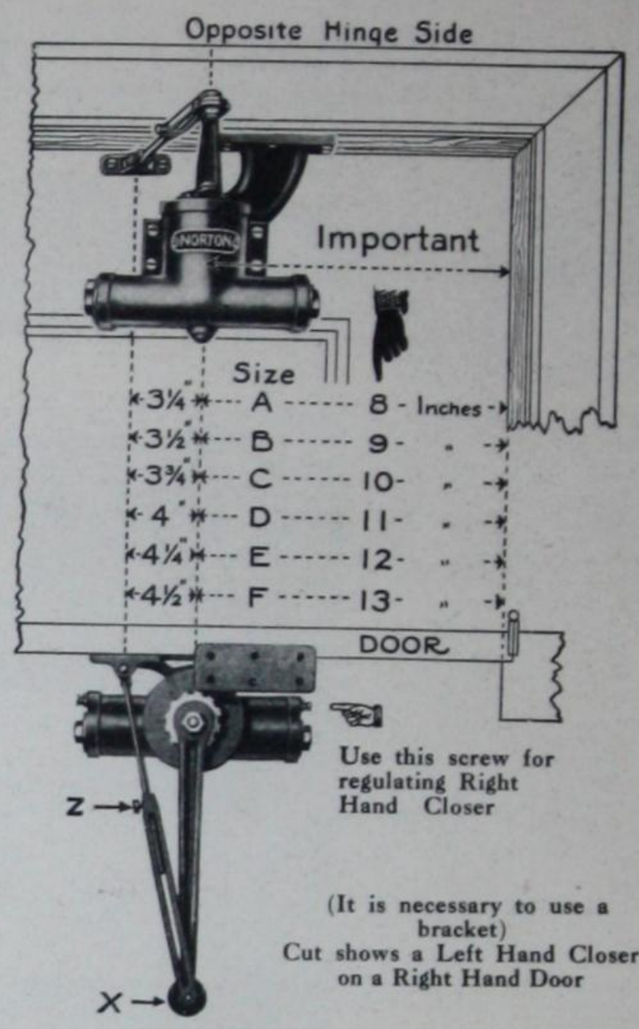

Use this screw for regulating Right Hand Closer

(It is necessary to use a bracket)
Cut shows a Left Hand Closer on a Right Hand Door

Rack and Pinion Style Closer

This cut shows the action of The Norton Liquid Do or Closer: Rack and Pinion style. Door under perfect control—**positive motion from A to D.**

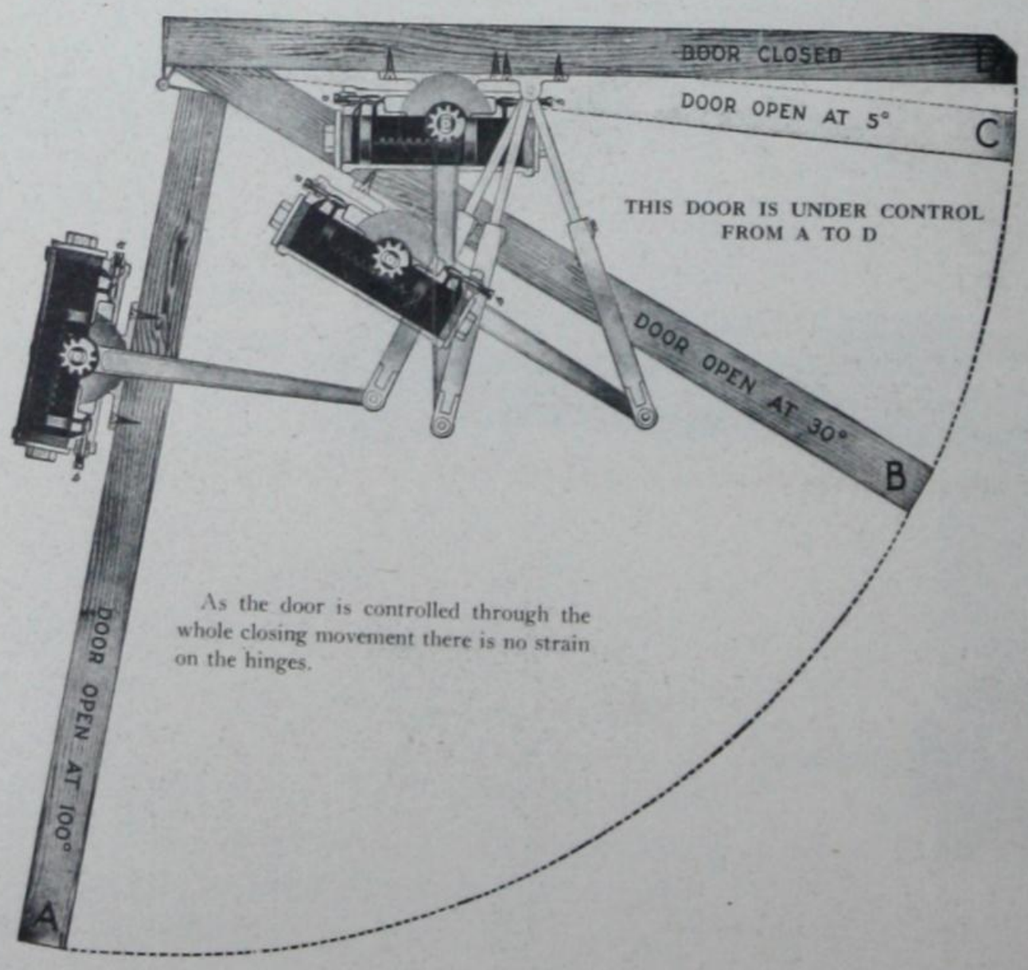

This Cut Shows the Action of a Full Rack and Pinion Type Door Closer

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

The No. 4 Norton Screen Door Closer

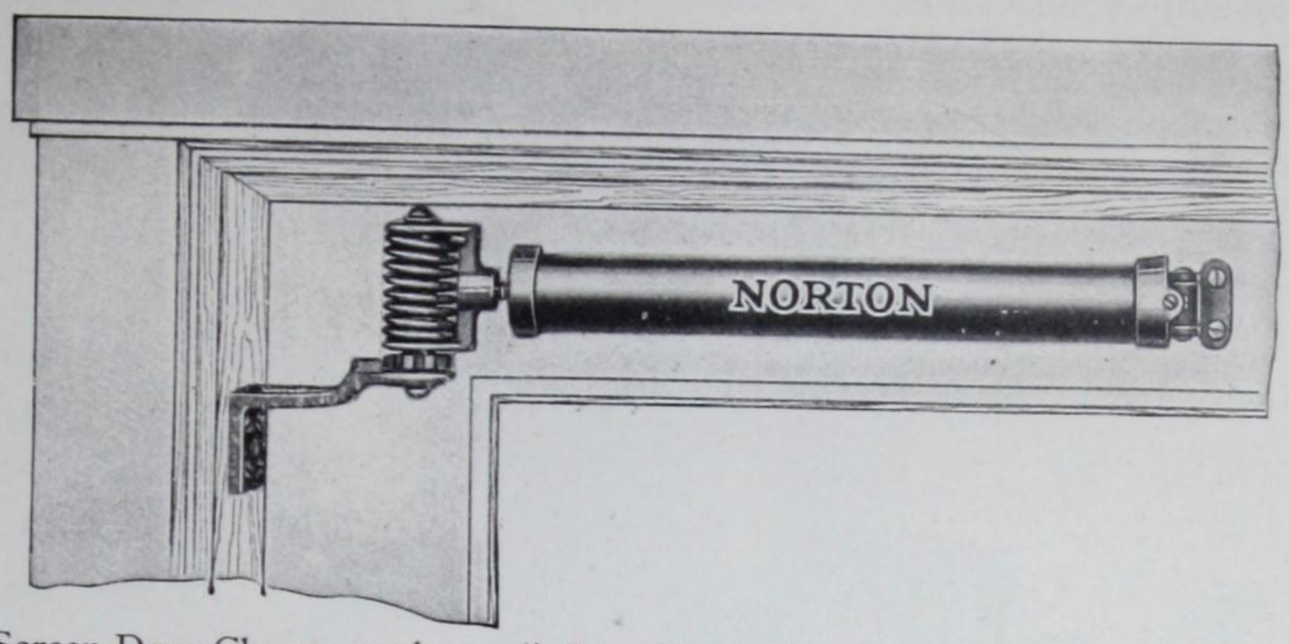

The Norton Screen Door Closer may be applied to either side of the door without change of bracket. It may be used between doors in a space of two inches.

The Norton Closer is made with a seamless brass tube which will not rust. The bracket, spring holder and hinge plate are made of heavy steel stampings which will not break. The piston is constructed with a spring to hold the washer against the side walls. This assures checking at all times.

Packed in individual carton with full instructions for applying.

Parts for Norton Screen Door Closer

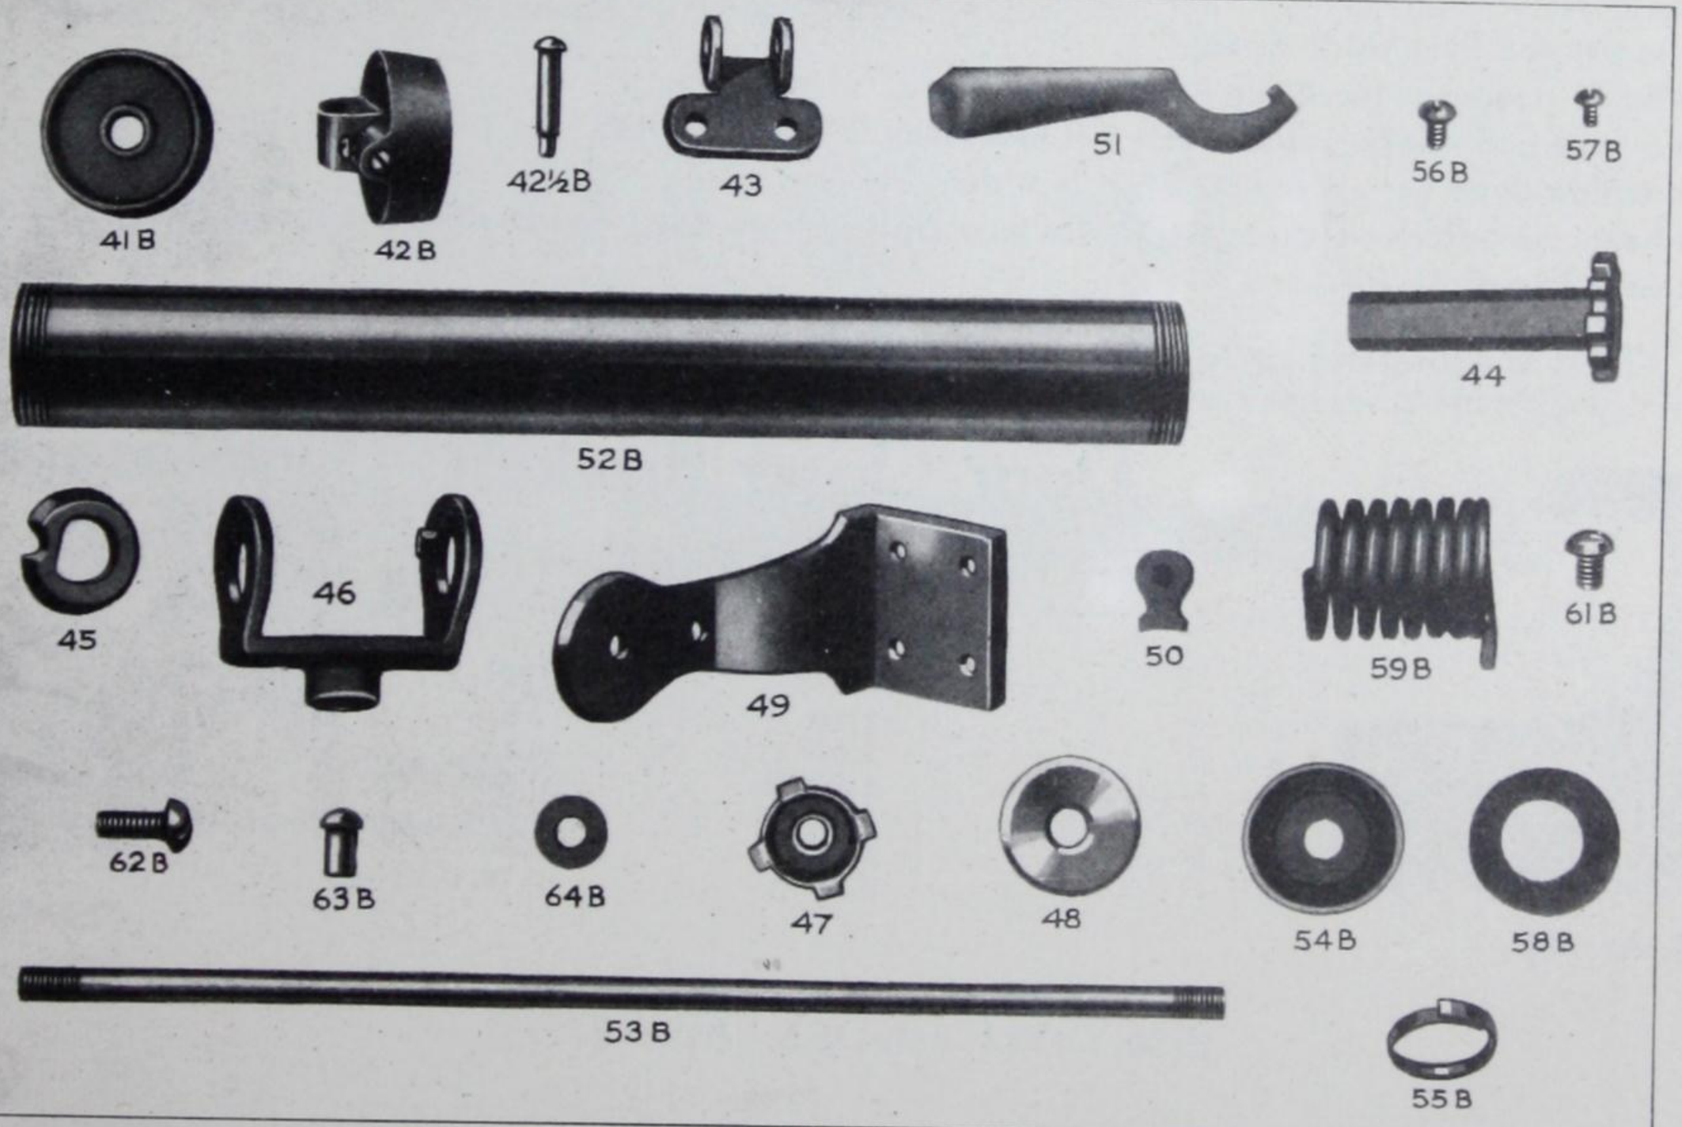

41B	Piston Cap	47	Top Plate	53B	Piston Rod	59B	Steel Spring
42B	Hinge Cap	48	Bottom Plate	54B	Cup Leather	60B	Wood Screws
42½B	Hinge Cap Rivet	49	Bracket	55B	Spring Brass	61B	Top Screws
43	Hinge Plate	50	Dog	56B	Regulating Screw	62B	Bottom Screw
44	Ratchet	51	Wrench	57B	Brass Set Screw	63B	Dog Screw
45	Ratchet Washer	52B	Cylinder	58B	Ring Packing	64B	Iron Washer
46	Spring Holder						

EACH $4.50

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

RUSSWIN LIQUID DOOR CHECKS

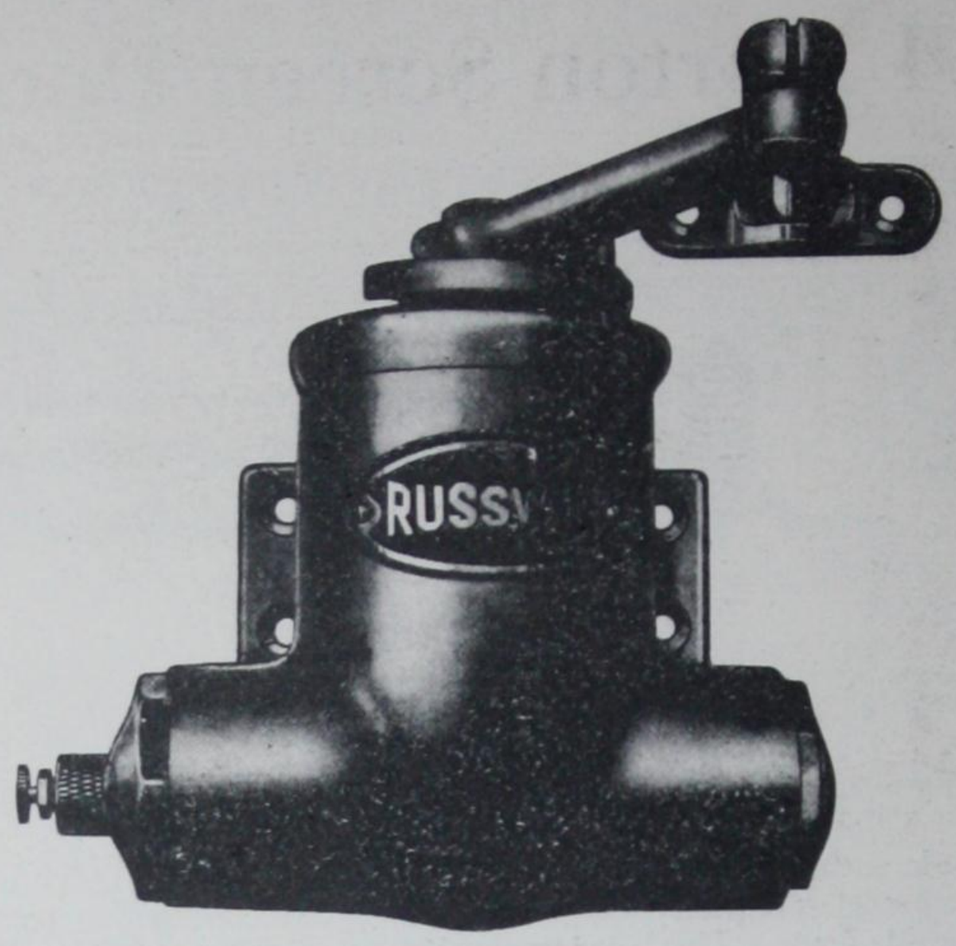

For Right or Left-hand Doors

Without Reversing Either Arm or Spring

	Types of Doors		
SIZE A.	For screen and light inside doors.	Each	$14.30
SIZE B.	For inside doors not exceeding 3 feet in width.	Each	18.70
SIZE C.	For outside and vestibule doors, etc., not exceeding 2½ feet in width.	Each	23.10
SIZE D.	For outside doors not exceeding 3 feet in width.	Each	27.50
SIZE E.	For heavy outside doors exceeding 3 feet in width and large doors operated against strong draughts.	Each	36.30
SIZE F.	For extra heavy outside doors.	Each	46.20

These specifications apply to doors under normal conditions. If the door is unusually heavy, or is subject to very strong draughts use one size larger than specified.

Door Closer Brackets

Always Have the Closer Indoors Where Possible

Number 127

	127	128
Size A	1.40	2.50
Size B	1.60	3.10
Size C	1.80	3.50
Size D	2.20	4.40
Size E	3.00	5.50
Size F	3.30	5.70

Number 128

1926, 1914 MODEL (New Style)

Springs for A Russwin Door Checks,	Each	$1.80
Springs for B Russwin Door Checks,	Each	2.20
Springs for C Russwin Door Checks,	Each	2.80
Springs for D Russwin Door Checks,	Each	3.60
Springs for E Russwin Door Checks,	Each	5.30
Springs for F Russwin Door Checks,	Each	6.90

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Parts for Russwin Door Closer

When ordering parts be sure to specify SIZE and model of CLOSER. See end cap for size and model. If outside parts in other than Maroon Bronze finish are wanted, specify metal and finish.

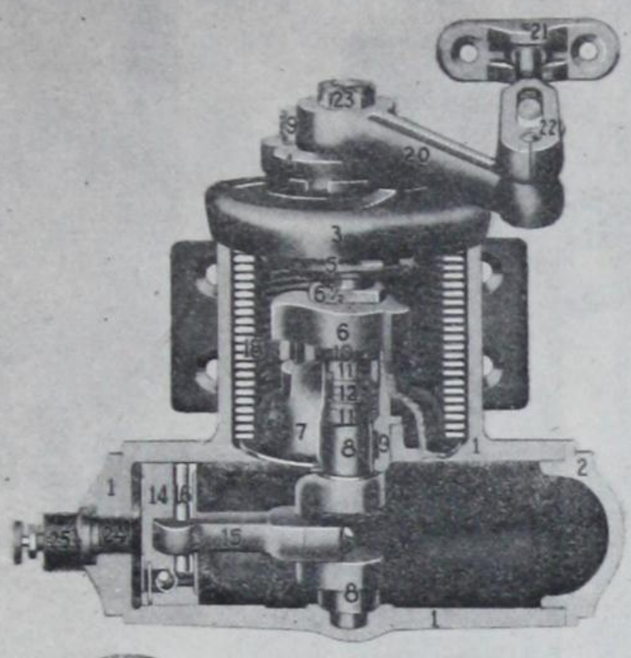

3-COVER



4-RATCHET

4½-RATCHET WASHER

CASE PIN

2-CAP

9-GLAND

5-TOP DOG

6-MIDDLE DOG

6½-MIDDLE DOG NUT

7-LOWER DOG

8-SPINDLE



17-PISTON VALVE BALL

10-GLAND PACKING NUT

11R BRASS GLAND WASHER

11 LEATHER GLAND WASHER

12-CORK GLAND WASHER

19-RATCHET PIN

14-PISTON

15-PISTON LINK (COMPLETE)

16-LINK PIN

17½-PISTON VALVE PIN

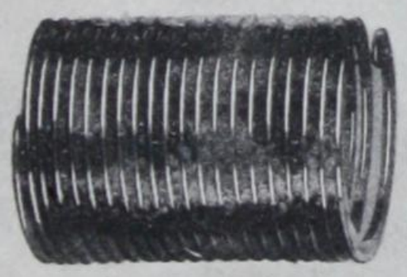

18-COIL SPRING



20-ARM



22-LOOP CONNECTION AND SCREW

23-SPINDLE NUT

24-PLUG SCREW



24½ PLUG SCREW WASHER

NAME PLATE RIVET

NAME PLATE

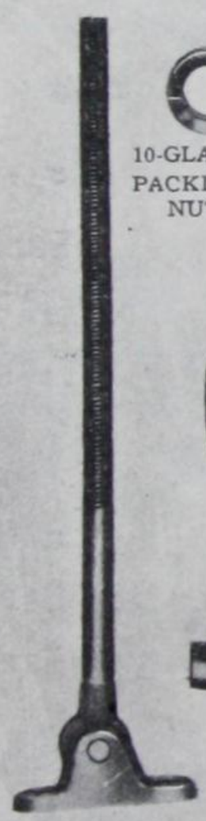

21-EXTENSION ARM & BRACKET

VALVE PARTS

25-VALVE ASSEMBLED

PACKING KNOB

VALVE TUBE

VALVE NUT

VALVE STEM AND BUTTON

VALVE STEM WASHERS

CASE NUT

VALVE TUBE WASHERS

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

STORE DOOR HANDLES

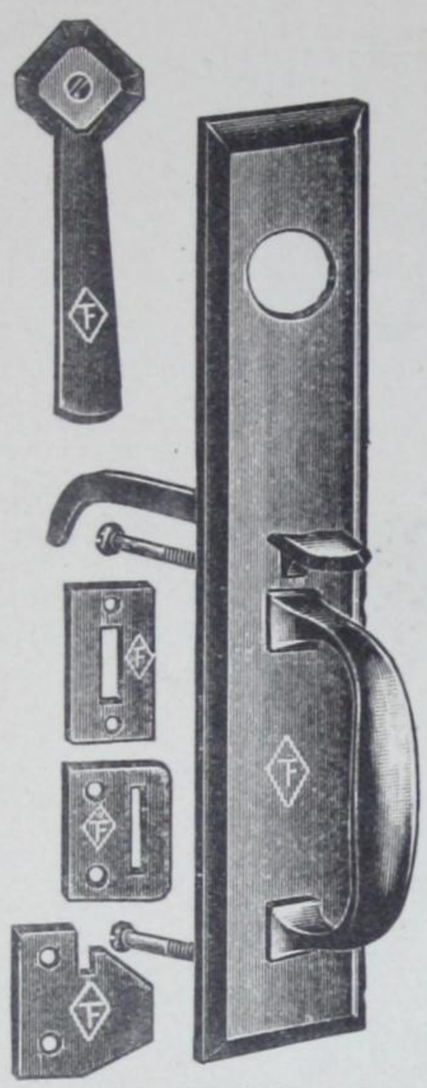

00 (without Night Latch)
0004 (with Night Latch)

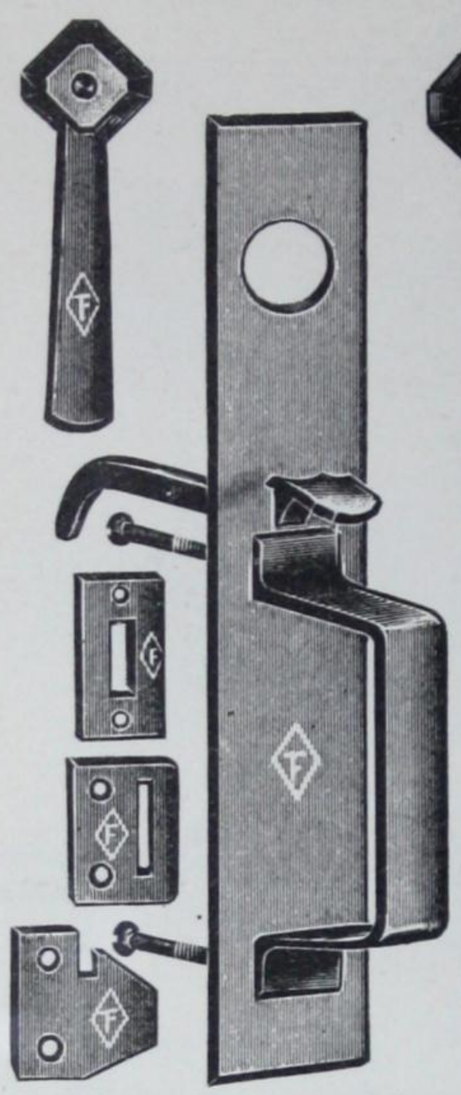

016 (without Night Latch)
01604 (with Night Latch)

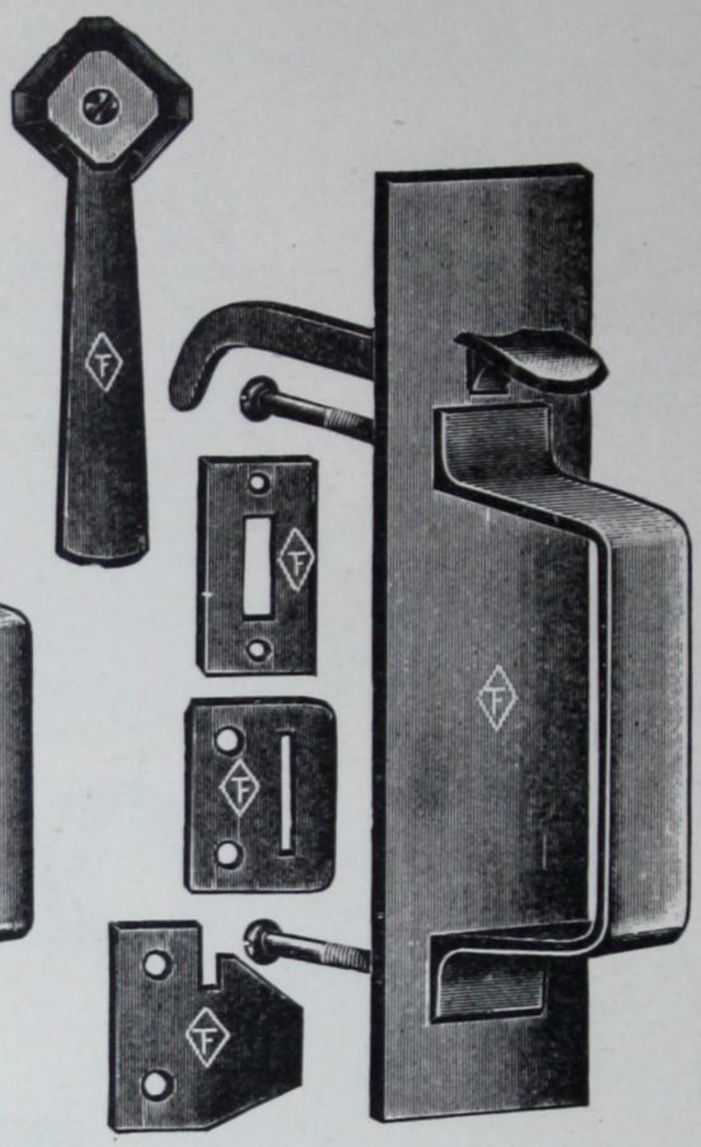

06

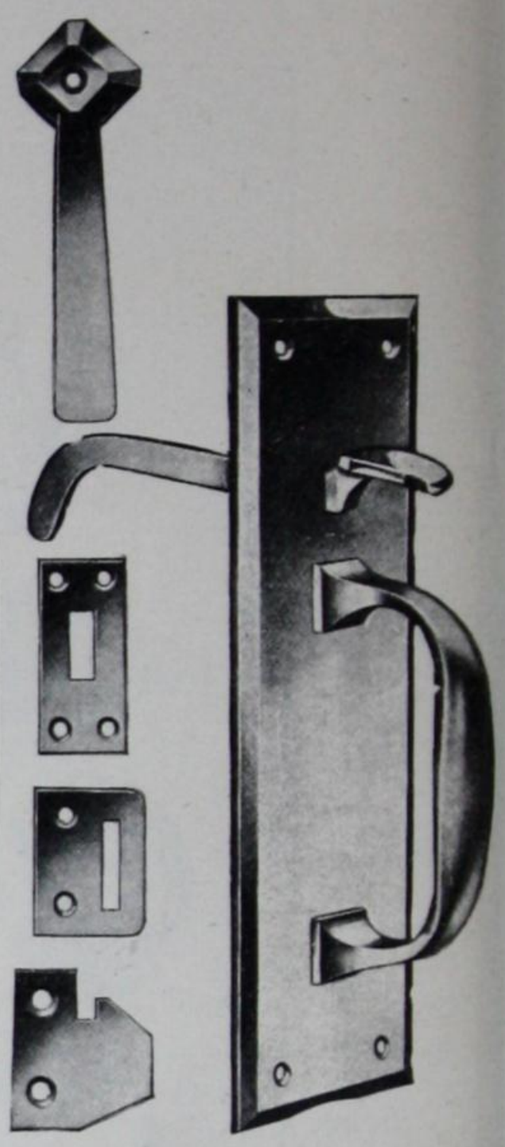

333

00F (without Night Latch) **Cast Brass** ..... **Each $7.10**

0004F (complete with Night Latch **04**, see Page 52) ..... **Each $8.90**

1 Plate 12¾ x 2½ in.
1 Grip
1 in Box

016F (without Night Latch) **Cast Iron** ..... **Each $3.80**

016D2 (without Night Latch) **Cast Iron** ..... **Each $3.80**

01604F (complete with Night Latch **04**, see Page 52) ..... **Each $7.10**

01604D2 (complete with Night Latch **04**, see Page 52) ..... **Each $7.10**

1 Plate 13 x 2½ in.
1 Reversible Offset Grip
1 in Box

Store Door Thumb Latches 06D2 ..... **Doz. $41.60**

1 Plate 9⅜ x 2½ in.
1 Reversible Offset Grip
¼ Doz. in Box.

No. **333** Bevelled Steel Plate.

Note the deep bevel with square edge which sets off the plate to the best advantage.

For either Right or Left Hand Doors. Offset Grips No. **333**. Supplied with Steel Plate and Cast Iron Grip, Thumb Piece, Latch Ba and Rosette, Catch, Guide, Escutcheon and necessary screws.

Plate is attached to Grip by Locknut Washer through the back, in a manner which permits plate to be flat against the door requiring no sinking.

Size of Plate	10 x 3 Inches
" Bevel	¼ x ¼ "
" Grip, overall	5⅛ "
Grip C to C of screw Holes	4⅜ "

Each $3.60

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

THUMB LATCHES

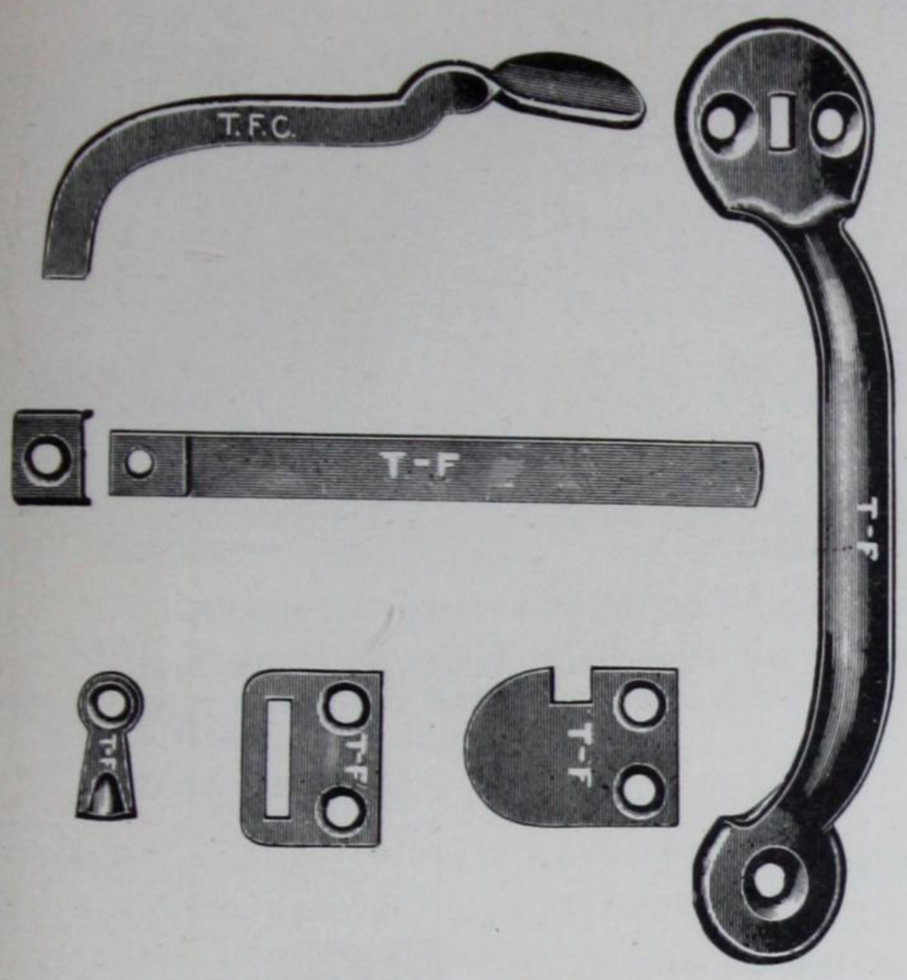

Catch for No. 2.

No. 2, Wrought Steel, Japanned
Size 6¾ in.
One in Carton..... **Doz. $3.50**

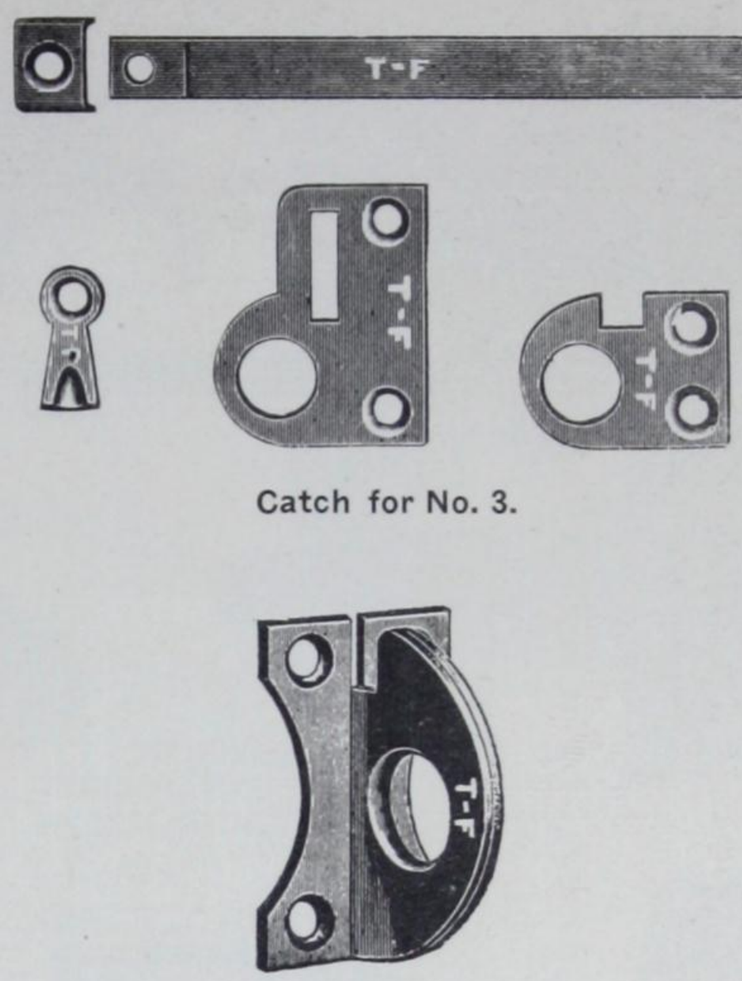

Catch for No. 3.

No. 3, Wrought Steel, Japanned.
Size 7⅝ in.
With Padlock eyes.
One in Carton..... **Doz. 5.50**

Catch for No. 4.

No. 4, Wrought Steel, Japanned.
Size 8⅞ in.
With Padlock eyes.
One in Carton..... **Doz. 9.10**

GARAGE DOOR LATCHES

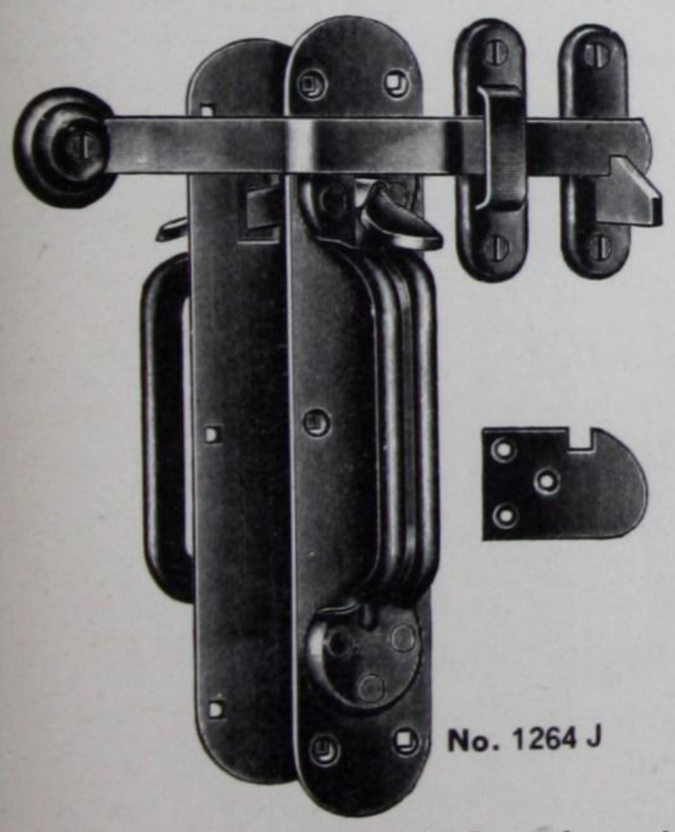

No. 1264 J

1264J Wrought Steel Japanned..... **Doz. 49.30**
Escutcheon plates, two 14½ x 2¾ in.
Grips, two 10½ x 1¼ in.
Latch bar 12 in.
Extra heavy, suitable for large garage and warehouse doors, 1¾ to 2¼ in.

127G Cast Iron Japanned..... **Doz. 28.50**
Latch bar 1¼ x 10 x $\frac{5}{16}$ in.
Handles, two 10½ in.
One in Box.
Balance same as 228,

227G Cast Iron Japanned..... **Doz. $16.00**
Latch Bar 1 x 9¼ x ¼ in.
Handles, two 7¾ in.

For Doors 1¾ in. to 2¾ in. supplied with jamb plate and door plate drilled to permit use of padlock.

127 G 227 G

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Storm Door Sets

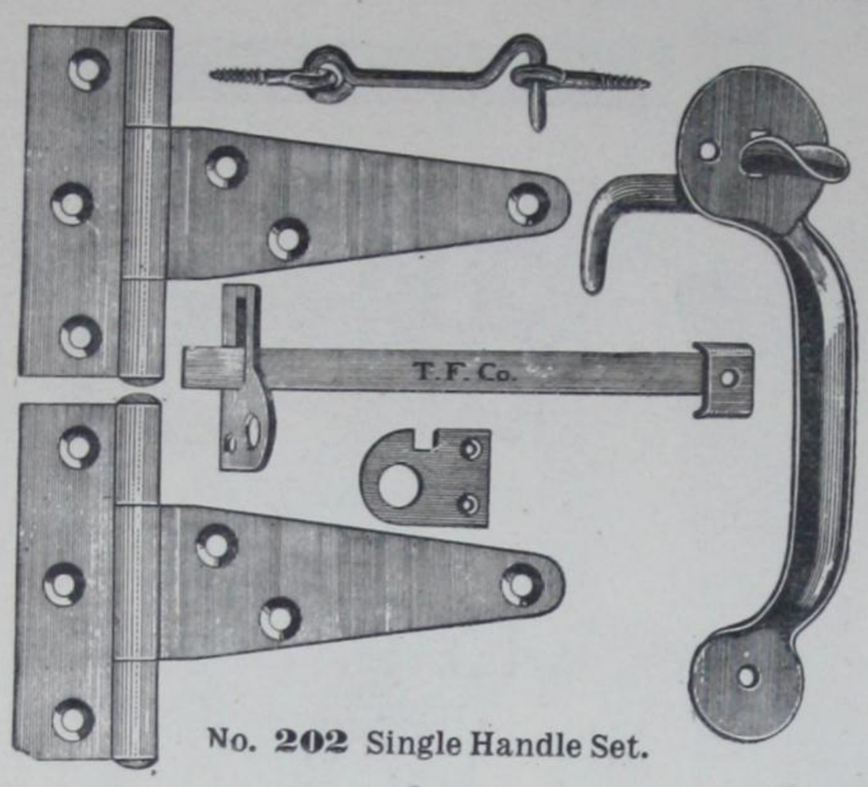

No. **202** Single Handle Set.

Number	**202**
Length of Handle	6¾
" " Latch Bar	5
" " Thumb Piece	4
" " of strap	3
" " Joint	3½
Width of Tee	1
Weight per case	39

PACKED—1 set in a carton—6 dozen sets in a case.

Shortened Thumb Pieces are made to accommodate doors up to 1¼ inches Thick

If required for any other thickness be sure to specify.

While these sets are primarily for Storm Doors they may also be used on Shed, Barn and Garage Doors with equal satisfaction.

Doz. Sets $10.30

GATE LATCHES

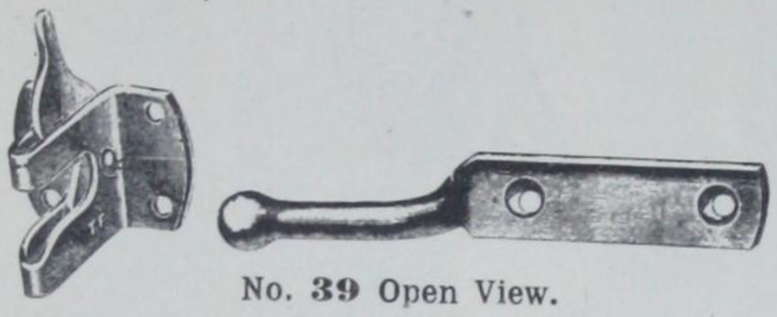

No. **39** Open View.

Finish—Japanned or Galvanized.
PACKED—1 doz. in a box. 12 doz. in a case.
Weight per case 68 lbs.
Requires 2 No. 10 F.H. and 4 No. 7 R.H. Screws.

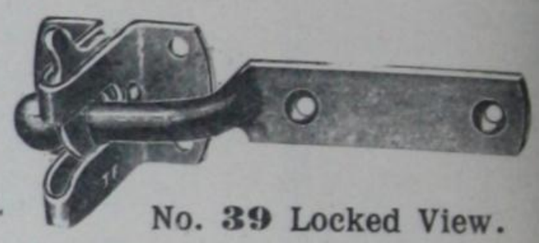

No. **39** Locked View.

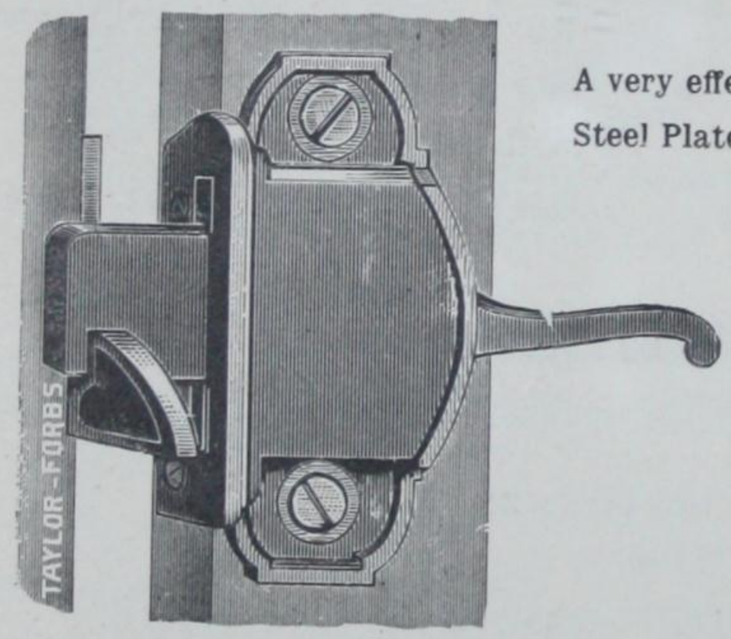

60

A very effective Latch, with safety catch. Operation is simple and positive. Steel Plate is 2 x 1½ inches. Steel hook is riveted. Malleable Bolt 5¼ x ¾ inches. **$4.50 Doz.**

No. 60, Cast Iron ..... **Doz. $5.90**

Cast iron plate 3¾ x 1⅞ in.
Length of latch bar 4¾ in.
Suitable for right or left hand gates.
To swing one way.
1 Doz. in Box.

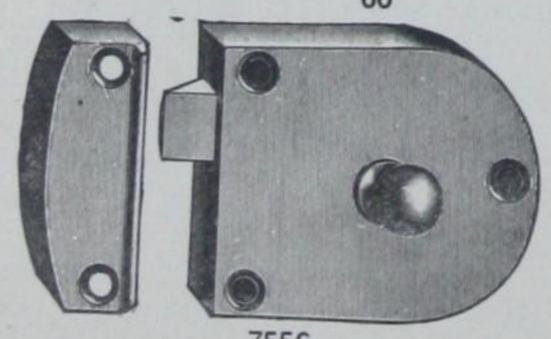

7556

SECRET GATE LATCHES

7556F, Cast Iron ..... **Doz. $25.50**
7556D2, Cast Iron ..... **Doz. 25.50**
7556 Japanned ..... **Doz. 20.00**

Case 2 x 2½ in. Single Acting.

Reversible for right and left hand gates, operates by pressure of finger to underside of latch case.

The knob has no effect upon latch bolt.

½ Doz. in Box.

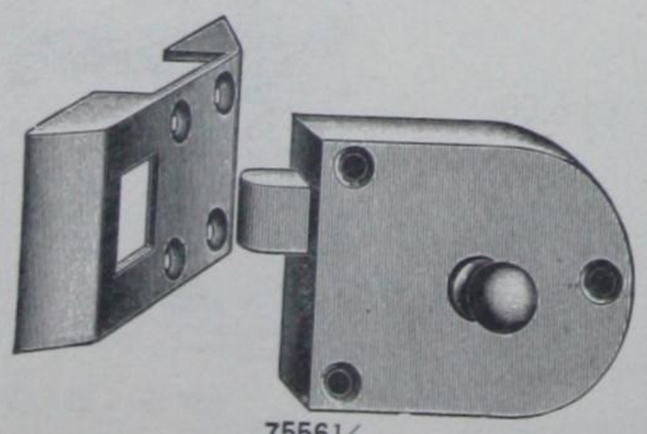

7556½

7556½F, Cast Iron ..... **Doz. $32.00**
7556½D2, Cast Iron ..... **Doz. 32.00**

Double Acting.

Balance description same as **7556**, see above.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

BARN DOOR LATCHES

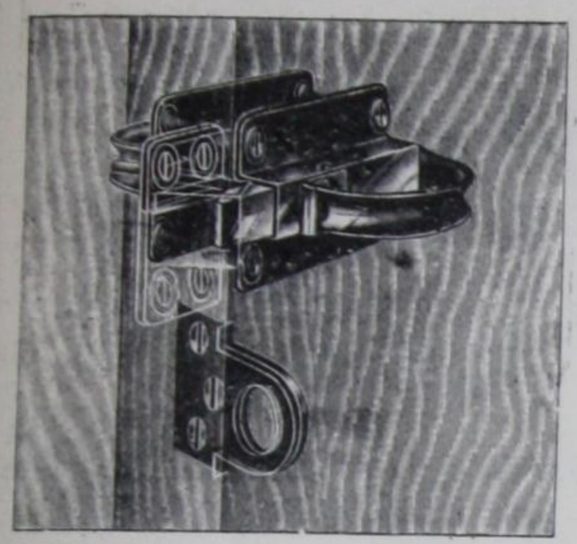

1240 J

No. 1240J, Japanned Wrought Steel ..... **Doz. $12.60**

Plates 5 x 2¾ in.
Grips 4½ in.
Padlock Eyes, two, 2⅛ x 1⅞ in.
The latch works automatically.
For Doors ¾ to 1¾ in.
Tinned Bolt.
¼ Doz. in Box.

No. 156, Japanned Wrought Steel ..... **Doz. $16.80**

Latch Bar, 9 x 1 x ¼ in.
Flush Handle Inside 3 in.
Comb. Strikes and Padlock Eyes, two 2½ x 2¾ in.
For Swing or Slide Doors, 1¾ to 2⅝ in.
1 in Box.

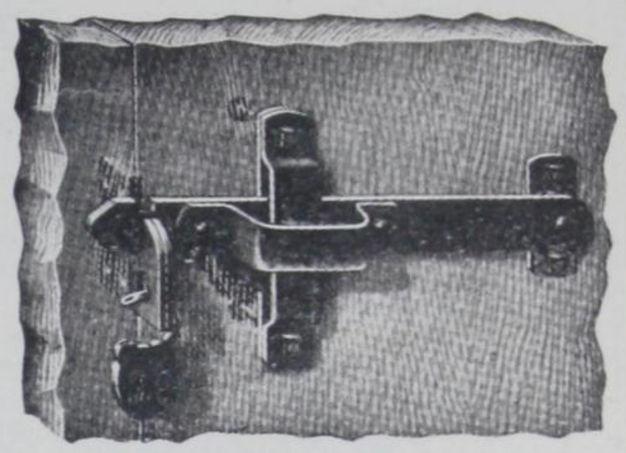

156

No. 127B Cast Iron Japanned ..... **Doz $28.50**

Latch Bar 1¼ x 10 x $\frac{5}{16}$ in.
Handles, two, 10½ in.

Cast Iron Latch for doors 1¾ to 2¾ in., style B, is specially designed for Barn Doors, being provided with harness guard on Jamb Plate, which prevents harness, etc., from catching. Another feature of this latch is the Double Grip giving a better hold on the door than the small tail piece of the ordinary latch.

1 in Box.

No. 227B Cast Iron Japanned **Doz. $16.00**

Latch Bar 1 x 9¼ x ¼ in.
Handles, two, 7¾ in.
For Doors 1¾ to 2 in.
1 in Box.
Otherwise same as No. 127B.

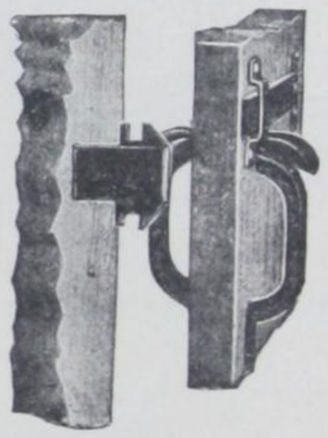

127 B and 227 B

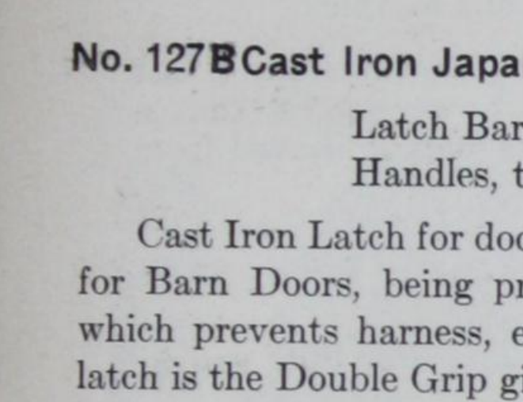

1252 J

No. 1252J, Japanned Wrought Steel ..... **Doz. $25.70**

Handle 10½ in.
Latch Bar 12 in.

Combination holes for bolts or screws. Packed with screws.
The Escutcheon Plate shown fits over the thumb latch on outside of door covering the hole, giving the latch a finished appearance.

1 in Box.

NORFOLK BARN DOOR LATCHES

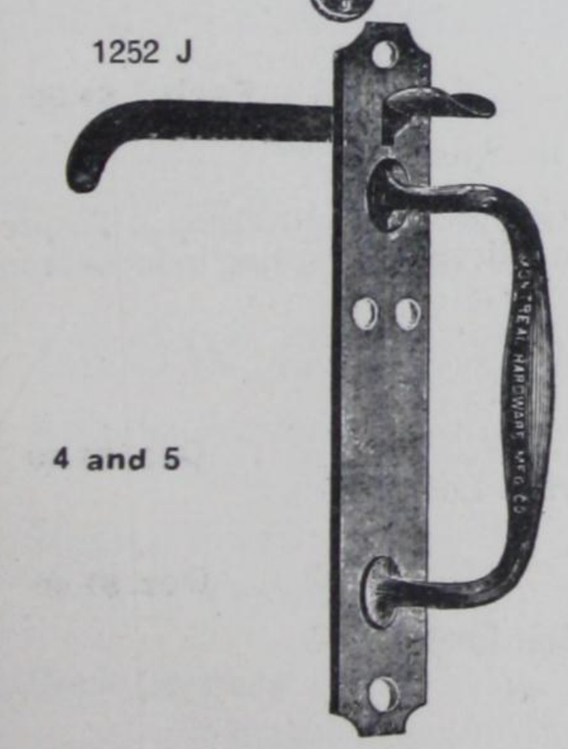

4 and 5

No. 4 Light, Wrought Iron, Unpolished ..... **Doz. $13.40**

Plate 9½ x 2½ in.
Straight Grip.
½ Doz. in Box.

5. Heavy Wrought Iron, Unpolished ..... **Doz. $19.30**

Plate 10¾ x 2¼ in.
Straight Grip.
½ Doz. in Box.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

LOCK REPAIRS

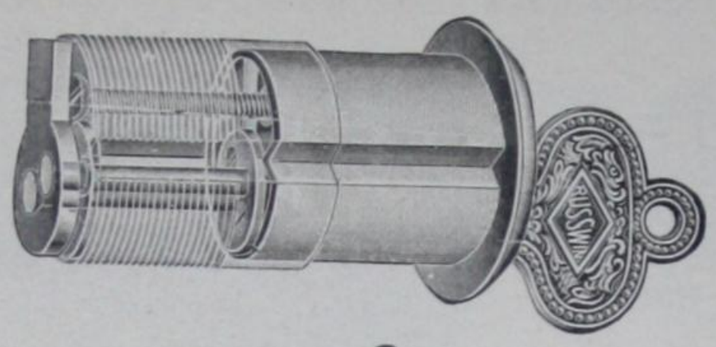

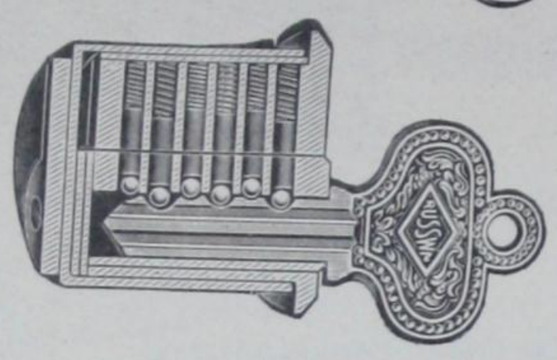

Belleville Cylinder



Adjustable Cylinder Ring.

4060 Knob Washer.

Knob Screw.



30 Auxiliary Spring.

5. Flat Steel Spring.

6. Brass Wire Spring.

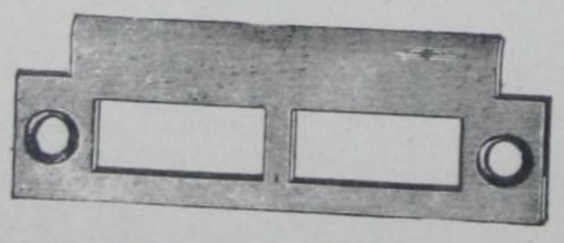

900 Mortise Lock Strike.

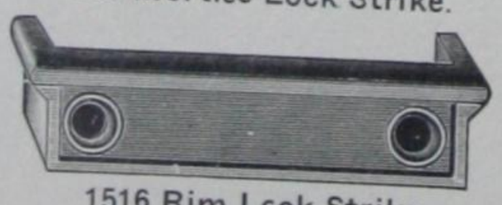

1516 Rim Lcck Strike.

Russwin Adjustable Cylinders	Each	$4.20
Russwin Adjustable Cylinders in Pairs	Per Pair	$8.40

Description—

Adjustment is made by turning the adjusting screw at the back of the cylinder. This action lengthens or shortens the barrel of the cylinder to the required length.

All Russwin Cylinder Front and Store Door Sets are furnished with Adjustable Cylinders for doors from 1¾ to 4 in. thick.

In ordinary use these cylinders do not require lubricating, but should the Keyway become clogged with dirt, we suggest that a very small quantity of powdered graphite (this may be shaved from the point of a lead pencil) be applied to the key.

Belleville Cylinders	Each	$5.00
Belleville Cylinders in Pairs	Per Pair	$10.00
Adjustable Cylinder Rings	Doz.	$5.00

Furnished with all Cylinder Locks

Knob Washers, 4060	Per Ounce	.20

For 5/16 in. Spindle

Knob Screws, 90 x 9, Steel, 5/16 in. Long	Gross	$2.50
Knob Screws, 90 x 7½, Steel, 5/16 in. Long	Gross	$2.50
Knob Screws, 90 x 09C, Steel, 5/16 in. Long	Gross	$2.60

1 Gross in Box

Auxiliary Springs, 30	Each	$1.50

1½ in. diameter for 5/16 in. Spindle

Mortise into door between lock hub and escutcheon. To prevent sagging of lever handles and to relieve latch spring in locks from heavy wear.

Mortise Lock Strikes, 900	Doz.	$1.50

Suitable for 3½ in. Mortise Locks

Rim Lock Strikes, 1516	Doz.	$1.40

Cast Iron for Regular Rim Locks

Flat Steel Lock Springs, No 5 x 3/16 in.	Coil	.70
Flat Steel Lock Springs, No. 5 x ¼ in.	Coil	.80

Three feet in a coil.

Coiled Brass Wire Lock Spring, No. 6	Per Box	.90

Three feet in a Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SHOW CASE FIXTURES

GLOBE BRACKETS AND STANDARDS

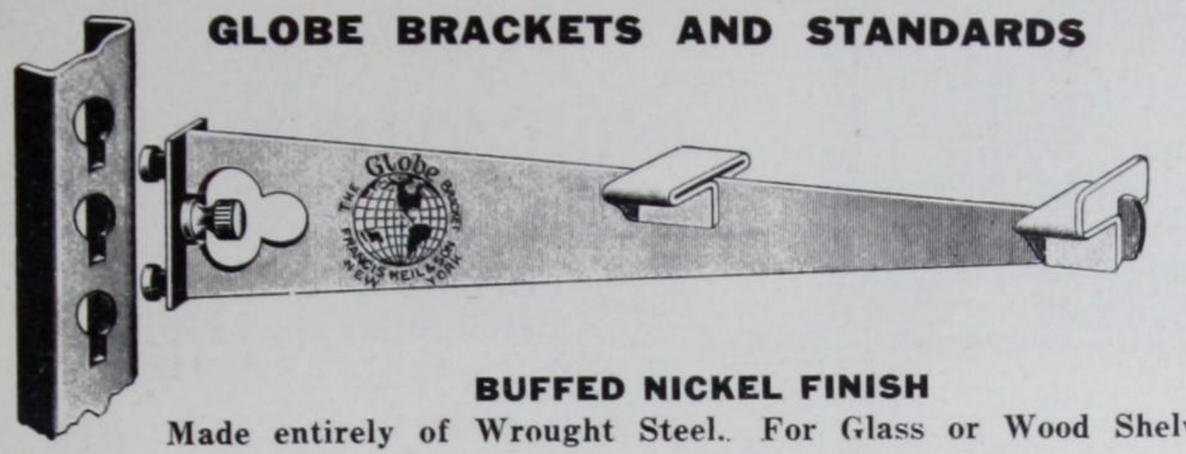

BUFFED NICKEL FINISH

Made entirely of Wrought Steel.. For Glass or Wood Shelves.

Brackets				
Length ins.	6	8	10	12
W't. each, lbs.,	1½	2¼	3	3¾
Each,	**$0.70**	**.90**	**1.00**	**1.10**

Ten in a Box.

Standards			
Length inches,	24	30	36
Weight ea., lbs.	½	⅝	¾
Each,	**$0.70**	**.80**	**.90**

Ten in a Box.

GLOBE BRACKET RESTS

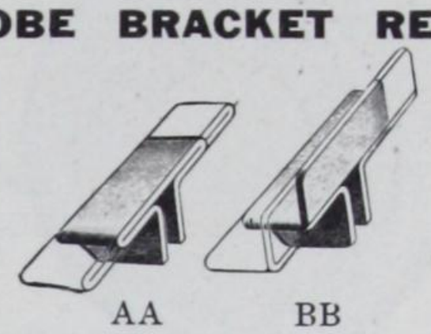

AA BB

Nickel Plated—Adjustable

No. AA—Size 1⅛ inches. Used on center of Globe Brackets. Weight per 100 2 lbs., per 100 **$10.00**

No. BB—Size 1⅛ inches. Used on end of Globe Brackets. W't. per 100 2½ lbs. per 100 **18.00**

Twenty Four in a Box.

SLIDING DOOR SHEAVES

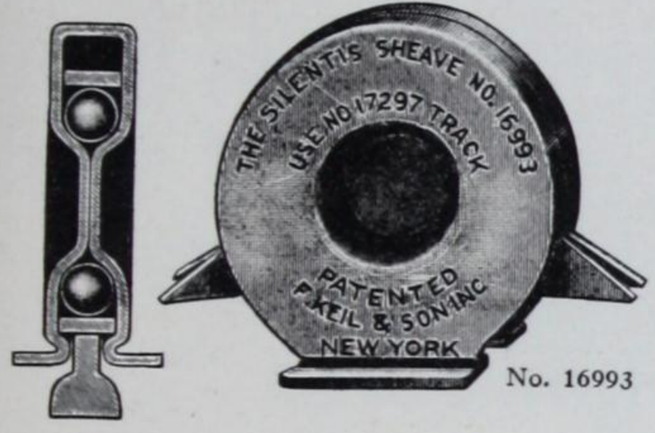

No. 16993

To use with Track Nos. 17315, 17297

Wrought Steel, thickness of case 9/32 in., ball bearing wheel, has gauge flanges and double prongs for fastening, to drive in.

No. 16993—Weight per dozen ¾ lb. - per dozen **$2.40**

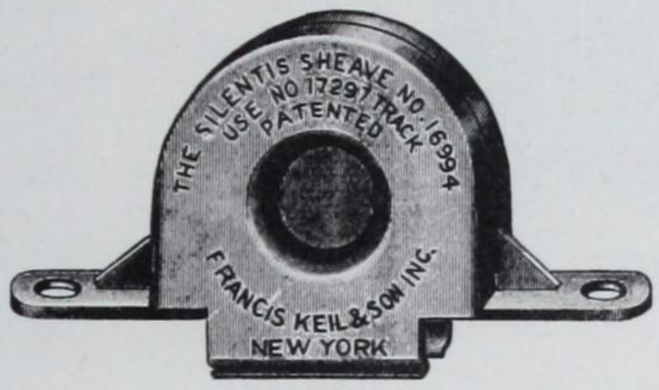

No. 16994

Case, 9/32 inch thick, has lugs for screwing on

No. 16994 **Doz. $3.20**

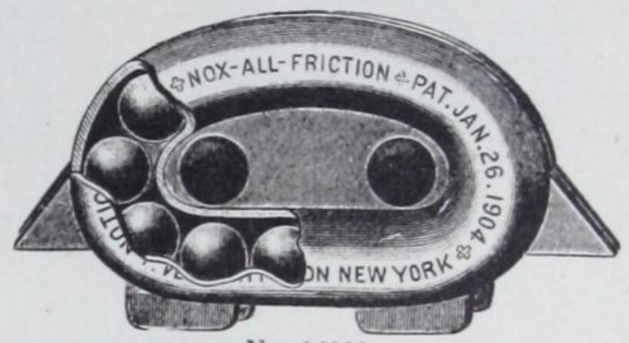

No. 16998

To use with Track Nos. 17315, 17297

Wrought Steel thickness of case 11/32 in. hardened steel balls, has double prongs for fastening, to drive in.

No. 16998—Wt. per doz. 1 lb. - - per dozen **$2.40**

SLIDING DOOR TRACK

Nos. 17315,

Wrought Steel, Plain Finish, in Ten Foot Lengths.

No. 17315—Size ½x1/16 in., for use with sheaves Nos. 16993 and 16698. Wt. 100ft. 12½ lbs. - - per 100 ft. **$5.50**



No. 17297

Wrought Steel, Copper Plated Finish in Six, Eight and Ten Foot Lengths.

Copper pins supplied for fastening, for use with sheaves Nos. 16993 and 16998.

No. 17297—Wt. per 100 ft. 18 lbs. - per 100 ft. **$12.20**

SHOW CASE CORNERS

No. 1N, Regular Front ..... Each **$2.20**
Wrought Brass

No. 2N, Sloping Front ..... Each **$2.80**
Wrought Brass

3N, Back Corners ..... Each **$1.00**
Wrought Brass

BACK CORNER

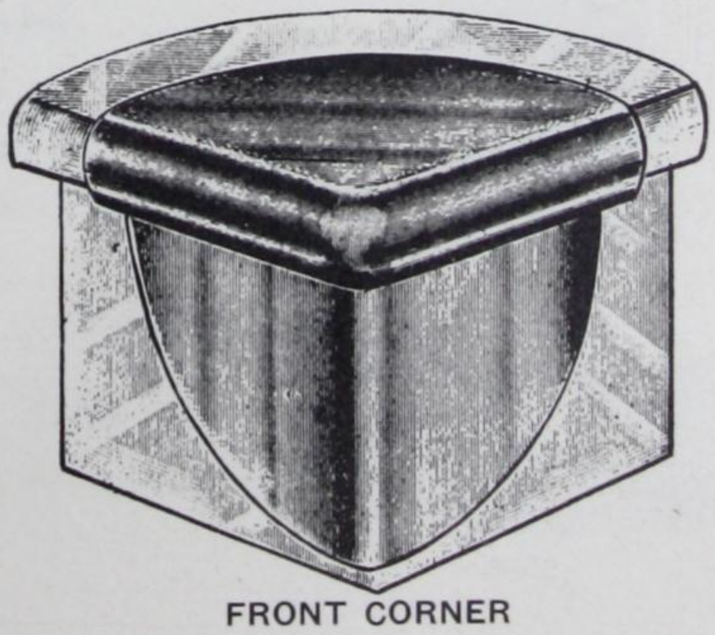

FRONT CORNER

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

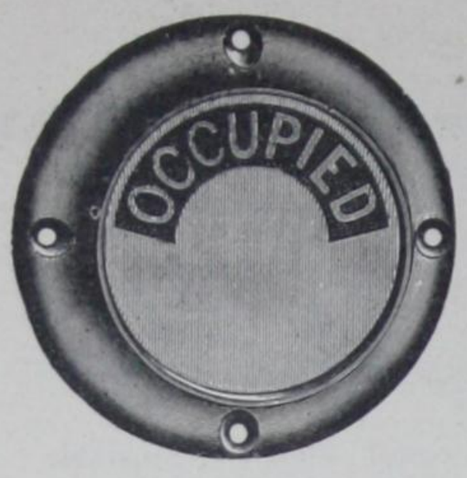

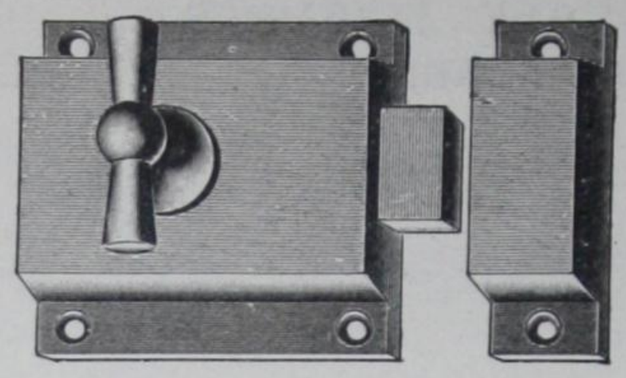

0156½

INDICATOR BOLTS

No. 0156½N, Cast Brass.....Each $4.50

With Rim Strike
Size without Strike 2½ x 2½ in.
Strike 2½ x ¾ in.
Indicator 3 in.
½ Doz. in Box

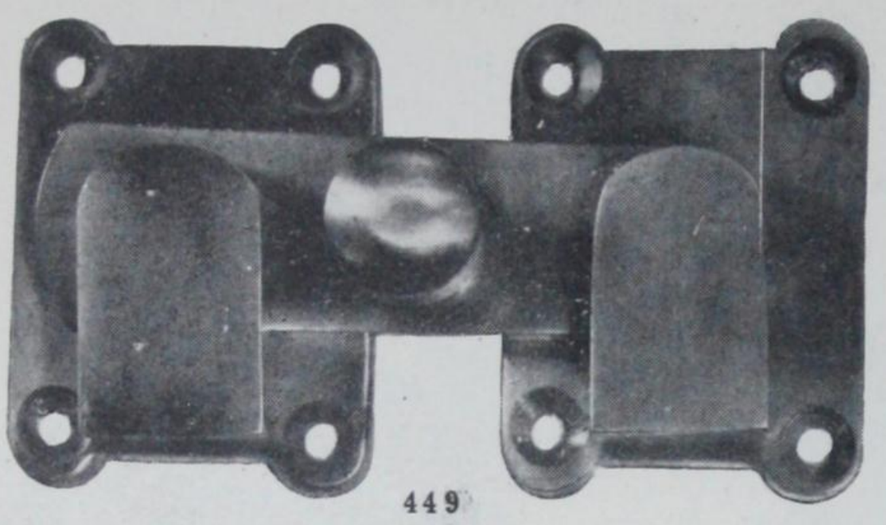

449

Cut full size

LAVATORY LATCHES

No. 449N, Cast Brass.....Doz. $19.00

Latch Bar 1 x 4¾ in.
Plates 1⅞ x 1⅞ in.
½ Doz. in Box

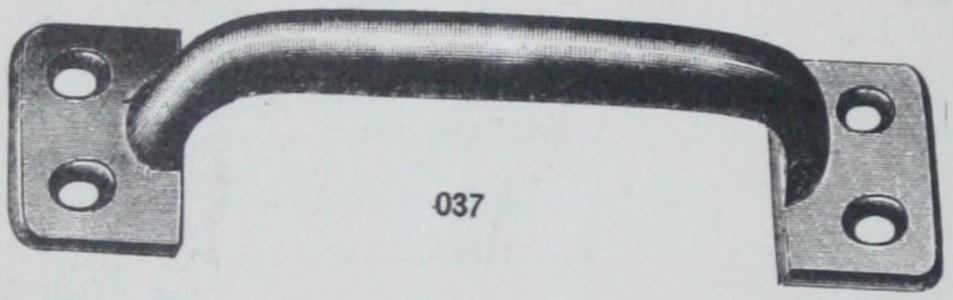

037

DOOR PULLS

No. 037N, Cast Brass.....Doz. $6.50

4½ x 1¼ in.
One Doz. in Box

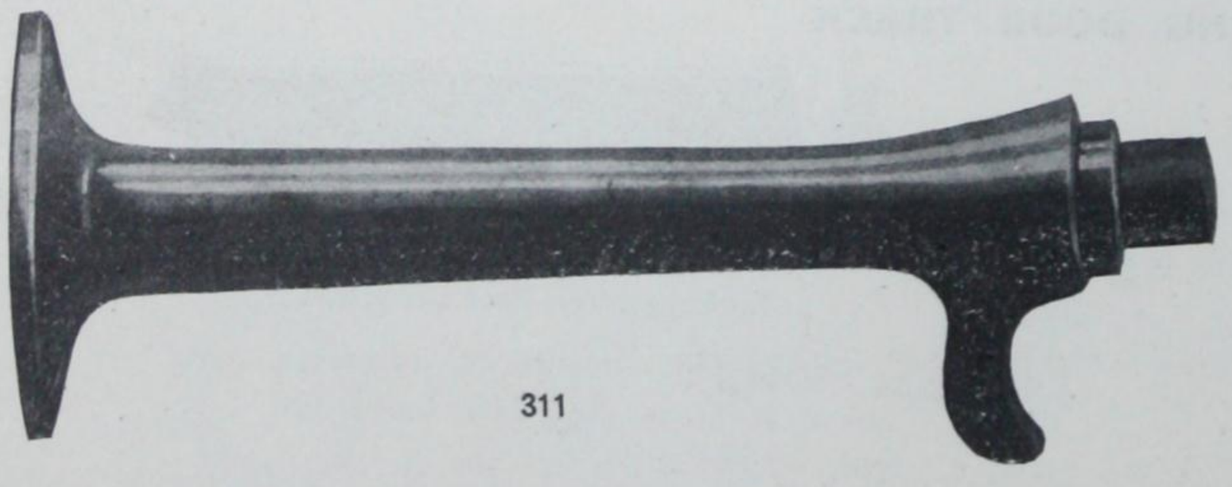

311

HOOKS AND BUMPERS

No. 311N, Cast Brass.....Doz. $15.80

Length 4⅜ in.
Base 1 9/16 in.
One Doz. in Box



6273

FLUSH SHOW CASE RING PULL

No. 6273F, Cast Brass.....Doz. $5.50

1½ in. Diameter
2 Doz. in Box

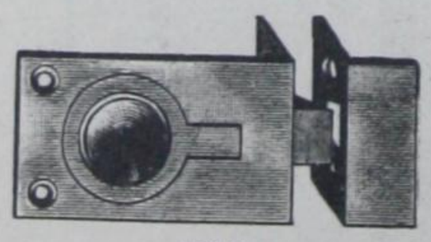

9510

FLUSH SHOW CASE CATCH

No. 9510F, Cast Brass.....Doz. $7.00

Size without Strike 2 x 1½ in.
2 Doz. in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

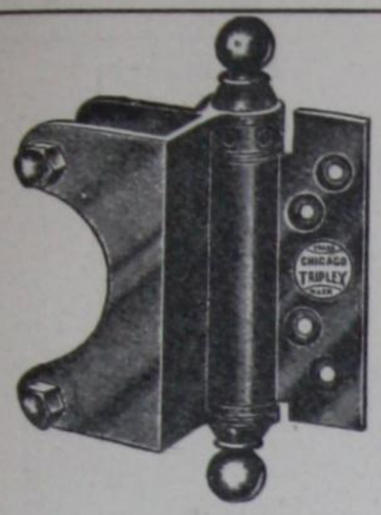

2242

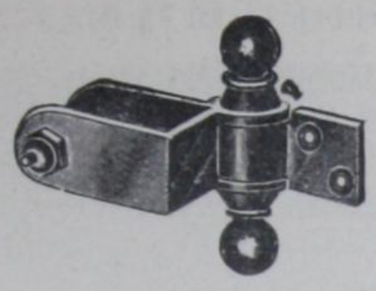

2244

TRIPLEX LAVATORY HINGES

No. 2242N and 2244 N, Spring and Blank ..... **Pair** **$18.00**
Heavy Wrought Brass, Single Acting
2242 Flange 4 in., 2244 Springless Hinge
Adjustable for 1⅛ in. to 1⅜ in. Marble
Pair consists of half pair each 2242 and 2244
1 Pair in Box

Can be supplied from factory only with reverse springs to hold the door open

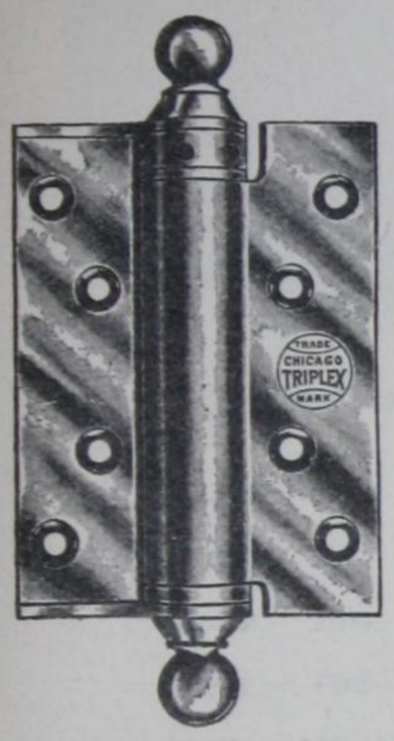

2212

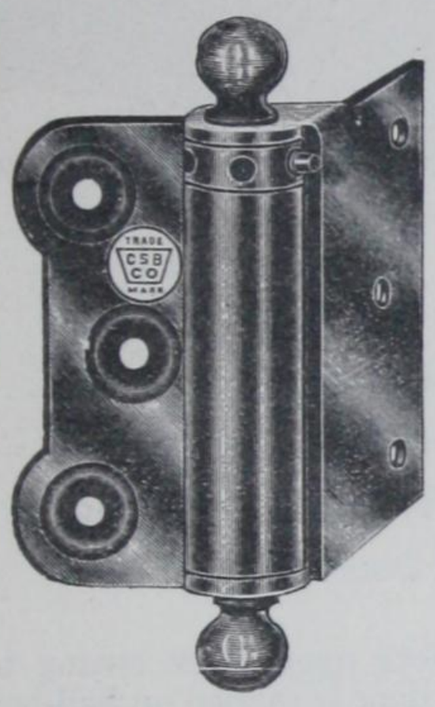

4215

SINGLE ACTING SPRING HINGES

No. 2212N x 3 in., For Doors ¾ in. to 1 in...... **Pair** **$6.40**
No. 2212N x 4 in., For Doors ⅞ in. to 1⅛ in...... **Pair** **$7.60**
No. 2212N x 5 in., For Doors 1⅛ in. to 1½ in...... **Pair** **$9.20**
Wrought Steel
1 Pair in Box
No. 4215N, Wrought Steel..... **Pair** **$2.40**
Length of Flange 3 in.
This hinge is especially serviceable in hanging doors where the thickness of the door and depth of the rabbet are not the same.

Can be supplied from factory only with reverse springs to hold the door open
1 Pair in Box



1247



1248



1245

LAVATORY DOOR STRIKES

No. 1247N, Wrought Brass..... **Each** **$4.70**
For doors-opening in
No. 1248N, Wrought Brass..... **Each** **$5.50**
For doors opening out
Adjustable for 1⅛ in. to 1⅜ in. Marble
3 in Box
No. 1245N..... **Each** **$1.50**
Wrought Brass
To be applied to edge of door, or surface of wall
1 Doz. in Box

38

FLUSH SHOW CASE PULLS

No. 38, Wrought Brass..... **Gross** **$4.30**
$\frac{15}{16}$ in. Diameter. Depth ¼ in.
1 Gross in Box
No. 7570F, Wrought Brass..... **Doz.** **$1.40**
1⅛ x 2⅞ in.

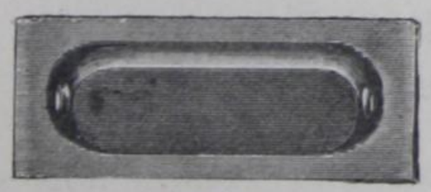

7570

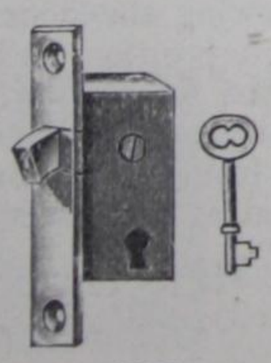

9575

SHOW CASE LOCKS

No. 9575F..... **Each** **$4.20**
Iron Case 1⅝ x 1 in. Cast Bronze Face 2⅞ x ½ in.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

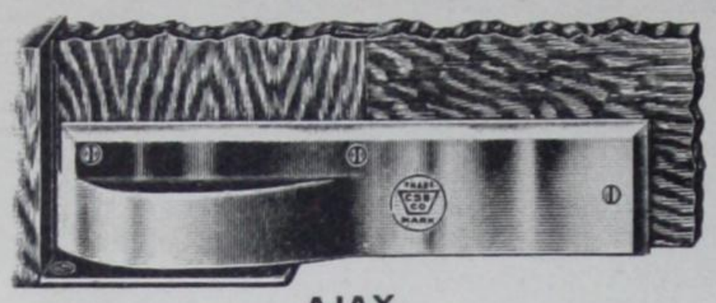

AJAX

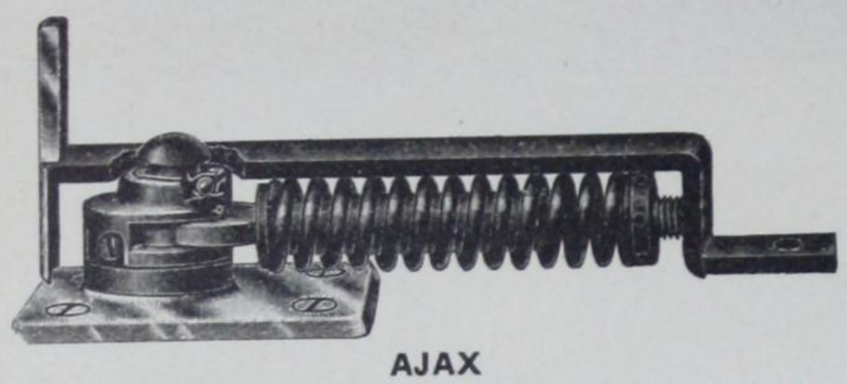

AJAX



Top Pivot for
AJAX and PREMIER

PREMIER

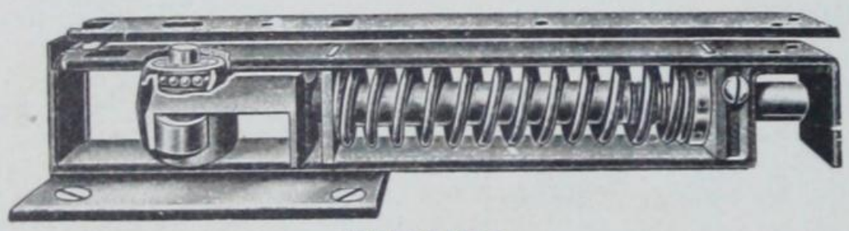

PREMIER

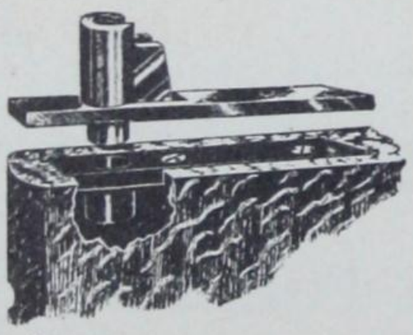

Relax Top Pivot.

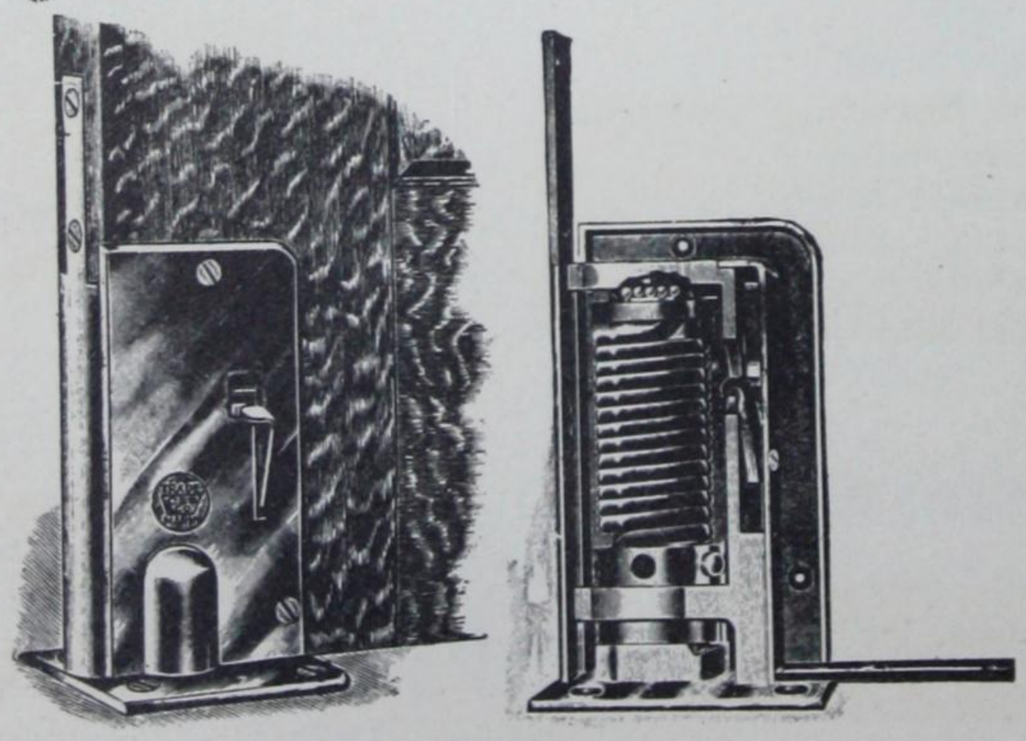

RELAX

CHICAGO AJAX FLOOR HINGES

3281F for Doors 1⅛ to 1¾ in.....	Set	$3.60
3171D2 for Doors 1⅛ to 1¾ in.....	Set	$3.60
3181SF4 for Doors 1⅛ to 1¾ in....	Set	$4.50

Holds the door open when swung to 90 degrees. Weight of door is carried on ball-bearings, located at top of hinge away from moisture and dust.

Spring tension is adjustable.
Floor plate 3¼ x 3¾ in.
One set in Box.

CHICAGO PREMIER FLOOR HINGES

4281F for Doors 1⅛ to 1¾ in.....	Set	$6.40
4281F for Doors 1¾ to 2¾ in.....	Set	$9.00
4171D2 for Doors 1⅛ to 1¾ in.....	Set	$6.40
4171D2 for Doors 1¾ to 2¾ in.....	Set	$9.00
4181SF4 for Doors 1⅛ to 1¾ in....	Set	$7.00
4211N for Doors 1⅛ to 1¾ in.....	Set	$8.40

Holds door open when swung to 90 degrees. Weight of door is carried on ball-bearings located at top of hinge away from moisture and dust. Compression spring is made of best tempered Flat Steel wire which gives this hinge greater durability and efficiency.

Small size has Floor Plate 3 x 4 in.
Large size has Floor Plate 3¾ x 5 13/16 in.
One set in Box.

CHICAGO RELAX FLOOR HINGES

6281F for Doors 1⅛ to 1½ in.....	Set	$10.20
6281F for Doors 1½ to 2 in.....	Set	$14.20
6171D2 for Doors 1⅛ to 1½ in.....	Set	$9.60
6171D2 for Doors 1½ to 2 in.....	Set	$14.20

Floor Plate 2 13/16 x 3½ in.

One set in Box.

In addition to description of Premier this hinge has the unique feature by which the spring action is readily released, allowing the door to be placed open at any desired position and is automatic in re-engaging as the door is swung to the closed position. This feature also eliminates the tendency of springs losing their power as the result of remaining fixed at high tension.

Small Size has Floor Plate 2 13/16 x 3½ in.
Large Size has Floor Plate 3¼ x 3¾ in.
One set in Box.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

Champion Double Acting Floor Hinge

Ball Bearing

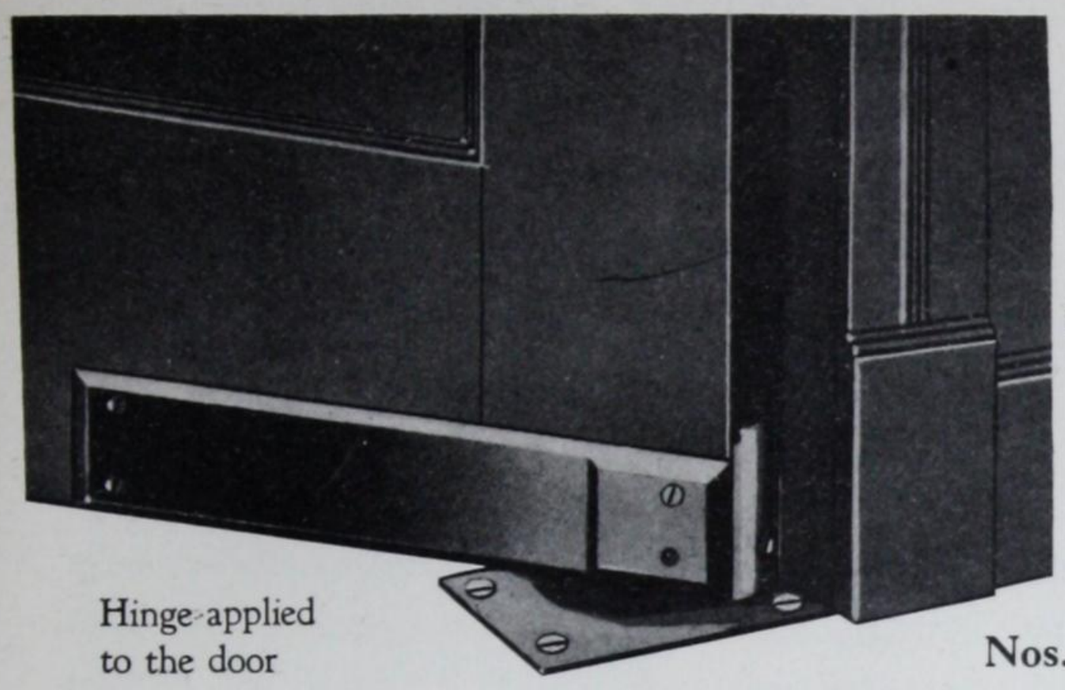

Hinge applied to the door

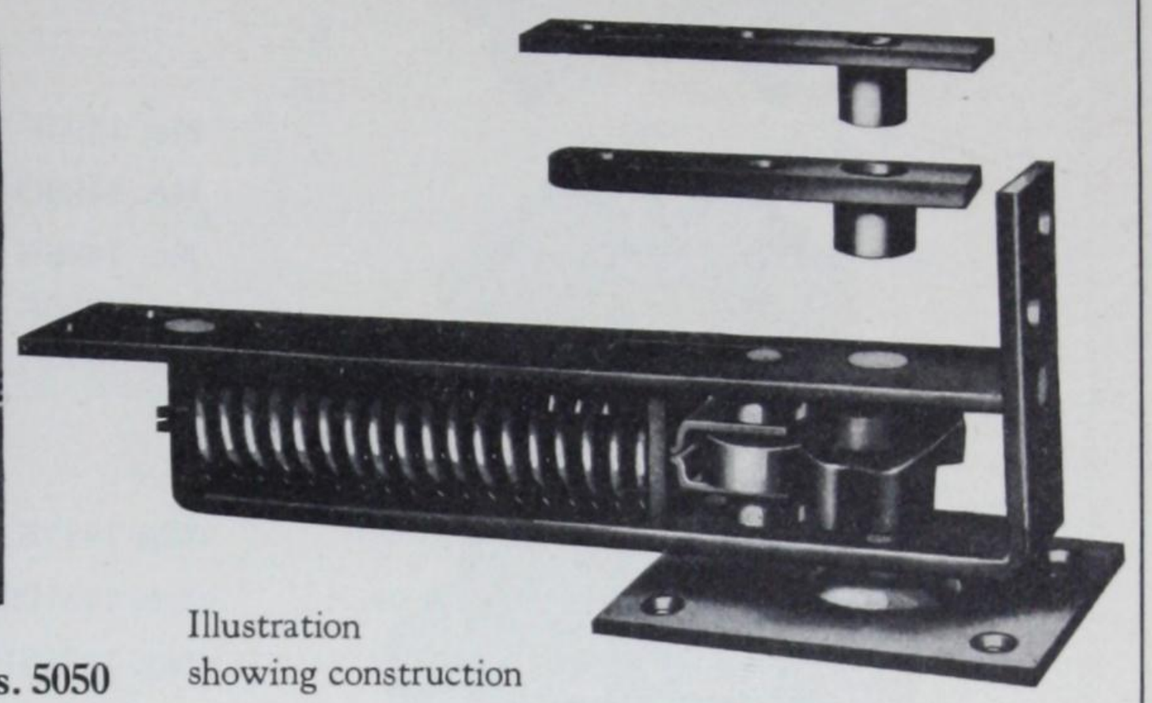

Illustration showing construction

Nos. 5050

Nos. 5050

Dull Brass Plated — Each **$2.00**

BATHROOM FIXTURES

No. 1800 RUST PROOF LINE
(Similar to Nickel)

1800

Doz. **$4.30**

1802

Doz. **$4.30**

1807

Doz. **$1.60**

1803

Doz. **$4.30**

1801

Doz. **$4.30**



1809

Doz. **$4.30**

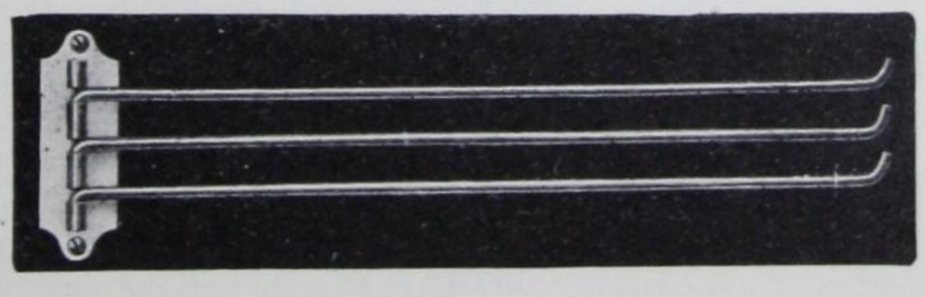

No. 1819

Doz. **$4.40**



1820.

Doz. **$3.60**

1805

Doz. **$2.00**

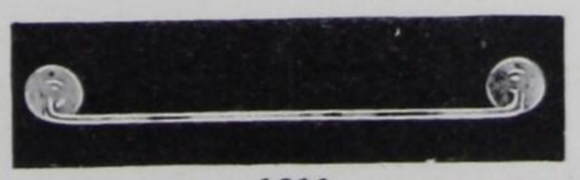

1811

Doz. **$4.40**

1810

Doz. **$3.40**

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

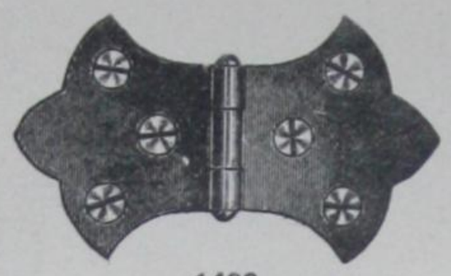

1490

1431

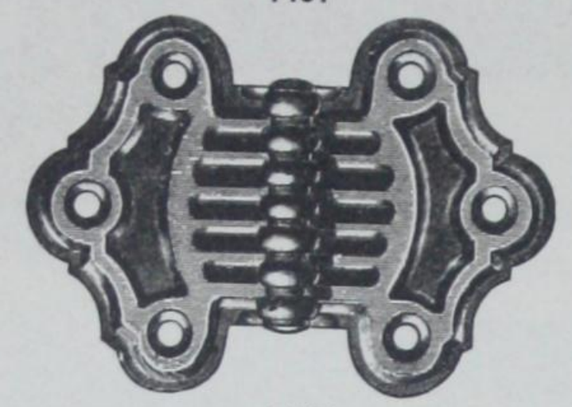

1417

1409

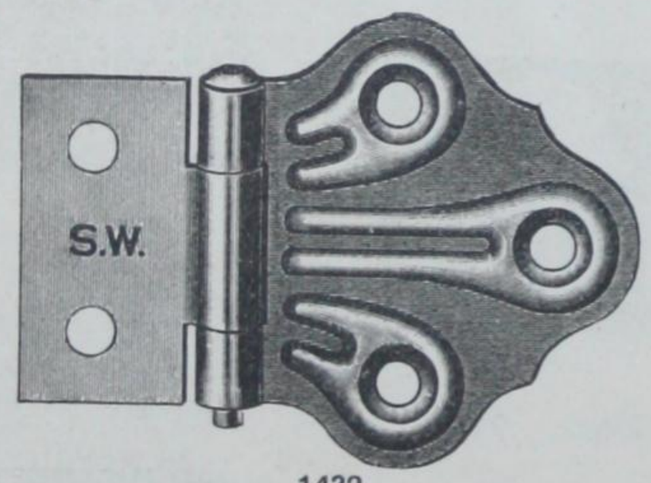

1432

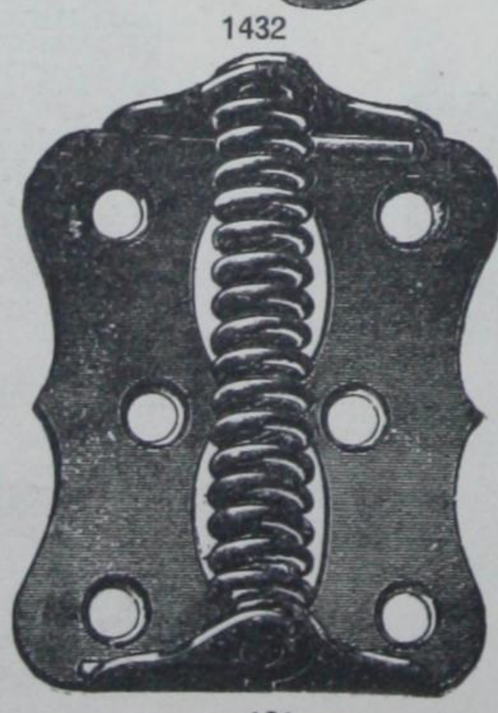

161

ORNAMENTAL HINGES

WROUGHT STEEL

No. 1490F.. x 1 in	Doz. Pairs	$2.00
No. 1490D2. x 1 in	Doz. Pairs	$2.00
No. 1490N.. x 1 in	Doz. Pairs	$2.42
No. 1490F.. x ¾ in	Doz. Pairs	$1.60
No. 1490N.. x ¾ in	Doz. Pairs	$2.00

No. 1431F	Doz. Pairs	$2.52
No. 1431D2	Doz. Pairs	$2.52
No. 1431SF4	Doz. Pairs	$3.06
No. 1431N	Doz. Pairs	$3.48

Description—

Length of joint, 1¼ in.
Width open, 3 in.
One Doz. Pairs in Box

No. 1417	Doz. Pairs	$11.34
No. 1417D2	Doz. Pairs	$11.34

Description—

Length of joint, 1¾ in.
Width open, 4 3/32 in.
½-Doz. Pairs in Box

No. 1409F, 7/16 in. offset	Doz. Pairs	$12.40
No. 1409D2, 7/16 in. offset	Doz. Pairs	$12.40

Description—

Length of joint, 1¾ in.
Width open, 4½ in.
½-Doz. Pairs in Box

No. 1432F, Half Surface	Doz. Pairs	$2.64
No. 1432D2, Half Surface	Doz. Pairs	$2.64
No. 1432SF4 Half Surface	Doz. Pairs	$3.80
No. 1432N Half Surface	Doz. Pairs	$4.04

Description—

Length of joint, 1¼ in.
Width when open, 2¼ in.
One Doz. Pairs in Box

SHOW CASE SPRING HINGES

No. 161, Brass Plated	Doz. Pairs	$5.56
No. 161, Nickel Plated	Doz. Pairs	$6.20

One Doz Pairs in Box
2 in. x 1¾ in.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

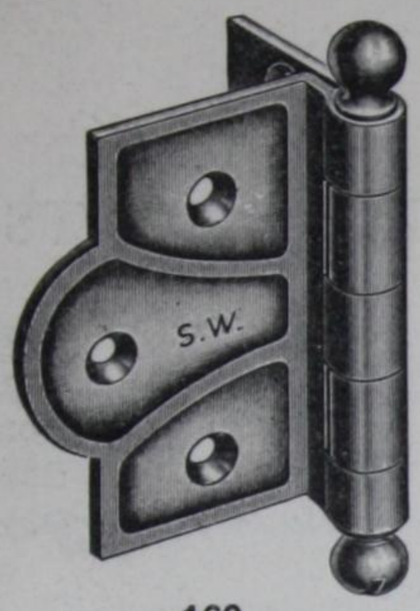

160

HALF SURFACE BUTTS

	3 in.	3½ in.	4 in.
No. 160F	.82	.80	$1.04 Pair
No. 160D2	.82	.80	$1.04 Pair
No. 160N	$1.02	$1.08	$1.24 Pair

Wrought Steel Loose Pin

One Pair in Box

BALL BEARING BUTTS (Loose Pin)

	4 x 4 in.	4½ x 4½ in.	5 x 5 in.	6 x 6 in.
No. BB241F	$2.10	$2.74	$3.86	$5.86 Pair
No. BB241D2	$2.10	$2.74	$3.86	$5.86 Pair
No. BB241H	$2.20	$2.68	$3.94	$6.14 Pair
No. BB241SF4	$2.20	$2.86	$3.94	$6.14 Pair
No. BB241N	$2.48	$3.14	$4.22	

Wrought Steel Loose Pin

One Pair in Box

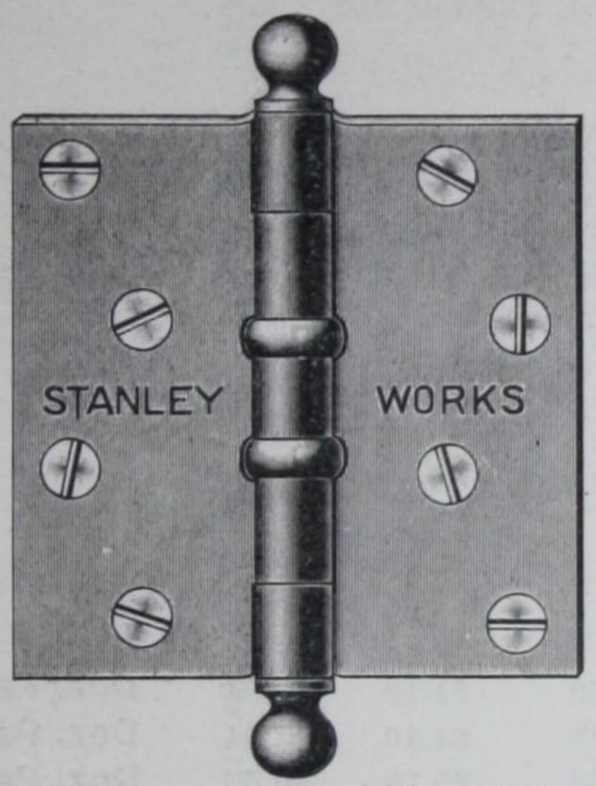

BB241 Planished BB241½ Polished

	4 in.	4½ in.	5 in.	6 in.
No. BB241½F	$2.74	$3.38	$4.48	$6.90 Pair

BUTTS

	2½ x 2½	3 x 3	3½ x 3½	4 x 4	4½ x 4½	5 x 5	6 x 6
No. 241F	$ .42	.42	.44	.60	1.22	2.00	2.10 Pair
No. 241D2	.42	.42	.44	.60	1.22	2.00	2.10 Pair
No. 241H	.64	.68	.68	.84	1.64	2.56	4.34 Pair
No. 241SF4	.64	.68	.68	.84	1.64	2.56	4.34 Pair
No. 241N	.68	.76	.80	.96	1.84	2.66	4.64 Pair

Wrought Steel Loose Pin

One Pair in Box

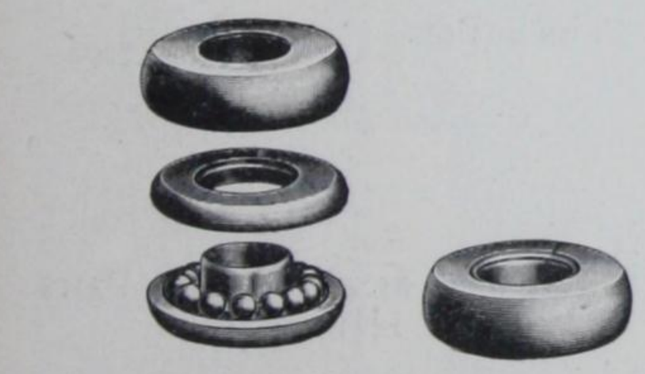

Cut of Washer taken apart to show construction

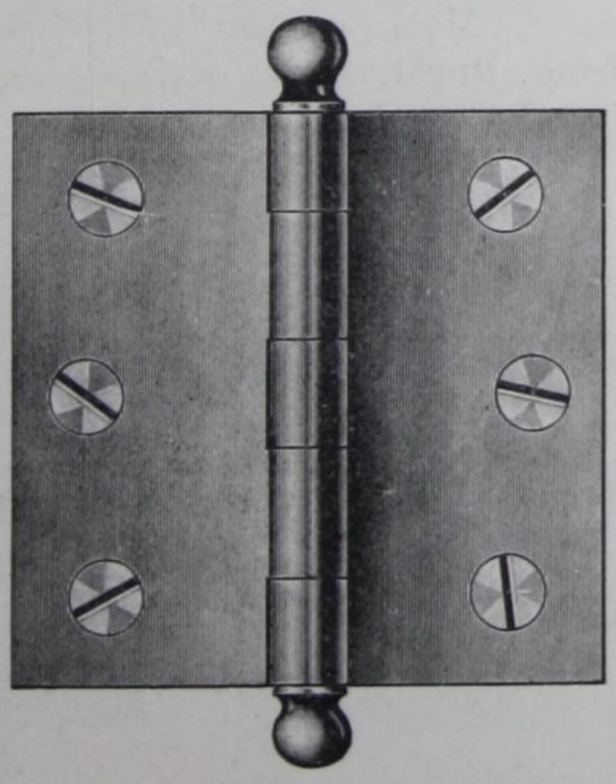

241 Planished 241½ Polished

	3 x 3 in.	3½ x 3½ in.	4 x 4 in.	4½ x 4½ in.	5 x 5
No. 241½F	$1.56	$1.70	$2.02	$2.62	$3.76 Pair
No. 241½N	$1.68	$2.74	$4.70		

Wrought Steel Loose Pin

One Pair in Box

Butts 241½ are more highly finished than 241, in that all unevenness is ground out of the surface and they are polished.

To prevent warping and doors getting out of alignment, use 1½ pair butts.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

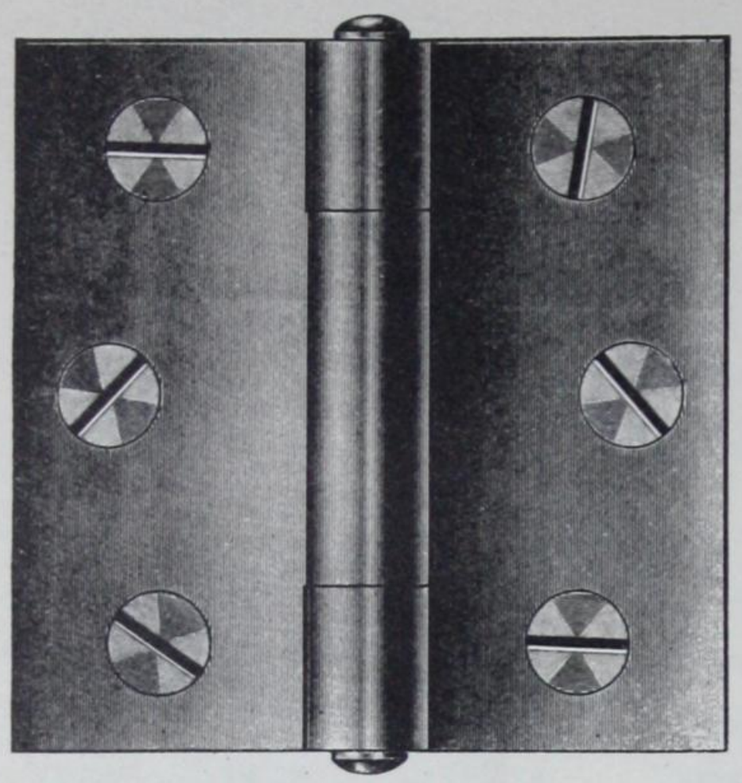

291-808

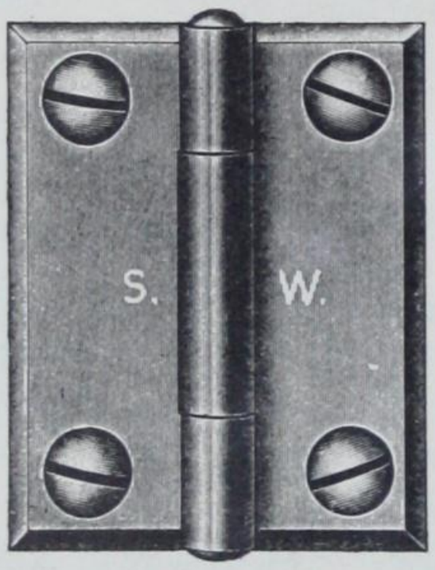

284

800

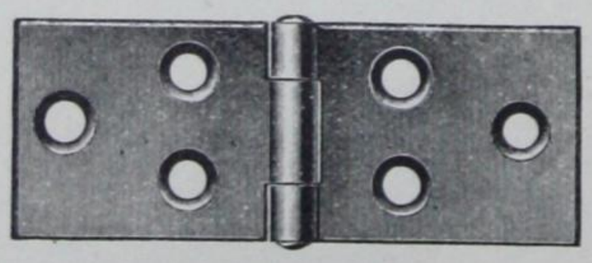

814

WROUGHT STEEL BUTTS

	2½ x 2½ in.	3 x 3 in.	
No. 291F	$5.78	$6.50	Doz. Pairs
No. 291D2	$5.78	$6.50	Doz. Pairs
No. 291H	$7.88	$8.60	Doz. Pairs
No. 291SF4	$7.88	$8.60	Doz. Pairs
No. 291N	$8.40	$10.08	Doz. Pairs

Fast Pin

½-Doz. Pairs in Box

No. 808	2½ x 2½ in.	3 x 3 in.	3½ x 3½ in.	4 x 4 in.	
	$2.40	$2.90	$4.20	$5.40	Doz. Pairs

Fast Pin. Bright Steel

2½ x 2½ in., 3 x 3 in. One Doz. Pairs in Box.

3½ x 3½ in., 4 x 4 in. ½ Doz. Pairs in Box

	1½ in.	2 in.	2½ in.	3 in.	
No. 284F	$3.06	$3.58	$4.10	$4.94	Doz. Pairs
No. 284D2	$3.06	$3.58	$4.10	$4.94	Doz. Pairs
No. 284N	$4.62	$5.14	$5.78	$6.50	Doz. Pairs
Width open	1 7/16 in.	1 9/16 in.	1 11/16 in.	2 in.	

One Doz. Pairs in Box.

	1 in.	1¼ in.	1½ in.	2 in.	
No. 800	.56	.68	.84	$1.26	Doz. Pairs
Width open	1 3/16 in.	1 5/16 in.	1 7/16 in.	1 11/16 in.	

	2½ in.	3 in.	3½ in.	4 in.	
	$1.48	$2.10	$3.16	$4.20	Doz. Pairs
Width open	1⅞ in.	2⅛ in.	2½ in.	2⅞ in.	

Narrow. Bright.

One Doz. Pairs in Box

WROUGHT STEEL BACK FLAPS

No. 814	1 in.	1¼ in.	1½ in.	1¾ in.	2 in.	
	$1.16	$1.48	$1.80	$2.10	$2.42	Doz. Pairs
Width open	2⅞ in.	3 3/16 in.	3 7/16 in.	4 in.	4⅜ in.	

Bright

One Doz. Pairs in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

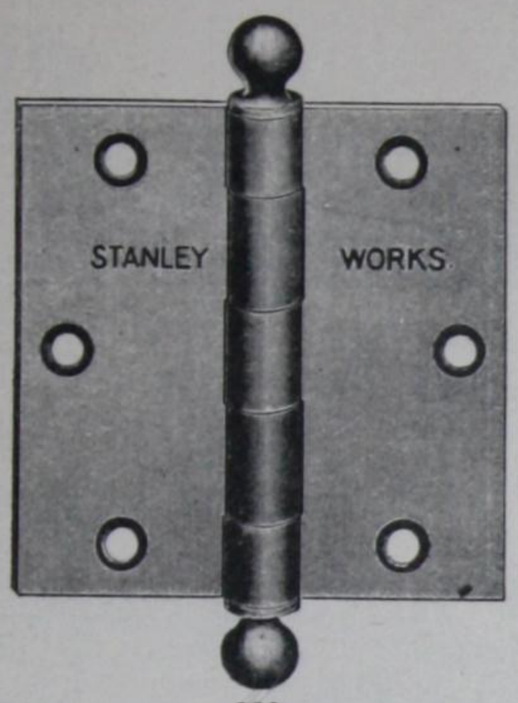

289

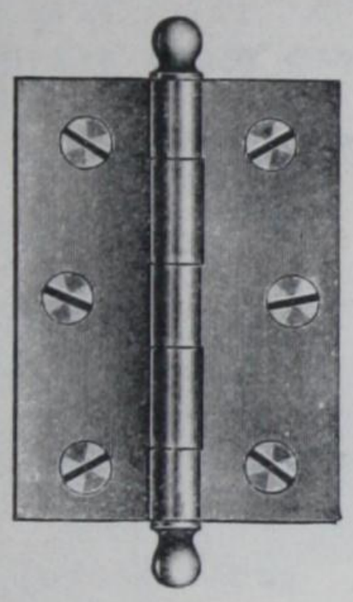
295

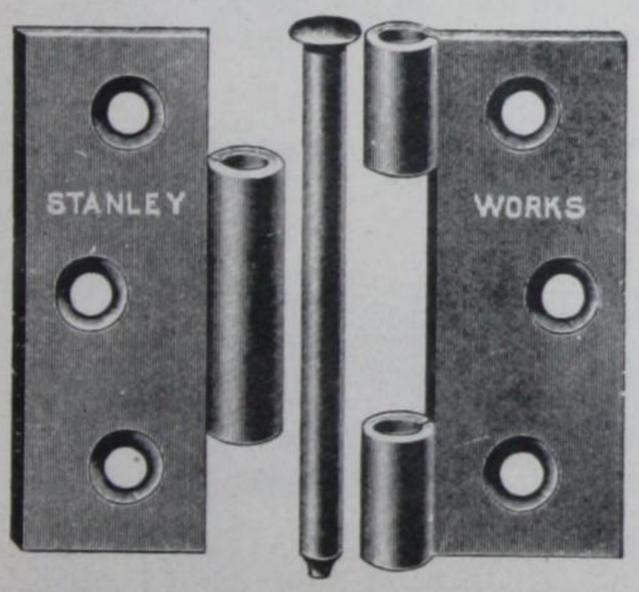

804

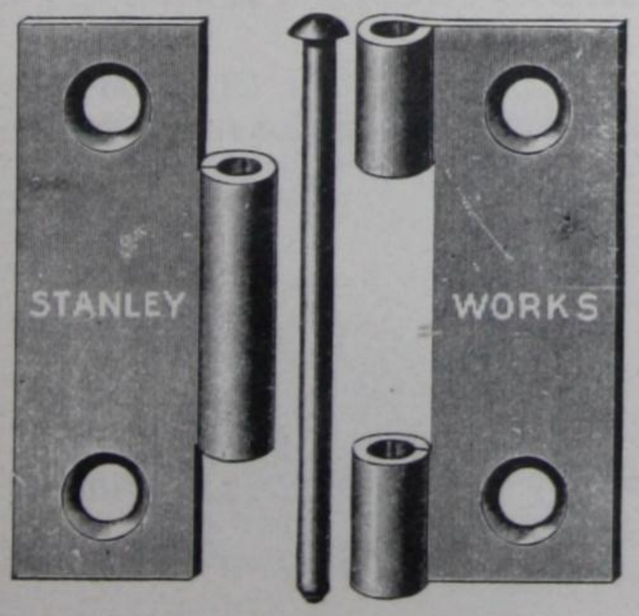

840

BUTTS

LIGHT LOOSE PIN

		Doz. Prs.		Doz. Prs
No. 289F	2½ x 2½ in.	$4.70	3 x 3 in.	$6.00
No. 289D2	2½ x 2½ in.	$4.70	3 x 3 in.	$6.00
No. 289H	2½ x 2½ in.	$6.80	3 x 3 in.	$8.10
No. 289SF4	2½ x 2½ in.	$6.80	3 x 3 in.	$8.10
No. 289N	2½ x 2½ in.	$6.40	3 x 3 in.	$7.90

Butts No. 289 are much lighter than No. 241 and especially suitable for casement windows.

½ Doz. Prs. in Box

LIGHT NARROW LOOSE PIN

	Doz. Prs.	Doz. Prs	Doz. Prs.	Doz. Prs.
No. 295F	1½ in. $3.06	2 in. $3.48	2½ in. $4.20	3 in. $5.36
No. 295D2	1½ in. $3.06	2 in. $3.48	2½ in $4.20	3 in. $5.36
No. 295H	1½ in. $3.88	2 in. $4.40	2½ in. $5.04	3 in. $6.20
No. 295SF4	1½ in. $3.88	2 in. $4.40	2½ in. $5.04	3 in. $6.20
No. 295N	1½ in $4.84	2 in. $5.26	2½ in. $5.88	3 in. $7.14

½ Doz. Prs. in Box

No. 804	2 x 2 in.	2½ x 2½ in.	3 x 3 in.	3½ x 3½ in.	4 x 4 in.	4½ x 4½ in.
Size of Screw	7	8	9	10	10	11
Doz. Prs.	$1.00	$1.32	$1.84	$2.80	$3.68	$5.04

2 x 2 in., 2½ x 2½ in., 3 x 3 in.: 1 Doz. Prs in Box

3½ x 3½ in., 4 x 4 in., 4½ x 4½ in.: ½ Doz. Prs in Box

No. 840	1½ in.	2 in.	2½ in.	3 in.
Size of Screw	5	6	6	7
Doz. Prs.	.84	$1.06	$1.26	$2.10

1 Doz. Prs in Box

Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

900

LIGHT STRAP HINGES 900

WROUGHT STEEL

	3 in.	4 in.	5 in.	6 in.	8 in.
Doz. Pairs.....	**$1.36**	**$1.68**	**$2.10**	**$2.64**	**$4.20**
Weight Doz. Pairs	2½ lbs.	3 lbs.	5 lbs.	9 lbs.	11 lbs.

¼-Doz. Pairs in Bundle

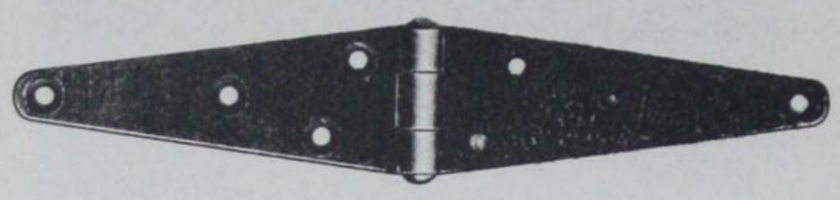

209

HEAVY STRAP HINGES 209

WROUGHT STEEL

	4 in.	5 in.	6 in.	8 in.	10 in.	12 in.	14 in.
Doz. Pairs	**$3.60**	**$4.00**	**$4.80**	**$6.60**	**$11.50**	**$14.70**	**$22.36**
Weight Doz. Pairs	16 lbs.	20 lbs.	23 lbs.	33 lbs.	60 lbs.	70 lbs.	75 lbs.

¼-Doz. Pairs in Bundle

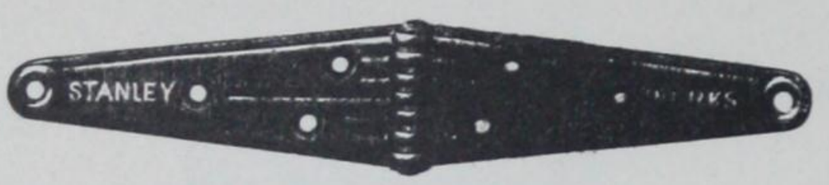

935

CORRUGATED STRAP HINGES 935

WROUGHT STEEL

	4 in.	5 in.	6 in.	8 in.	10 in.	12 in.
Doz. Pairs	**$2.74**	**$3.80**	**$4.94**	**$8.20**	**$12.92**	**$20.50**
Weight Doz. Pairs	5 lbs.	8 lbs.	15 lbs.	25 lbs.	38 lbs.	60 lbs.

¼-Doz. Pairs in Bundle

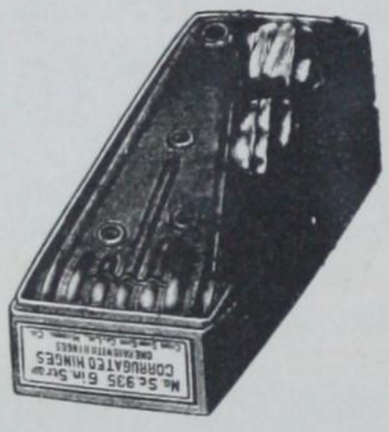

Sc.935

CORRUGATED STRAP HINGES Sc.935

WROUGHT STEEL

	4 in.	5 in.	6 in.	8 in.	10 in.
Doz. Pairs.....	**$3.90**	**$5.14**	**$6.62**	**$9.90**	**$15.20**
Weight Doz. Pairs..	0 lbs.	10 lbs.	15 lbs.	29 lbs.	47 lbs.

One Pair in Carton with Screws

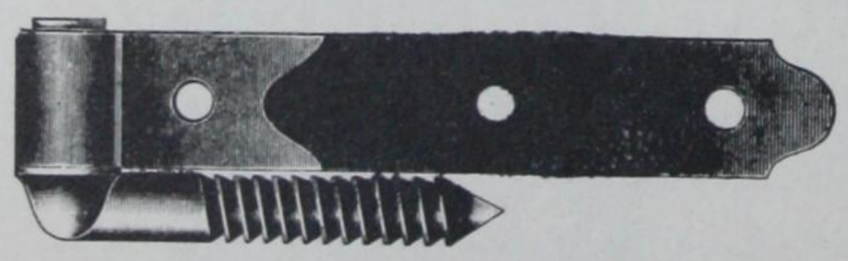

Screw Hook and Strap

SCREW HOOK and STRAP HINGES

	6 in.	8 in.	10 in.	12 in.	15 in.	18 in.	21 in.	24 in.
Doz. Pairs	**$7.70**	**$8.80**	**$12.20**	**$13.00**	**$15.60**	**$22.90**	**$24.80**	**$31.50**
Weight Doz. Pairs	30 lb.	42 lb.	48 lb.	55 lb.	70 lb.	95 lb.	115 lb.	132 lb.

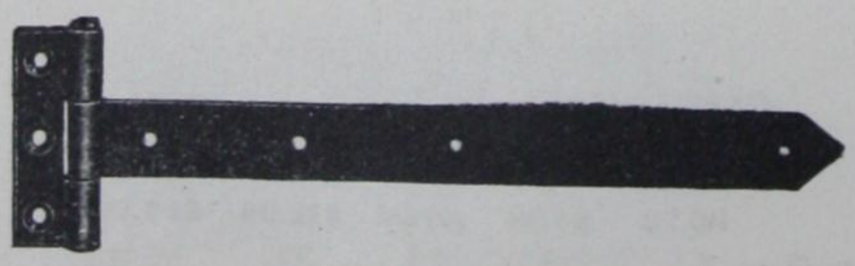

03-3

GARAGE or WAREHOUSE HINGES

No. 03-3 x 18in..... Pair **$5.20**

Pintel's Malleable Iron 7 in. High, 2¼ in. Wide

Hinge Straps Steel $\frac{5}{16}$ x 2½ in.

Weight Per Pair, 14 lbs.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

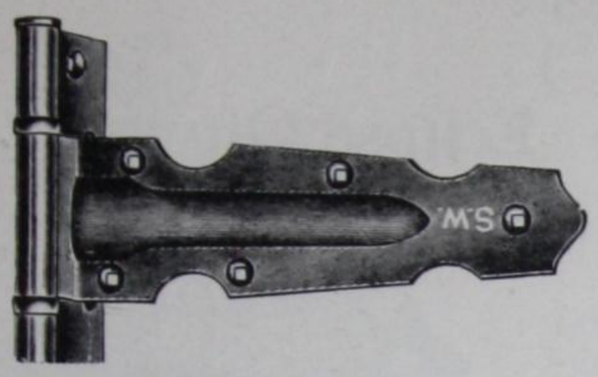

1457 Jx10 in

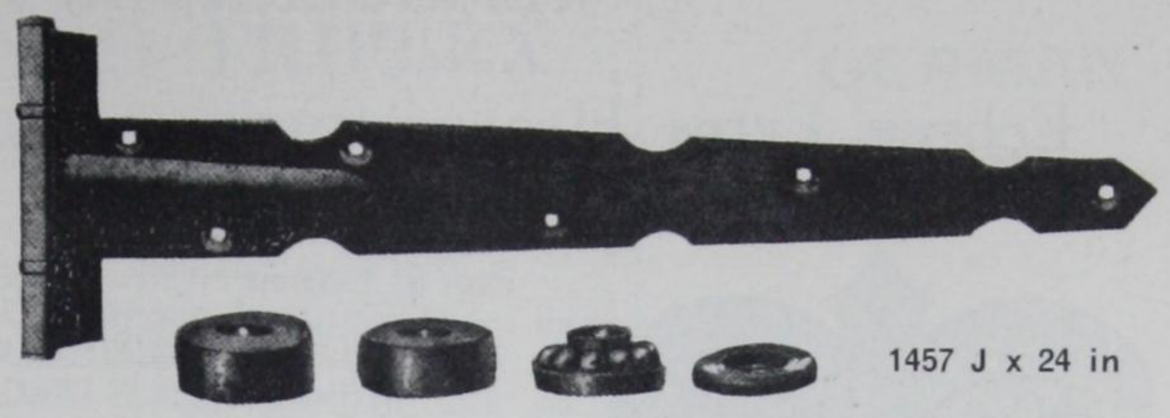

1457 J x 24 in

BALL BEARING GARAGE DOOR HINGES

WROUGHT STEEL

No. 1457J x 10 in., Japanned..... Pair $5.00
No. 1457J x 24 in., Japanned..... Pair $7.00

Dimensions of 10 in.
Length of Strap 10 in. Width of T 2¾ in.
Length of Joint 7 in. Width of Strap at Joint 3 in.
1 Pr. in Box with Screws
Screw holes are countersunk for Screws or Bolts
Dimensions of 24 in. same as 10 in. except Length of Strap is 24 in.

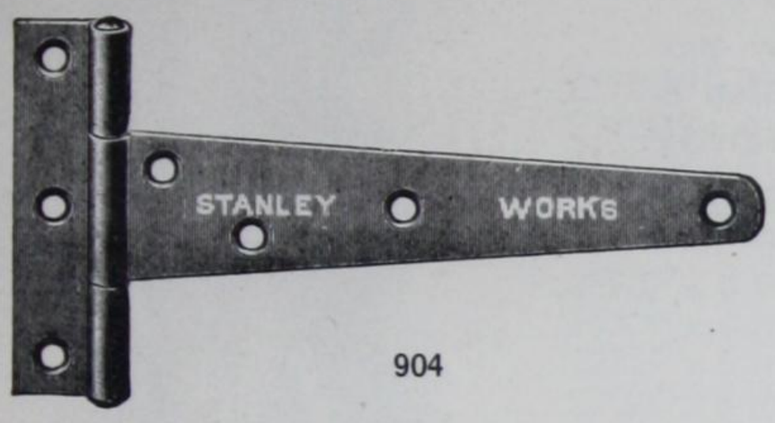

904

LIGHT TEE HINGES 904

WROUGHT STEEL

	3 in.	4 in.	5 in.	6 in.	8 in.
Doz. Prs.	$1.26	$1.38	$1.68	$2.74	$3.30
Weight Doz. Prs.	3 lbs.	4 lbs.	5 lbs.	8 lbs.	10 lbs.

¼ Doz. Prs. in Bundle

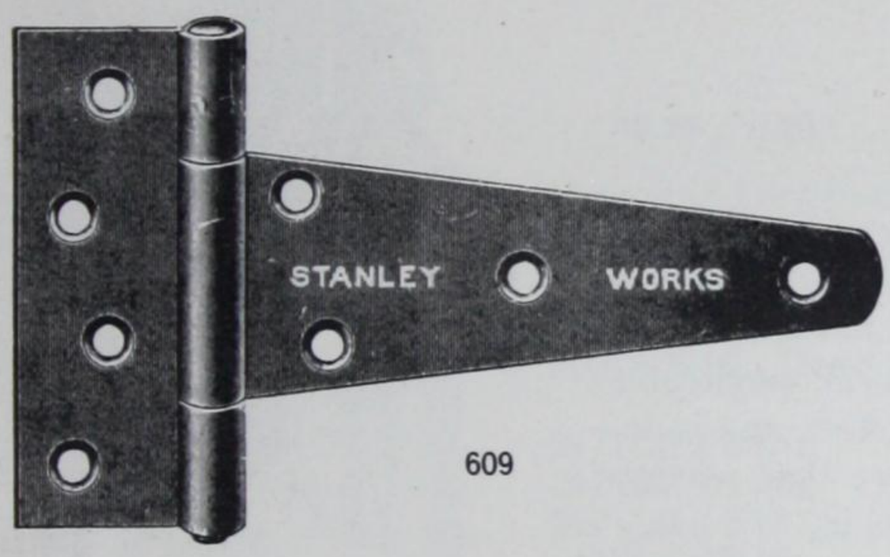

609

HEAVY TEE HINGES 609

WROUGHT STEEL

	4 in.	5 in.	6 in.	8 in.	10 in.	12 in.	14 in.
Doz. Prs.	$3.16	$3.68	$4.20	$5.56	$9.56	$12.40	$18.80
Wgt. Doz. Prs.	13	17	19	23	42	65	75 lbs.

¼ Doz. Prs. in Bundle

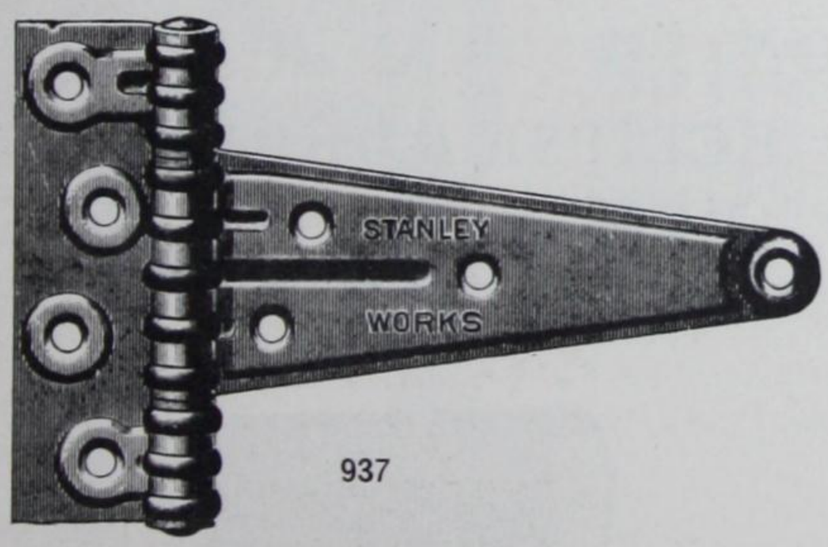

937

CORRUGATED TEE HINGES 937

WROUGHT STEEL

	4 in.	5 in.	6 in.	8 in.	10 in.	12 in.
Doz. Prs.	$3.88	$4.94	$5.50	$9.04	$14.82	$23.10
Weight Doz. Prs	6	11	17	27	40	50 lbs.

¼ Doz. Prs. in Bundle

Sc. 937

CORRUGATED TEE HINGES Sc. 937

WROUGHT STEEL

	4 in.	5 in.	6 in.	8 in.	10 in.
Doz. Prs.	$5.72	$6.20	$8.00	$12.60	$17.90
Weight Doz. Prs.	8	13	20	32	50 lbs.

1 Pr. in Carton with Screws

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

REFRIGERATOR HINGES

Eclipse Extra Heavy

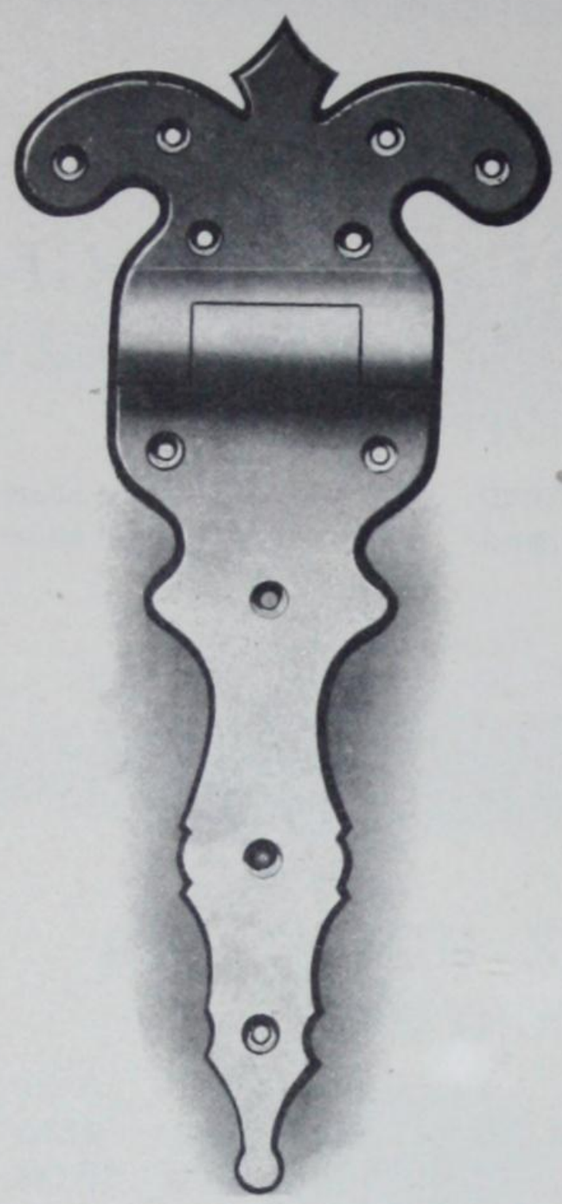

5

No. 5, Tinned..... Pair $14.90

Size 15 in. Overall
10 in. to centre of pin
Malleable Iron

Has a very heavy loose pin. Knuckle is very heavy and strap is made in such a way that it positively cannot sag. Suitable for cold storage and heavy doors where a substantial hinge is required.

Packed with screws
Weight 9 lbs. Pair

Eclipse Offset

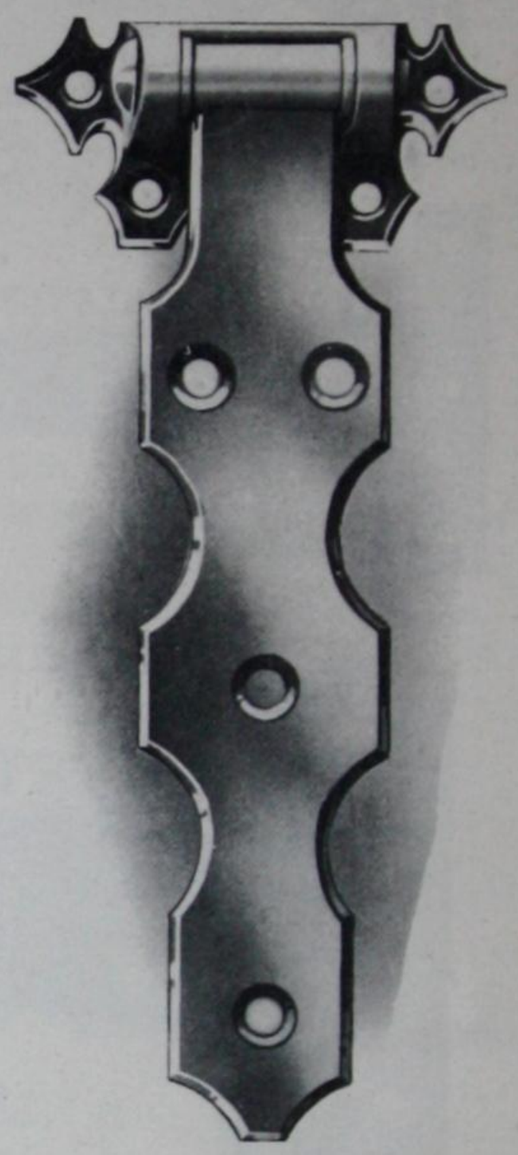

105

No. 105, Tinned..... Pair $7.00

Strap 12 x 2¼ in.
Socket 5¼ x 2½ in.
Malleable Iron
Loose Pin

This is a practical serviceable hinge with a 1⅛ in. offset, and is designed for offset doors that overlap the jamb from 1 to 1½ in.

Packed with Screws

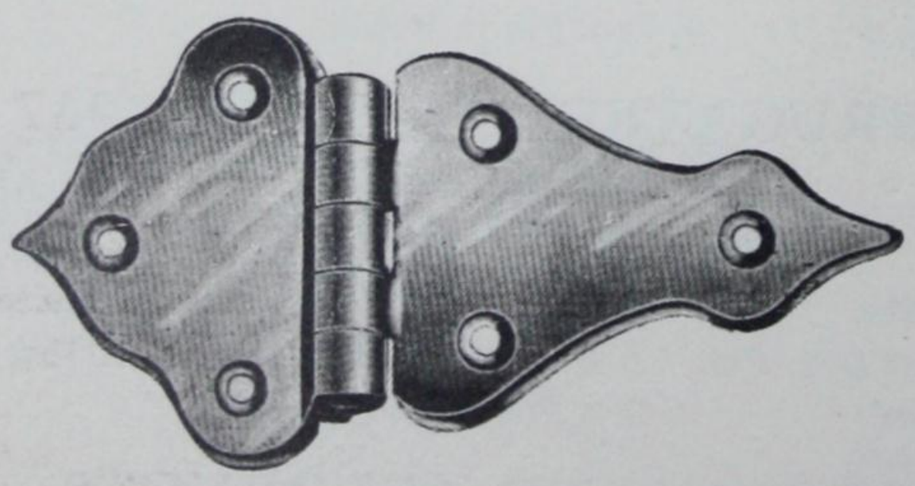

No. 531—Refrigerator Hinge—*Cast Brass*
—4 inches over all, 2½ inches wide,
⅜ Offset

No. 531 F,..... Pair $1.58

ECLIPSE RUBBER REFRIGERATOR GASKET

1-2

No. 1..... Per foot .32

For Large Doors

No. 2..... Per foot .32

For Windows

Used between refrigerator door or window and frame to insure absolutely airtight sealing.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

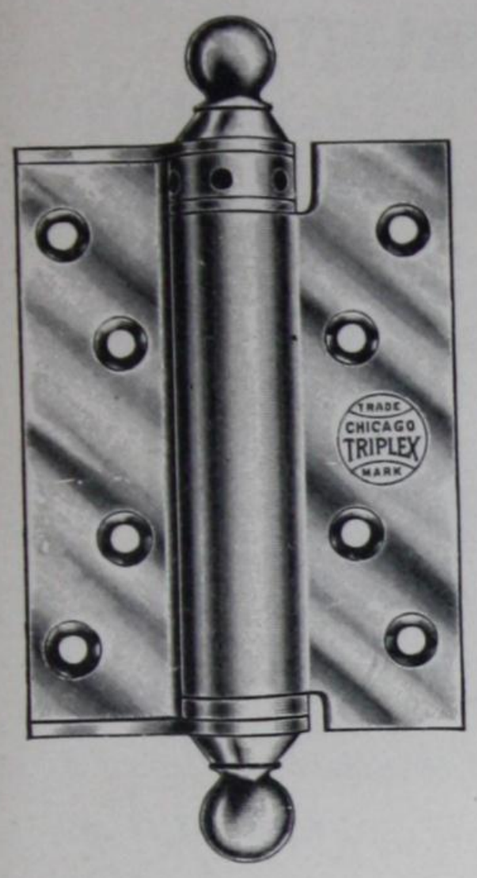

CHICAGO TRIPLEX SPRING BUTTS

SINGLE ACTING

2002 x 3 in., Dead Black Japanned Pair	$3.60
2002 x 4 in., Dead Black Japanned Pair	$4.40
2002 x 5 in., Dead Black Japanned Pair	$5.10
2002 x 6 in., Dead Black Japanned Pair	$6.10
2172D2 x 3 in. ..... Pair	$4.70
2172D2 x 4 in. ..... Pair	$5.80
2172D2 x 5 in. ..... Pair	$6.80
2172D2 x 6 in. ..... Pair	$8.60
2282F x 3 in. ..... Pair	$4.70
2282F x 4 in. ..... Pair	$5.80
2282F x 5 in. ..... Pair	$6.80
2282F x 6 in. ..... Pair	$8.50

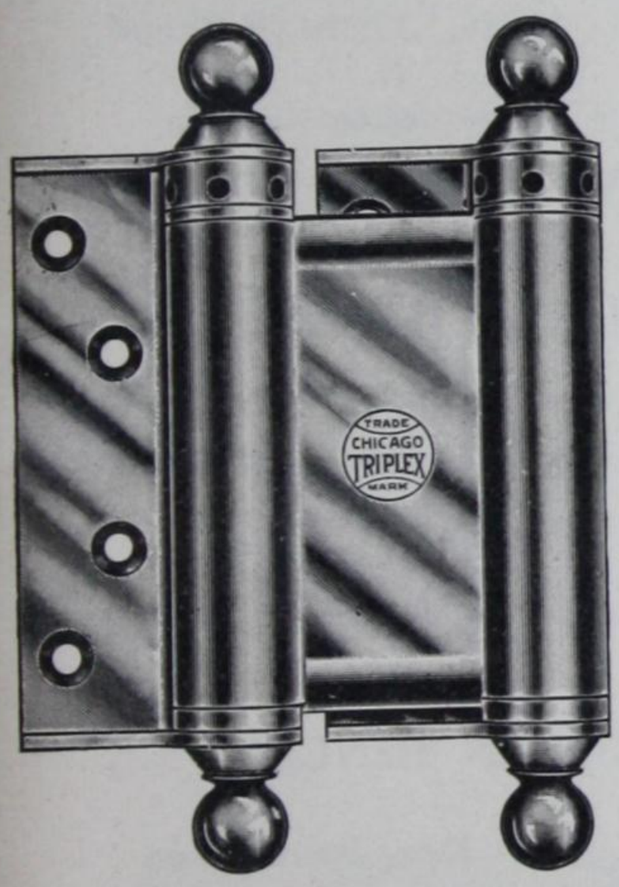

DOUBLE ACTING

2001 x 3 in., Dead Black Japanned Pair	$5.60
2001 x 4 in., Dead Black Japanned Pair	$6.70
2001 x 5 in., Dead Black Japanned Pair	$7.90
2001 x 6 in., Dead Black Japanned Pair	$9.70
2171D2 x 3 in. ..... Pair	$8.00
2171D2 x 4 in. ..... Pair	$9.70
2171D2 x 5 in. ..... Pair	$11.20
2171D2 x 6 in. ..... Pair	$14.30
2281F x 3 in. ..... Pair	$8.00
2281F x 4 in. ..... Pair	$9.70
2281F x 5 in. ..... Pair	$11.20
2281F x 6 in. ..... Pair	$14.30
2281F x 7 in. (from Factory only) .. Pair	$18.60
2281F x 8 in. „ „ „ ... Pair	$26.40

One Pair in Box

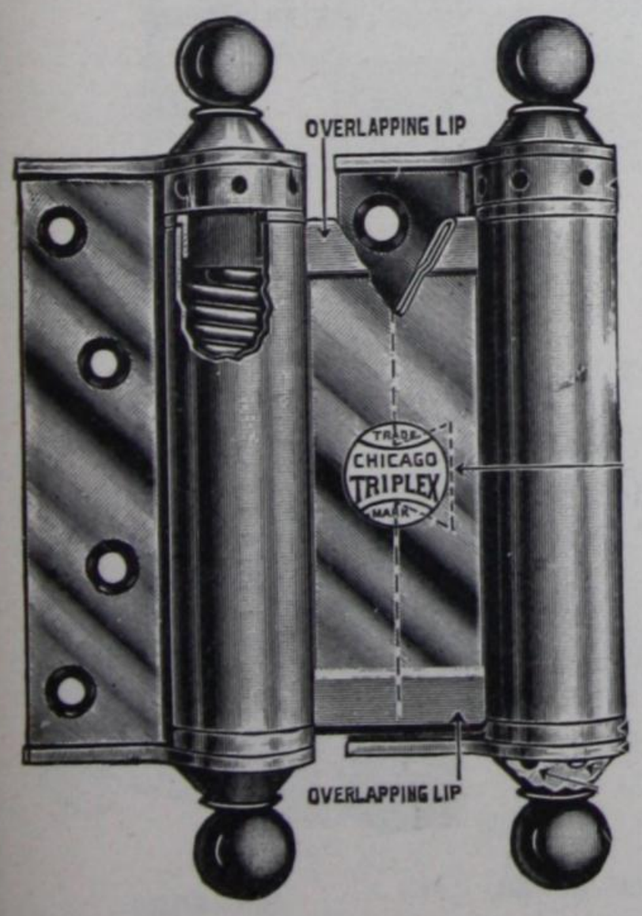

GERMAN MADE

Japanned	2001 Pattern
J29 x 3″ Pair	$2.88
J29 x 4″ Pair	3.24
J29 x 5″ Pair	4.06
J29 x 6″ Pair	5.68

Dull Brass	2281 Pattern
DB 29 x 3″ Pair	$4.50
DB 29 x 4″ Pair	4.96
DB 29 x 5″ Pair	6.48
DB 29 x 6″ Pair	8.10

SCHEDULE OF APPLICATION

DIMENSIONS

Size of Hinge	Door	Hanging Strip	DOORS			
Length of Flange	Thickness	Depth	Thick-ness	Width	Thick-ness	Width
3 in.	¾ to 1 in.	⅝ in.	¾ in. x 2 ft. 3 in. to 1		in. x 2 ft. 0 in.	
4 in.	⅞ to 1¼ in.	⅝ in.	⅞ in. x 2 ft. 6 in. to 1¼		in. x 2 ft. 0 in.	
5 in.	1⅛ to 1½ in.	⅝ in.	1⅛ in. x 2 ft. 6 in. to 1½		in. x 2 ft. 3 in.	
6 in.	1¼ to 1¾ in.	¾ in.	1¼ in. x 2 ft. 9 in. to 1¾		in. x 2 ft. 3 in.	

This schedule is for inside doors, made of soft wood, and not weighted with plate glass or heavy hardware.

For outside doors, subject to draught; heavy doors of hard wood or weighted with plate glass or hardware, we suggest the use of three hinges to a door or two of the largest hinges which the thickness of the door will allow.

A narrow, high door is much easier to swing than a wide, low door of the same weight or thickness.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

WROUGHT BRASS BUTTS



Narrow



Middle

NARROW

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.	2½ in.	3 in.
Width open	11/16 in.	23/32 in.	25/32 in.	⅞ in.	1 1/32 in.	1 13/32 in.	1⅝ in.
Size Screw.....	2	2	3	4	5	6	8
Doz. Pairs.....	**.80**	**.94**	**$1.36**	**$1.52**	**$2.34**	**$4.20**	**$7.30**

One Doz. Pairs in Box.

MIDDLE

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.	2½ in.	3 in.
Width open.....	¾ in.	27/32 in.	⅞ in.	1 in.	1 3/16 in.	1 9/16 in.	1 25/32 in.
Size Screw.....	2	3	4	4	5	6	8
Doz. Pairs.....	**.86**	**$1.12**	**$1.40**	**$1.75**	**$2.70**	**$5.00**	**$8.80**

One Doz. Pairs in Box.

BROAD

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.	2½ in.	3 in.
Width open.....	15/16 in.	1 in.	1 1/32 in.	1¼ in.	1⅜ in.	1¾ in.	1 29/32 in.
Size Screw.....	3	3	4	5	5	6	8
Doz. Pairs.....	**.92**	**$1.16**	**$1.56**	**$2.00**	**$3.04**	**$5.90**	**$10.30**

One Doz. Pairs in Box.



Broad

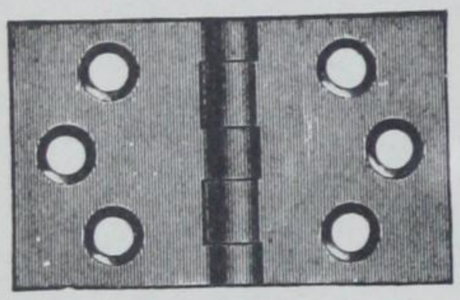

Desk

DESK HINGES WROUGHT BRASS

	1 in.	1¼ in.	1½ in.
Width open.....	1⅝ in.	1⅞ in.	2⅛ in.
Size Screw.....	4	4	5
Doz. Pairs.....	**$1.66**	**$2.30**	**$3.24**

One Doz. Pairs in Box.

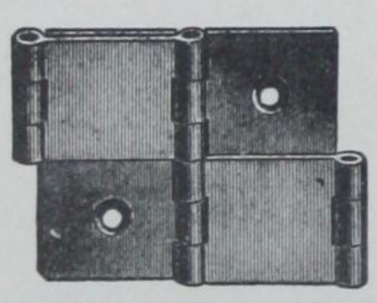

875

DOUBLE ACTING FOLDING SCREEN HINGES

No. 875 x ¾ in., Wrought Steel, Brass Plated..... **Doz. Pairs $6.80**
Length of Joint, 1¾ in. Width closed, ¾ in.
No. 875 x 1¼ in., Wrought Steel, Brass Plated..... **Doz. Pairs $9.00**
Length of Joint, 2 in. Width closed, 1¼ in.
One Doz. Pairs in Box.

Wrought Steel Kitchen Cabinet Hinges

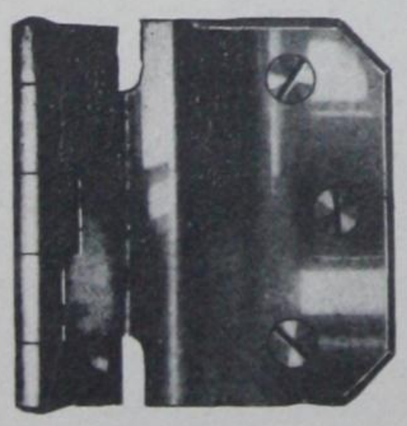

No 64 Two-thirds full size

No. 64 Wrought Steel—Polished and Plated.

⅜" offset for lipped doors

Doz. Prs. $6.40

No. 3028 Wrought Brass—⅜" Offset

Doz. Prs. $3.20

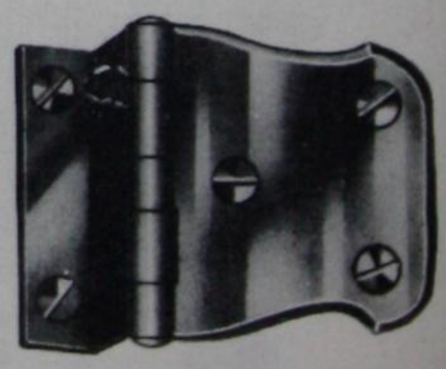

No. 3028

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

GLOCKLER REFRIGERATOR DOOR FASTENERS

Malleable Iron, Tinned

Malleable Iron Tinned

No. 1, 14 inch..... Each **$6.60**
No. 2, 11 inch..... Each **$4.40**
No. 3, 8½ inch..... Each **$2.20**

This fastener is easy to operate. In closing the door, turn the lever inside the keeper and press down on the handle.

To open the door, turn the handle around until the lever comes outside the keeper, then lift on the handle which will force the door open with little effort, no matter how tightly sealed.

REVERSIBLE

REFRIGERATOR DOOR FASTENERS

STRATFORD

Cast Brass; Polished Finish; Lever Catch; Reversible for Right and Left Hand Doors; Suitable for Flush or Offset Doors.

Per Doz. Prs.

No. 1033—Length Over-all 4 in.; Width 2 in..... **$11.10**

One Dozen in Box
Weight 4½ lbs. Dozen

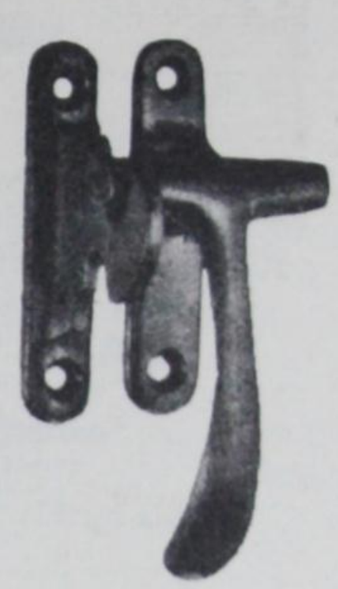

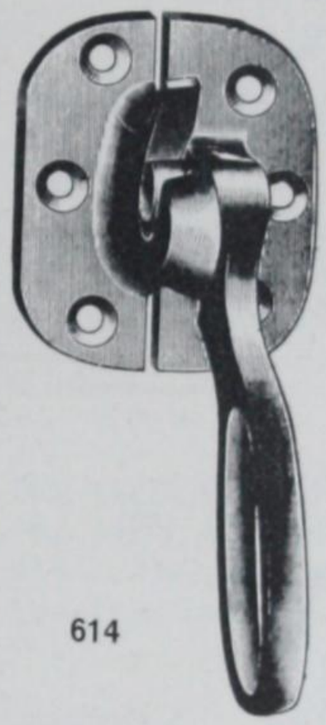

614

No. 614F, Cast Brass Doz. **$18.70**

Size 5 in.
Length of Lever 4 in.
½ Doz. in Box

No. 614N Doz. **$22.00**

REFRIGERATOR LATCHES

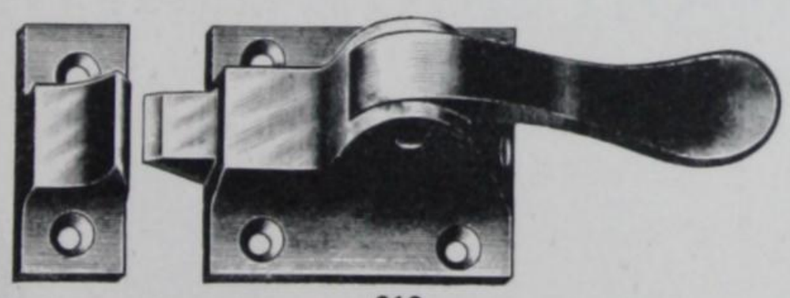

610

No. 610F, Cast Brass..... Doz. **$19.90**

No. 610N Cast Brass..... Doz. **$23.40**

1⅝ x 2½ in.
1 Doz. in Box

CHEST HINGES

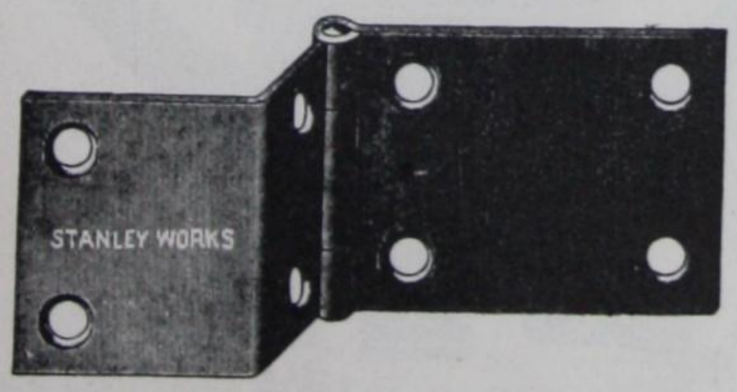

820

No. 820 x 1½ in., Wrought Steel..... Doz. Pairs **$2.80**

No. 820 x 2 in., Wrought Steel..... Doz. Pairs **$4.00**

¾ in. Offset

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SIDE HOOKS AND EYES

3327

3327 x 1½ in., Wrought Brass. Doz. .70
Three Doz. in Box

GATE HOOKS AND EYES

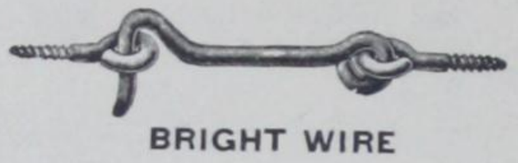

BRIGHT WIRE

Length (inches)	1½	2	2½	3
No. of Eye	A6	A7	A8	A9
Gross	$2.34	$2.88	$3.60	$4.32
Length (inches).	3½	4	5	6
No. of Eye.	A10	A11	A13	A13
Gross	$5.22	$6.12	$8.64	$10.80

1½, 2 and 2½ in., One Gross in Box.
Balance ½ Gross in Box.

SCREW HOOKS



BRIGHT WIRE, ROUND

Size Nos.	M3	M7	M11	M12	M18
Length, in.	1½	2	3	3¼	4½
Diam. Hook, in.	5/16	3/8	5/8	13/16	1 1/32
Weight Gross, lbs.	½	5	5	6	17
Per Gross	.90	$1.30	$2.30	$2.30	$6.00

CABIN HOOKS

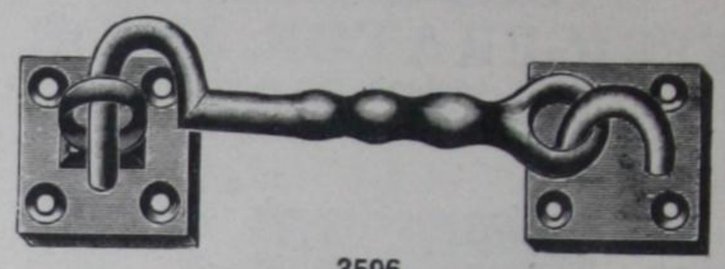

3596

3596 x 3 in., Wrought Brass. . Doz. $4.60
3596 x 4 in., Wrought Brass. . Doz. $6.00
3596 x 5 in., Wrought Brass. . Doz. $8.00

GATE HOOKS AND EYES

BRASS WIRE

Size	6 in.	Per Dozen
		$4.00

SCREW EYES

BRIGHT WIRE

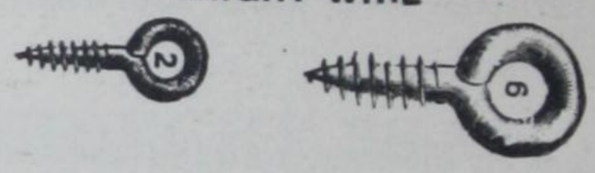

	Suite A—Size No. 2			Suite A—Size No. 6					
Size Nos.	A2	A3	A4	A6	A7	A8	A9	A11	A13
Per Gross	.60	.60	.60	.80	.80	1.00	1.10	1.50	2.40

HALL RACK HOOKS

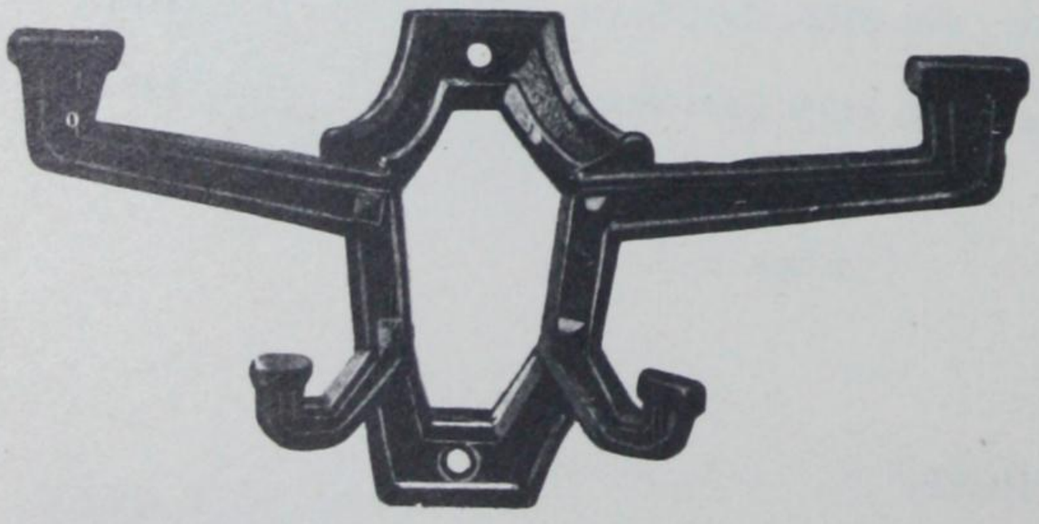

45

No. 45 x 9C, Cast Iron. . . . . Doz. $6.00
Projection 3 in.
Width Overall 7 in.

No. 57 x 9C, Cast Brass. . . . Doz. $34.40
Projection 3½ in.
Width Overall 7 in.

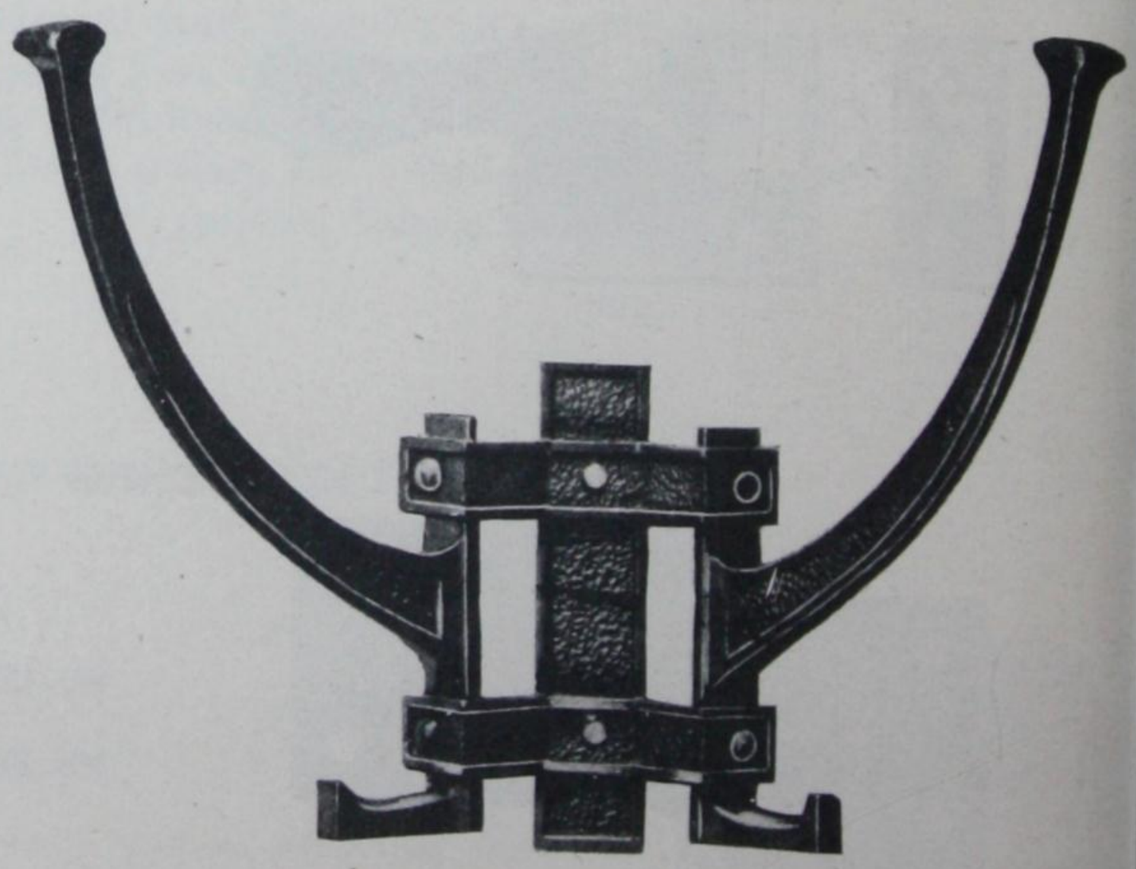

57

CEILING HOOKS

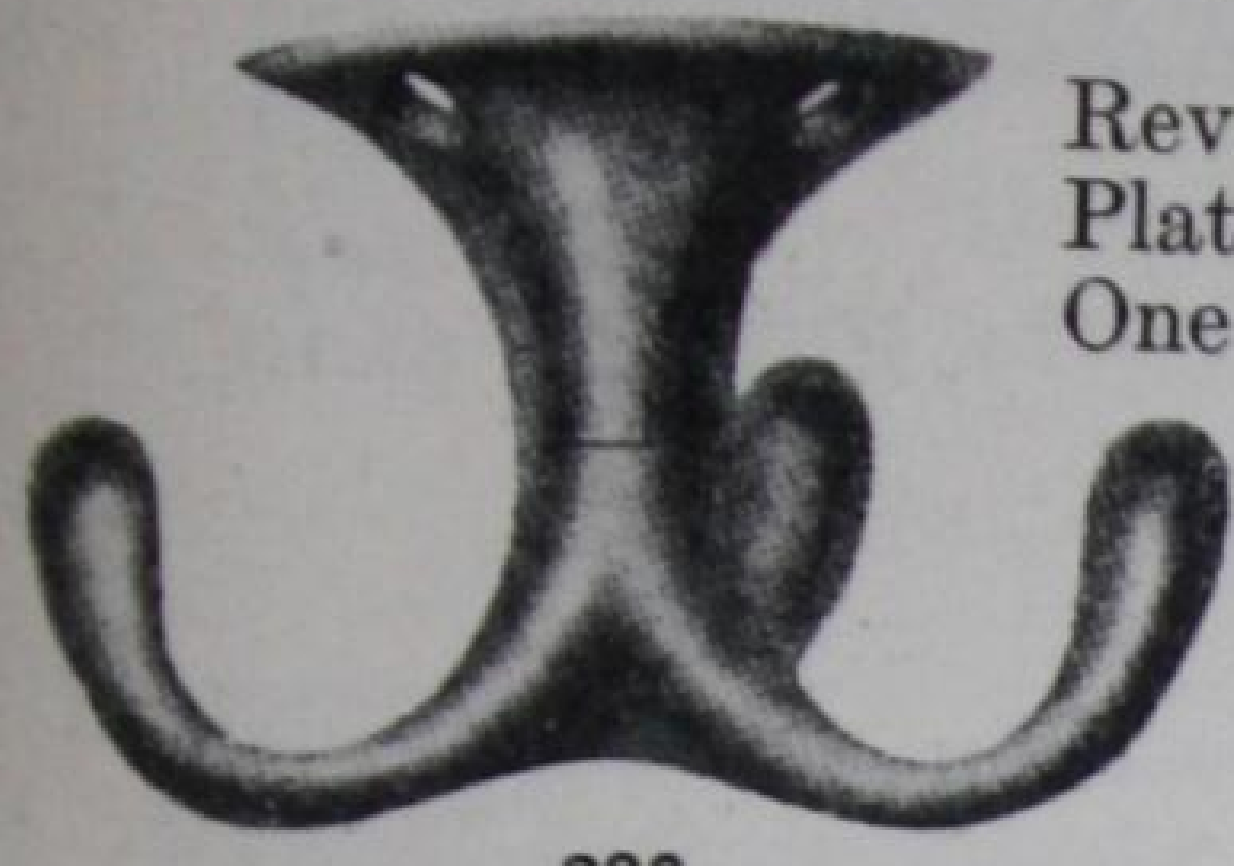

Revolving
Plate 2 in. Diameter, $2\frac{1}{4}$ in. Drop
One Doz. in Box

No. 206F, Cast Iron.

Doz. $4.00

206

Drop $2\frac{3}{8}$ in.
Two Doz. in Box

No. 659F, Cast Iron.

Doz. $1.40

659

125

$3\frac{1}{4}$ in. Wide. $2\frac{1}{4}$ in. Drop
$\frac{1}{2}$ Gross in Box

No. 125, Coppered Steel Wire

Gross $5.10

HAT AND COAT HOOKS

3 in. Projection
$\frac{1}{2}$ Gross in Box

3 Inch Coppered Steel Wire

Gross $2.40

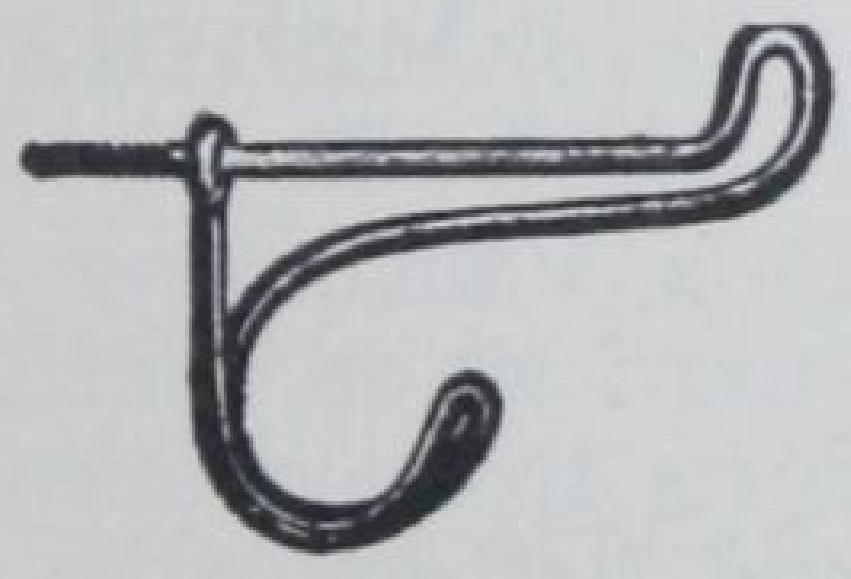

3 " Wire

WARDROBE HOOKS

203

Projection 2 in.
Two Doz. in Box

No. 203F, Cast Iron.

Doz. $1.30

$1\frac{3}{4}$ in. Projection
Two Doz. in Box

No. 59F, Cast Brass....... Doz. $4.00

No. 59N, Cast Brass....... Doz. $4.50

59

HAT AND COAT HOOKS

102 103 104

No. 102F, Cast Iron.......... Doz. $1.26
No. 102D2, Cast Iron........ Doz. $1.26
No. 102N, Cast Iron.......... Doz. $1.48
4 in. Overall. 2 $\frac{3}{4}$ in. Projection
One Doz. in Box

No. 103F, Cast Iron.......... Doz. $1.58
No. 103D2, Cast Iron........ Doz. $1.58
No. 103N, Cast Iron.......... Doz. $1.68
$4\frac{1}{2}$ in. Overall. $3\frac{3}{4}$ in. Projection
One Doz. in Box

No. 104F, Cast Iron.......... Doz. $1.90
No. 104D2, Cast Iron........ Doz. $1.90
6 in. Overall. 4 in. Projection
One Doz. in Box

No. 85 Coppered, Cast Iron....... Doz. .75
No. 86F Cast Iron...... Doz. $1.40
No. 86D2 Cast Iron..... Doz. $1.40
4 in. Overall. 4 in. Projection
Three Doz. in Box

No. 142F, Cast Brass.. Doz. $5.80
No. 142N, Cast Brass. Doz. $6.40
$4\frac{1}{2}$ in. Overall. $3\frac{1}{4}$ in. Projection
One Doz. in Box

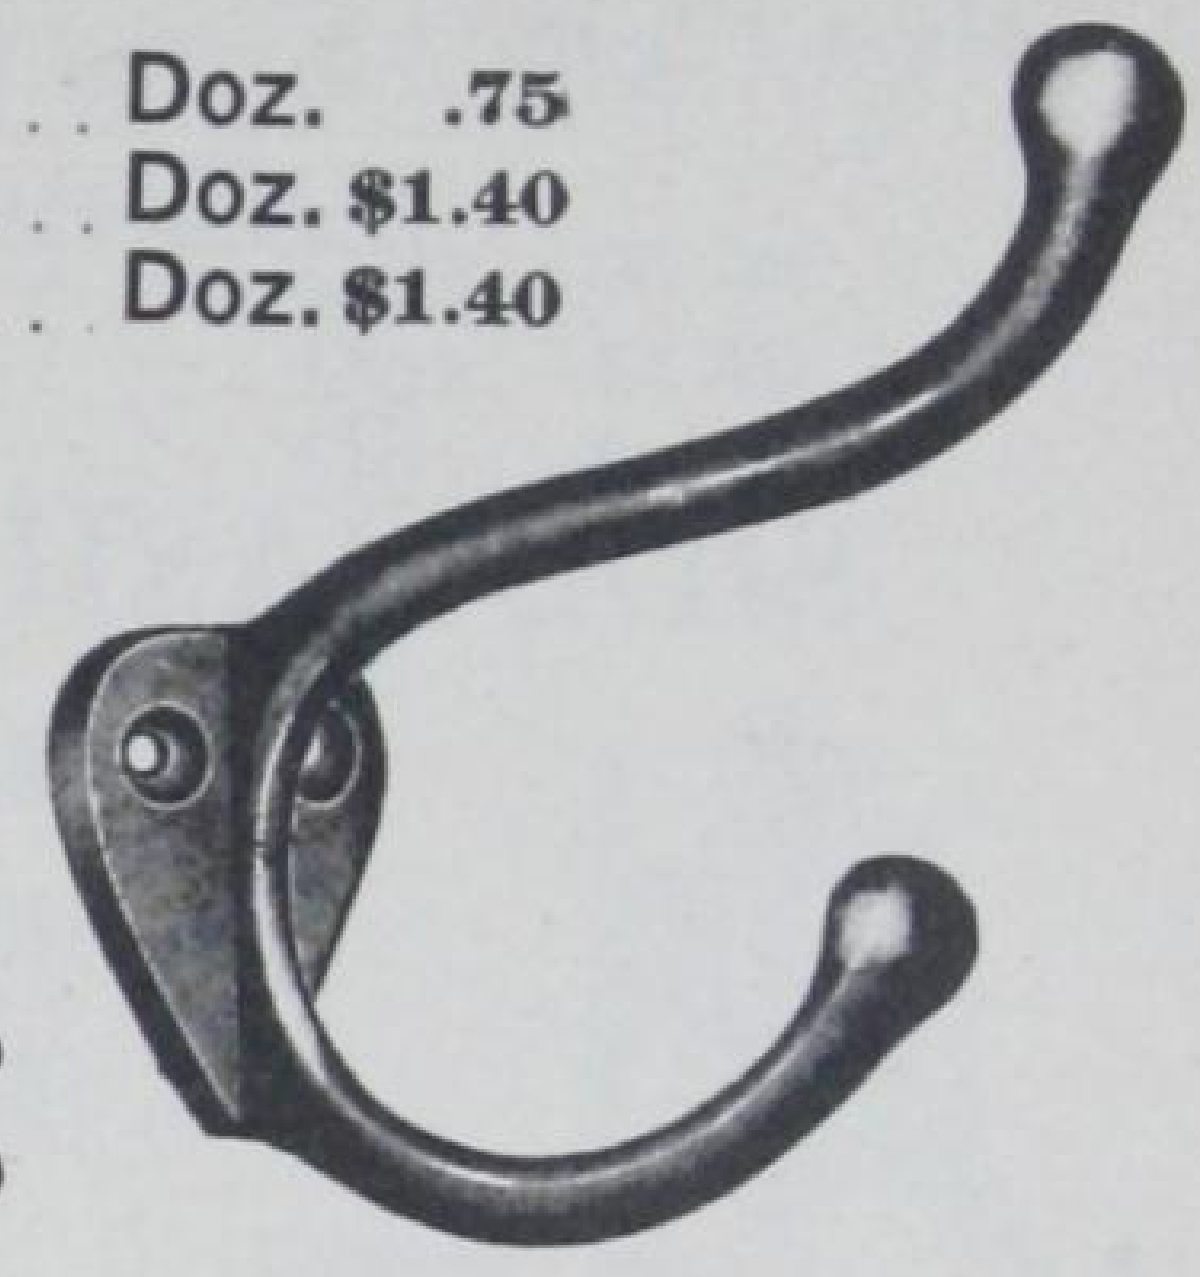

85 86 142

95 96

No. 95 Coppered, Cast Iron..... Doz. .74
No. 96F Cast Iron..... Doz. $1.26
No. 96D2 Cast Iron.... Doz. $1.26
$3\frac{1}{4}$ in. Overall. 3 in. Projection
Three Doz. in Box

No. 21 Coppered, Cast Iron

$4\frac{1}{4}$ in. Overall. 3 in. Projection
One Doz. in Box

Doz. $1.04

21

B 1116

No. B1116
Coppered, Cast Iron
3 in. Projection
$4\frac{1}{4}$ in. Overall.
One Doz. in Box

Doz. $1.78

Costumer Hook

No. 100F, Cast Iron........... Doz. $2.50

No. 100F.

SASH FASTENERS

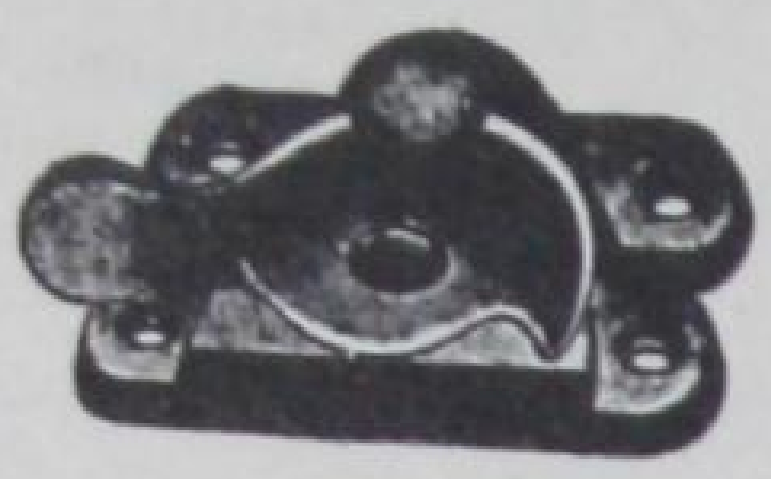

120

7120

2⅝ x 1½ in.

No. 120F, Cast Brass.....	Doz.	$9.80
No. 120SF4, Cast Brass...	Doz.	$10.70
No. 120N, Cast Brass.....	Doz.	$10.70
No. 7120F, Cast Iron.....	Doz.	$1.90
No. 7120D2, Cast Iron....	Doz.	$1.90
No. 7120SF4, Cast Iron....	Doz.	$2.20
No. 7120N, Cast Iron.....	Doz.	$2.20
No. 7120H, Cast Iron.....	Doz.	-$2.30



900

3¼ x 1¾ in.

No. 900F, Wrought Steel.	Doz.	$5.80
No. 900D2, Wrought Steel	Doz.	$5.80
No. 900N, Wrought Steel.	Doz.	$6.80
No. 900H, Wrought Steel.	Doz.	$5.80

For Public Buildings and Factories

One Doz. in Box. **From Factory only**

SIDE SASH FASTENERS

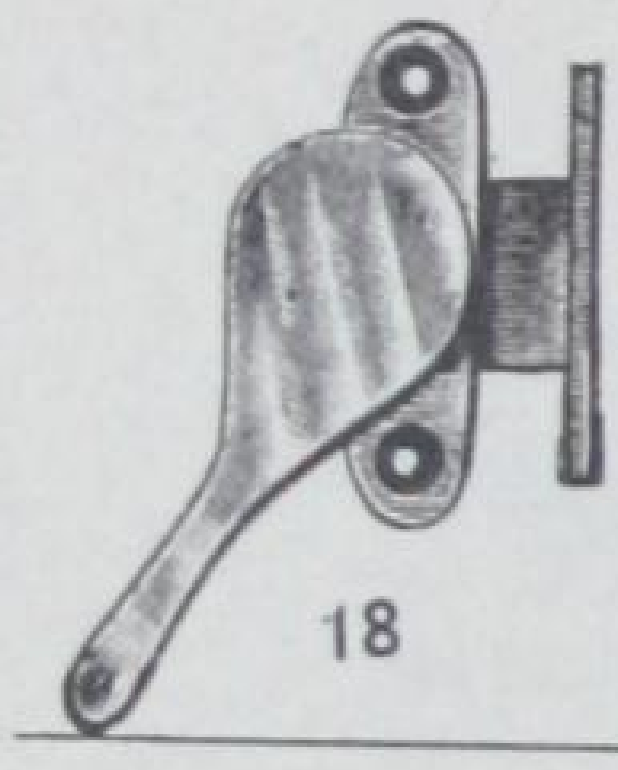

18

No. 18F, Malleable Iron..	Doz.	$2.10
No. 18D2, Malleable Iron.	Doz.	$2.10
No. 18N, Malleable Iron..	Doz.	$2.30

One Doz. in Box

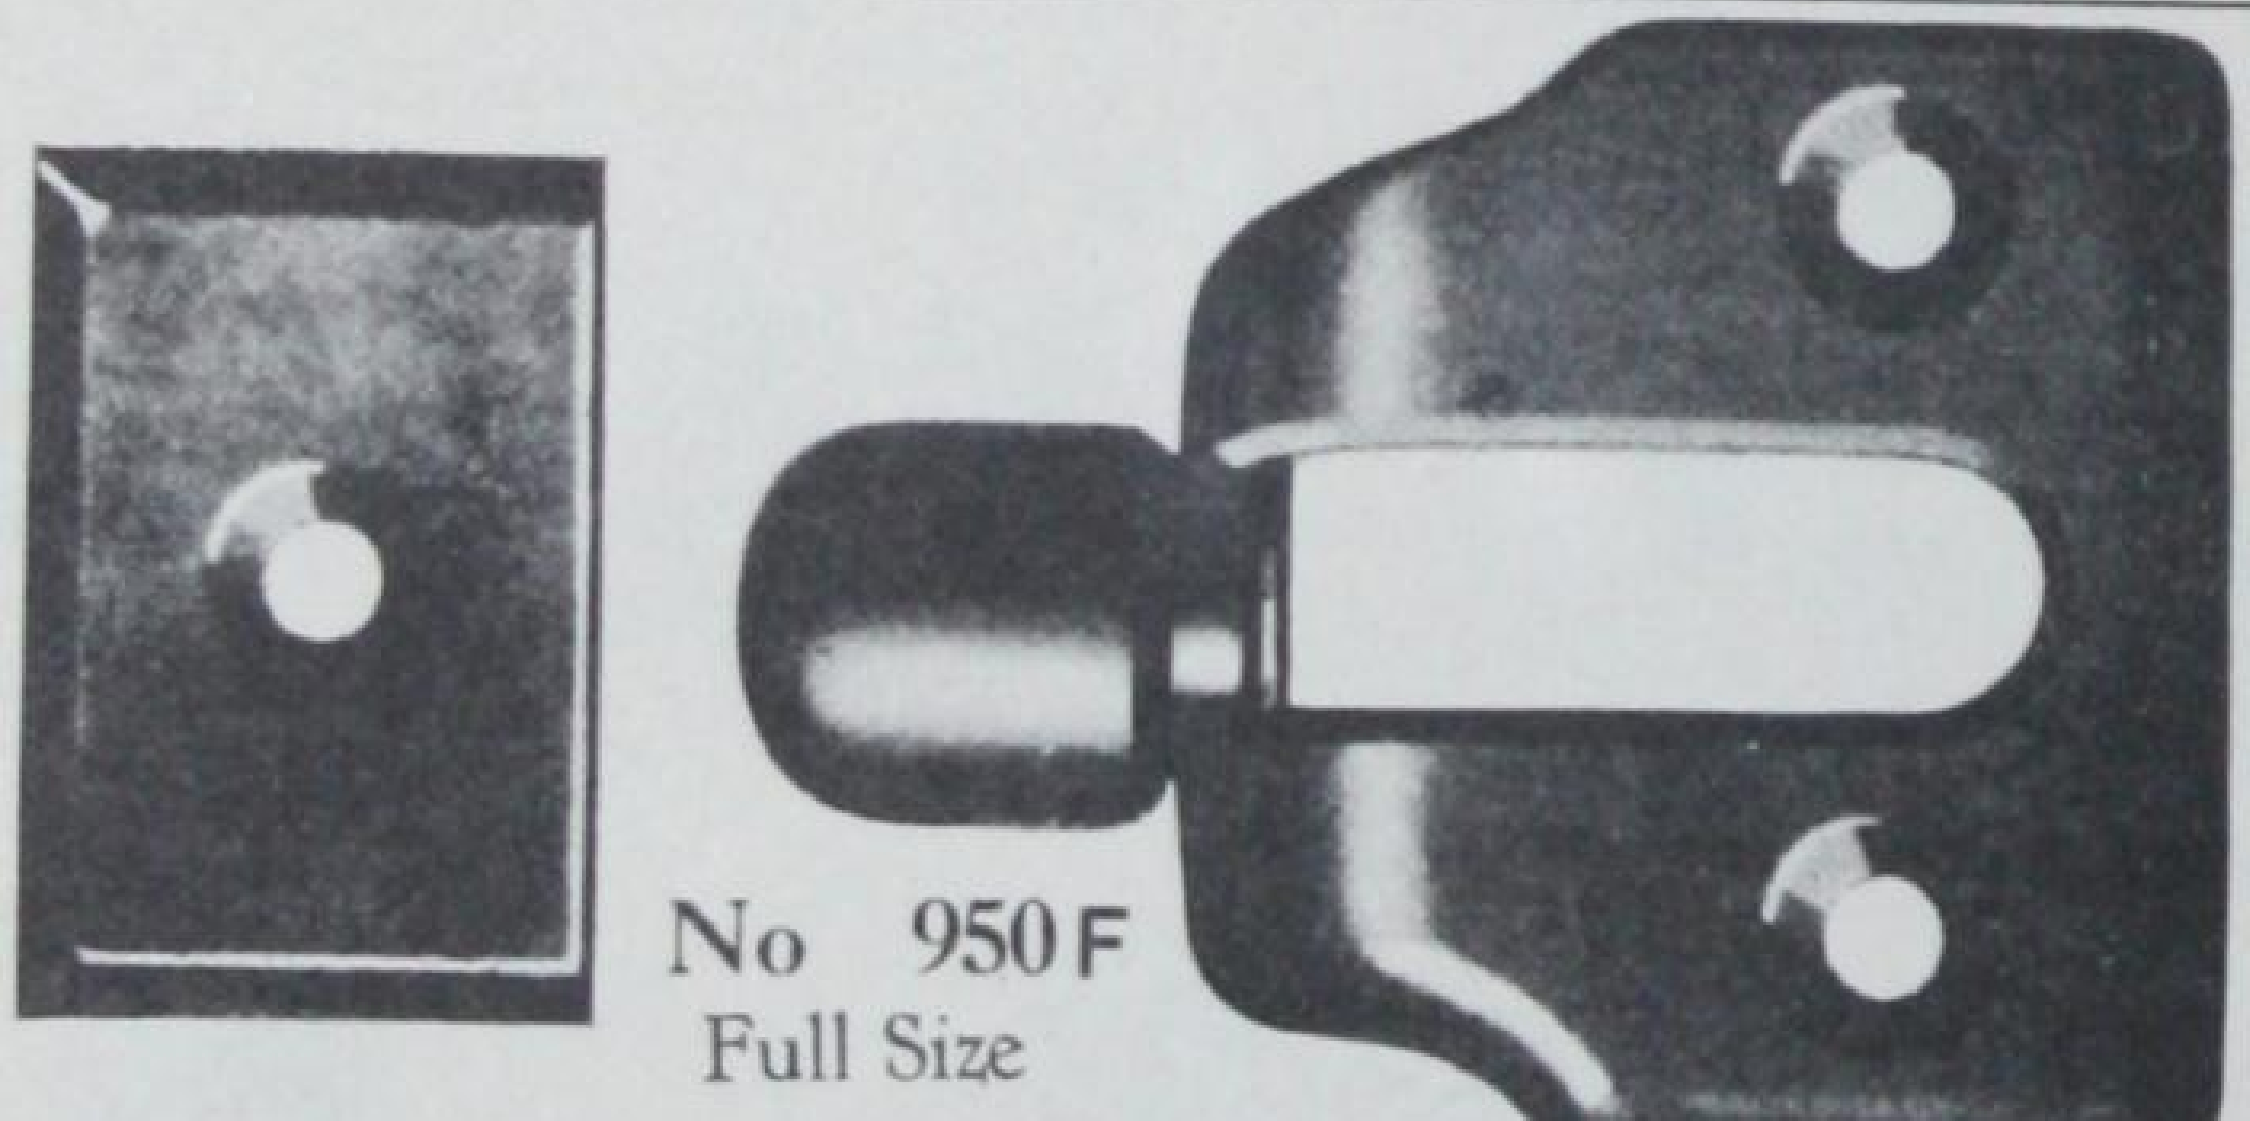

No 950F
Full Size

PEERLESS STORM SASH HANGERS

No. 1717,
Japanned, Wrought Steel... .Doz. Sets **$2.10**
Two Hooks and two Eyes to a Set
1 Doz. Sets in Box

PEERLESS STORM SASH FASTENERS



1719

No. 1719, Japanned, Wrought Steel....... Doz. Sets **$3.10**
Two Fasteners to a Set

DOWEL PINS



Dowel Pins, $\frac{5}{16}$ x 1½ in.................. per lb. **.20**

WINDOW SPRING BOLTS



100

No. 100............................ Doz. **$1.10**

Tinned Iron Bolt, Zinc Case

Length over all 3 in.

½ Gross in Box

WINDOW VENTILATING BOLTS

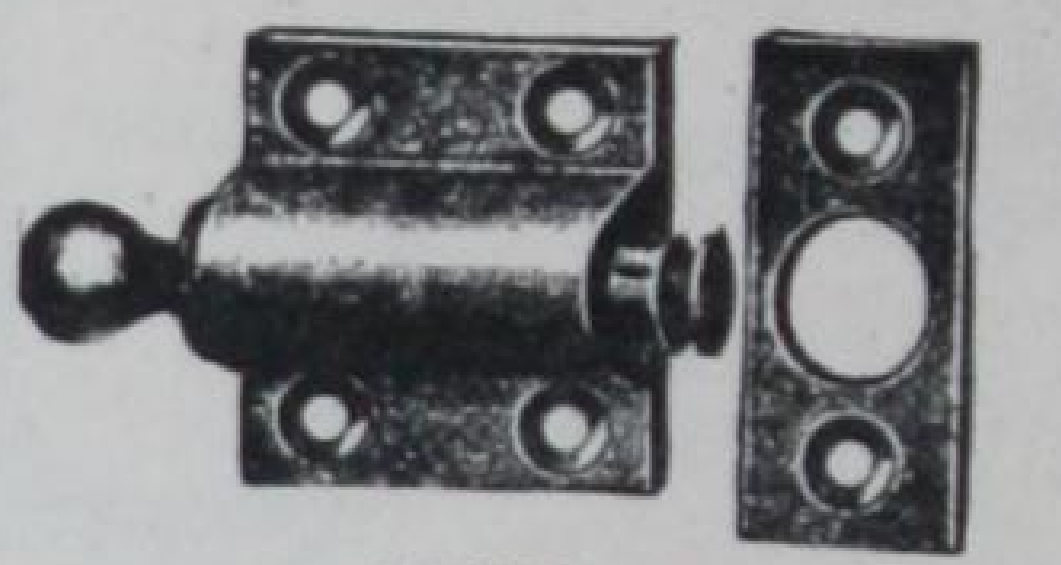

07500

No. 07500F, Cast Iron...............	Doz.	$12.00
No. 07500D2, , Cast Iron.............	Doz.	$12.00
No. 07500N, Cast Iron..............	Doz.	$12.00

1¼ x 1¼ in.

With holdback spring bolt, three strikes

1 Doz. in Box

Ventilating Sash Fasteners

This Ventilating Sash Fastener serves as a safeguard when ventilating rooms. It permits the windows to be opened either top or bottom or both top and bottom with entire security against intrusion. It is used extensively in apartment houses and sleeping rooms. It is easily applied to either side of the upper sash. No. 950F ....Doz. $8.40

2, 3 and 5

SASH ROLLERS

	Size Wheel	Size Plate	Doz.
No. 2, Japanned	$\frac{9}{16}$ x $\frac{7}{16}$ in.	1⅝ x $\frac{11}{16}$ in.	$1.50
No. 3, Japanned	$\frac{13}{16}$ x ½ in.	2⅛ x ⅞ in.	$1.90
No. 5, Japanned......	$\frac{15}{16}$ x ⅝ in.	2 x 1⅛ in.	$2.10

Cast Iron
Nos. 2 and 3, ½ Gross in Box
No. 5, ¼ Gross in Box

Storm Sash Adjusters

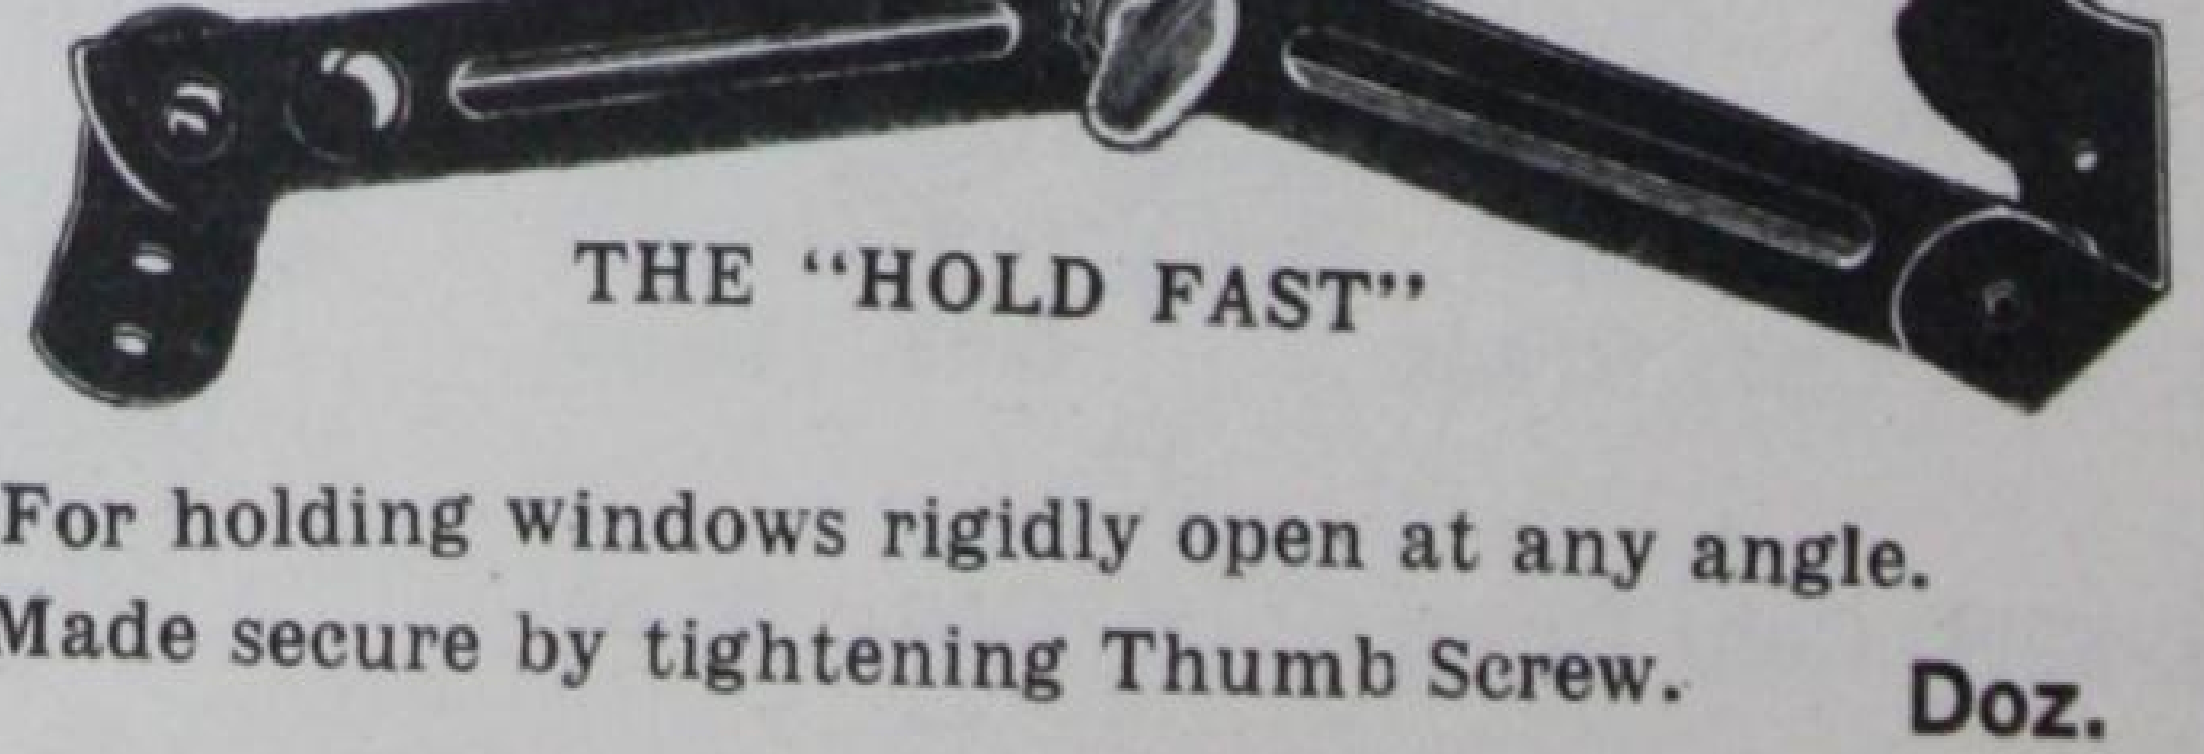

THE "HOLD FAST"

For holding windows rigidly open at any angle.
Made secure by tightening Thumb Screw. **Doz. $4.00**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

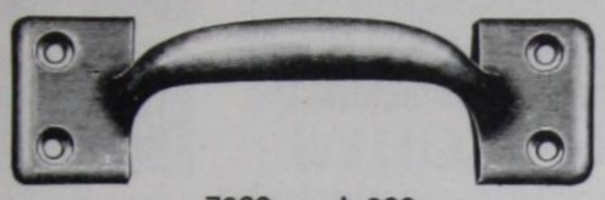

7033 and 033

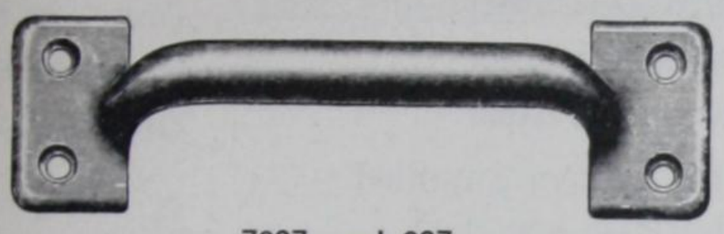

7037 and 037

486

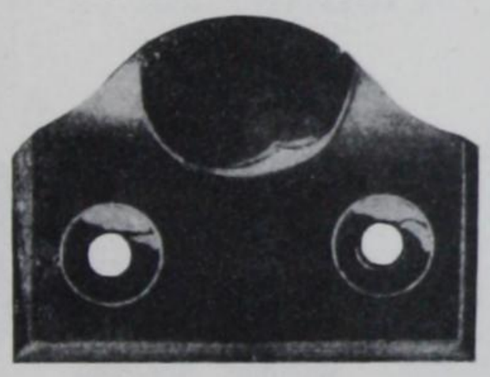

126



7284

7120

BAR SASH LIFTS

No. 7033F, Cast Iron	Doz.	$1.16
No. 7033D2, Cast Iron	Doz.	$1.16
No. 7033SF4, Cast Iron	Doz.	$1.26
No. 7033N, Cast Iron	Doz.	$1.26

1⅛ x 4 in.
One Doz. in Box

No. 033F, Cast Brass	Doz.	$4.70
No. 033SF4, Cast Brass	Doz.	$5.30
No. 033N, Cast Brass	Doz.	$5.30

1⅛ x 4 in.
One Doz. in Box

No. 7037F, Cast Iron	Doz.	$1.50
No. 7037D2, Cast Iron	Doz.	$1.50
No. 7037SF4, Cast Iron	Doz.	$1.60
No. 7037N, Cast Iron	Doz.	$1.60

1¼ x 4½ in.
One Doz. in Box

No. 037F, Cast Brass	Doz.	$6.20
No. 037SF4, Cast Brass	Doz.	$6.80
No. 037N, Cast Brass	Doz.	$6.80

1¼ x 4½ in.
One Doz. in Box

HOOK SASH LIFTS

No. 486F, Wrought Steel	Gross	$6.30
No. 486D2, Wrought Steel	Gross	$6.30
No. 486SF4, Wrought Steel	Gross	$7.10
No. 486N, Wrought Steel	Gross	$7.50

1⅜ x 1⅝ in.
¼ Gross in Box

No. 126F, Cast Brass	Doz.	$4.60
No. 126SF4, Cast Brass	Doz.	$5.00
No. 126N, Cast Brass	Doz.	$5.00

1¼ x 1⅝ in.
Three Doz. in Box

STOP BEAD SCREWS AND WASHERS

No. 7120F, Wrought Steel	Gross	$2.50
No. 7120D2, Wrought Steel	Gross	$2.50
No. 7120SF4, Wrought Steel	Gross	$2.90
No. 7120N, Wrought Steel	Gross	$2.90

Packed with Flat Head Screws 1¼ x 8 in.
One Gross in Box

No. 7284F, Wrought Steel	Gross	$4.80
No. 7284D2, Wrought Steel	Gross	$4.80
No. 7284SF4, Wrought Steel	Gross	$5.40
No. 7284N, Wrought Steel	Gross	$5.40

Packed with Round Head Screws 1 x 8 in.
One Gross in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

7031

SASH PULL SOCKETS

No. 7031F, Cast Iron .... Doz. $2.90
No. 7031D2, Cast Iron ... Doz. $2.90
No. 7031N, Cast Iron .... Doz. $2.90
No. 7031H, Cast Iron .... Doz. $3.20

1 in. Diameter

7015

SASH POLE HANGERS

No. 7015F, Cast Iron ... Doz. $4.10

One Doz. in Box

SASH PULL HOOKS

No. 7027F, Cast Iron ..... Doz. $4.40

3¾ x 1¼ in.
½-Doz. in Box

Sash Pull Poles, 8 ft. ..... Each $1.30

Plain Wood



CELLAR WINDOW SETS

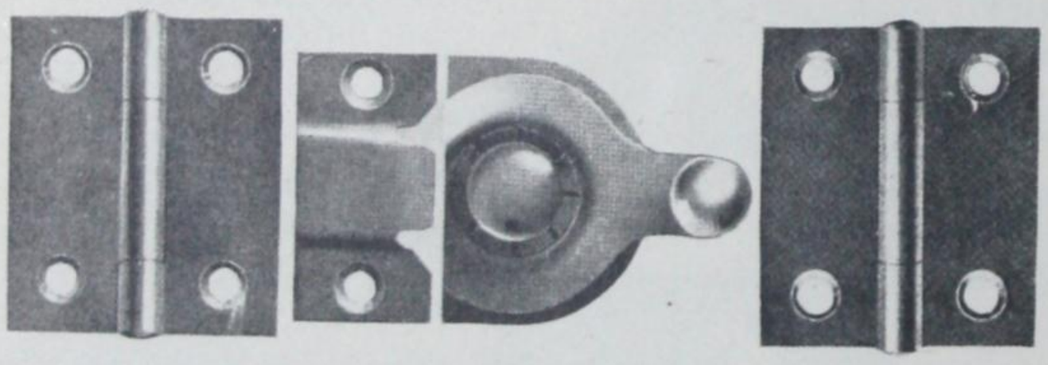

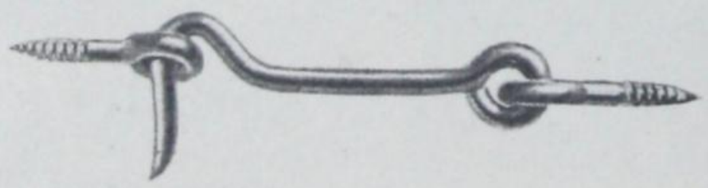

No. 1762J, Japanned, Wrought Steel ..... Doz. $5.00

Set consists of one pair 2 in. narrow Butts one 2½ in. Hook and Eye and one Catch
1 Set in Box

The "Automatic"

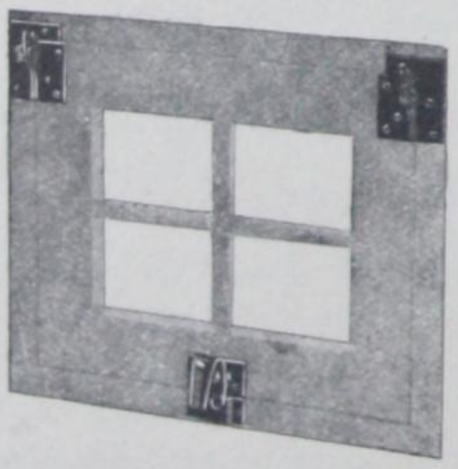

Wrought Steel; Corner pieces act as Hinges and are notched for partial or full opening. Set consists of two pairs Corner Pieces and One Fastener with Lever Pull

Per Doz. Sets
—Japanned .. $6.30
One Set in a Box.
Weight 9 lbs. Dozen Sets



With Universal Strike

TRANSOM CATCHES



With Regular Strike

No. 8910F, Wrought Steel ..... Doz. $5.80
No. 8910D2, Wrought Steel ..... Doz. $5.80
No. 8910N, Wrought Steel ..... Doz. $6.40
No. 8910H, Wrought Steel ..... Doz. $5.80

Regular Strike Always Supplied.
Unless otherwise specified.

TRANSOM CHAINS

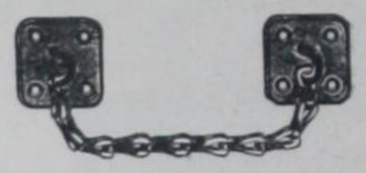

	12 in.	15 in.
No. 7052F.....	Doz. $4.60	Doz. $5.10
No. 7052D2.....	Doz. $4.60	Doz. $5.10
No. 7052N.....	Doz. $5.00	Doz. $5.50
No. 7052H.....	Doz. $4.60	Doz. $5.10

Wrought Steel Friction Cellar Window Set

CADMIUM FINISH — RUST-PROOF

No. 1769 One-half full size

Set No. 1769 K

Per dozen sets $8.60

Wrought Steel Friction Hinges

Same as above but hinge only, in Dull Brass Finish instead of Cadmium.

No. 1942 DB

Per dozen pairs $7.90

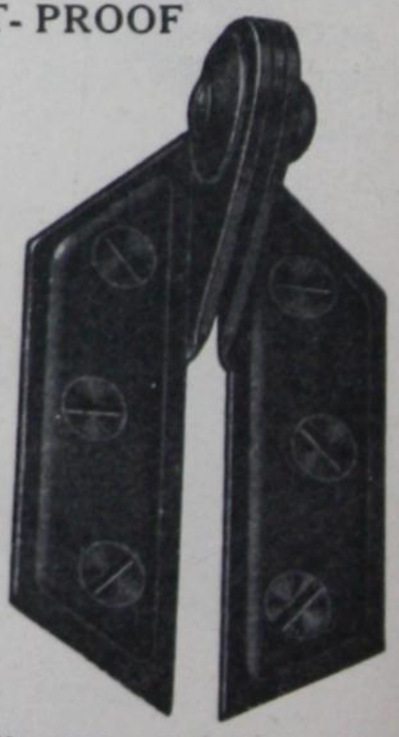

No. 1942 Two-thirds full size

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

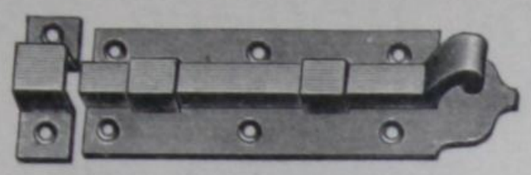

1153

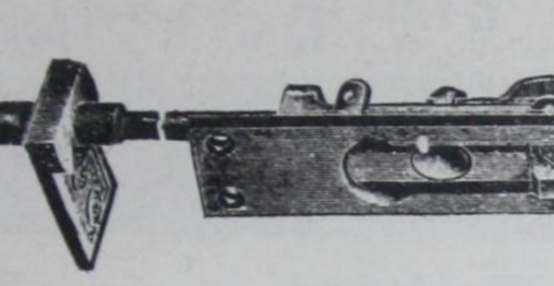

414

SQUARE SPRING BOLT

No. 1153 x 2 in., Wrought Brass... Doz. **$4.50**

SQUARE BOLTS

No. 414F, Wrought Steel..... Doz. **$8.60**
No. 414D2, Wrought Steel..... Doz. **$8.60**
No. 414N, Wrought Steel..... Doz. **$11.70**
3 x 1⅛ in.

131

FLUSH EXTENSION BOLTS

No. 131F, Cast Brass..... Each **$8.00**
No. 131D2, Cast Brass..... Each **$8.00**
No. 131H, Cast Iron..... Each **$8.00**
Case 1 x 6 in.
Rods 6 in. and 12 in. Specify size required.

1452

MORTISE DOOR BOLTS

No. 1452F, Wrought Steel..... Doz. **$8.50**
No. 1452D2, Wrought Steel..... Doz. **$8.50**
No. 1452SF4, Wrought Steel..... Doz. **$9.80**
No. 1452N, Wrought Steel..... Doz. **$9.80**
Barrel 9/16 x 2½ in.
Plate ¾ x 1¾ in.
Strike ⅞ x 2 in.

FLUSH BOLTS

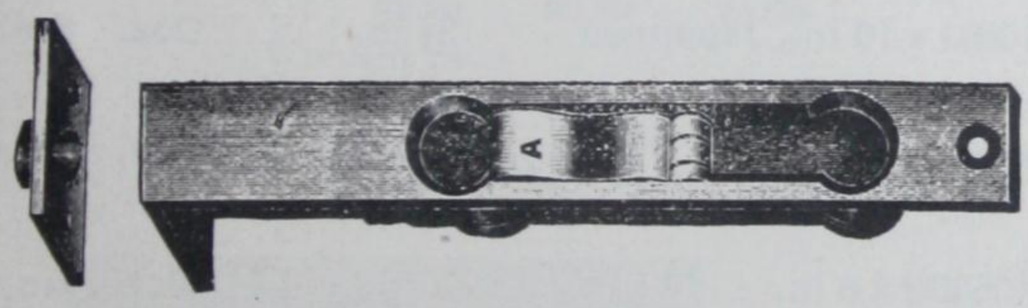

294 ⅞ x 6 in.

No. 294F, Cast Brass .....Each **$3.40**
No. 294, SF 4 .....Each **3.70**
No. 294, N .....Each **3.70**

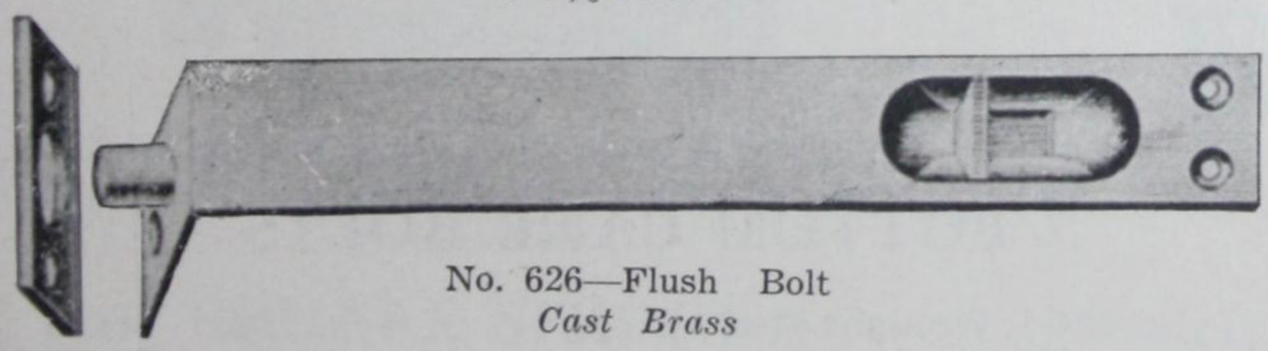

No. 626—Flush Bolt
Cast Brass

No. 626 x 3″ .....Doz. **$10.00**
626 x 4″ .....Doz. **11.00**
626 x 6″ .....Doz. **12.00**

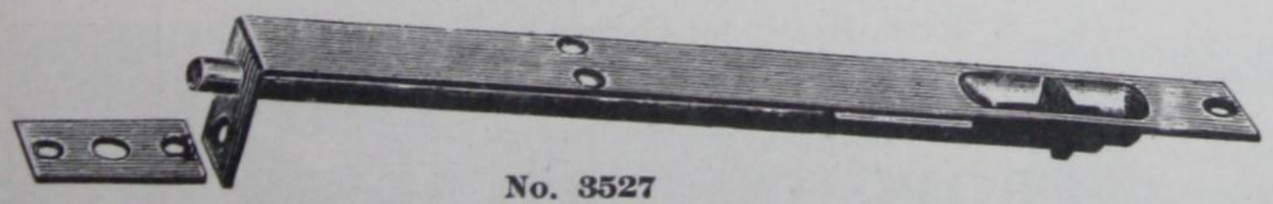

No. 3527

Wrought Brass
½ x 3″

No. 3527 .....Doz. **$2.50**

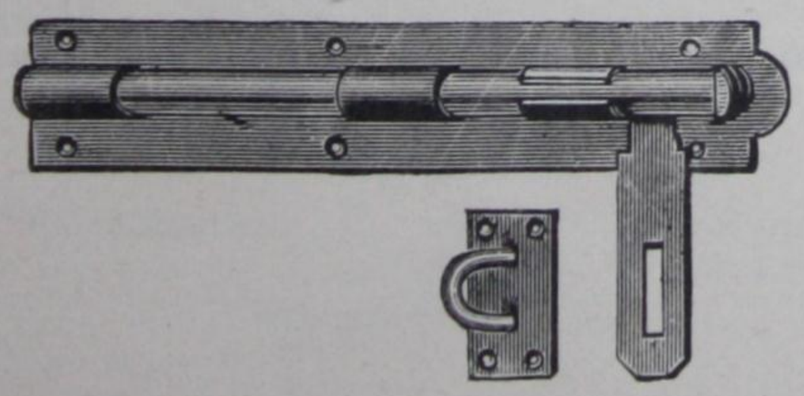

PAD BOLTS

No. 8 x 6 in., Wrought Steel Japanned
Doz. **$11.00**
No. 8 x 8 in., Wrought Steel Japanned
Doz. **$15.80**
½-Doz. in Box.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

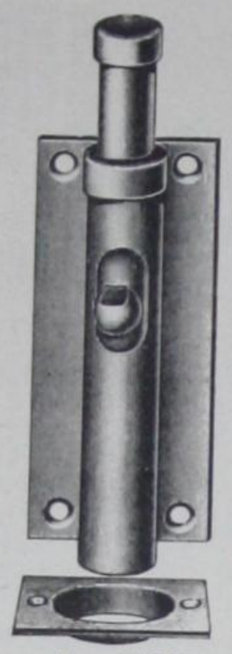

No. 1056
3″-6″-8″

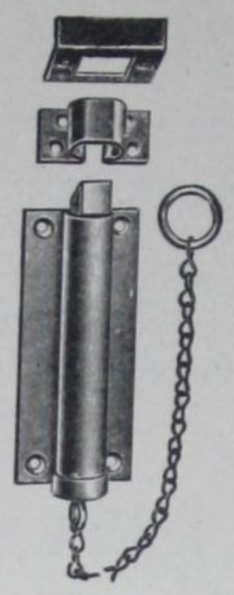

No. 1055
3″-6″-8″

CHAIN BOLTS

	Width		
No. 1055J x 6 in., Japanned	2 in.	Doz.	$11.20
No. 1055J x 8 in., Japanned	3⅜ in.	Doz.	$22.00
No. 1055J x 10 in., Japanned	3⅜ in.	Doz.	$31.60

	Width		
No. 1055F x 3 in.	1⅜ in.	Doz.	$11.20
No. 1055F x 6 in.	2 in.	Doz.	$16.10
No. 1055D2 x 3 in.	1⅜ in.	Doz.	$11.20
No. 1055D2 x 6 in.	2 in.	Doz.	$16.10

Wrought Steel
Bolts Reversible
3 in. Packed ½-Doz. in Box
6 in. „ ½-Doz. „
8 in. „ ¼-Doz. „
10 in. „ 1/12-Doz. „

No. 1056 x 10″

No. 1055 x 10″

FOOT BOLTS

	Width		
No. 1056J x 6 in., Japanned	2 in.	Doz.	$10.50
No. 1056J x 8 in., Japanned	3⅜ in.	Doz.	$21.92
No. 1056J x 10 in., Japanned	3⅜ in.	Doz.	$30.72
No. 1056F x 6 in.	2 in.	Doz.	$15.80
No. 1056D2 x 6 in.	2 in.	Doz.	$15.80

Wrought Steel

No. 12-⅝″ x 18″

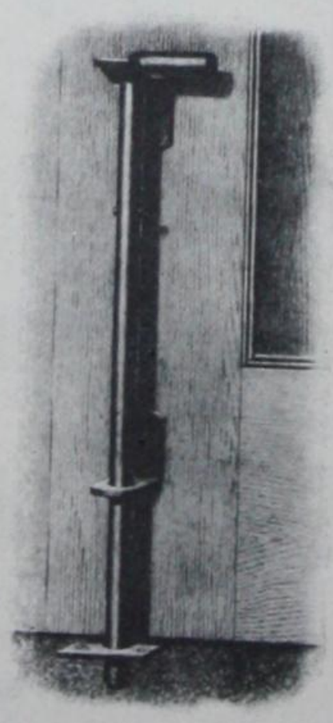

524-1

BOTTOM CANE BOLTS

No. 524-1, Wrought Steel . . . . . Doz. $14.00

⅝ x 18 in.
Extra Heavy for Garage or Warehouse Doors

BOW HANDLED BOLTS

No. 12, Japanned Wrought Steel . . . . . Doz. $80.00

⅝ x 18 in.
½-Doz. in Parcel

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CELLAR WINDOW BOLTS

Wrought

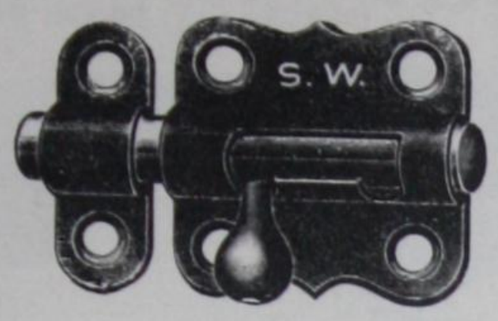

Steel

1076

No. 1076J x 2½ in., Japanned..... Doz. **$1.70**

BARREL BOLTS

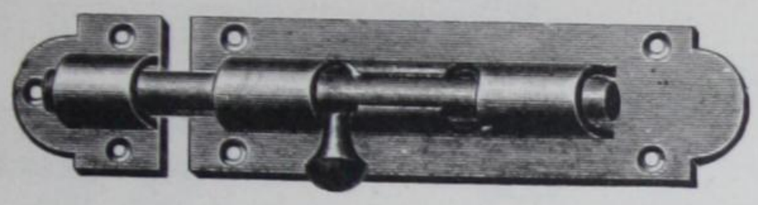

1077, 1078 and 406

No. 1077.....	2½ in.	3 in.	4 in.
Doz.....	**$7.50**	**$10.20**	**$11.80**

Wrought Brass, Polished
One Doz. in Box

No. 1078, Japanned	2½ in.	3 in.	4 in.	5 in.	6 in.
Doz.....	**$1.68**	**$1.92**	**$2.18**	**$2.72**	**$3.46**

One Doz. in Box

No. 406F.....	2½ in.	3 in.	4 in.
Doz.....	**$3.20**	**$3.80**	**$4.26**
No. 406D2.....	2½ in.	3 in.	4 in.
Doz.....	**$3.20**	**$3.80**	**$4.26**

Wrought Steel
One Doz. in Box

TOWER BOLTS

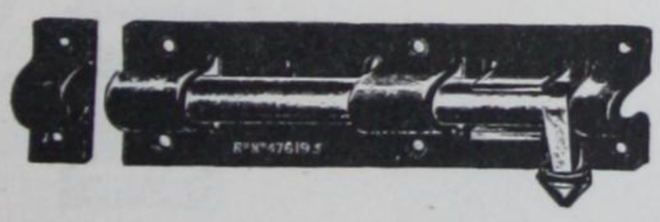

No.09, Japanned x	4 in.	6 in.	8 in.	10 in.	12 in.
Doz.....	**$2.30**	**$4.00**	**$4.80**	**$5.00**	**$7.00**

Wrought Steel

SQUARE SPRING NECK BOLTS

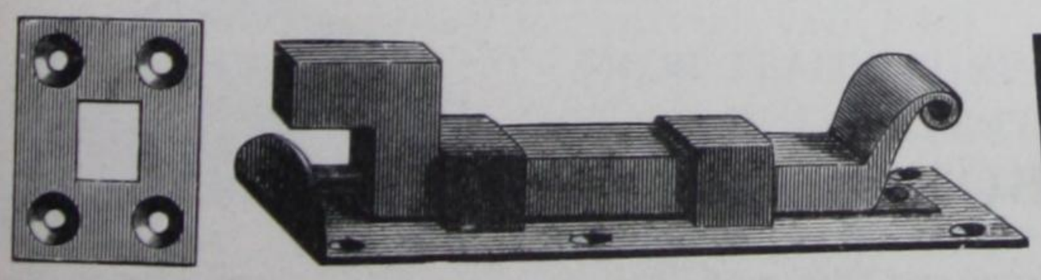

1102

No. 1102, Japanned....	6 in.	8 in.
Doz.....	**$16.00**	**$21.00**

Wrought Steel

FOOT BOLTS

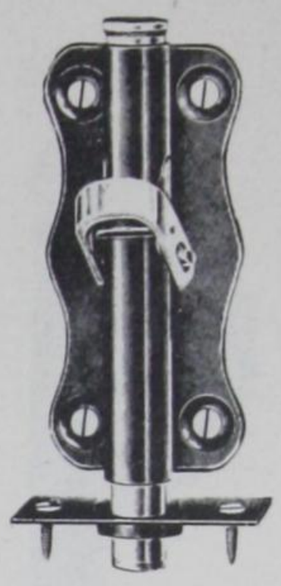

Heavy Wrought Steel Case, 5″ x 2¼″
Solid Steel Bolt 1″ Throw.
Strike Plate, 2⅞″ x 1¼″.

No.	Size Ins.	Finish	Doz.
018-6	6	Japanned	**$11.50**

Positive action with Foot Lever, no springs—sure trip.

Half Round Surface Bolts

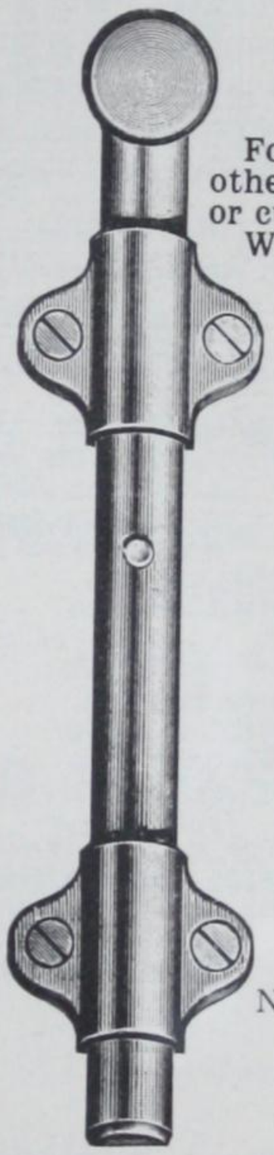

For French Doors and Windows as well as many other purposes. So easy to put on. No mortising or cutting—simply screw them in place.
Wrought steel, strong and durable.



Angle Strike



Universal Strike

Number	Size of Bolt Inches	Throw Inches	Extreme width inches	Doz.
27	6″	½	1	**$6.60**
27	12″	½	1	**$8.40**

SQUARE SPRING BOLTS

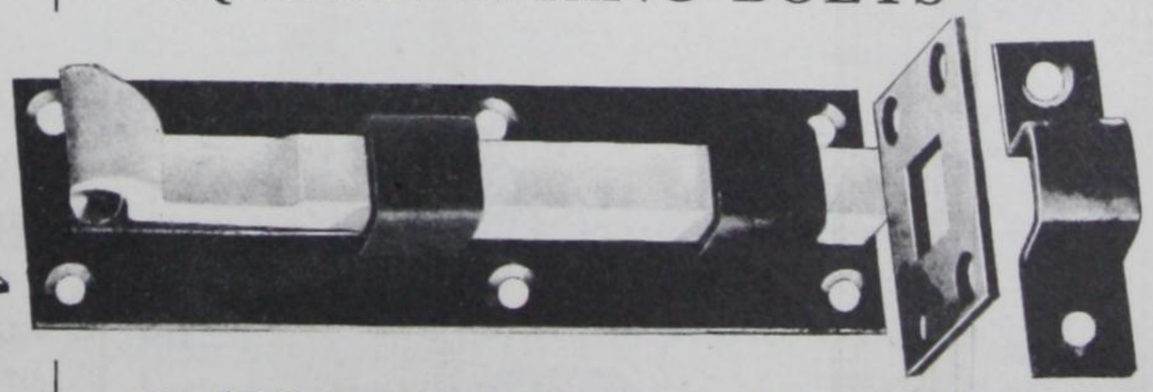

No. 1088 Japanned..	6 in.	8 in.	10 in.
Doz.....	**$8.50**	**$13.50**	**$19.40**

Wrought Steel
6 in., One Doz. in Box
8 in., ½-Doz. in Box
10 in., ¼-Doz. in Box

All Prices Subject to Change Without Notice

SASH BALANCES

Set Consists of 4 Balances for 2 Sashes.

Side Pattern

PULLMAN

Steel Frame

The Pullman Sash Balance, is the only steel frame balance made, consequently is unbreakable. Beside this important advantage it possesses all the qualities contained in other Sash Balances, and costs no more. Guaranteed for 20 years on any building.

Size of Face Plate for all Nos. 6x1 in. Dimensions of Mortise for all Nos.: Length 3 7/16 in., width 1 in., depth 3 7/16.

SIDE PATTERN

Nos.	Weight of each sash, lbs.	Length of Tape inches	Per set of 4
2-A	4 to 5	46	**$6.00**
3-A	5 to 7	46	**$6.00**
4-A	7 to 9	46	**$6.00**
5-A	9 to 11	46	**$7.00**
6-A	11 to 13	46	**$7.00**
7-A	13 to 15	46	**$7.00**
8-A	15 to 17	46	**$7.40**
9-A	17 to 19	46	**$7.40**
10-A	19 to 21	46	**$7.40**
11-A	21 to 23	46	**$8.40**
12-A	23 to 25	46	**$8.40**
13-A	25 to 27	46	**$8.40**
14-A	27 to 29	46	**$8.40**

One Set in Box with Screws
Weight per set from 3½ to 6 lbs.

CALDWELL

Cast Iron

Side Pattern: Spring.—Installed in the same manner as an ordinary pulley. Fitted with strong aluminum bronze tape for attaching to sash. A set screw in the face of plate provides adjustment for slight variations in the weight of sash.

Side Pattern

SIDE PATTERN

Nos.	Weight of sash, lbs.	Length of Tape, inches	Weight Per set lbs.	Per set of 4
B 6	4 to 6	30	2¾	**$5.20**
B 8	6 to 8	30	3	**$5.70**
B10	8 to 10	34	3¼	**$6.20**
B12	10 to 12	38	4⅞	**$6.80**
B14	12 to 14	42	5⅛	**$7.30**
B16	14 to 16	42	6⅞	**$7.80**
B18	16 to 18	44	7	**$8.30**
B20	18 to 20	46	7⅛	**$8.80**
B23	20 to 23	50	9½	**$10.40**
B26	23 to 26	50	9⅝	**$11.00**
B29	26 to 29	52	10¼	**$11.70**
F32	29 to 32	52	10½	**$12.30**
C35	32 to 35	54	11	**$14.30**

	Dimensions of Face Plate Length Inches	Width Inches	Dimensions of Mortise Length Inches	Width Inches	Depth Inches
Nos. B Series	5½	1¼	3 11/16	1¼	3 9/16
No. C Series	6¾	1 7/16	4¾	1 1/16	4 11/16

One Set in a Box, with Screws.

SASH PULLEYS

All Steel, Anti-Friction Axle Bearing, Brass Plated on Steel.

No. 23G—Face 5x1⅛ ins., wheel 2¼ in.; weight per dozen, 3½ lbs. - - - per dozen **$4.20**

Half Dozen in a Box.

SASH CORD



Hercules, Braided, White Cotton—In Hanks

Nos.	Diam., ins.	Length Hank, ft.	Wt. Doz., lbs.	Per lb.
6	3/16	100	18	**$1.00**
7	7/32	100	22	**.98**
8	¼	100	27	**.96**
9	9/32	100	32	**.96**
10	5/16	100	39	**.96**
12	⅜	100	56	**.96**

One Dozen Hanks in a Bundle.

AXLE PULLEYS

12

No. 12, Wrought Steel .... Doz. **$1.40**
Face 2¾ x 1 in. Sheave 2 in.
Axle Bearing, polished Wheel and Face
To apply bore four 13/16 in. holes, centres ⅝ in. apart
Insert Pulley and punch out Lips with Nail Set

No. R911F, Cast Iron .... Doz. **$5.00**
No. R911D2, Cast Iron .... Doz. **$5.00**
Face 4⅜ x 1 in. 2 in. Wheel for Cord
½ Doz. in Box

No. R912F, Cast Iron .... Doz. **$5.50**
No. R912D2, Cast Iron .... Doz. **$5.50**
No. R612, Unfinished .... Doz. **$4.60**
Face 5¼ x 1⅛ in. 2¼ in. Wheel for Cord
½ Doz. in Box

No. R918F, Cast Iron (From Factory Only) .... Doz. **$6.20**
No. R918D2, Cast Iron (From Factory Only) .... Doz. **$6.20**
No. R618, Unfinished (From Factory Only) .... Doz. **$5.00**
Face 5⅝ x 1¼ in.
2½ in. Wheel with Combination Groove for Cord or Chain

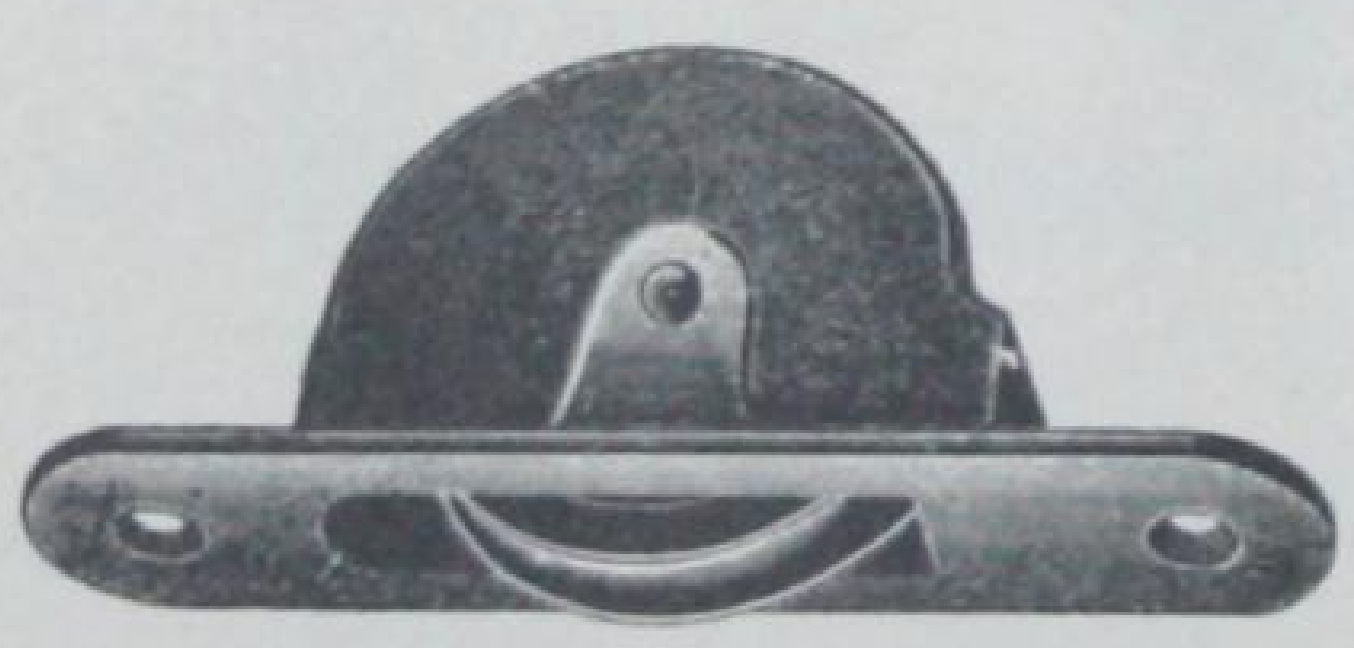

R911, R912, R612, R918, R618

AWNING OR BLIND CORD



White Braided Cotton

Nos.	4	4½
Diameter, ins. -	⅛	9/64
No. of feet in hank -	48	100
Weight per dozen, lbs.	3	10
Per dozen hanks -	**$5.60**	**21.00**

Lewis Wind-O-Regulators

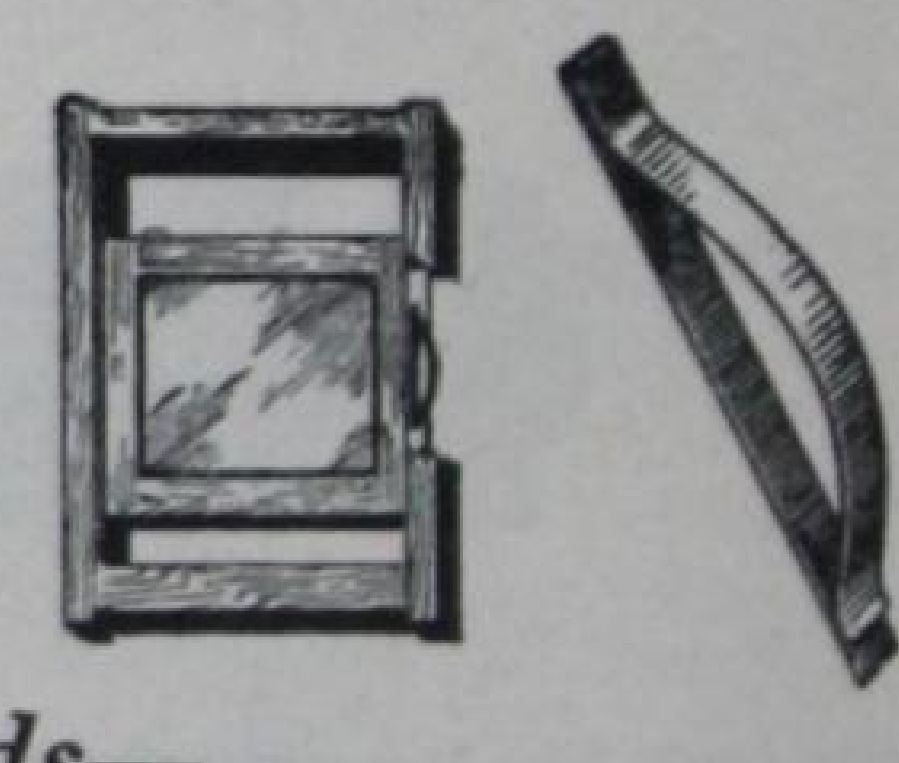

Holds—

Windows in any position without weights, cords or pulleys

Per Single Doz. $5.50

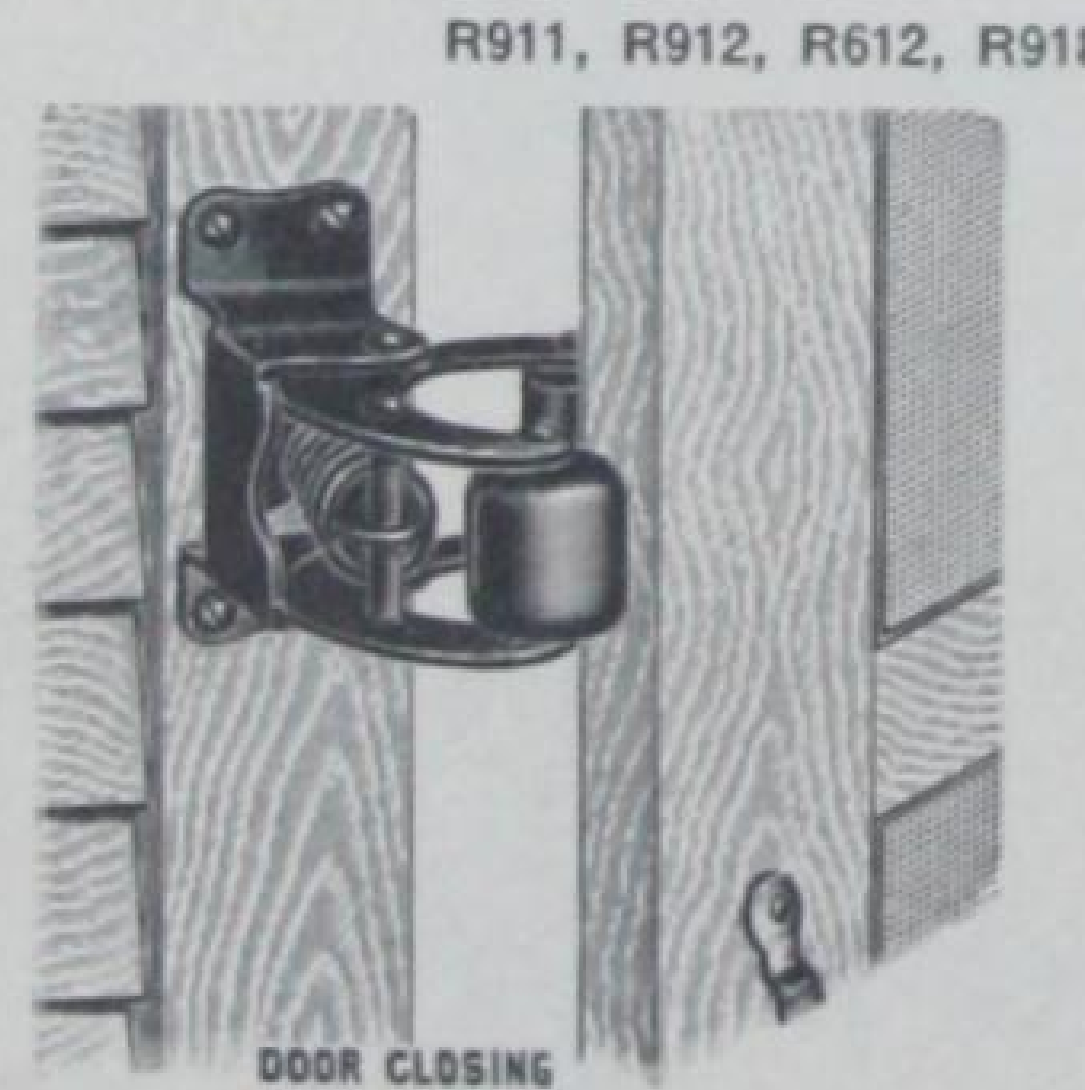

Superior

Superior Screen Door Catches .... Doz. **$2.90**
1¾ x 2 in.
Japanned Wrought Steel with Rubber Roller

Screen Door Turnbuckles, 60J .... Doz. **$2.20**
Japanned, Length 42 in.
Will prevent sagging of a new screen door and counteract sagging of an old door.

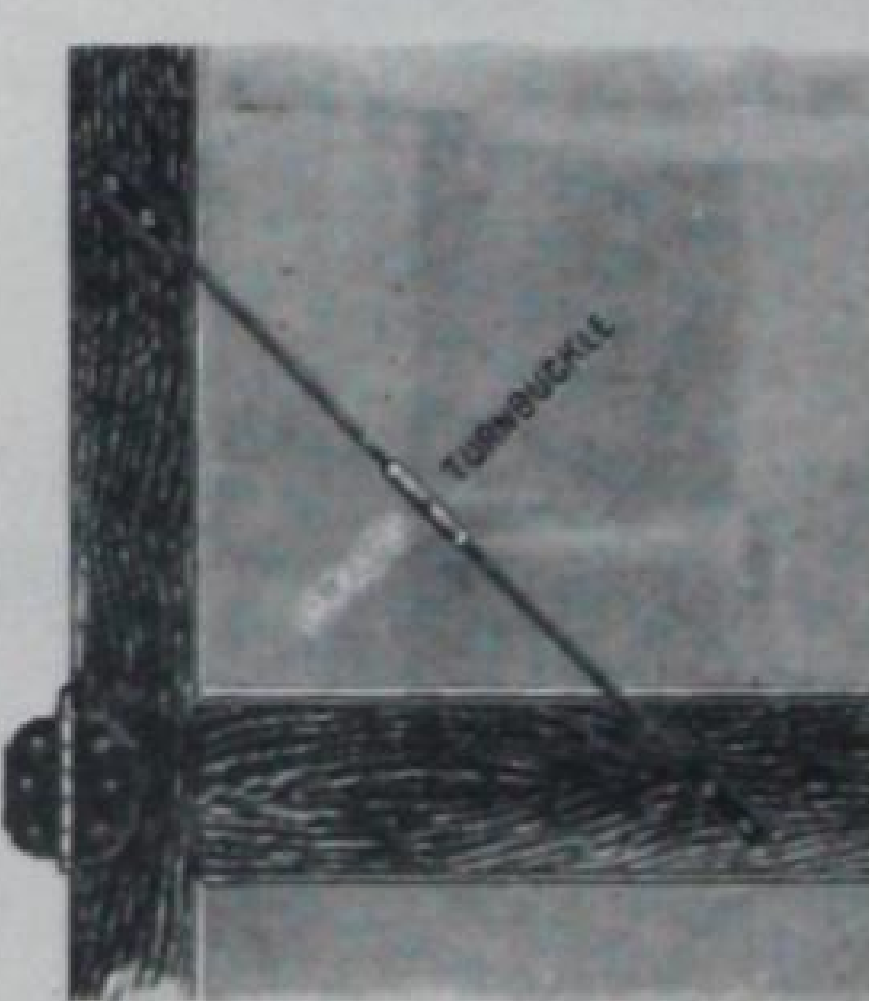

60J

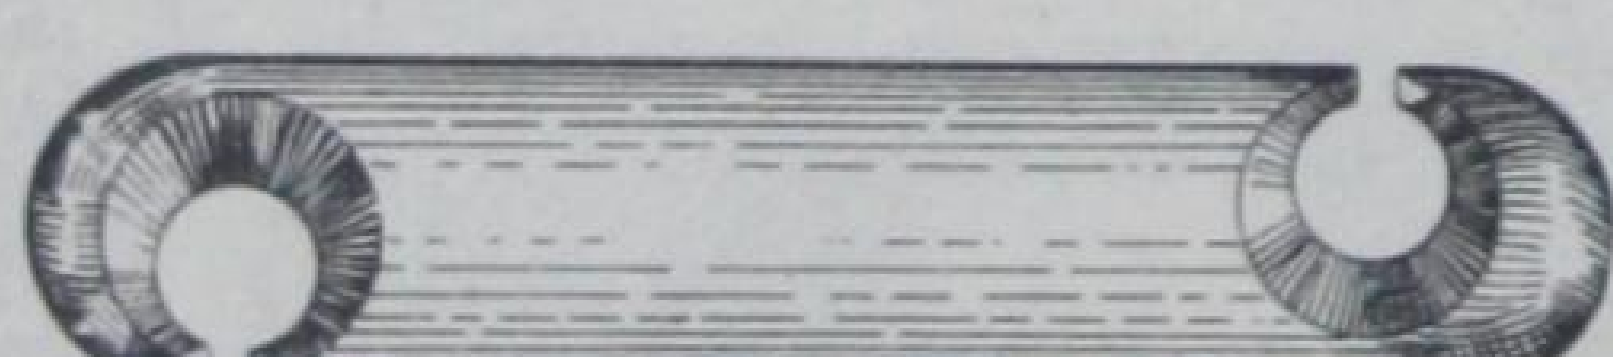

Sash Weights

SECTIONAL SASH WEIGHTS

½ lb. Cast Iron	Lb.	.10
1 lb. Cast Iron	Lb.	.10

SASH WEIGHTS CAST IRON INTERLOCKING

Weight	Length	Diameter	Per 100 Lbs.
2	4 in.	1¾ in.	**$9.00**
3	7¾ in.	1¾ in.	**$9.00**
5	10½ in.	1¾ in.	**$9.00**
7	15 in.	1¾ in.	**$9.00**

By hooking weights together any required weight can be made up, making it unnecessary to stock a large assortment

SASH CHAIN

No. 80, Galvanized	Per 100 ft.	**$7.60**
No. 80, Coppered	Per 100 ft.	**$6.00**
No. 130, Galvanized	Per 100 ft.	**$7.50**
No. 130, Coppered	Per 100 ft.	**$7.00**

80—For sash up to 80 lb.
130—For sash up to 130 lb.
500 feet on a Spool

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SHELF BRACKETS

No. 140 Japanned Wrought Steel

	3 x 4 in.	4 x 5 in.	5 x 7 in.	6 x 8 in.	7 x 9 in.
Doz. Pairs...	$1.50	$1.90	$2.90	$3.40	$4.50

	8 x 10 in.	10 x 12 in.	12 x 14 in.
Doz. Pairs.....	$4.80	$6.70	$9.90

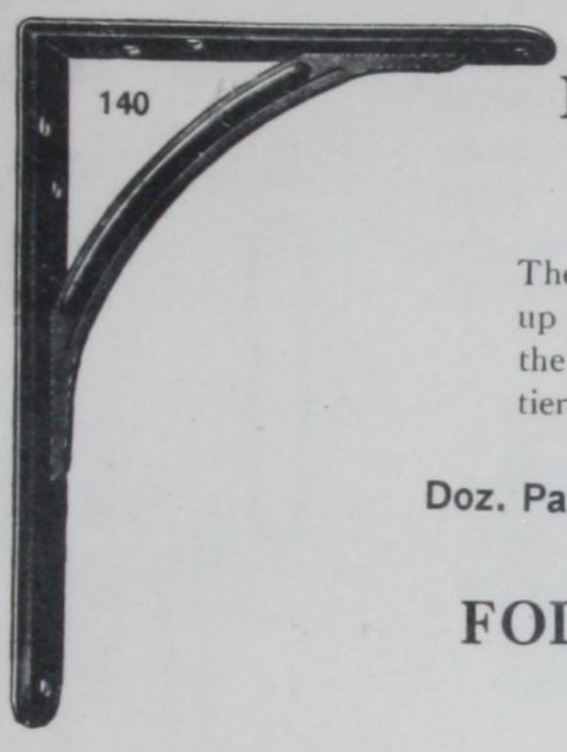

140

No. 796 Wrought Steel

Made of one piece of cold rolled steel.

The forming of the metal provides strength. There is free access to the screw holes in putting up the bracket. The shape of this bracket allows the use of the full space between shelves built in tiers.

	6 x 8 in.	7 x 9 in.	8 x 10 in.
Doz. Pairs...	$4.20	$5.00	$6.00

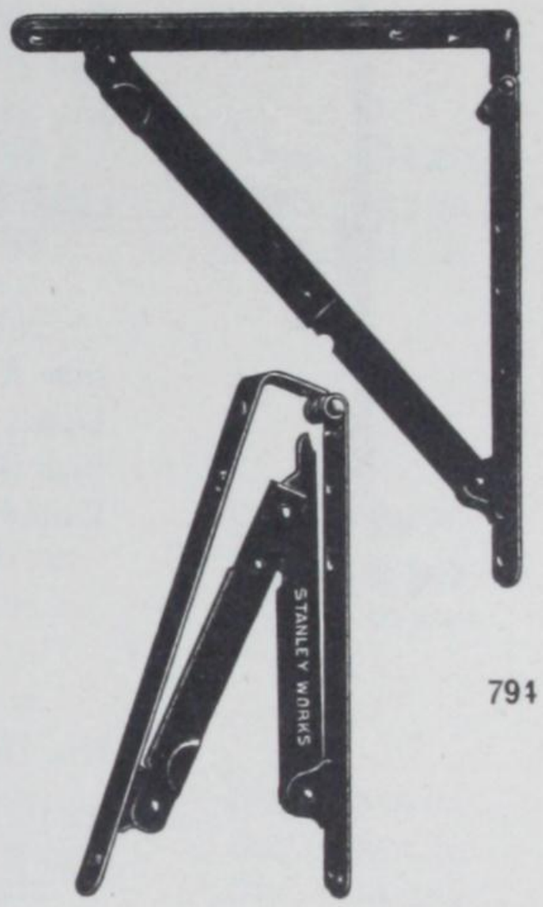

794

FOLDING SHELF BRACKETS

No. 794 Japanned Wrought Steel

	8 x 8 in.	12 x 12 in.
Doz. Pairs.....	$17.00	$25.00

No. 796 (4"x 5")
Full size

FLAT CORNER IRONS

No. 999 Wrought Steel

	⅜ x 2 in.	½ x 2½ in.	⅝ x 3 in.	¾ x 3½ in.
Gross	$3.60	$4.20	$6.00	$6.70

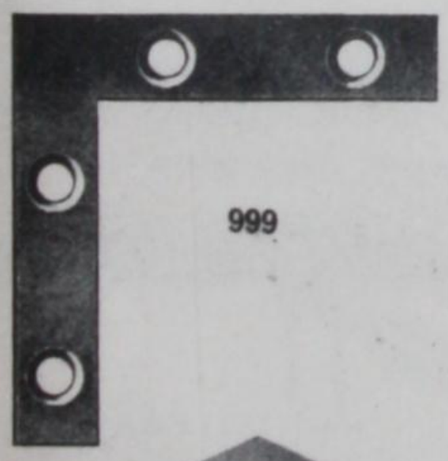

999

CORNER BRACES

997

No. 997 Wrought Steel

	1½ in.	2 in.	2½ in.	3 in.	4 in.	5 in.
Width.....	½ in.	½ in.	⅝ in.	¾ in.	⅞ in.	1 in.
Doz.....	.34	.42	.58	.72	$1.32	$1.80

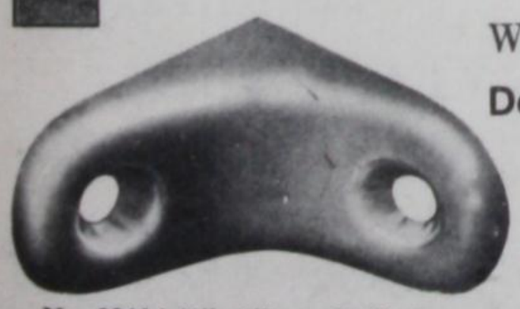

No. 996½ (1"x 1") Full size

Wrought Steel Corner Irons

No. 996½ Finish Dull Copper — 1 x 1 .....Doz. .90; 2 x 2 .....Doz. 1.10

No. 998 Brass Plated. — ½ x 1½ .....Doz. .60

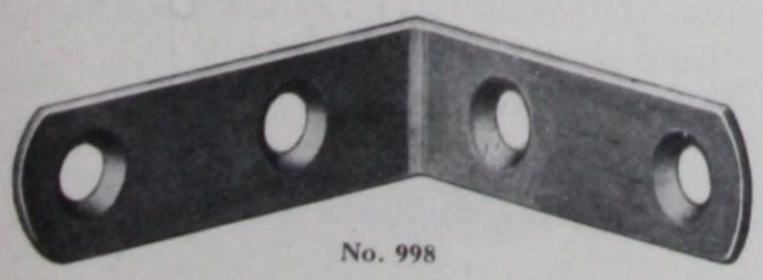

No. 998

All Prices Subject to Change Without Notice

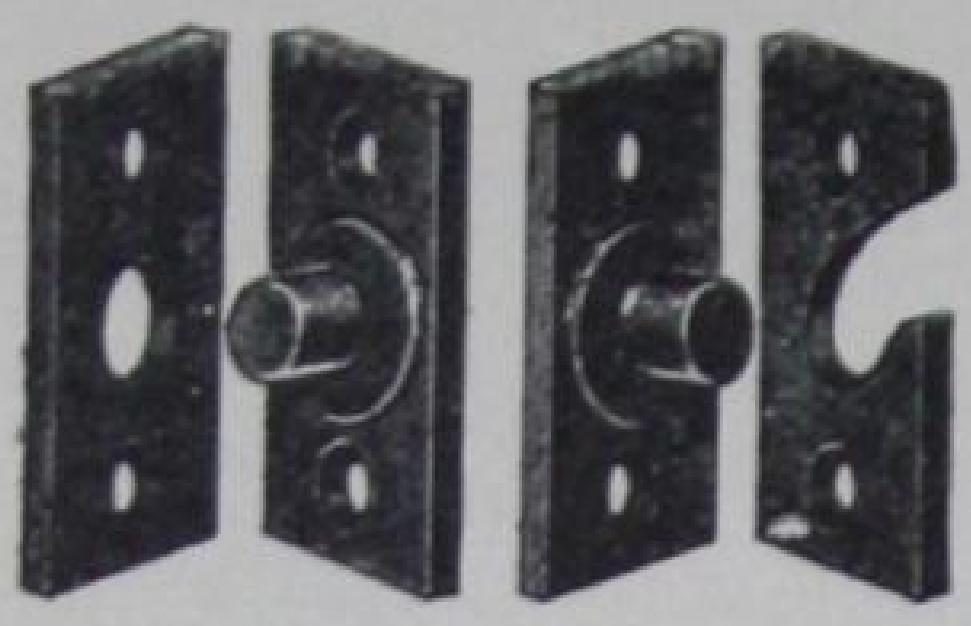

2003 2005 2020

SASH CENTRES

	Size Plates	Size Pin	Doz. Sets
No. 2003	1⅞ x ¾ in.	⅜ in.	$1.80
No. 2005	2¼ x ⅞ in.	⅜ in.	$1.80
No. 2020	2¾ x 1 5/16 in.	½ in.	$2.00
No. 3401, 1¾ x 3⅞ for 1¾ in. sash			$10.70
No. 3402, 2 x 4¼ in. for 2 in sash			$11.50

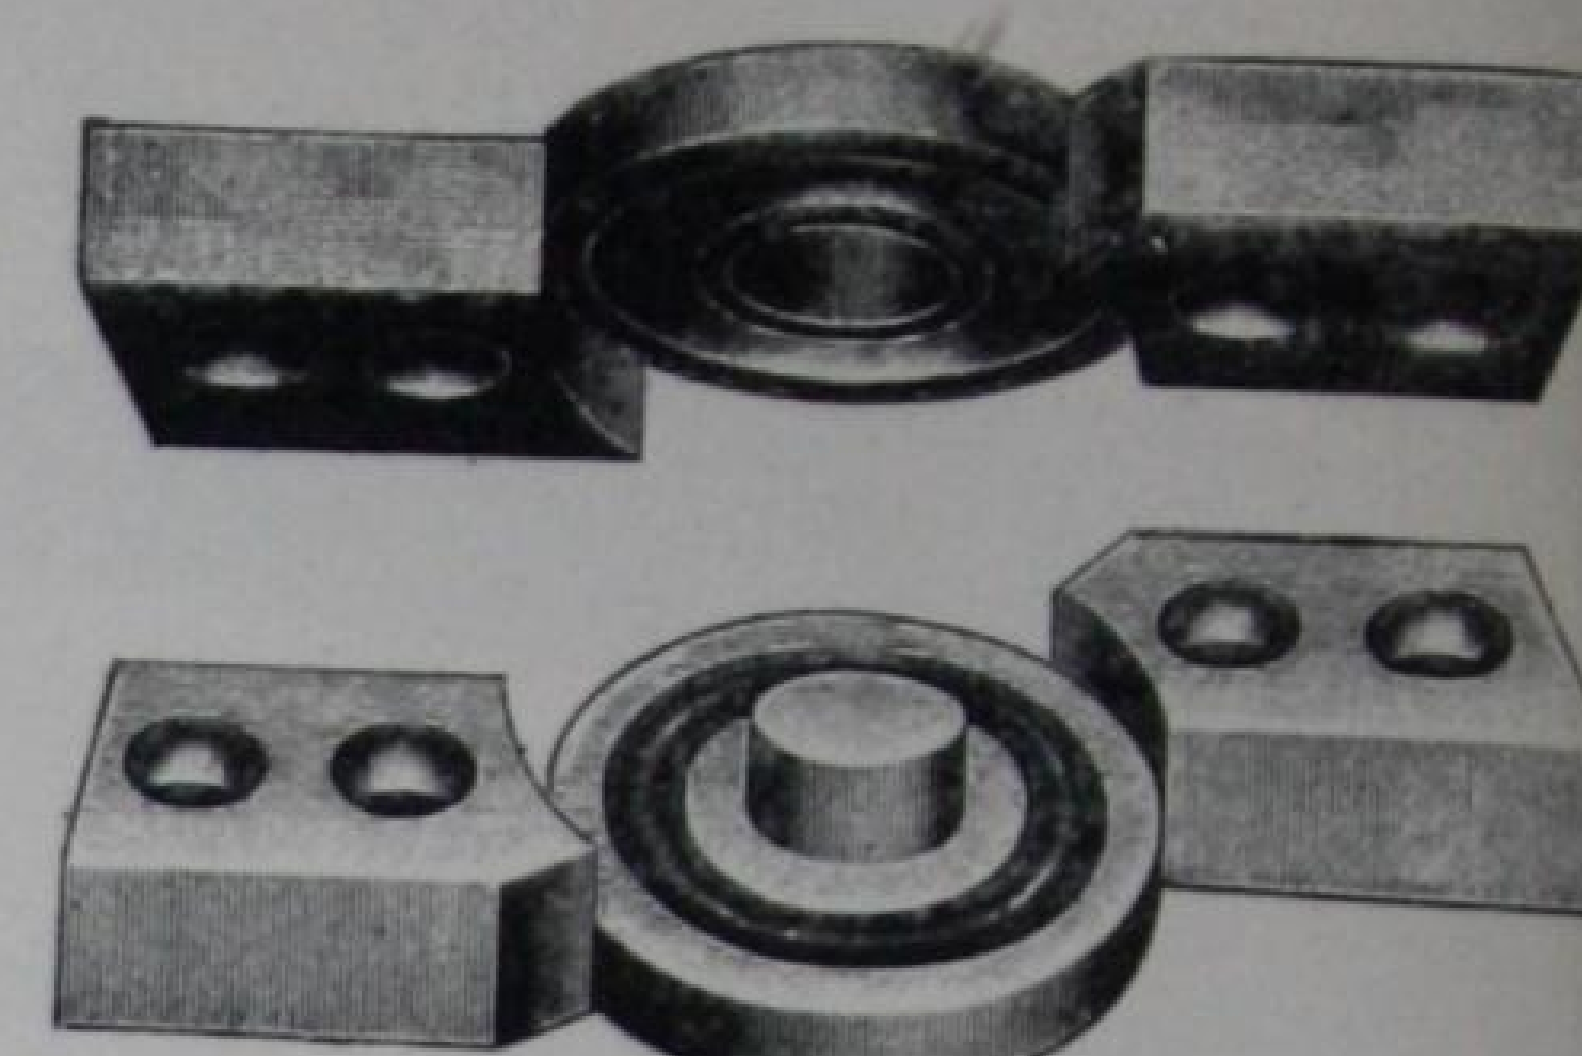

3401 and 3402

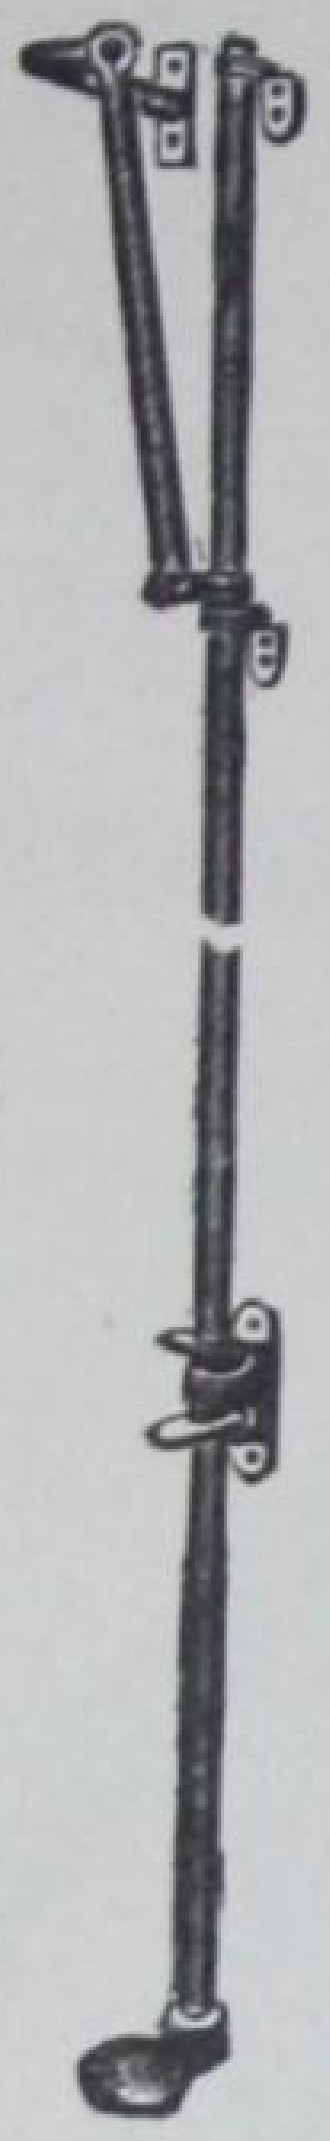

204 and 214

TRANSOM RODS

No. 204F ¼ x 4 in.......................... Each $1.40
No. 204D2 ¼ x 4 in.......................... Each $1.40
No. 214F 5/16 x 4 in.......................... Each $1.90
No. 214D2 5/16 x 4 in.......................... Each $1.90
No. 214N 5/16 x 4 in.......................... Each $2.20
No. 214H 5/16 x 4 in.......................... Each $2.20

To determine correct length of rod required, measure distance from floor to centre of transom and deduct four feet.

ENDLESS GREEN CORDS

Size A..........	6 ft.	7 ft. 6 in.	9 ft.	12 ft.
Doz............	$3.50	$4.00	$5.00	$6.00
Size B..........	6 ft.	7 ft. 6 in.	9 ft.	12 ft.
Doz............	$4.00	$5.00	$6.00	$7.00



LEGGOTT'S SKYLIGHT OPENERS

No. 1502 x 12 in.............................. Each $3.90

12 in. Opens 10 in., suitable for skylights up to 24 x 15 in.
Use B size endless cords.

1502

PRESTON'S IMPROVED FANLIGHT OPENERS

B182, ⅜ x 12 in.................. Each $1.60
B182, ⅜ x 15 in.................. Each $1.70
B182, ½ x 18 in.................. Each $1.90

Use A cords for ⅜ in. and B cords for ½ in.
Brass wheel, iron fittings, brass plated for fanlights hinged at bottom opening in.
Hinged at top opening out and
Pivoted at sides.

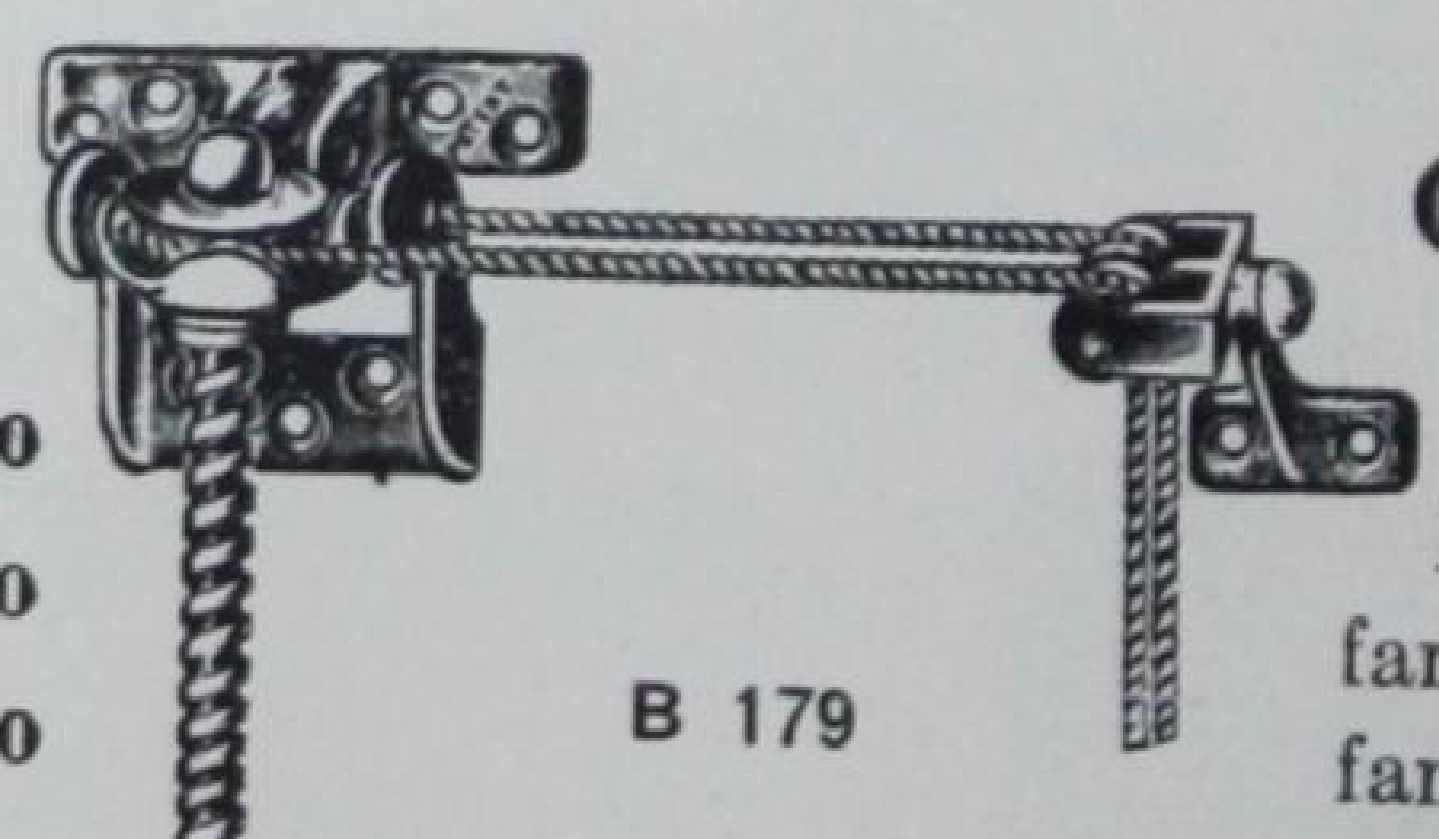

B 179

PRESTON'S FANLIGHT OPENERS AND PULLEYS

B179 x ⅜ x 15 in.............. Each $3.90

Brass wheel, iron fittings, brass plated for fanlights hinged at bottom opening in. When fanlight is closed screw folds down out of the way of blinds, etc.

Use A cords.

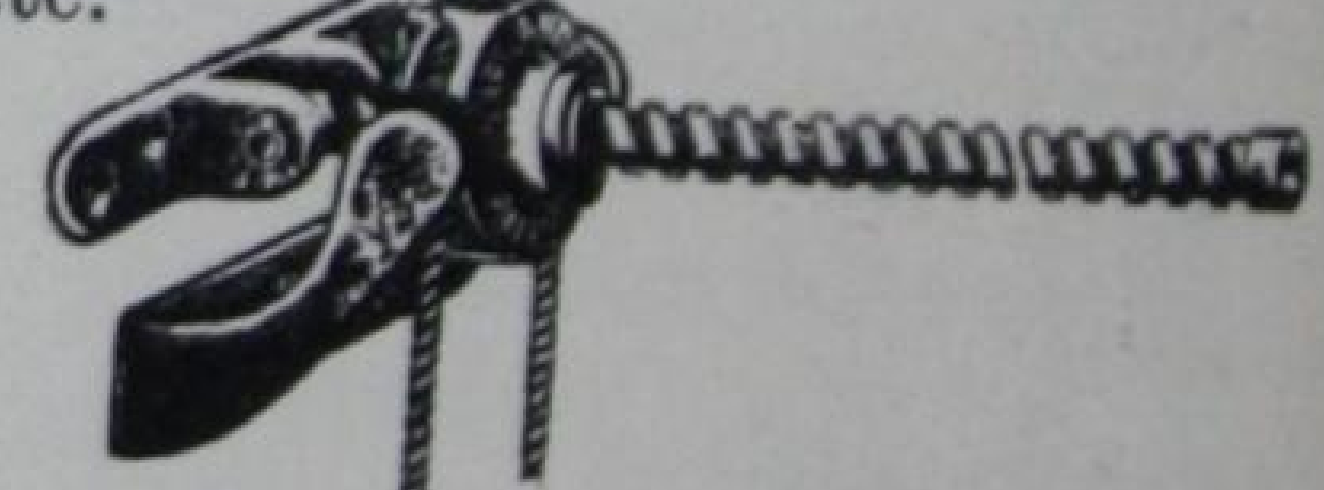

Nos. 182, 182A

SIDE ADJUSTMENTS FOR CONVERTIBLE OPENERS

No. 1796½ x ⅜ in.................. Each .30
No. 1796½ x ½ in.................. Each .50

Iron brass plated. Should be fixed so that end of slot is reached at same time that screw is fully extended, thus preventing any unequal strain.

Recommended to be used on heavy fanlights or wider than 30 in.



1796½

1796

"CONVERTIBLE" FANLIGHT OPENERS

No. 1796, ⅜ x 4½ in.............. Each $2.00
No. 1796, ½ x 6 in.............. Each $3.50

Iron brass plated for all fanlights and casements opening in or out.
½-Doz. in Box.
Use A cords for ⅜ in.
Use B cords for ½ in.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

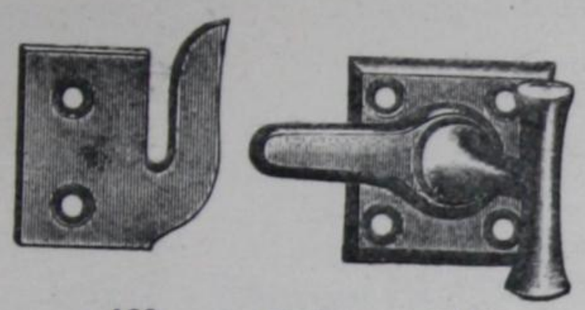

160 and 7160

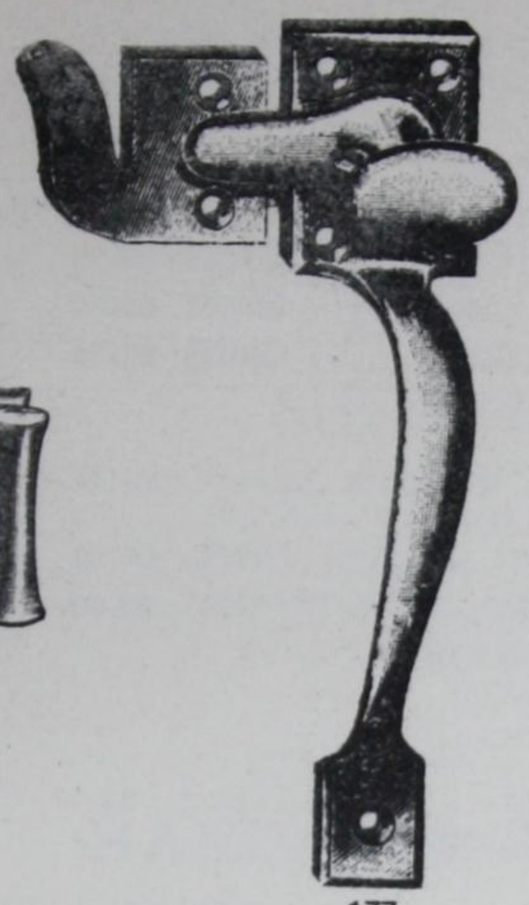

177



210 5008

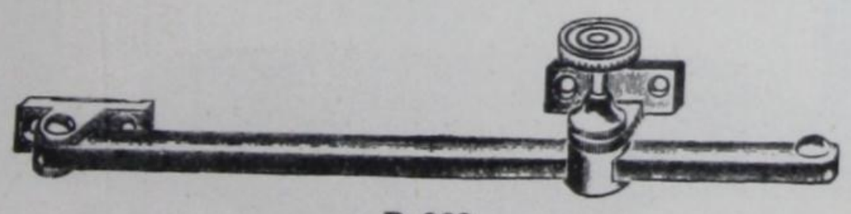

B 860

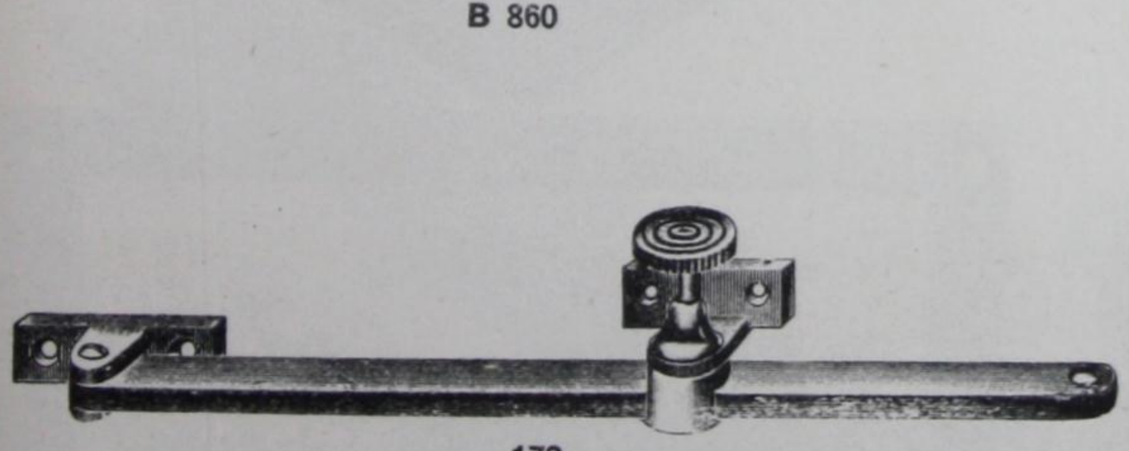

172

B879

CASEMENT FASTENERS

No. 160F, Cast Brass	Doz.	$9.20
No. 160SF4, Cast Brass	Doz.	$10.50
No. 160N, Cast Brass	Doz.	$10.50

1⅜ x 1⅜ in.
1 Doz. in Box

No. 7160F, Cast Iron	Doz.	$3.80
No. 7160D2, Cast Iron	Doz.	$3.80
No. 7160SF4, Cast Iron	Doz.	$3.70
No. 7160N, Cast Iron	Doz.	$3.70

1⅜ x 1⅜ in.
1 Doz. in Box

No. 177F, Cast Brass	Doz.	$12.90
No. 177SF4, Cast Brass	Doz.	$14.40
No. 177N, Cast Brass	Doz.	$14.40

6 x 1⅛ in.
1 Doz. in Box

No. 210F, Cast Brass	Doz.	$17.60
No. 210SF4, Cast Brass	Doz.	$19.30
No. 210N, Cast Brass	Doz.	$19.30

Size 5 in.
1 Doz. in Box

No. 5008F, Cast Brass	Doz.	$15.30
No. 5008SF4, Cast Brass	Doz.	$16.80
No. 5008N, Cast Brass	Doz.	$16.80

Size 5 in.
1 Doz. in Box

CASEMENT ADJUSTERS

No. B860F	Doz.	$16.00
No. B860SF4	Doz.	$17.50
No. B860N	Doz.	$17.50

Cast Brass Fittings
Wrough Brass Tube
Size 10 in.
1 Doz. in Box

No. 172F, Cast Brass	Doz.	$25.70
No. 172SF4, Cast Brass	Doz.	$28.00
No. 172N, Cast Brass	Doz.	$28.00

Size 12 in.
1 Doz. in Box

B879, Dead Black Japan	Doz.	$7.50

Malleable Iron
Size 12 in. for casements opening out.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DRAWER PULLS

310

No. 310F, Wrought Steel . . . . . Gross **$8.70**
No. 310D2, Wrought Steel . . . . . Gross **$8.70**
No. 310SF4, Wrought Steel . . . . Gross **$9.50**
No. 310N, Wrought Steel . . . . . Gross **$9.50**
No. 310H, Wrought Steel . . . . . Gross **$9.50**
Size 3½ in.

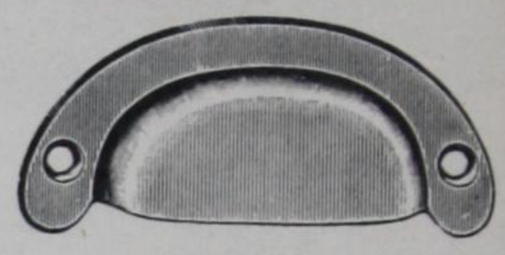

310

206

No. 206F, Cast Brass . . . . . Doz. **$6.20**
No. 206N, Cast Brass . . . . . Doz. **$6.90**
Size 4⅜ in.

4951

No. 4951F, Cast Iron . . . . . Doz. **$2.00**
Size 2⅝ in.

DRAWER PULL AND CARD HOLDERS

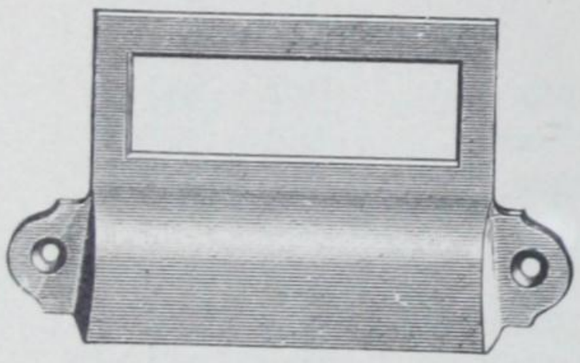

2067 and 2067½

No. 2067½F, Cast Brass
Size overall 2¼ x 3 in.
Size card 1⅛ x 2½ in.
Size opening ¾ x 2¼ in.
Doz. **$6.10**

No. 2067F, Cast Brass
Size overall 1¾ x 2¾ in.
Size card 1 x 2⅜ in.
Size opening 11/16 x 2¼ in.
Doz. **$8.10**

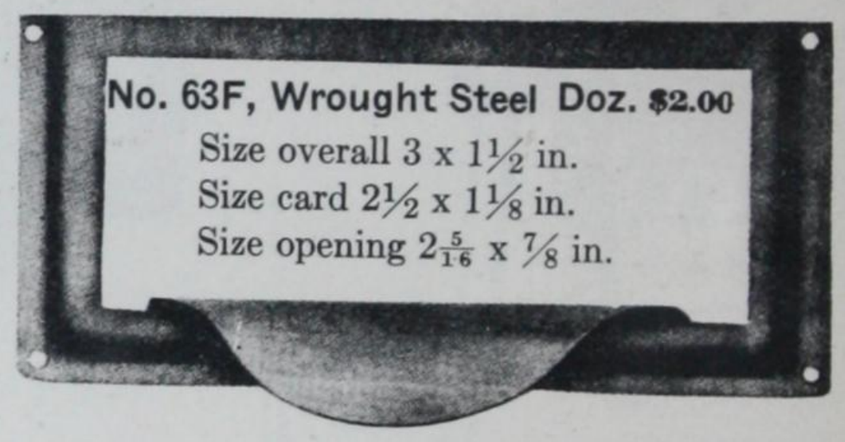

No. 63F, Wrought Steel Doz. **$2.00**
Size overall 3 x 1½ in.
Size card 2½ x 1⅛ in.
Size opening 2 5/16 x ⅞ in.

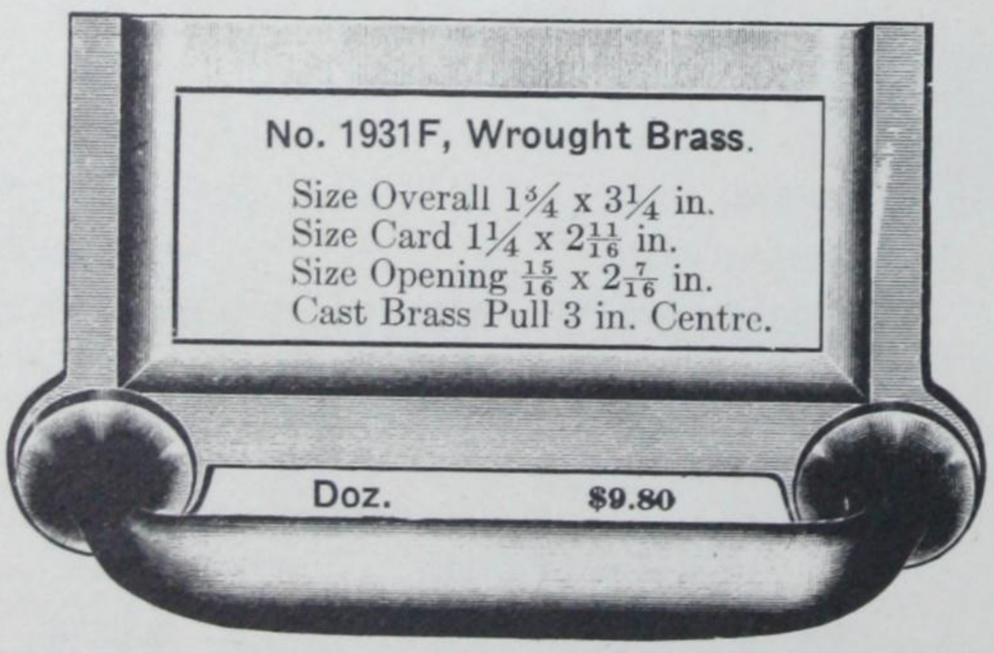

No. 1931F, Wrought Brass.
Size Overall 1¾ x 3¼ in.
Size Card 1¼ x 2 11/16 in.
Size Opening 15/16 x 2 7/16 in.
Cast Brass Pull 3 in. Centre.
Doz. **$9.80**

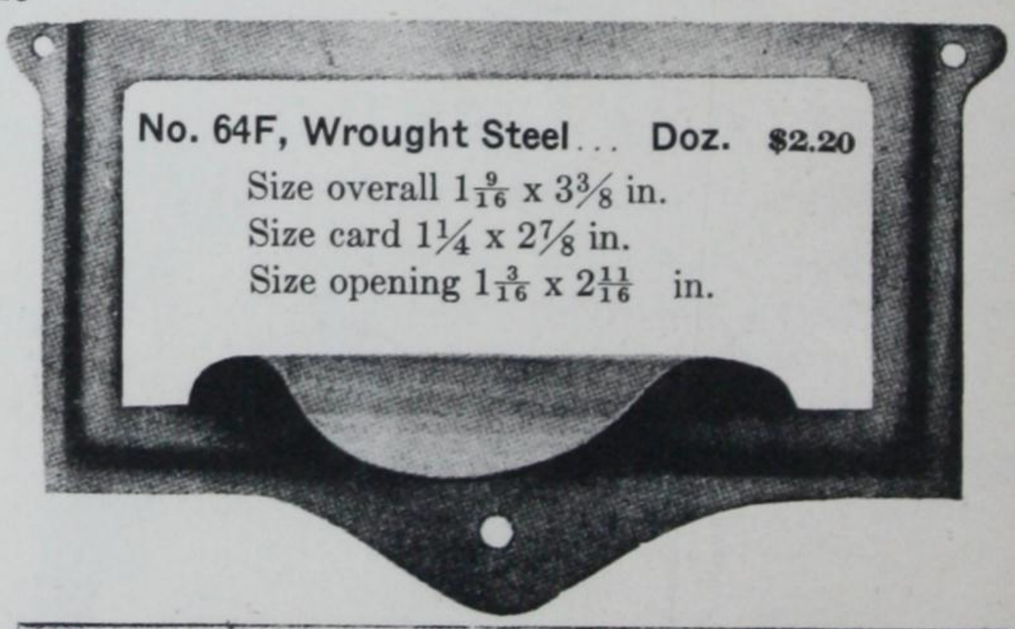

No. 64F, Wrought Steel . . . Doz. **$2.20**
Size overall 1 9/16 x 3⅜ in.
Size card 1¼ x 2⅞ in.
Size opening 1 3/16 x 2 11/16 in.

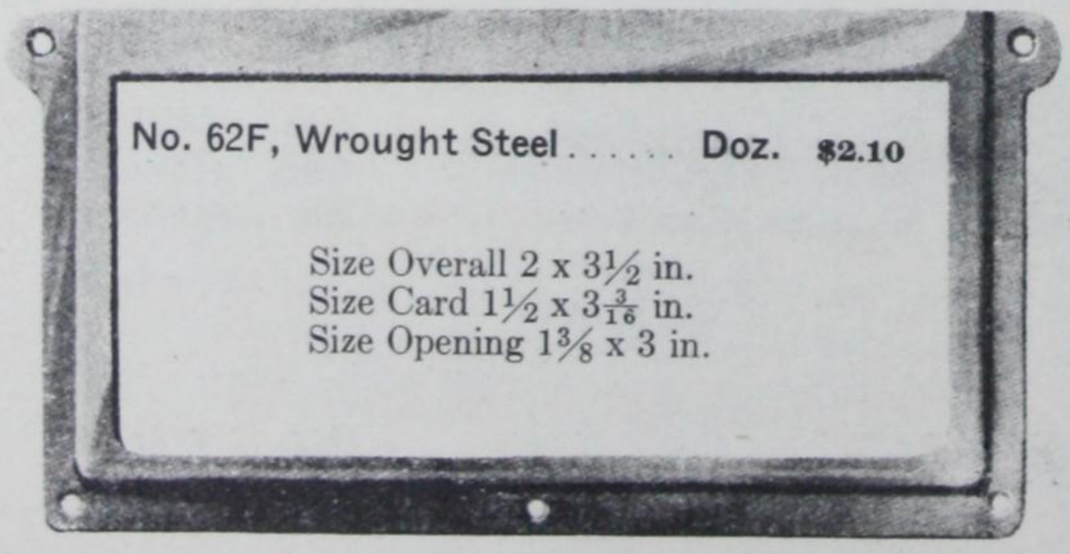

No. 62F, Wrought Steel . . . . . Doz. **$2.10**
Size Overall 2 x 3½ in.
Size Card 1½ x 3 3/16 in.
Size Opening 1⅜ x 3 in.

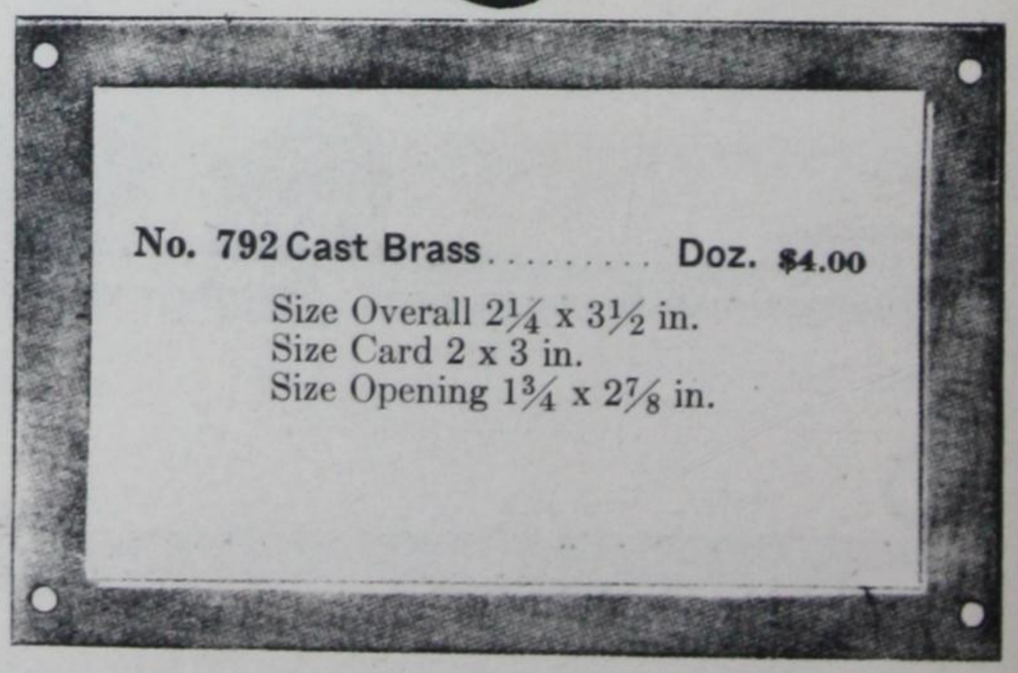

No. 792 Cast Brass . . . . . Doz. **$4.00**
Size Overall 2¼ x 3½ in.
Size Card 2 x 3 in.
Size Opening 1¾ x 2⅞ in.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

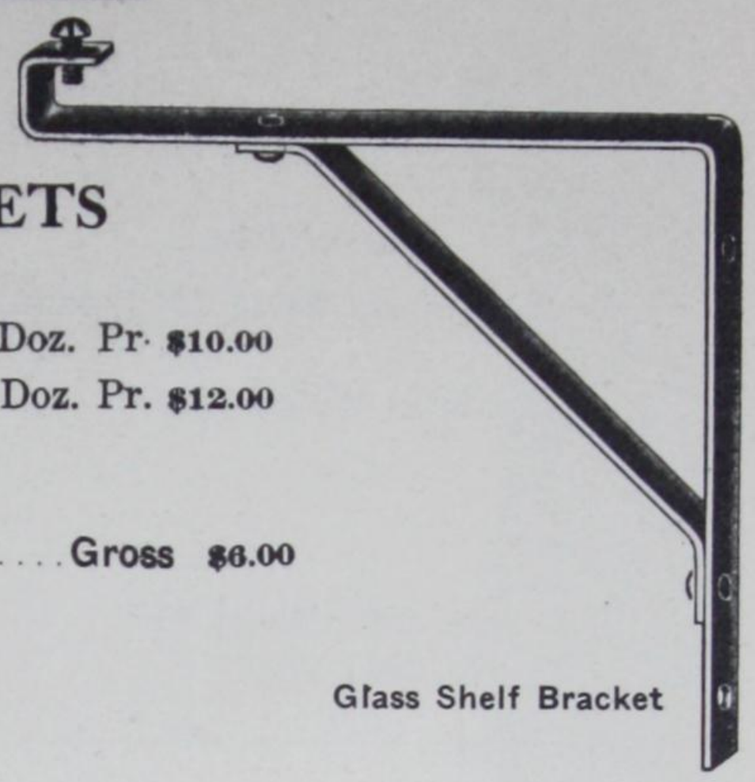

Glass Shelf Bracket

GLASS SHELF BRACKETS

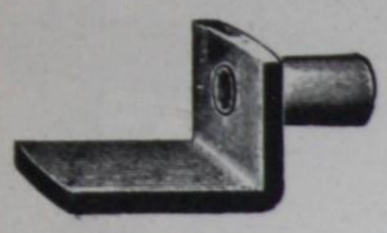

1764

Wrought Steel, Nickel Plated

4½ x 5 in. ..... Doz. Pr. **$10.00**

4½ x 6 in. ..... Doz. Pr. **$12.00**

SHELF RESTS

No. 1764 **Brass Plated, Wrought Steel** ..... **Gross $6.00**

Pin $\frac{5}{16}$ in. Diameter
Pin $\frac{3}{8}$ in. Long
1 Gross in Box

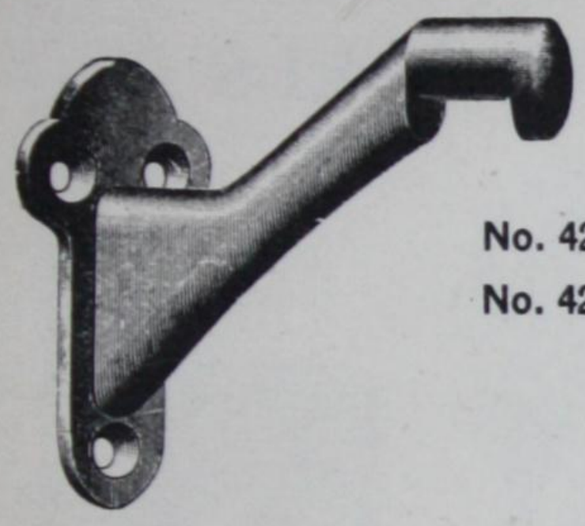

420

HAND RAIL BRACKETS

No. 420F, Cast Iron ..... **Doz. $6.00**

No. 420D2, Cast Iron ..... **Doz. $6.00**

Base 3 in. Long. Projection 3½ in.
½ Doz. in Box

HAND RAIL SCREWS

No. 51, $\frac{5}{16}$ x 4½ in. ..... **Doz. $1.00**

Single nut, Wrought Steel
3 Doz. in Box

No. 52, $\frac{5}{16}$ x 4½ in. ..... **Doz. $1.10**

Double nut, Wrought Steel
3 Doz. in Box

51



52

BOX CORNERS

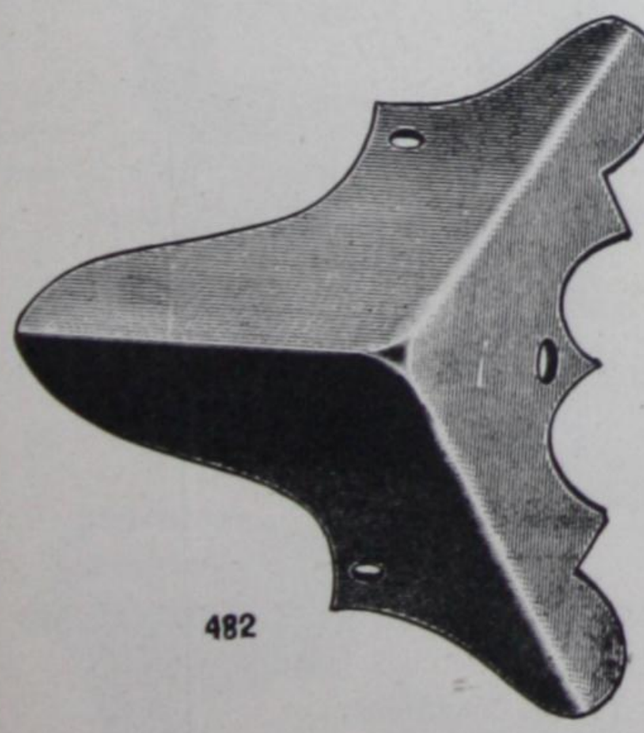

482

No. 482, Wrought Brass ..... **Doz. $8.00**

1⅜ x 1⅞ in.
3 Doz. in Box

No. 483, Wrought Brass ..... **Doz. $8.60**

¾ x 1½ in.
1 Doz. in Box

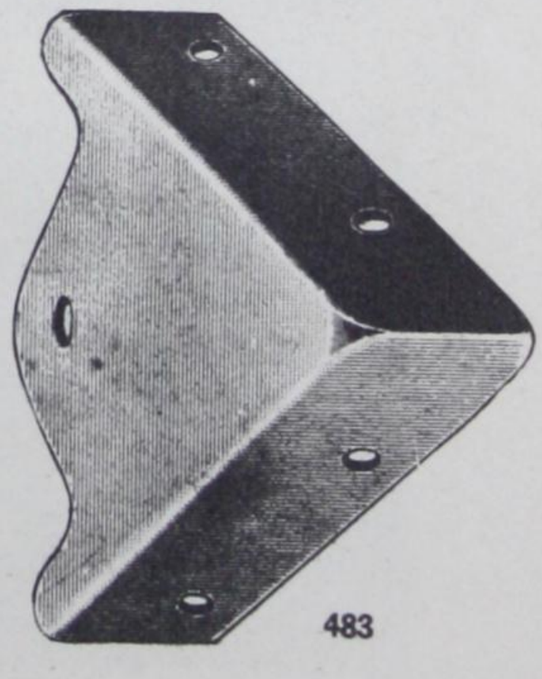

483

CARD HOLDERS

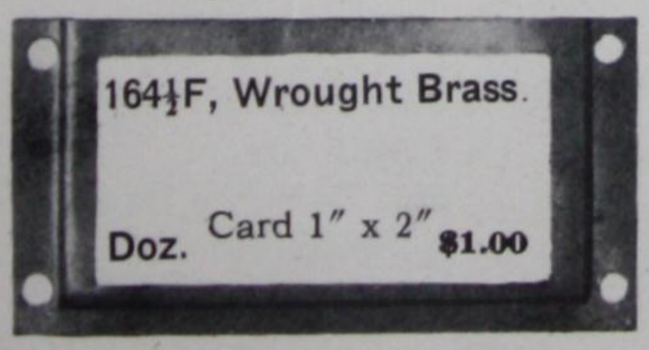

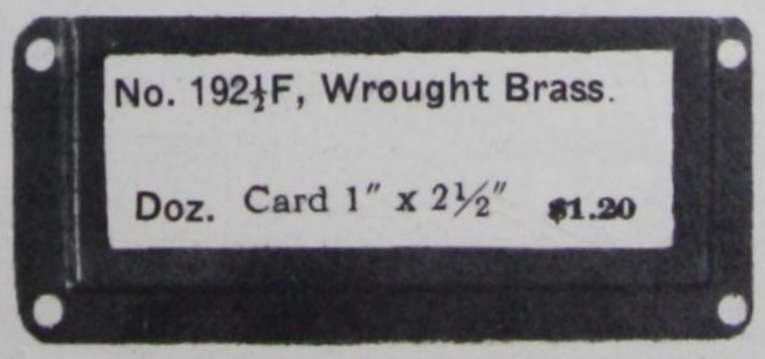

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

CUPBOARD CATCHES

Reversible

Flush or Offset by using different strike

Nickel Plated only.

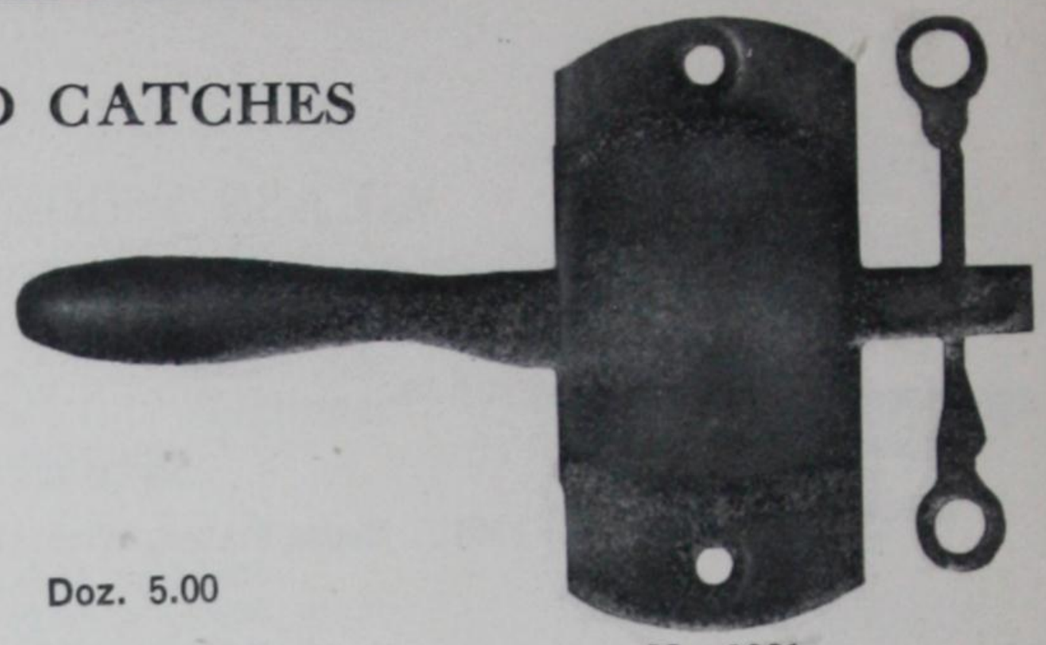

No. 2991

No. 2991 Offset 3/8" — Doz. 5.00

No. 2991 Flush — Doz. 5.00

Cast Brass; Length Pull 3½ in.; Spring Lever Catch; Adjustable to Doors from 1 to 1¼ in. Thick; Operated by Push Button.

No. 523 Push Catch—Wrought Brass—Complete with Catch and Strike

Doz. 4.70

FLUSH DOOR PULLS

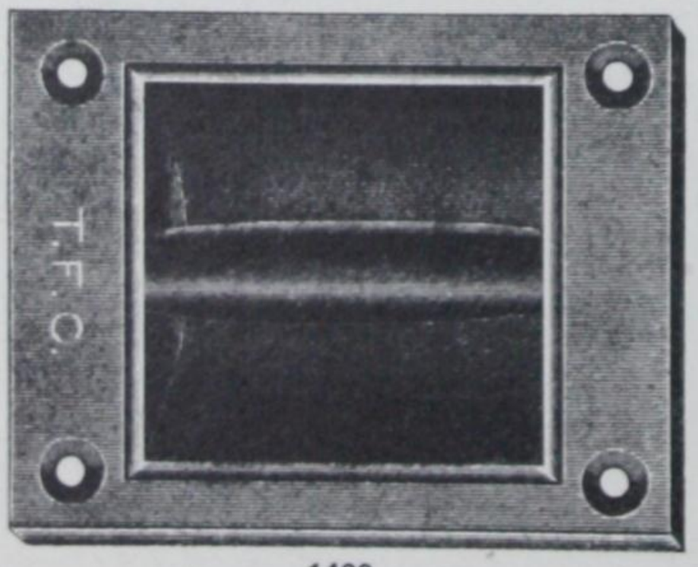

1400

No. 1400, Cast Iron Japanned ..... Doz. 5.00
4¾ x 3¾ in.
½ Doz. in Box

DOOR PULLS

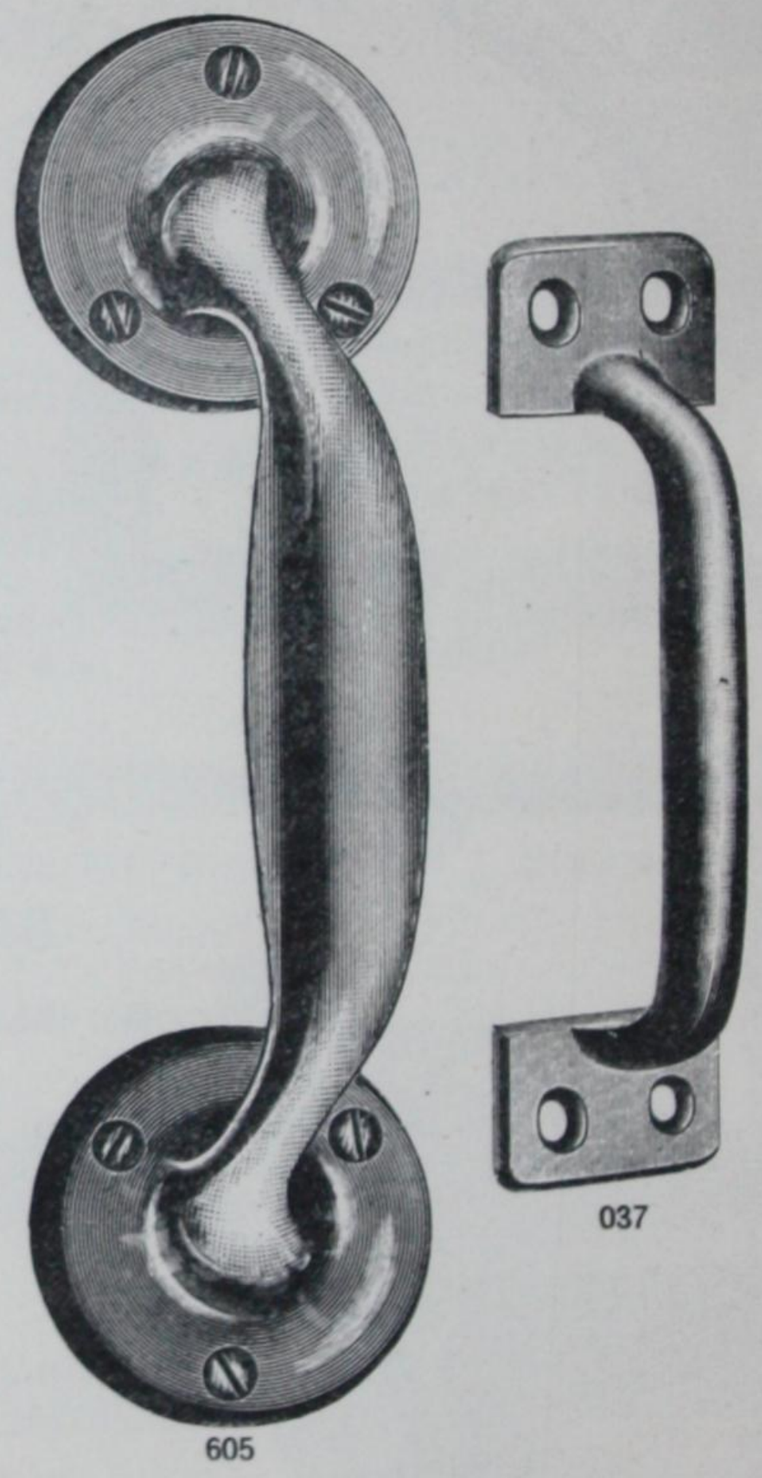

037

605

No. 605F, Cast Brass ..... Doz. $21.50
Length 6 in.
Size Ends 1½ in. Diameter
½ Doz. in Box

No. 037F, Cast Brass ..... Doz. 9.90
Length 5 in.
Size Ends ⅞ x 1¼ in.
1 Doz. in Box

The Winnipeg Paint & Glass Co. Limited

Regina - WINNIPEG - Saskatoon

SPECIALTIES

DOOR PULLS

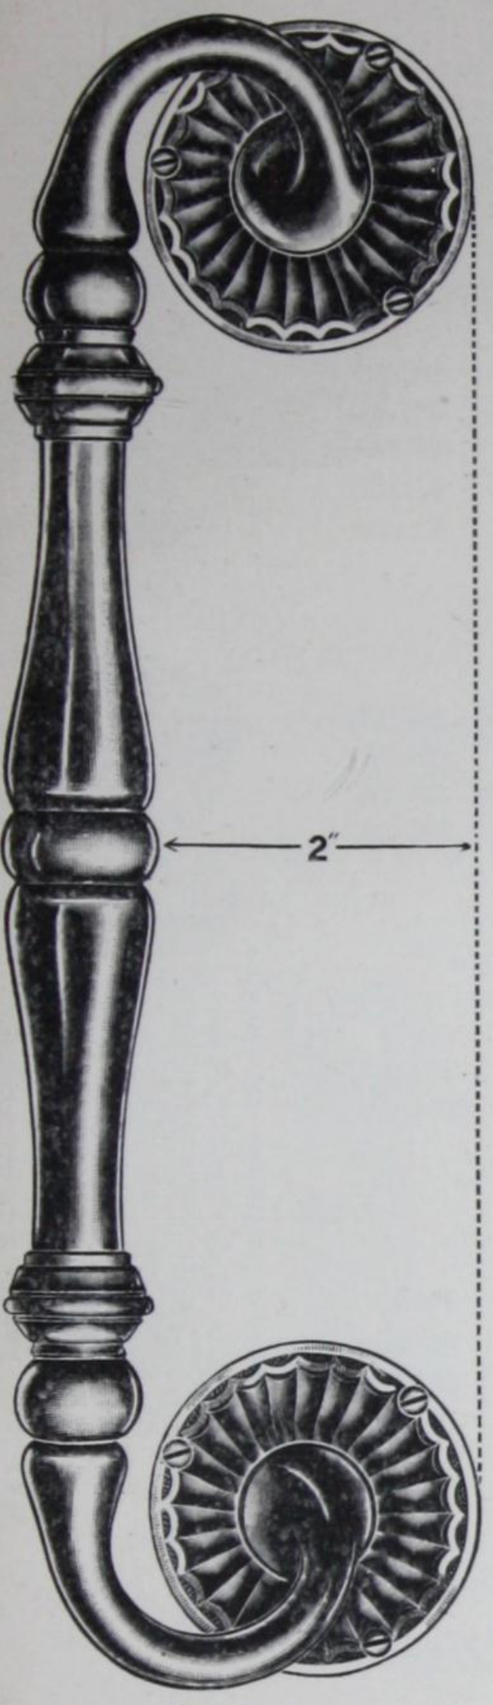

No. 8321.

CAST BRONZE

DIMENSIONS

Length—Over all 11¾ in.
Offset—Centre of Grip—1¼ in.
Plates—2⅜ in. Diameter.

Each $15.00

No. 3185

Finish
Pol. Bronze

Length
Over all
11¼ in.
Cast Brass

Each $6.00

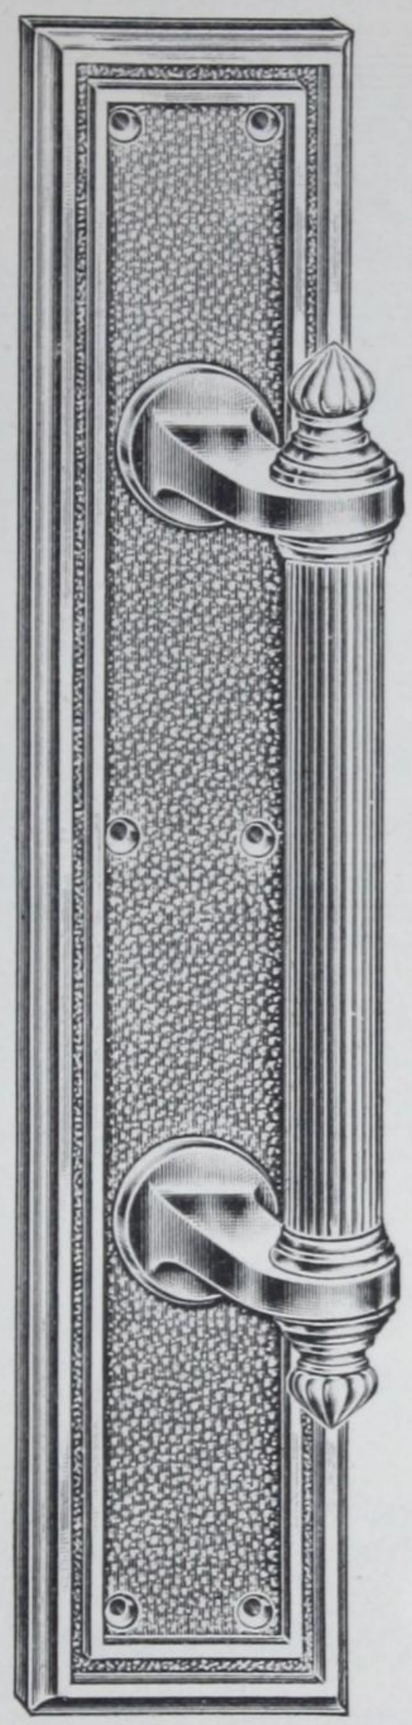

Grip No. 842

Plate No. 33972

16 x 3¼

Nos. 1736 x 9

Size
5¾x1⅞ in.
Metal
Cast Brass
Doz. $12.80

No. 662—Grip
Cast Brass
5¼ inch Centre
6 inches over all.
Each $2.80

DOOR STOPS

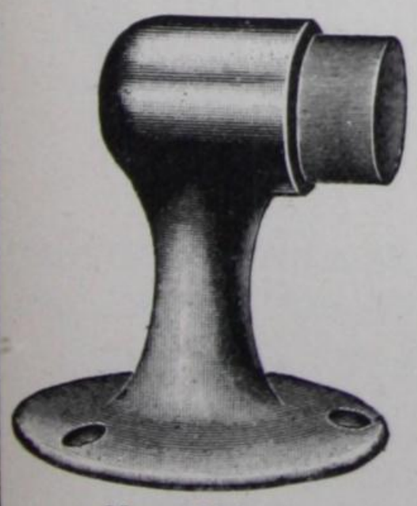

No. 1614

No.
1614
Base Diameter
2½ in.
Height
2¾ in.

Metal
Cast Brass
Doz. $14.40

FLUSH BOLTS

Finish
Statuary Bronze
Grip only **$15.00**
Grip and Plate **$23.40**

No. 1601-1602

No.	Diameter of Base	Projection	Metal	Doz.
1601	1⅝ in.	3½ in.	Cast Brass	11.40
1602	1⅝ in.	2½ in	Cast Brass	8.50

No.
708

Width of Plate
1 in.

Cast Iron

Doz. $8.90

Nos. 708FX6

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

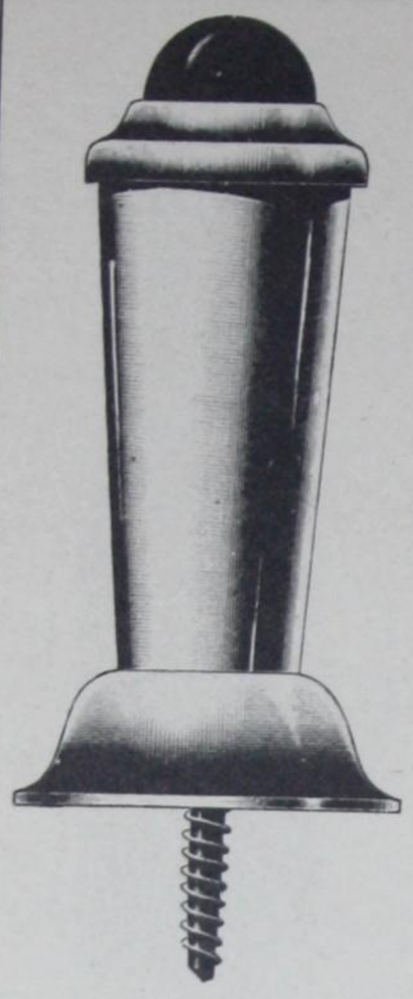

3410

7201

BASE KNOBS

No. 5, Hardwood Unfinished ..... Gross **$9.20**
Rubber Tip.
2½ in. Projection, 1 in. Base.
¼ Gross in Box.

5

No. 7201F, Cast Iron ..... Doz. **$2.30**
No. 7201D2, Cast Iron ..... Doz. **$2.30**
No. 7201SF4, Cast Iron ..... Doz. **$2.62**
No. 7201N, Cast Iron ..... Doz. **$2.62**
No. 7201H, Cast Iron ..... Doz. **$2.30**
Rubber Tip.
2½ in. Projection.
One Doz. in Box.

No. 3410F, Wrought Steel ..... Doz. **$3.36**
No. 3410D2, Wrought Steel ..... Doz. **$3.36**
No. 3410SF4, Wrought Steel ..... Doz. **$3.78**
No. 3410N, Wrought Steel ..... Doz. **$3.78**
Rubber Tip.
3 in. Projection, 1½ in. Base.
One Doz. in Box.

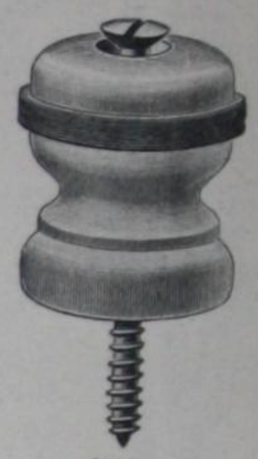

354

FLOOR DOOR STOPS

No. 354, Hardwood Varnished ..... Gross **$21.40**
Height 1¾ in., Diameter 1⅜ in.
Rubber Band.
¼ Gross in Box.

7610

No. 7610F, Cast Iron ..... Doz. **$2.30**
No. 7610D2, Cast Iron ..... Doz. **$2.30**
No. 7610N, Cast Iron ..... Doz. **$2.62**
Height 1¼ in., Base 1 in.
Rubber Tip.
One Doz. in Box.

CHAIN DOOR FASTENERS

No. 8675, Cast Brass ..... Doz. **$12.60**
5¾ x 1⅜ in.
One Doz. in Box.

8675

No. 21513 Cast Iron Dull Brass Plated ..... Doz. **$4.80**

GARAGE DOOR HOLDERS

No. 1774J, Wrought Steel, Japanned ..... Pair **$5.20**

Set consists of three parts. Heavy steel bar which holds back the door. The pivot plate coupling the bar to the door and the bumper plate which locks the bar to the frame of the garage at two points. Reversible for right or left hand doors. One Set in Box.

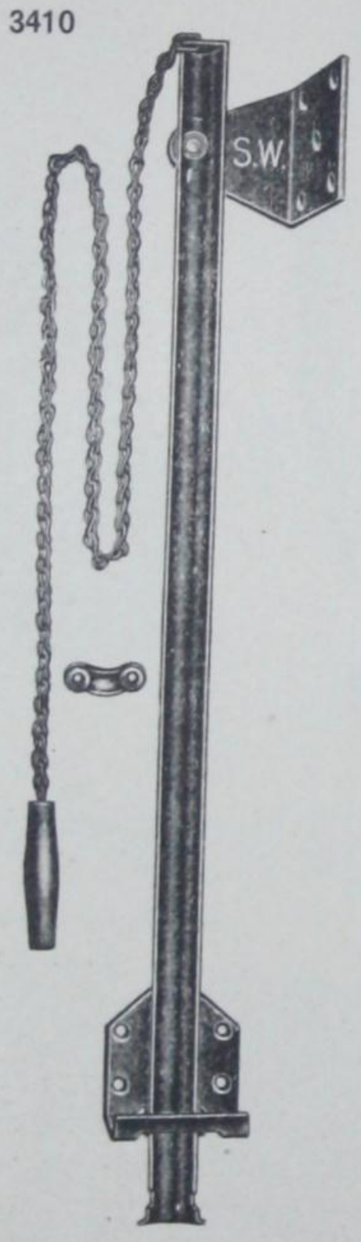

1774 J

DRAWER KNOBS

No. 69—Knob—*Brass*
9-16 inch Diameter
No. 440—Knob—¾ inch Diameter

No. 69 ..... Doz. **$1.30**
No. 440 ..... Doz. **$2.30**

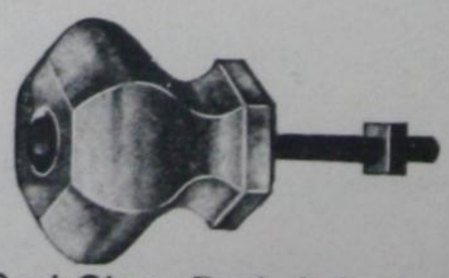

Opal Glass; Particularly suited to Kitchen and Bathroom Fixtures; Complete with Nickel Plated Bolts and Nuts.

No. 04 to match 1706 ..... Doz. **$2.20**
No. 05 to match 1707 ..... Doz. **$2.60**

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SCREEN DOOR HINGES

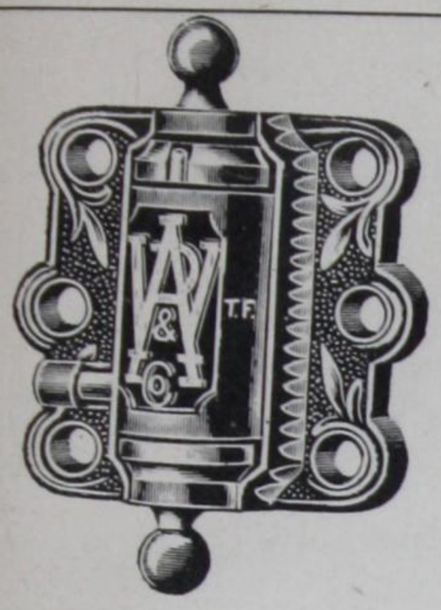

200

No. 200, Japanned Cast Iron.
3 x 3 in.
Doz. Pairs **$2.90**



75

No. 75 Japanned Wrought Steel.
3 x 2½ in., Fast Pin
Doz. Pairs **$2.60**

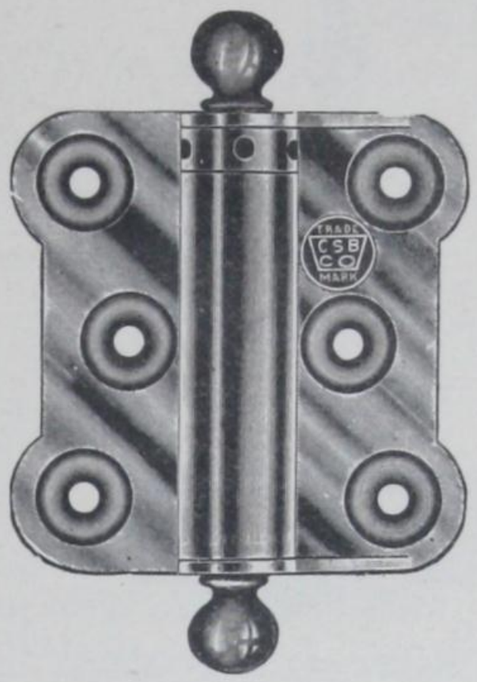

3005-3175-3285

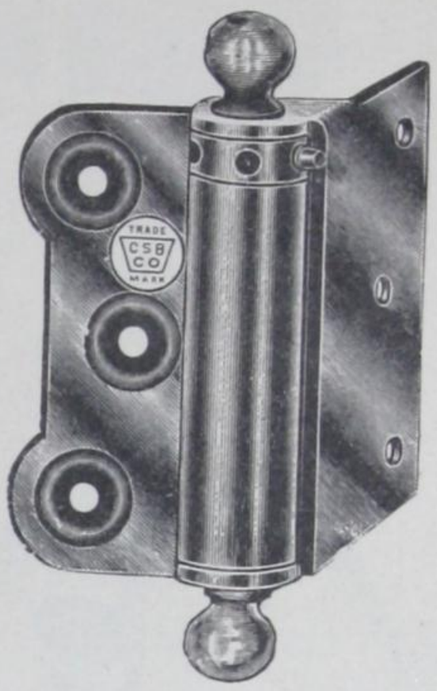

4175-4285

No. 4175D2, Wrought Steel..... Per Pair **$1.90**
No. 4285F, Wrought Steel..... Per Pair **$1.90**
3 in. Adjustable Tension
Springs best Tempered Steel Wire
One Pair in Box

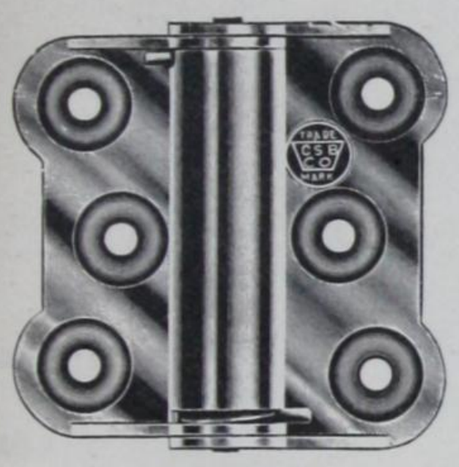

505-575-585

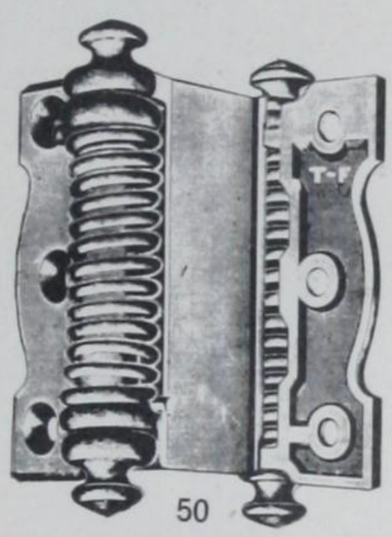

50

No. 3005, Japanned Wrought Steel.... Per Pair **$1.70**
No. 3175D2, Wrought Steel..... Per Pair **$1.90**
No. 3285F, Wrought Steel..... Per Pair **$1.90**
3 x 3 in. Adjustable Tension
Springs best Tempered Steel Wire

No. 505, Japanned Wrought Steel Doz. Pairs **$3.80**
No. 575D2, Wrought Steel..... Doz. Pairs **$5.80**
No. 585F, Wrought Steel..... Doz. Pairs **$5.80**
2¾ x 2¾ in.

No. 50, Japanned Cast Iron..... Doz. Pairs **$10.10**
Double Acting
3 in. Steel Spiral Coil Spring



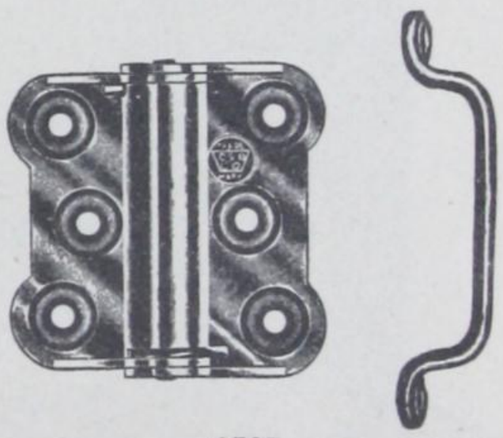

1505

SCREEN DOOR SETS

No. 1505, Japanned, Wrought Steel..... Doz. **$6.00**
No. 1585F, Wrought Steel..... Doz. **$7.80**
No. 1575D2, Wrought Steel..... Doz. **$7.80**
Set consists of 1 Pair Spring Hinges, 1 Steel Wire Pull, 1 Hook and Eye

No. 1750J, Japanned, Wrought Steel..... Doz. **$6.40**
No. 1750D2, Old Copper, Wrought Steel..... Doz. **$7.90**
Set consists of 1 Pair loose Pin Hinges 3 x 3 in. to Screw on Surface, 1Wrought Steel Pull 5 in., 1 Door Spring, 1 Gate Hook and Eye.

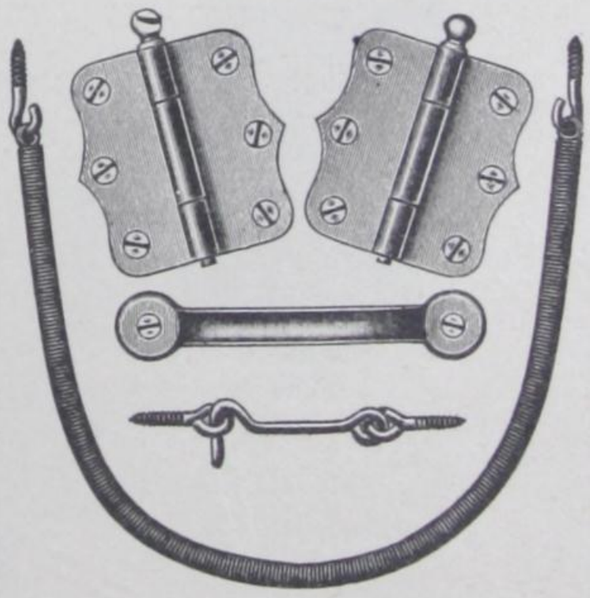

1750

MORTISE SCREEN DOOR LATCHES

No. 7560F, Wrought Steel..... Doz. **$14.60**
No. 7560D2, Wrought Steel..... Doz. **$14.60**
Latch Iron Case 2 x 1⅞ x $\frac{7}{16}$ in.
Front 3¾ x ¾ in., Backset 1⅜ in.
½ Pair Knobs 1¾ in.
½ Pair Lever Handles 2 in.
2 Escutcheons 4 x 1½ in.
Stop on inside Escutcheon Locks the Latch

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

DOOR HOLDERS

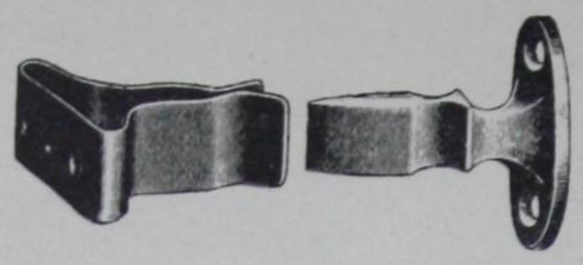

7111

No. 7111F ..... **Doz. $8.00**

No. 7111D2 ..... **Doz. $8.00**

Cast Iron Base 1⅞ x ⅞ in.
Wrought Steel Clip 2¼ x ¾ in.
One Doz. in Box

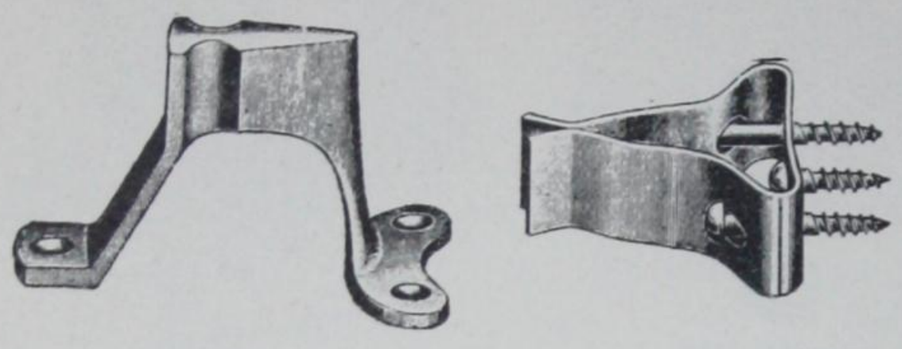

7112

No. 7112F ..... **Doz. $11.00**

No. 7112D2 ..... **Doz. $11.00**

Cast Iron Base 3⅛ x 1¾ in.
Wrought Steel Clip 2¼ x ¾ in.
One Doz. in Box

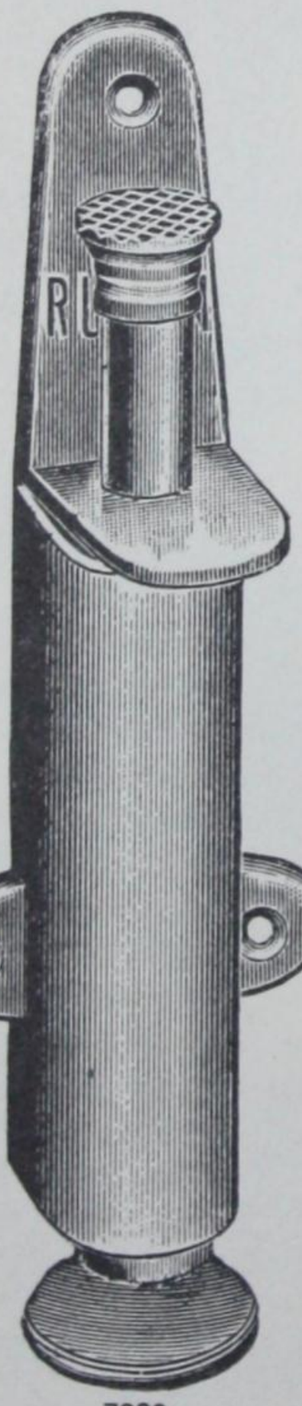

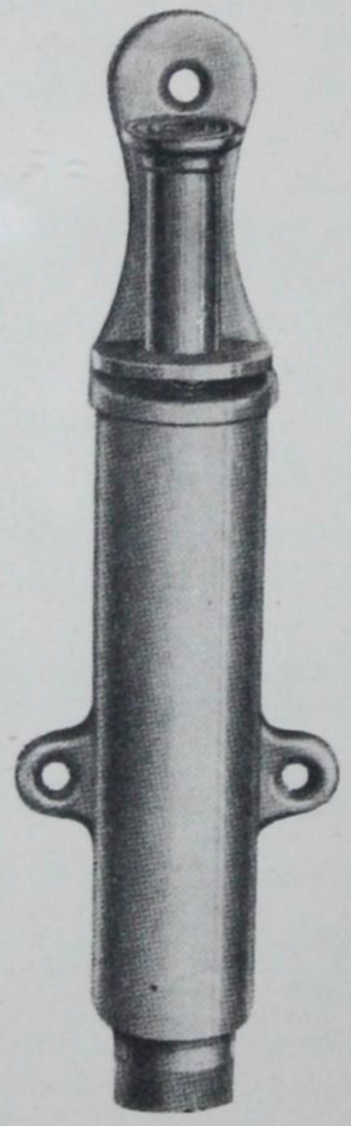

9410

No. 9410F, Wrought Steel ..... **Doz. $18.00**

No. 9410D2, Wrought Steel ..... **Doz. $18.00**

No. 9410SF4, Wrought Steel ..... **Doz. $18.00**

Length 5 in.
For Light Inside Doors
½-Doz. in Box

7280

No. 7280F, Wrought Steel ..... **Doz. $21.60**

No. 7280D2, Wrought Steel ..... **Doz. $21.60**

8 x 2½ in.

For Entrance Doors. The rubber tip prevents marring of floor and slipping.

¼-Doz. in Box

The Grand Peerless Door Stop

Strong in construction and neat in design. Easily lowered and raised by foot without noise, and when up is held by a spring as shown between the "lugs" which protect the spring so that it is almost impossible to get same out of order.

Made of Cast Bronze, in 4 different sizes with levers 4, 5, 7 and 9 in.

Packed one in a box with screws.

Finishes: Polished or Dull Bronze.

No. 105—(With 5-in. lever) . . . **Each $3.20**

No. 105

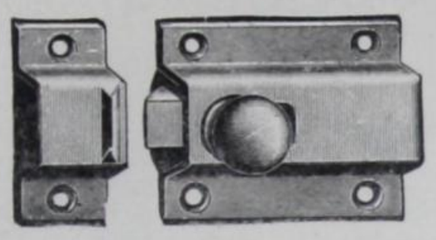

2010

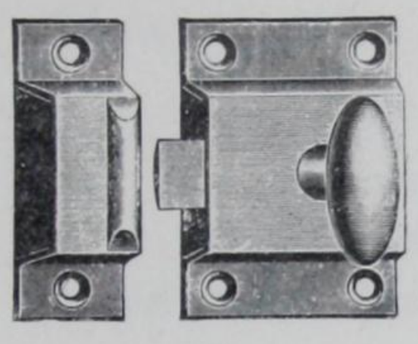

7810

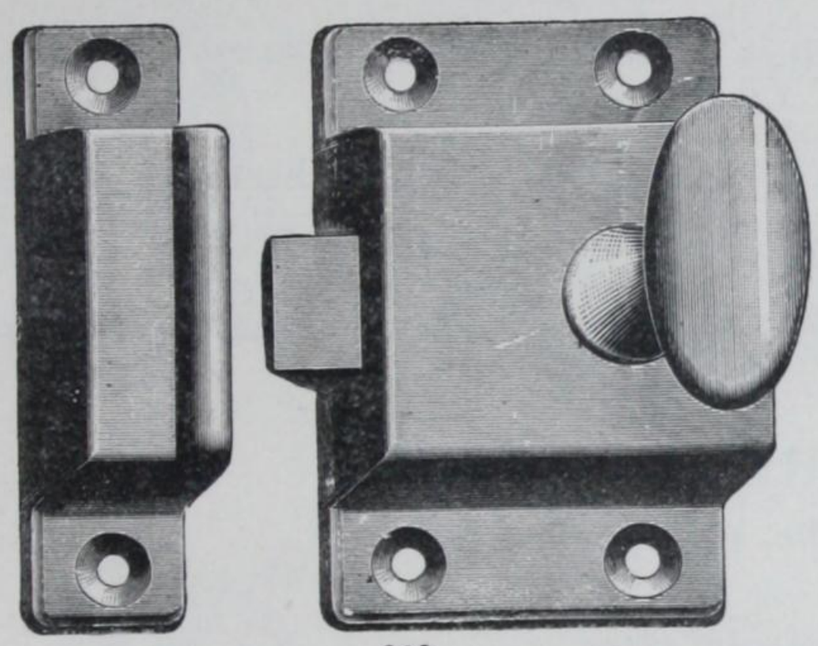

906

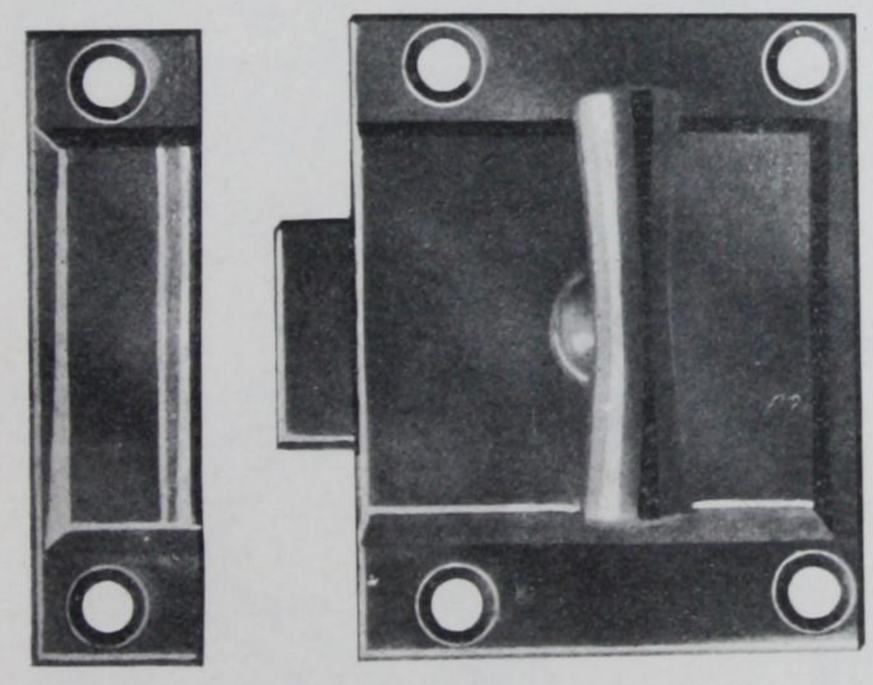

179

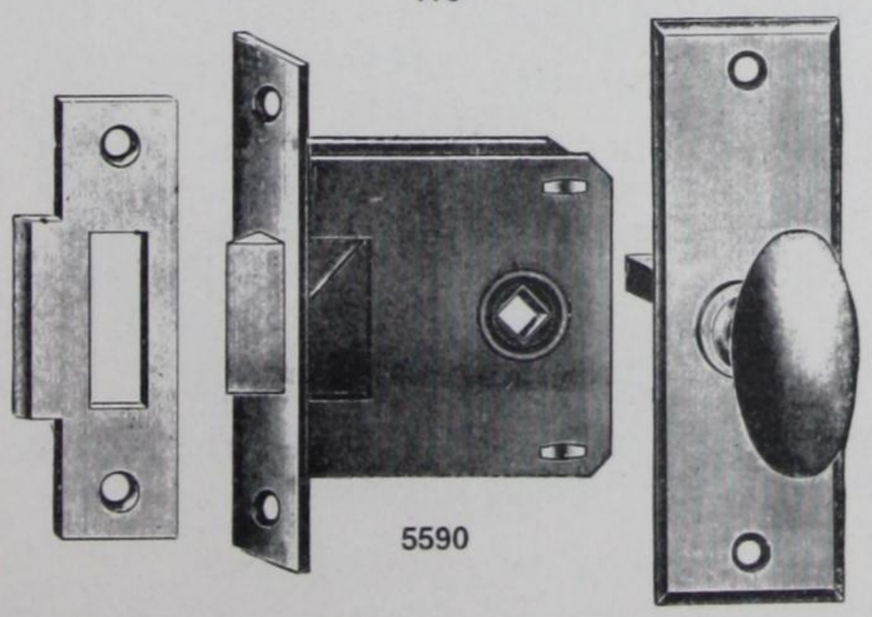

5590

CUPBOARD CATCHES

No. 2010F, Wrought Steel	Doz.	$2.30
No. 2010D2, Wrought Steel	Doz.	$2.30
No. 2010SF4, Wrought Steel	Doz.	$2.42
No. 2010N, Wrought Steel	Doz.	$2.42

Size with Strike 1½ x 2¼ in.
Two Doz. in Box

CUPBOARD TURNS

No. 7810F, Wrought Steel	Doz.	$2.84
No. 7810D2, Wrought Steel	Doz.	$2.84
No. 7810SF4, Wrought Steel	Doz.	$3.04
No. 7810N, Wrought Steel	Doz.	$3.04
No. 7810H, Wrought Steel	Doz.	$3.04

Size with Strike 1⅞ x 1⅞ in.
One Doz. in Box

No. 906F, Wrought Steel	Doz.	$2.84
No. 906D2, Wrought Steel	Doz.	$2.84
No. 906SF4, Wrought Steel	Doz.	$3.04
No. 906N, Wrought Steel	Doz.	$3.04

Size with Strike 2¼ x 2¼ in.
One Doz. in Box

No. 179F, Cast Brass	Doz.	$15.00
No. 179SF4, Cast Brass	Doz.	$16.50
No. 179N, Cast Brass	Doz.	$16.50

Size with Strike 2¼ x 2½ in.
One Doz. in Box

MORTISE CUPBOARD LATCHES

No. 5590F, Wrought Brass	Doz.	$35.00
No. 5590SF4, Wrought Brass	Doz.	$38.00
No. 5590N, Wrought Brass	Doz.	$38.00

Latch 1½ x 1¾ in.
Back Set 1⅛ in.
Face Plate 2½ x ½ in.
Strike 3 x 1 in
For Doors ⅝ to 1¼ in. Thick
½ Doz. in Box

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

74—174

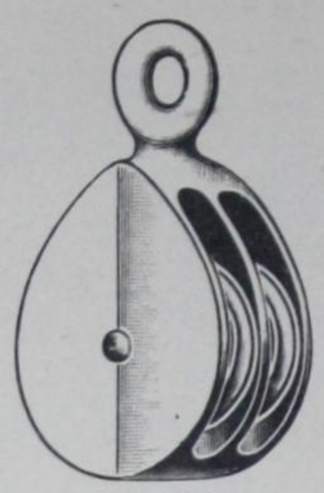

76—176

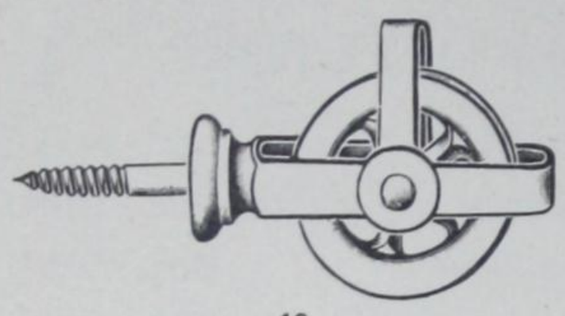

46

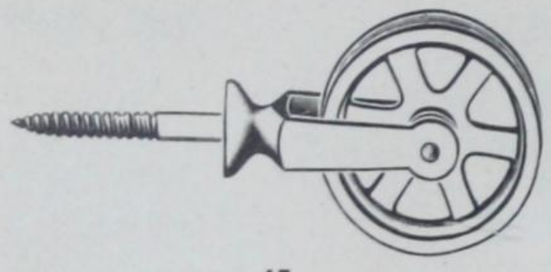

45

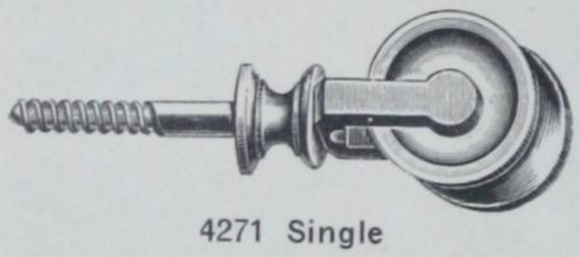

4271 Single

4271 Double

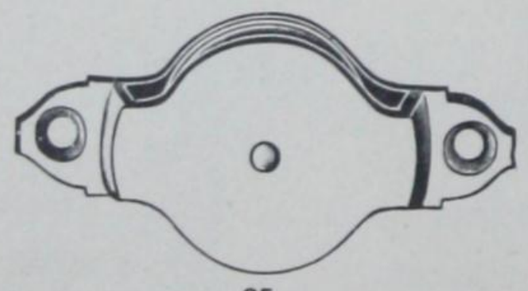

25

55

AWNING PULLEYS

No. 74, Japanned Iron, Single Wheel

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.
For Rope	3/16 in.	¼ in.	9/32 in.	5/16 in.	7/16 in.
Doz.	**$1.20**	**$1.50**	**$1.80**	**$2.30**	**$4.60**

One Doz. in Box.

No. 76, Galvanized Iron, Single Wheel

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.
For Rope	3/16 in.	¼ in.	9/32 in.	5/16 in.	7/16 in.
Doz.	**$1.90**	**$2.30**	**$2.80**	**$3.90**	**$7.40**

One Doz. in Box.

No. 174, Japanned Iron, Double Wheel

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.
For Rope	3/16 in.	¼ in.	9/32 in.	5/16 in.	7/16 in.
Doz.	**$1.30**	**$1.60**	**$1.90**	**$2.60**	**$4.90**

One Doz. in Box.

No. 176, Galvanized Iron, Double Wheel

	¾ in.	1 in.	1¼ in.	1½ in.	2 in.
For Rope	3/16 in.	¼ in.	9/32 in.	5/16 in.	7/16 in.
Doz.	**$2.00**	**$2.50**	**$3.00**	**$4.30**	**$8.40**

One Doz. in Box.

SCREW PULLEYS

No. 46, Japanned Iron

	1½ in.	2 in.
For Rope	¼ in.	5/16 in.
Doz.	**$3.50**	**$5.50**

One Doz. in Box.

No. 45, Japanned Iron

	1 in.	1¼ in.	1½ in.	2 in.
For Rope	3/16 in.	¼ in.	¼ in.	5/16 in.
Doz.	**$1.30**	**$1.40**	**$1.70**	**$2.50**

One Doz. in Box.

No. 4271, Single, Cast Brass

	¾ in.	1 in.
Doz.	**$3.80**	**$5.50**

No. 4271, Double, Cast Brass

	¾ in.	1 in.
Doz.	**$6.60**	**$9.00**

One Doz. in Box.

SIDE PULLEYS

No. 25, Japanned Iron

	1 in.	1¼ in.	1½ in.	2 in.
For Rope	3/16 in.	¼ in.	¼ in.	5/16 in.
Doz.	**$2.20**	**$2.40**	**$2.60**	**$4.00**

One Doz. in Box.

UPRIGHT PULLEYS

No. 55 x 2 in., Japanned Iron ..... **Doz. $3.50**

For Rope 5/16 in. One Doz. in Box.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

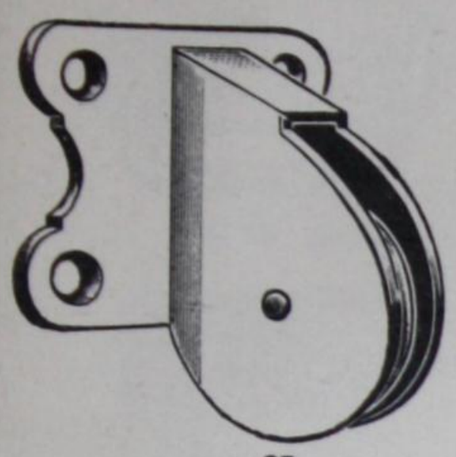
85

HOT HOUSE PULLEYS

No. 85 x 2 in., Japanned Cast Iron ..... **Doz.** **$5.90**
Single
For $\frac{5}{16}$ in. Rope

No. 87 x 2 ins., Japanned Cast Iron ..... **Doz.** **$7.60**
Double
For $\frac{5}{16}$ in. Rope

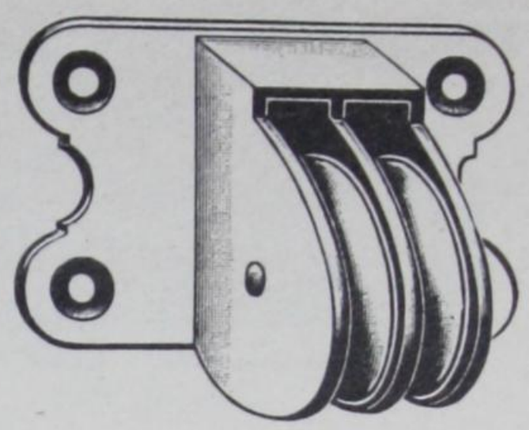
87

CLOTHES LINE PULLEYS

No. 358

No. 159, Galvanized Cast Iron ..... **Doz.** **$4.70**
"Knot Passing"

No. 358, Galvanized ..... **Doz.** **$5.90**
Cast iron frame with solid eye at right angles to frame.

Cast iron wheel 5 inch diameter.

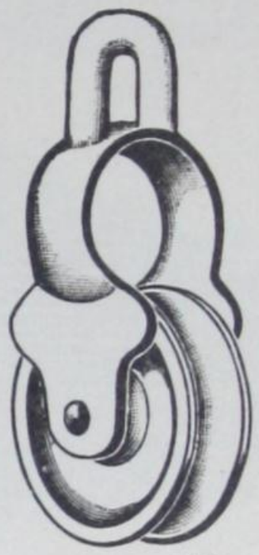
159

LINE CLEATS

No. 14, Galvanized Malleable Iron **$1.00**
4½ in.
Two Doz. in Box

No. 4230F x 3 in., Cast Brass ..... **Doz.** **$4.80**

14 and 4230

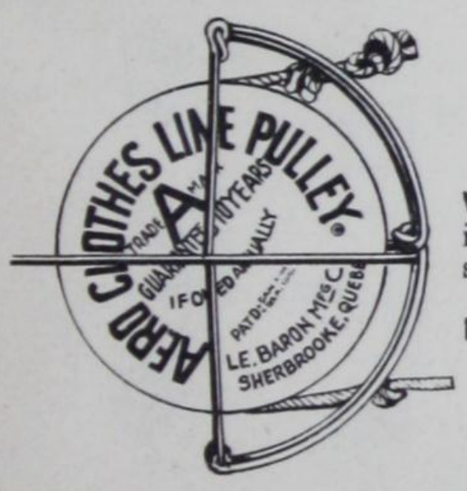

AERO PULLEYS

Heavy Galvanized Frame and Guides; Waterproof Hardwood Pulley; Aero Junior is a small Pulley for a Short Line; Takes any size Line, Wire or Rope.

Per Doz.
No. 14—Aero, Size Wheel 6 in. **$7.20**
Weight 12 lbs. Dozen

AERO SUPPORTS

Heavy Galvanized Steel Wire Frame; Weather proofed Hardwood Pulley; Prevents Pulley Lines from sagging.

Per Doz.
—Size Pulley 2¾ in.; Length 12 in. **$5.40**
Weight 4½ lbs. Dozen
Open Stock

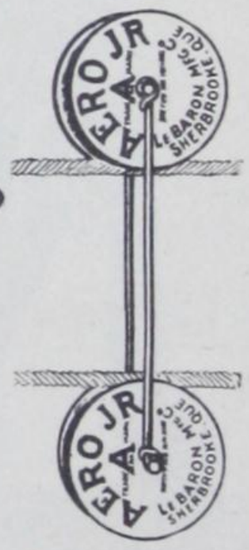

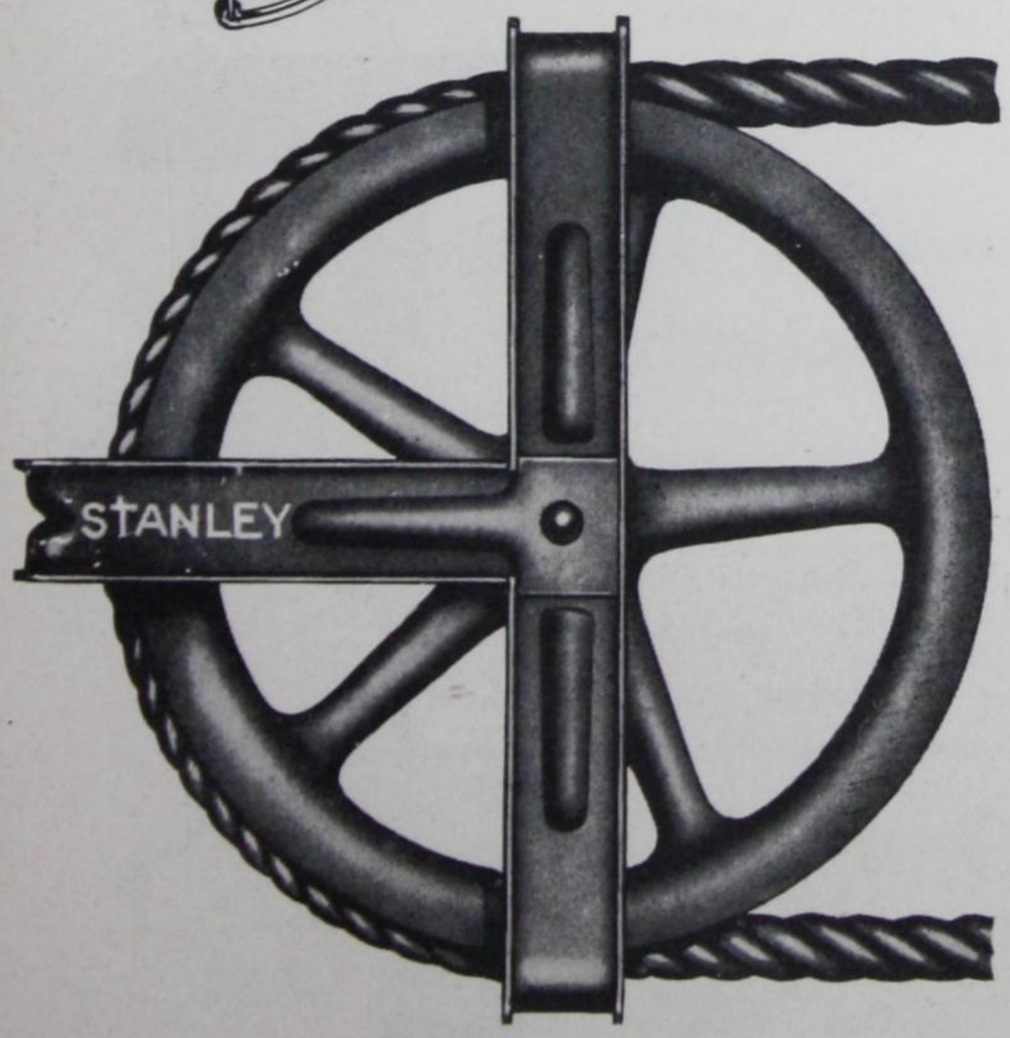

(ONE HALF ACTUAL SIZE)

GALVANIZED CLOTHES LINE WIRE

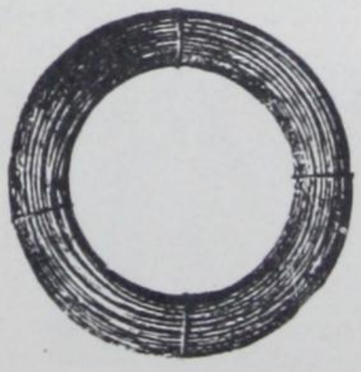

A galvanized soft steel wire, 19 gauge, composed of six strands loosely twisted, the whole making a strong and pliable wire rope.

Per Doz.
50 ft. Coils; One Dozen Coils **continuous** in Bundle **$4.20**

Stanley Clothes-Line Pulleys

Hot Galvanized with Brass Axle
Rust-Proof Doz. **$12.90**

An exceptionally easy and accurately working pulley.

The wheel is large and the frame very strong.

Designed so that the clothes line will work freely and not bind in any position.

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

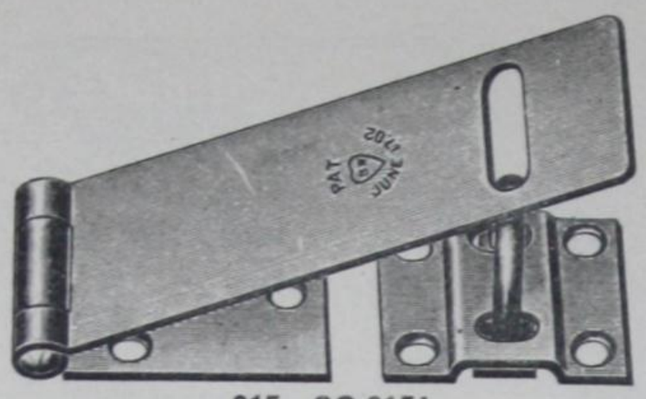

915—SC 915½

SAFETY HASPS

No. 915 x 3 in. Wrought Steel ..... **Doz. $1.48**
No. 915 x 4½ in. Wrought Steel ..... **Doz. $1.90**
No. 915 x 6 in. Wrought Steel ..... **Doz. $2.94**

Loose staple self adjusting to door shrinkage
1 Doz. in Box

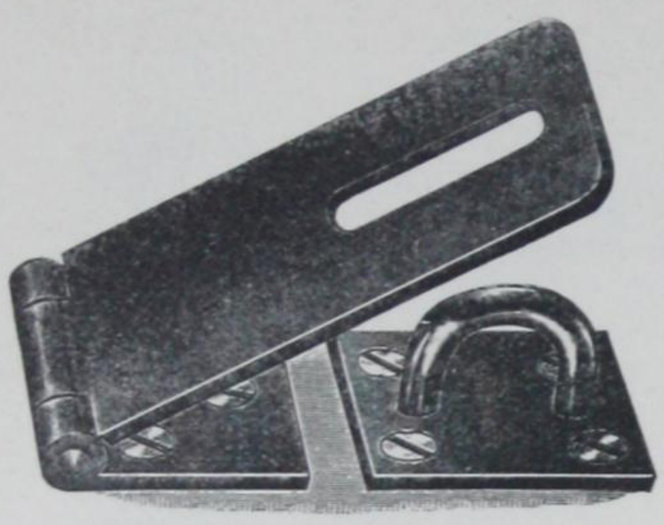

815

No. 815 x 3 in. Wrought Steel ..... **Doz. $1.50**
No. 815 x 4½ in. Wrought Steel ..... **Doz. $1.90**
No. 815 x 6 in. Wrought Steel ..... **Doz. $2.94**

Solid Staple
1 Doz. in Box

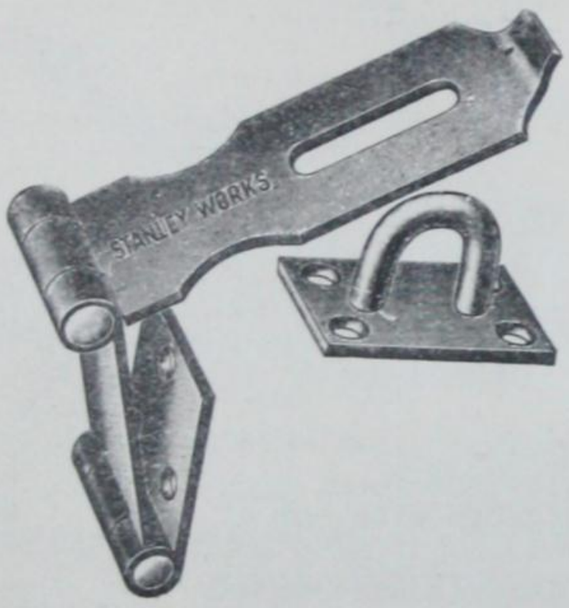

925

No. 925 x 4½ in. Wrought Steel ..... **Doz. $4.70**
No. 925 x 6 in. Wrought Steel ..... **Doz. $7.40**

4½ in.—1 Doz. in Box. 6 in.—½ Doz in Box

No. 891F, 3 in. Cast Brass ..... **Doz. $8.40**

1 Doz. in Box

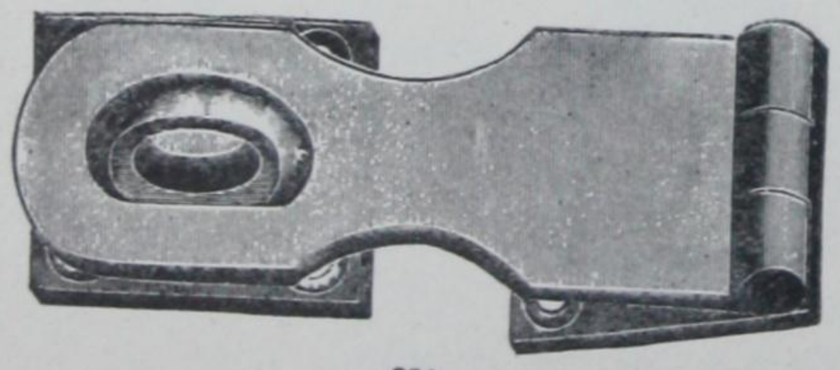

891

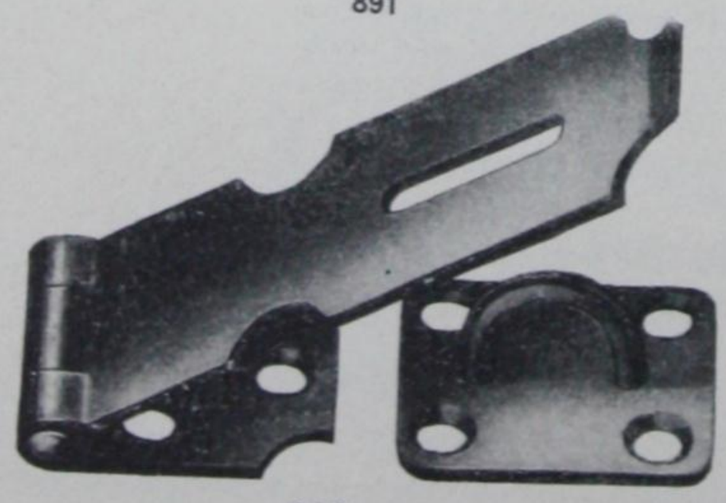

346

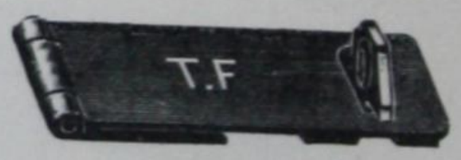

Closed View

717 x 4½"

Finished in—Plain Bright Steel,

Doz. $2.94

Open View

717

No. 346C Wrought Steel Brass Plated

Size, Length of Slotted Part (Inches)	Size of Hinge Part (Inches)	Length of Joint (Inches)	Size of Staple Plate (Inches)
2½	1⅛ x 15/16	⅞	1¼ x 15/16

Doz. $2.60

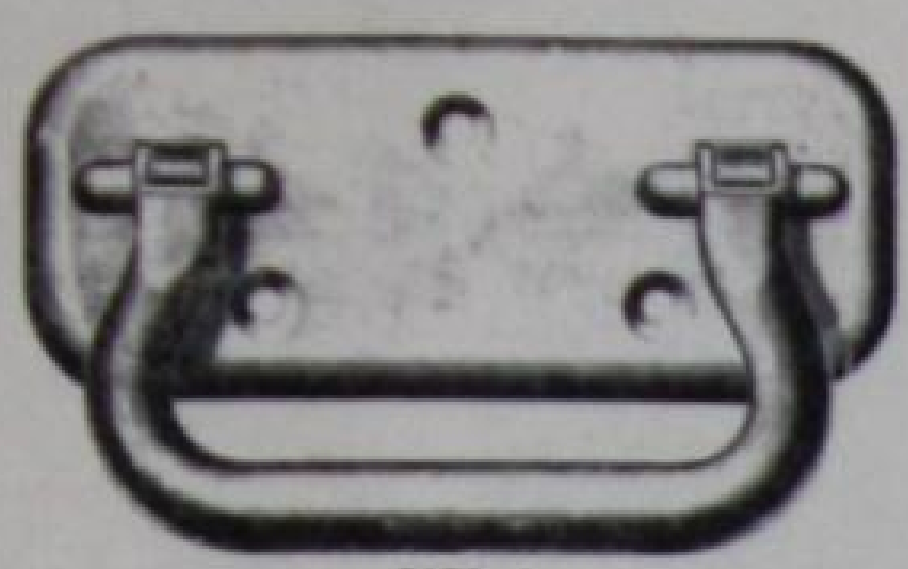

2082 J

CHEST HANDLES

No. 2082J, Japanned Wrought Steel.......Doz. Pairs $8.80
No. 2082 Old Copper ....Doz. Pairs $11.50

Handle 4 in.
Plate 2 in. x 4¾ in.
½ Doz. Pairs in Box

No. 1205J, Japanned Wrought Steel .... Doz. Pairs $7.20

Handle 3½ in.
Plate 3⅝ x 3 in.
½ Doz. Pairs in Box

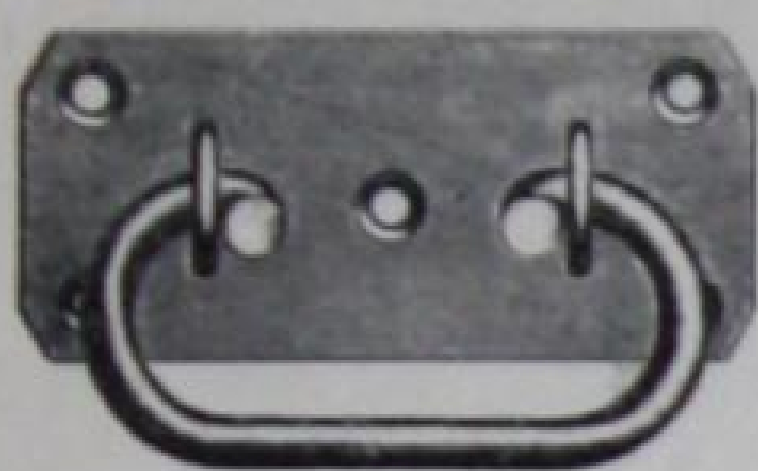

1205 J

TRAP DOOR RINGS

No. 1215J x 1, Japanned Wrought Steel .... Doz. $5.50

Ring Handle 2 in. Diameter
Plate 3½ x 3¼ in.
½ Doz. in Box

1215 J x 1

WROUGHT STAPLES

No. 155 x 1½ in. .... Gross .80
No. 155 x 2 in. .... Gross $1.10
No. 155 x 2½ in. .... Gross $1.40
No. 155 x 3 in. .... Gross $2.00
No. 155 x 4 in. .... Gross $3.50

1½ in., 2 in., 2½ in.,—1 Gross in Box
3 in., 4 in., —½ Gross in Box



155

PADLOCK EYES

No. 1245J, Japanned Wrought Steel .... Doz. $2.60

2⅛ x 1⅞ in.
¾ x ⅝ in. Hole

An inexpensive device for fastening garage, barn and warehouse doors. Can be used to advantage with latch No. 1252.

1245 J

7914
Style of 7924

PUSH PLATES (Marked Push)

No. 7914 x 9C, Cast Brass..........Doz. $8.40
Size 2 x 3 in.
1 Doz. in Box

PULL PLATES (Marked Pull)

No. 7924 x 9C, Cast Brass..........Doz. $8.40
Size 2 x 3 in. Same design as 7914 Push Plate
1 Doz. in Box

DOOR PULLS

No. 250, Cast Iron Japanned .... Gross $12.50
Length 6 in.
1 Doz. in Box.

482Jx3 (6½″)	Doz.	$2.70
482Jx4 (7⅞″)	Doz.	$7.30
482Fx3 (6½″)	Doz.	$8.50
482Fx4 (7⅞″)	Doz.	$9.20

Length 6½ in.
Width of Plate 1¾ in.
1 Doz. in Box.



250



482

No. 1265J, Wrought Steel Japanned .... Doz. $10.74
Length 10½ in.
Width 1¼ in.
Width of Ends 2½ in.
½ Doz. in Box.
Suitable for Garage, Warehouse and Stable Doors.

No. 1266J, Wrought Steel Japanned .... Doz. $14.70
Length 14½ in.
Width 2¾ in.
Grip 10½ x 1¼ in.
Grip ends 2½ in. wide.
⅙-Doz. in Box.
Equipped with combination holes for screws or bolts.
For Extra Heavy Doors.

1265J

1266J

No. 5210F, Wrought Steel .... Doz. $1.00
No. 5210D2, Wrought Steel .... Doz. $1.00
Length 5 in.
3 Doz. in Box.

No. 640F, Steel Wire .... Gross $6.00
No. 640D2, Steel Wire .... Gross $6.00
Length 5 in.
3 Doz. in Box.

640

5210

HALF BUTTONS

No. 4568 x ¾ in. Cast Brass .... Doz. .40
No. 4568 x 1 in. Cast Brass .... Doz. .50

4568

HINGE HASPS AND STAPLES

WROUGHT STEEL

No. 912 x 3 in. .... Doz. $1.26
No. 912 x 4½ in. ...... Doz. $1.58
No. 912 x 6 in. .... Doz. $2.00
No. 912 x 8 in. .... Doz. $3.58

912

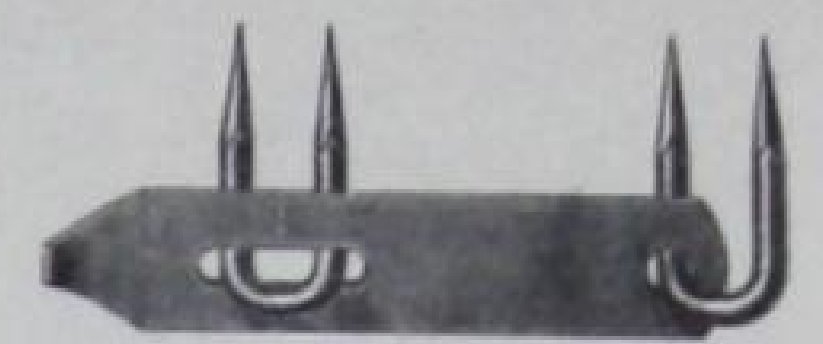

20

HASPS AND STAPLES

WROUGHT STEEL

No. 20 x 6 in. .... Doz. $1.00
No. 20 x 8 in. .... Doz. $1.26
One Doz. in Box

HASPS, HOOKS AND STAPLES

WROUGHT STEEL

No. 30 x 6 in. .... Doz. $1.26
No. 30 x 8 in. .... Doz. $1.68

One Doz. in Box

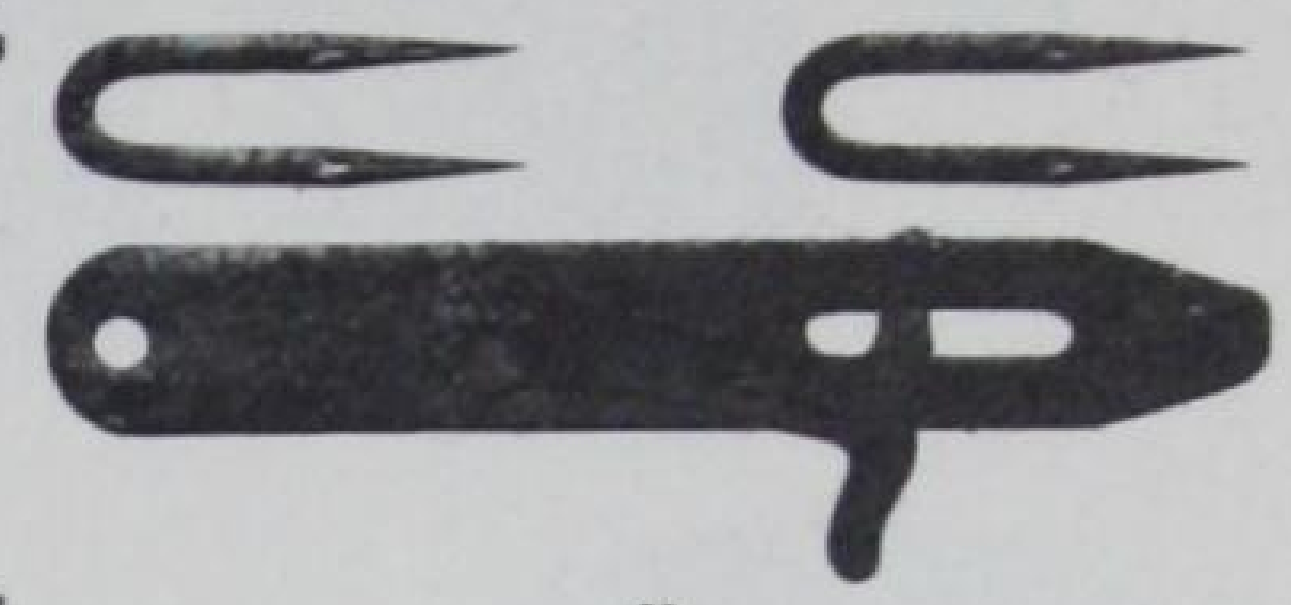

30

WROUGHT STEEL

No. 35 x 8 in. .... Doz. $2.10
Extra Heavy
One Doz. in Box

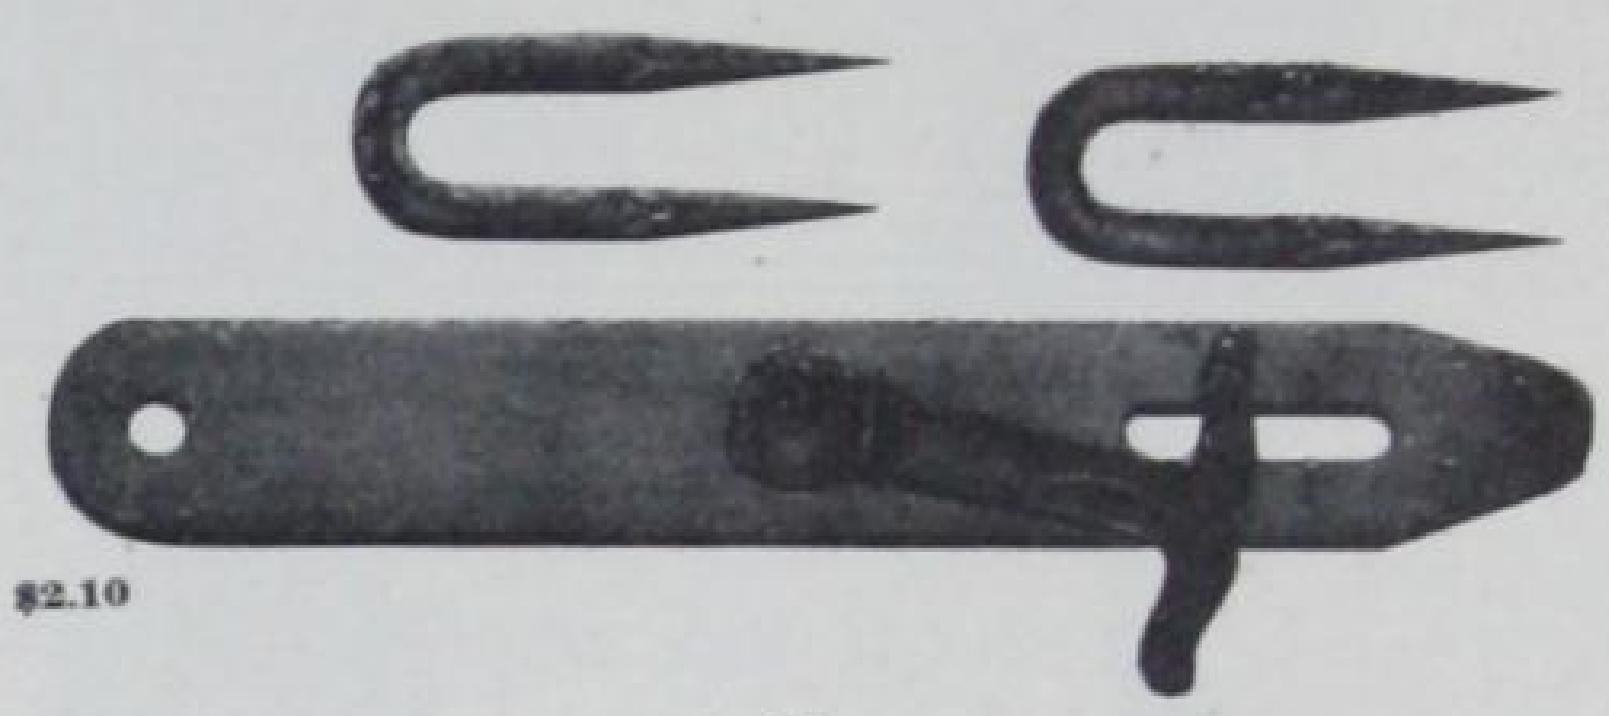

35

WROUGHT, ROUND, BRIGHT HOOKS AND STAPLES

Extra Heavy
No. 50, 5/16 x 5 in. .... ¼ Grs. $16.20
¼-Gross in Box

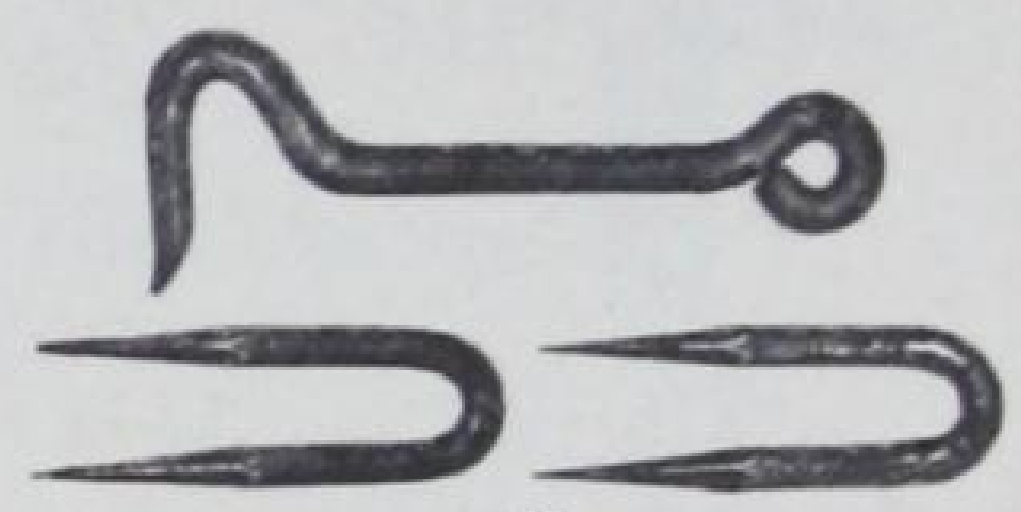

50

DOOR SPRINGS

2-3-4-5

No. 2, Perfection, 5/32 x 16 in. .... Doz. $1.12
No. 3, Perfection, 11/32 x 16 in. .... Doz. 1.20
No. 4, Perfection, ⅜ x 16 in. .... Doz. 1.30
No. 5, Perfection, 7/16 x 16 in. .... Doz. 1.50

Steel Wire, Japanned

Perfection Springs are used to tighten automobile tire chains in addition to being sold for screendoors.

No. 280, 9 in. Japanned .... Doz. $4.20
No. 281, 11 in. Japanned .... Doz. $6.30
No. 282, 13 in. Japanned .... Doz. $9.10

1 Doz. in Box

No. 270, Reliance, 8 in. Japanned .... Doz. $6.50
No. 270, Reliance, 10 in. Japanned .... Doz. $10.00

A very powerful and efficient spring. The ratchet tension adjustment eliminates the necessity of a tension rivet and retains the tension as it is applied.

8 in. for medium doors
10 in. for heavy doors

280-281-282

270
Reliance

DOOR BUTTONS

Japanned

No. 4 x 1¼ in. Wrought Steel .... Gross $1.20
No. 4 x 1½ in. Wrought Steel .... Gross $1.40
No. 4 x 2 in. Wrought Steel .... Gross $1.50
1 Gross in Box
No. 935 x 1 in. Cast Brass .... Doz. .50
No. 935 x 1¼ in. Cast Brass .... Doz. .60
No. 935 x 1½ in. Cast Brass .... Doz. .70

4

935



7560

RIM SCREEN DOOR LATCHES

No. 7511F, Wrought Steel .... Doz. $11.10
No. 7511D2, Wrought Steel .... Doz. $11.10
Latch Iron Case 2¼ x ⅞ in.
½ Pair Knobs 1½ in.
½ Pair Lever Handles 2 in.
1 Escutcheon 3 x 1½ in.
Stop on Latch Case Locks the Latch
¼ Doz. in Box



7511

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

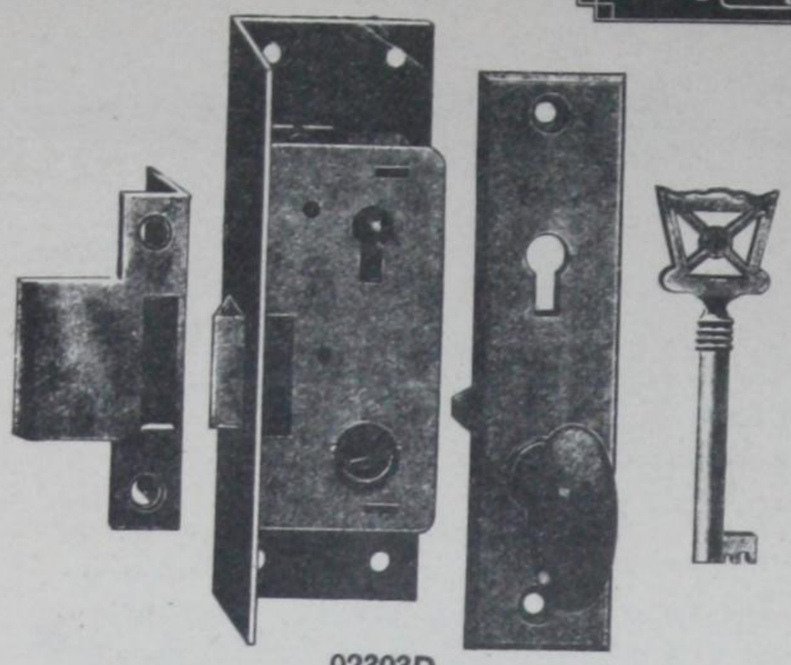

02303D

Round Oak

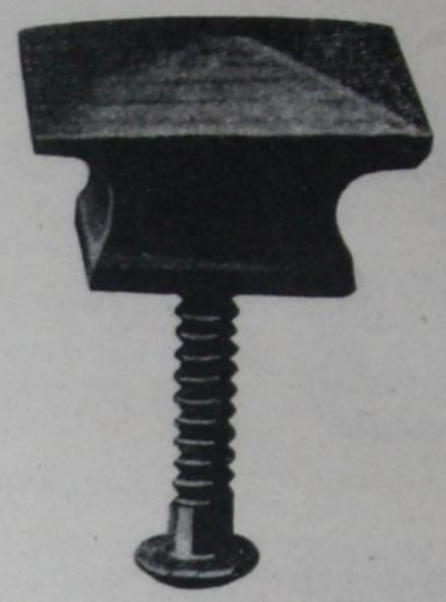

Square Oak

213

132 and 133

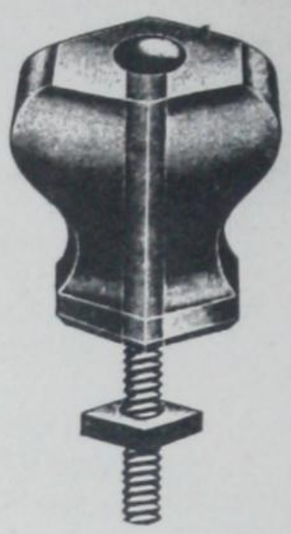

1706, 1707 and 1708

CUPBOARD LOCKS

No. 02303F, Wrought Brass	Doz.	$50.00
No. 02303D2, Wrought Brass	Doz.	50.00
No. 02303SF4, Wrought Brass	Doz.	55.00

4 x $1\frac{7}{16}$ in. Backset 1 in.
Escutcheon 4 x 1 in. Oval Knob
Not Reversible. Specify Right or Left Hand.
½ Doz. in Box

68

74

DRAWER KNOBS

No. 213F, Wrought Brass	Doz.	1.00
No. 213D2, Wrought Brass	Doz.	1.00
No. 213N, Wrought Brass	Doz.	1.10
$1\frac{1}{16}$ in. Diameter		
No. 132F, Cast Brass	Doz.	2.30
No. 132D2, Cast Brass	Doz.	2.30
No. 132N, Cast Brass	Doz.	2.60
$1\frac{1}{16}$ in. Diameter		
No. 133F, Cast Brass	Doz.	2.20
No. 133D2, Cast Brass	Doz.	2.20
No. 133N, Cast Brass	Doz.	2.40
¾ in. Diameter		
No. 68F, Cast Brass	Doz.	3.00
No. 68N Cast Brass	Doz.	3.50
$\frac{15}{16}$ in. Diameter		
No. 116F, Cast Brass	Doz.	3.50
$\frac{15}{16}$ in. Square		
No. 51F, Cast Brass	Doz.	4.40
$1\frac{1}{8}$ in. Square		
No. 226SF4, Cast Brass	Doz.	3.50
$1\frac{1}{16}$ in. Square		
No. 74SF4, Cast Brass	Doz.	2.00
$1\frac{1}{4}$ in. Diameter		
No. 188SF4, Cast Brass	Doz.	3.40
$1\frac{1}{2}$ x 1 in.		
Round Oak Unfinished, 1 in	Doz.	.90
Round Oak Unfinished, $1\frac{1}{2}$ in	Doz.	1.10
Square Oak Unfinished, 1 in	Doz.	1.90
Square Oak Unfinished, $1\frac{1}{2}$ in	Doz.	2.20
No. 1706, Pressed Glass, $\frac{7}{8}$ in	Doz.	1.10
No. 1707, Pressed Glass, $1\frac{1}{8}$ in	Doz.	1.30
No. 1708, Pressed Glass, $1\frac{1}{4}$ in	Doz.	1.90

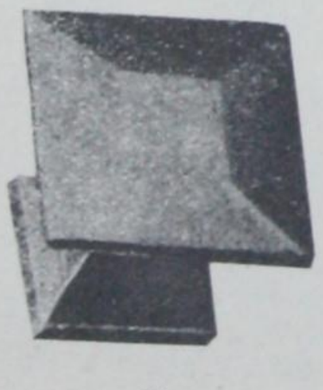

51

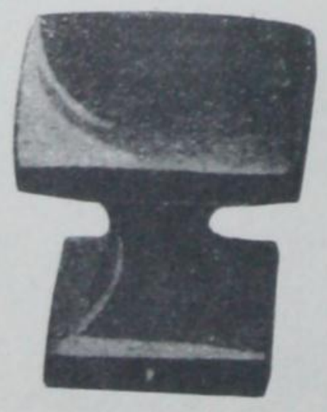

116

226

188

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon


No. SA21

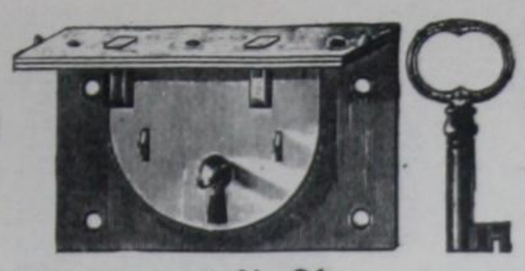
No.S4

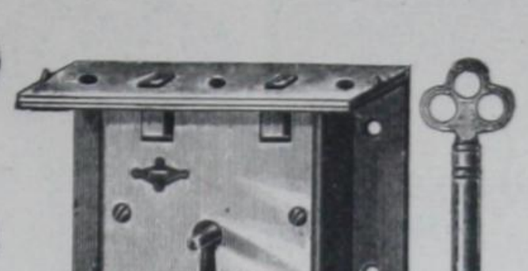
No.S114

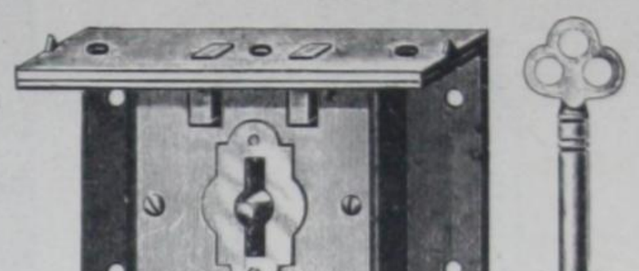
S86

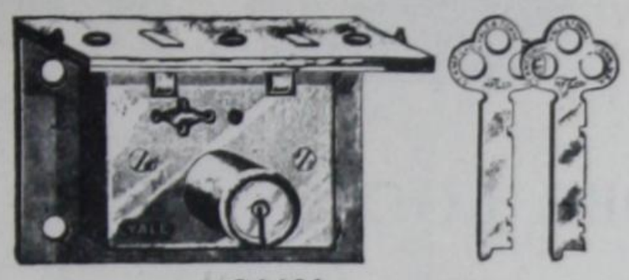
SA164

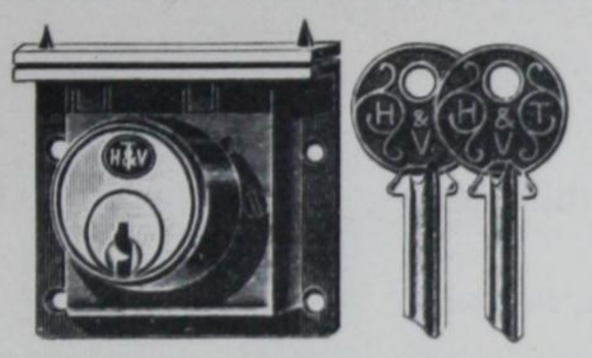
094

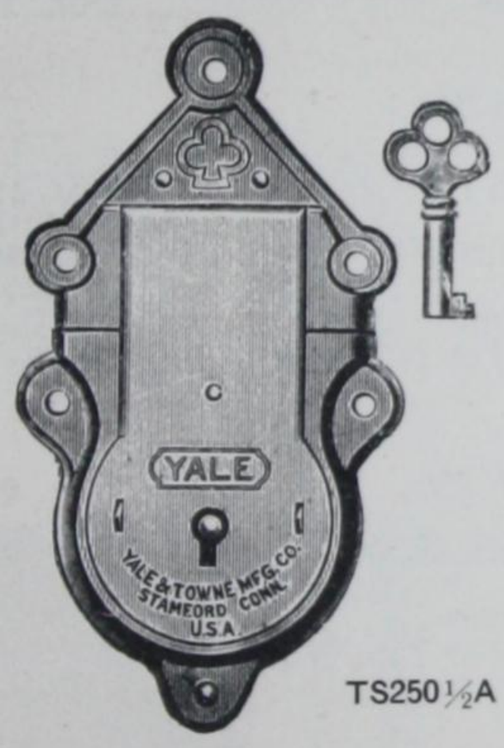

TS250½A

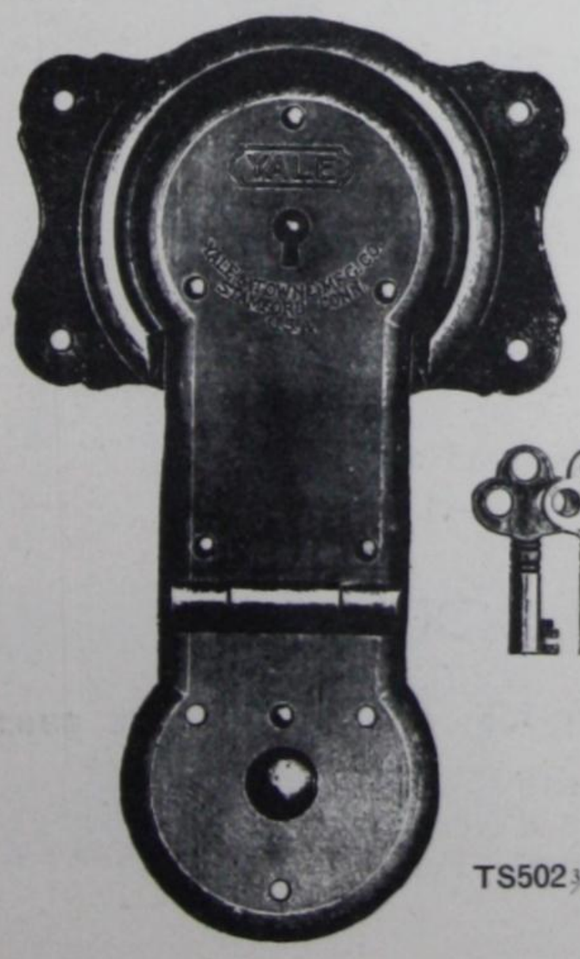

TS502¾ A

CHEST LOCKS

Yale S89, same as Eagle 1977, Corbin 88 ..... **Doz. $27.00**
1⅞ x 3 in. Iron, Self-locking.
Distance from Edge of Selvedge to centre of Key Pin 1 in.
1 Key. Brass Escutcheon. Similar to **S86.** 12 Changes.
1 Doz. in Box.

Yale S86, same as Eagle 9, Corbin 85 ..... **Doz. $33.00**
2¾ x 4 in.
Distance from Edge of Selvedge to centre of Key Pin 1⅜ in.
1 Key. 12 Changes. Warded Keyhole. Brass Escutcheon.
1 Doz. in Box.

Yale S114, same as Eagle 427, Corbin 104 ..... **Doz. $19.00**
1¾ x 2½ in. Iron.
Distance from Edge of Selvedge to centre of Key Pin 1 in.
1 Key. 12 Changes. 1 Doz. in Box.

Yale S4, same as Eagle 166, Corbin 34 ..... **Doz. $11.20**
1½ x 2½ in. Iron.
Distance from Edge of Selvedge to centre of Key Pin ⅞ in.
1 Key. 6 Changes. 1 Doz. in Box.

Yale SA21, same as Eagle 42, Corbin 01 ..... **Doz. $4.10**
⅞ x 1¼ in. Brass.
Distance from Edge of Selvedge to centre of Key Pin ⅜ in
1 Key, keyed alike. 1 Doz. in Box.

Yale SA164, same as Eagle 6071½, Corbin 0144P ..... **Doz. $36.00**
1¾ x 2½ in. All Brass. For ¾ in., 1 in., 1¼ in. wood. Assorted in each dozen.
Distance from Edge of Selvedge to centre of Nose 1 in.
2 Flat Steel Keys, N.P. 12 Changes.
1 Doz. in Box.

CYLINDER CHEST LOCKS

Cylinder Chest Locks, 094 ..... **Doz. $56.00**
2 x 2¼ in. All Brass.
Distance from Edge of Selvedge to centre of Cylinder 1¼ in.
2 Keys. 1 in Box.

TRUNK LOCKS

TS250½A ..... **Doz. $11.00**
5 in. Malleable Iron, Brass Plated
1 Key, keyed alike, attached to Trunk without cutting.
1 Doz. in Box

TS502¾A ..... **Doz. $14.00**
6 in. Steel Brass Plated.
2 Keys. 4 Changes.
1 Doz. in Box.

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon



W2¼ and W3¼

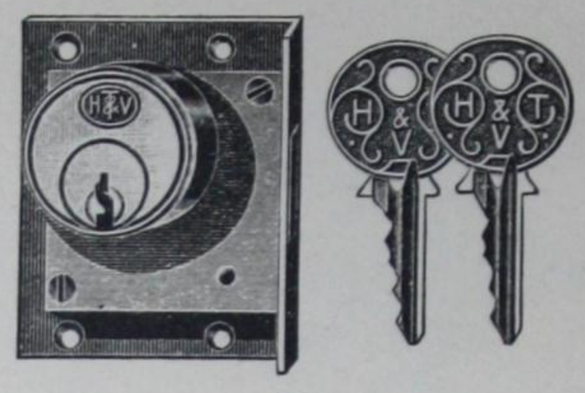

093

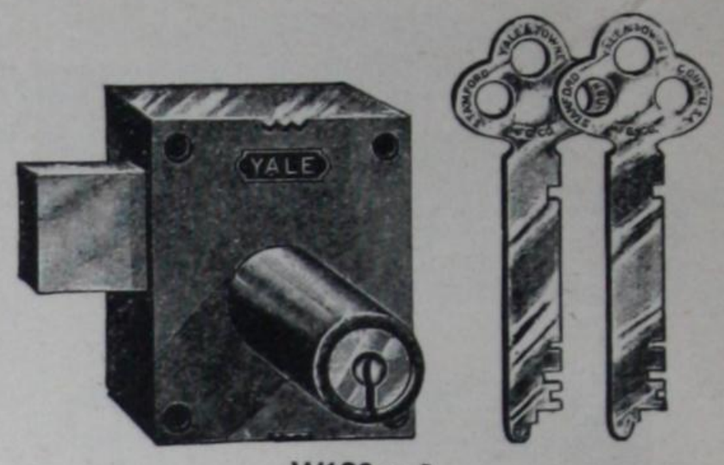

W120 x ⅞

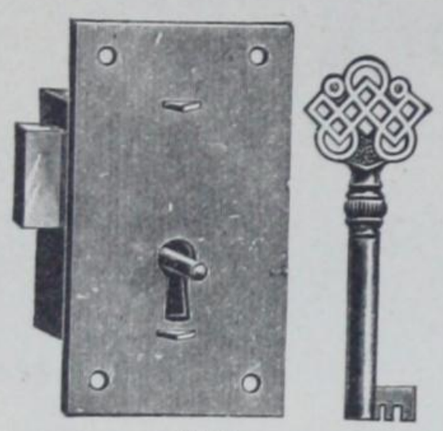

W7



W100 and WA100

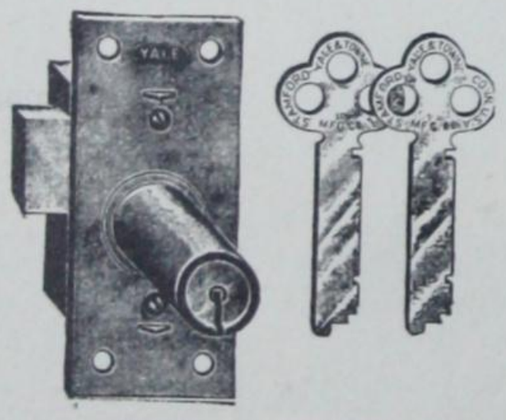

W102 and WA102

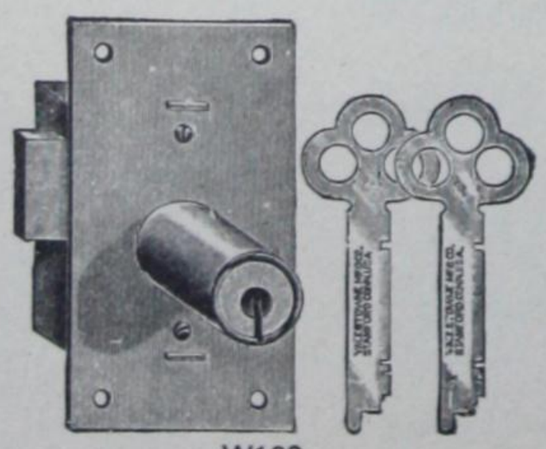

W103

WARDROBE LOCKS

Yale W2¼, same as Eagle, 1875¼ Corbin 701B ..... **Doz. $3.20**

2 x 1in. Iron
One Key. Keyed alike. One Doz. in Box

Yale W3¼, same as Eagle 415¼ Corbin 702B ..... **Doz. $4.10**

2½ x 1¼ in. Iron
One Key. Keyed alike. One Doz. in Box

Yale W7, same as Eagle 510, Corbin 704 ..... **Doz. $3.80**

3 x 1⅝ in. Iron
One Key. Keyed alike. One Doz. in Box

Yale W100, same as Eagle 1055, Corbin 749 ..... **Doz. $21.00**

Yale WA100, same as Eagle 1056, Corbin 0749 ..... **Doz. $25.50**

1⅞ x ⅞ in. W100 Iron. WA100 Brass
Two Flat Steel Keys. 12 Changes. For ⅞ in. Wood
One Doz. in Box

Yale W102, same as Eagle 7098, Corbin 750 ..... **Doz. $28.70**

Yale WA102, same as Eagle 6098, Corbin 0750 ..... **Doz. $30.00**

2¾ x 1¼in. W102 Iron. WA102 Brass
Two Flat Steel Keys. 12 Changes. For 1 in. Wood
One Doz. in Box

Yale W103, same as Eagle 7074, Corbin 751 ..... **Doz. $34.00**

3 x 1⅝ in. Iron
Two Flat Steel Keys. 12 Changes. For 1⅛ in. Wood
One Doz. in Box

Cylinder Wardrobe Locks 093 ..... **Doz. $7.00**

2¼ x 2 in. All Brass
Two Keys. For 1⅛ in. Wood
Not Reversible, specify Right or Left Hand when ordering
One in Box

LOCKER LOCKS

Yale W120, same as Eagle 1986, Corbin 755 ..... **Doz. $39.50**

2 x 1⅝ in. Iron Case. Brass Bolt with ⅝ in. Throw
Distance from Edge of Case to Centre of Nose 13/16 in.
Two Flat Steel Keys. All Keys different. For ⅞ in. Wood

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon


R100 and R101

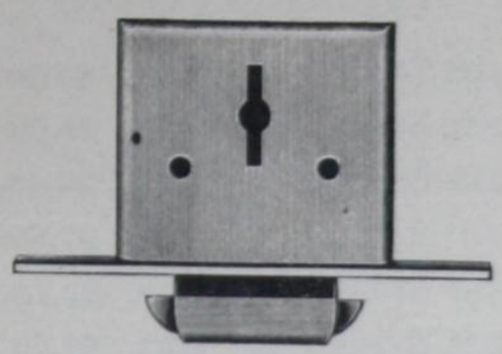
S 208



DRAWER LOCKS

Yale R100, same as Eagle 563, Corbin 450 ..... **Doz. $16.30**
1¼ x 1½ in. Iron
Distance from Edge of Selvedge to centre of Key Pin ½ in.
1 Key. 1 Doz. in Box.

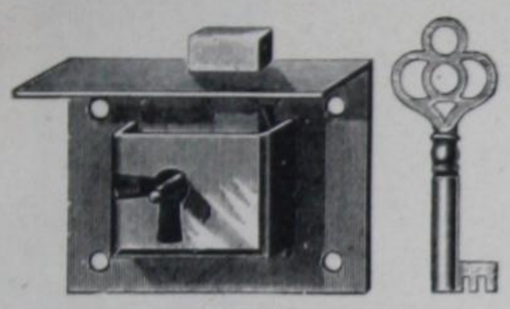
R465

Yale R101, same as Eagle 454, Corbin 452 ..... **Doz. $16.30**
1½ x 2 in. Iron
Distance from Edge of Selvedge to centre of Key Pin ⅝ in.
1 Key. 1 Doz. in Box.

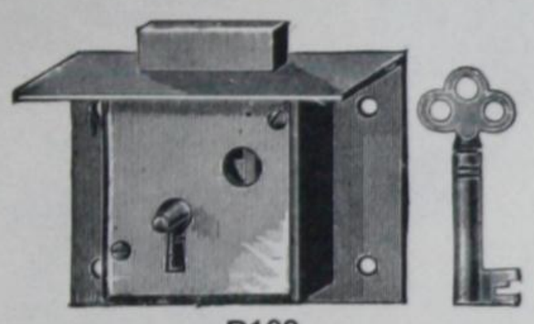
R108

Yale R465, same as Eagle 423, Corbin 625 ..... **Doz. $4.40**
1¾ x 2¼ in. Iron.
Distance from Edge of Selvedge to centre of Key Pin ¾ in.
1 Key. 1 Doz. in Box.

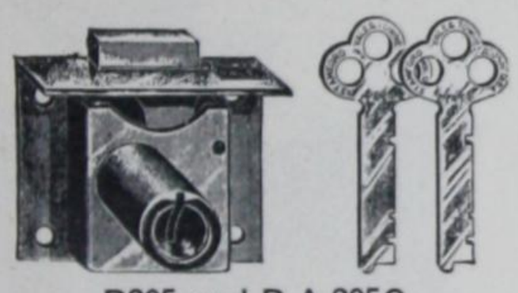
R295 and R A 295C

Yale R108, same as Eagle 237, Corbin 457 ..... **Doz. $17.70**
1¾ x 2½ in. Iron.
Distance from Edge of Selvedge to centre of Key Pin ⅞ in.
1 Key. 1 Doz. in Box.

Yale R295C, same as Eagle 1921, Corbin 590 ..... **Doz. $13.00**
Yale RA295C, same as Eagle 01921, Corbin 0590 ..... **Doz. $16.00**
1½ x 1¾ in. **R295C** Iron, **RA295C** Brass.
Distance from Edge of Selvedge to centre of Keyway ¾ in.
2 Flat Steel Keys. 1 Doz. in Box.

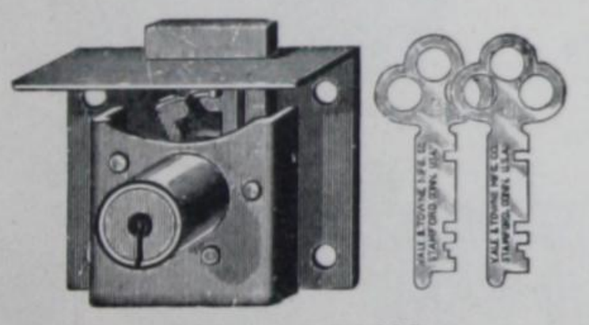
R300 and RA300

Yale R300, same as Eagle 1816, Corbin 592½ ..... **Doz. $17.50**
Yale RA300, same as Eagle 01816, Corbin 0592½ ..... **Doz. $19.00**
1⅝ x 2 in. **R300** Iron, **RA300** Brass.
Distance from Edge of Selvedge to centre of Keyway ⅞ in.
2 Flat Steel Keys. 1 Doz. in Box.

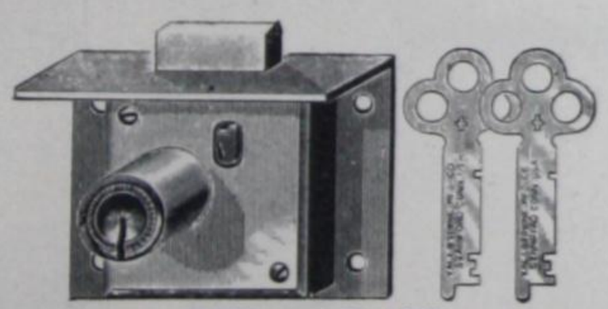
R340 and R A341

Yale R340, same as Eagle 6117, Corbin 610½ ..... **Doz. $36.00**
Yale RA341, same as Eagle 6101, Corbin 0611½ ..... **Doz. $40.00**
1¾ x 2¼ in. **R340** Iron, **RA341** Brass.
Distance from Edge of Selvedge to centre of Keyway ⅞ in.
2 Flat Steel Keys. 1 Doz. in Box.

CYLINDER DRAWER LOCKS

Cylinder Drawer Locks 095 ..... **Each $5.60**
2 x 2¼ in. All Brass.
Distance from Edge of Selvedge to centre of Cylinder 1¼ in.
2 Keys. 1 in Box.

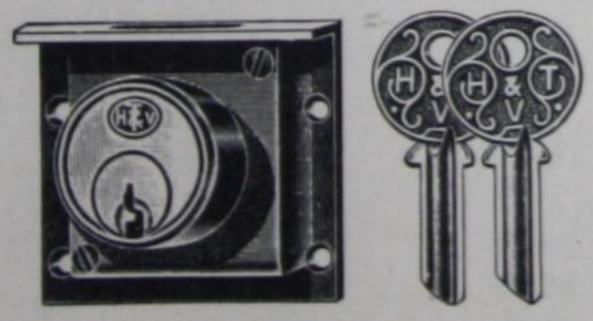
095

ROLL TOP DESK LOCKS

No. S208 ..... **Doz $24.60**
Iron case 1⅝ x 3 in. Brass Strike Plate and Escutcheon
Distance from Edge of Selvedge to centre of Keyway ⅞ in.
2 Keys. 1 Doz. in Box.

All Prices Subject to Change Without Notice

334
1¾ x 2½

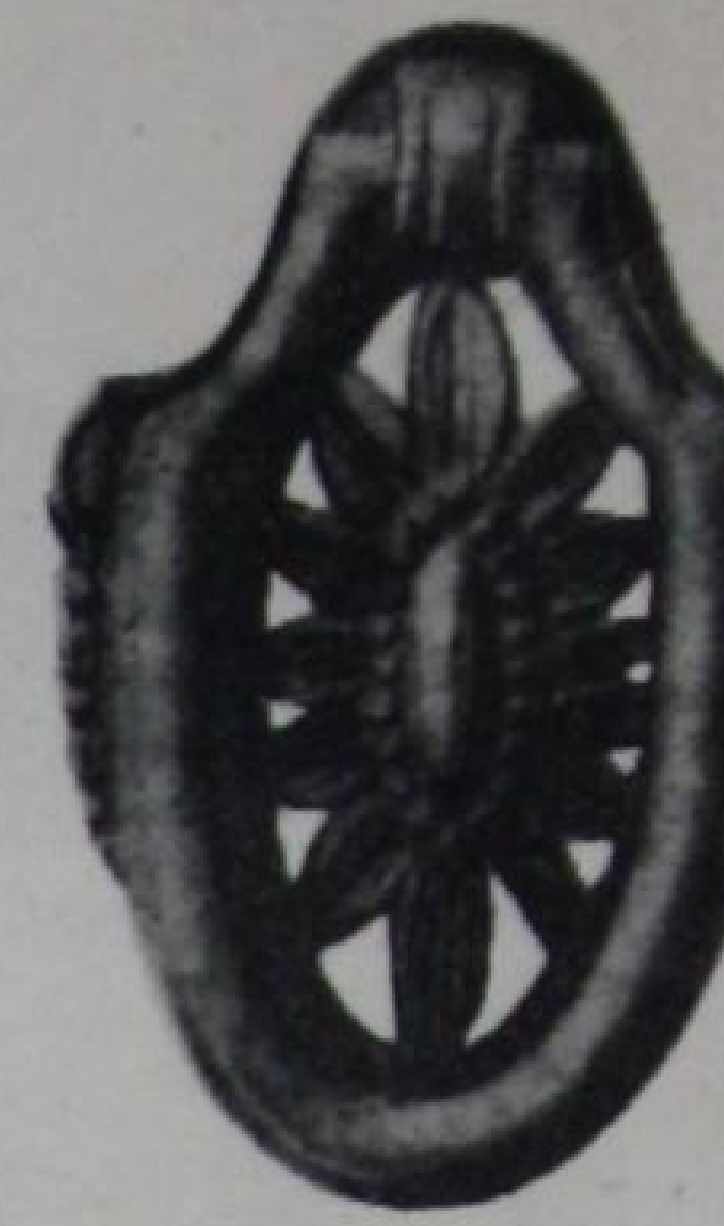

96
1⅞ x 2¾

DRAWER PULLS

No. 334SF4, Cast Brass.......Doz. $5.90
No. 335SF4, Cast Brass.......Doz. $5.00
No. 96SF4, Cast Brass.......Doz. $9.40
No. 97SF4, Cast Brass.......Doz. $7.80
No. 114SF4, Cast Brass.......Doz. $9.10
No. 115SF4, Cast Brass.......Doz. $7.40
No. 385SF4, Cast Brass.......Doz. $4.10
No. 386SF4, Cast Brass.......Doz. $8.70

All above One Doz. in Box

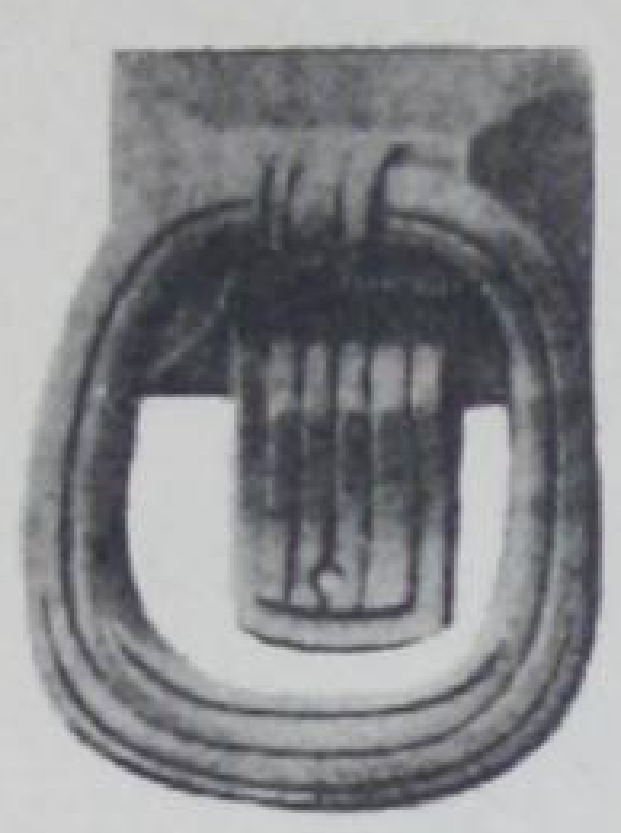

335
1½ x 1¾

114
2¾ x 1⅞

115
2¼ x 1½

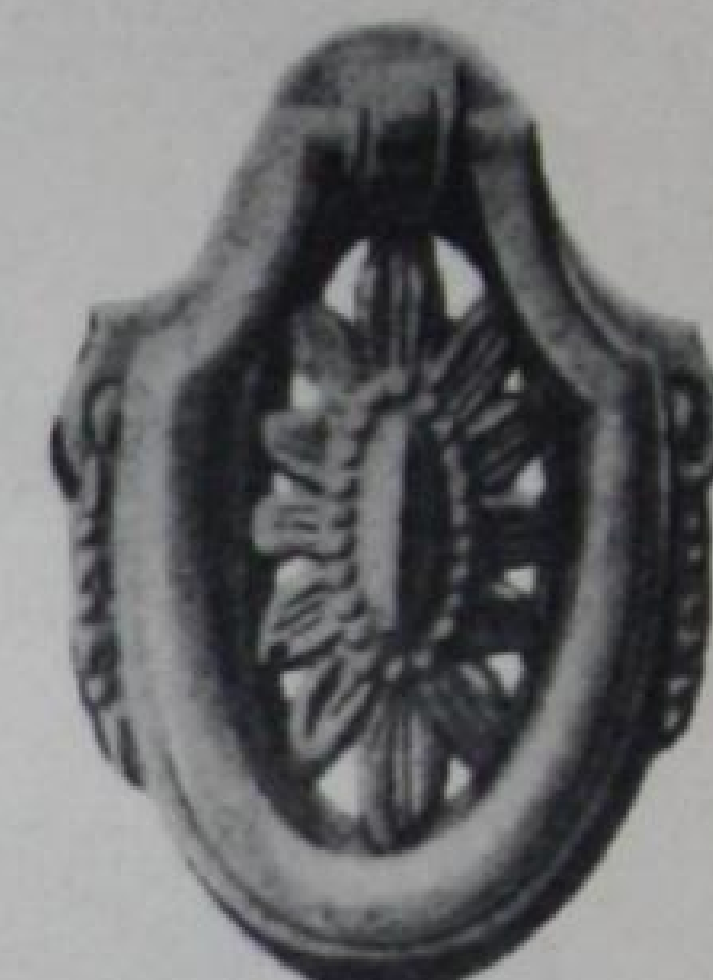

97
1⅝ x 2¼

385
2 x 2¼

386
1⅜ x 1⅝

No. 112SF4, Cast Brass...........Doz. $4.60
No. 111SF4, Cast Brass...........Doz. $4.80
No. 366SF4, Cast Brass...........Doz. $3.50
No. 365SF4, Cast Brass...........Doz. $3.80
No. 155SF4, Cast Brass...........Doz. $8.20

CABINET DOOR PULLS

No. 156SF4, Cast Brass...........Doz. $5.70

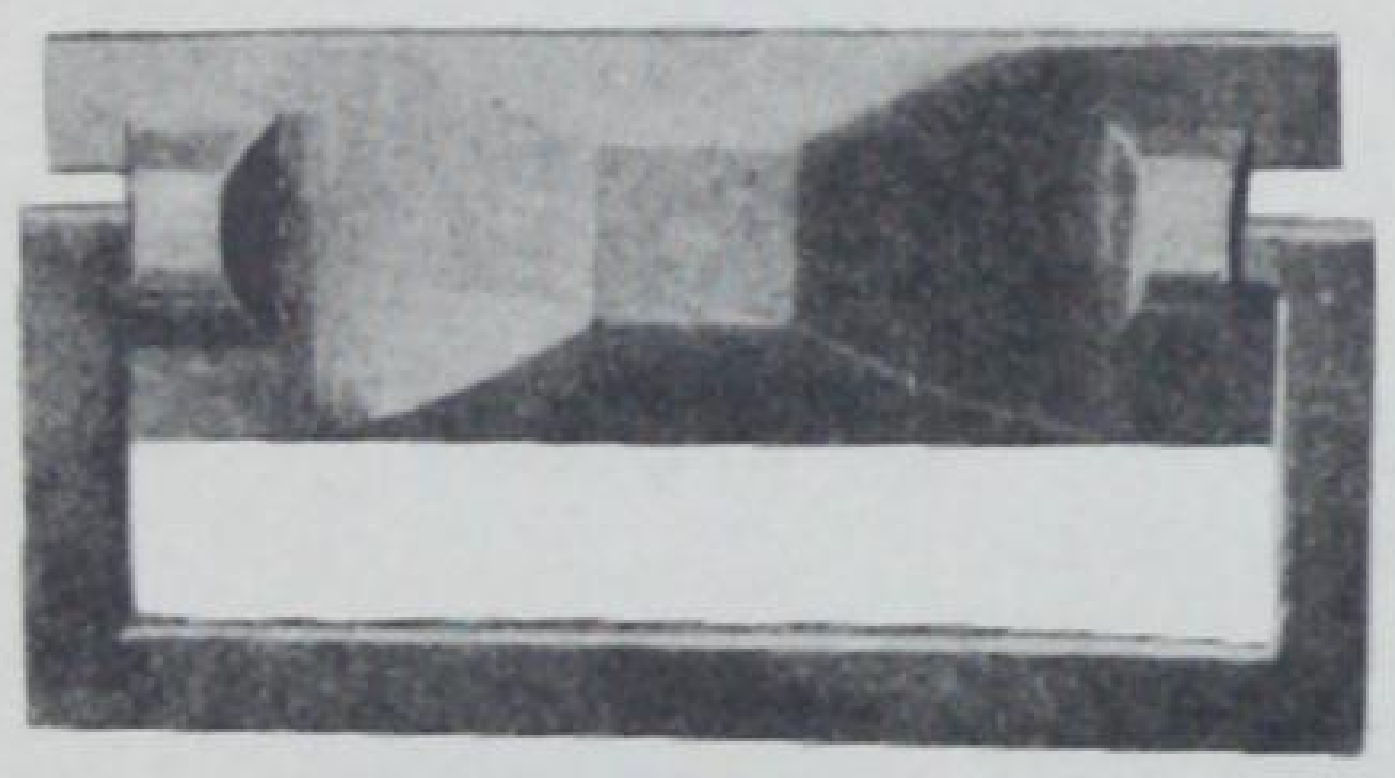

111
3⅛ x 1⅝

155
3¼ x 2¼

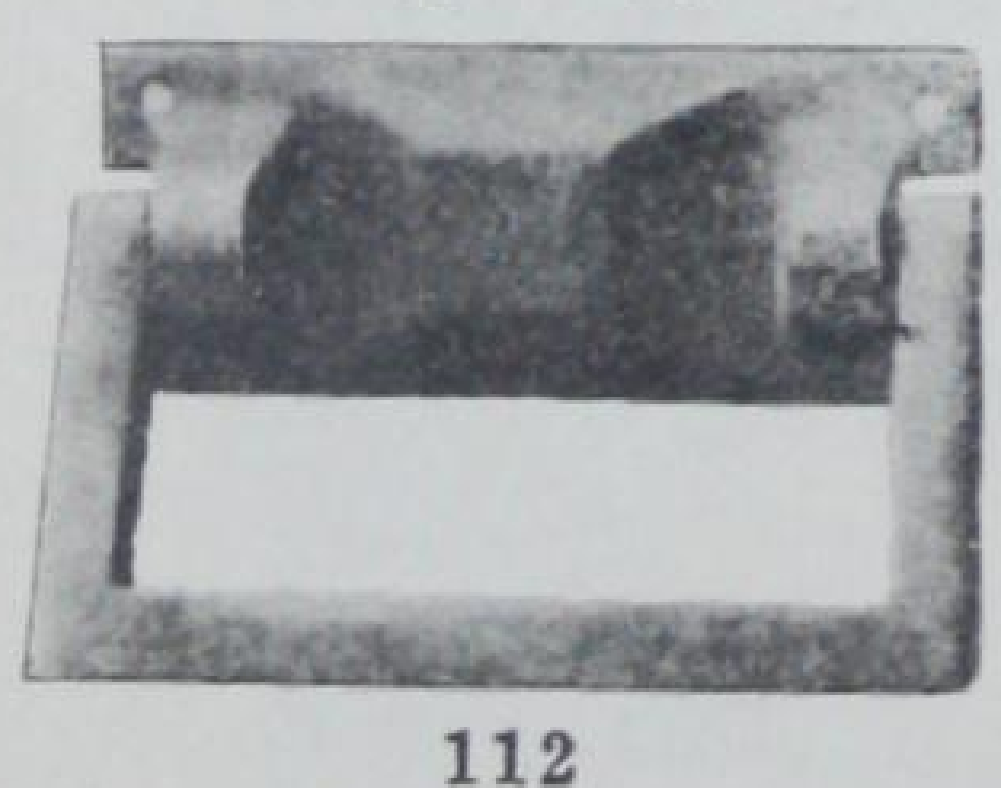

112
2¼ x 1½

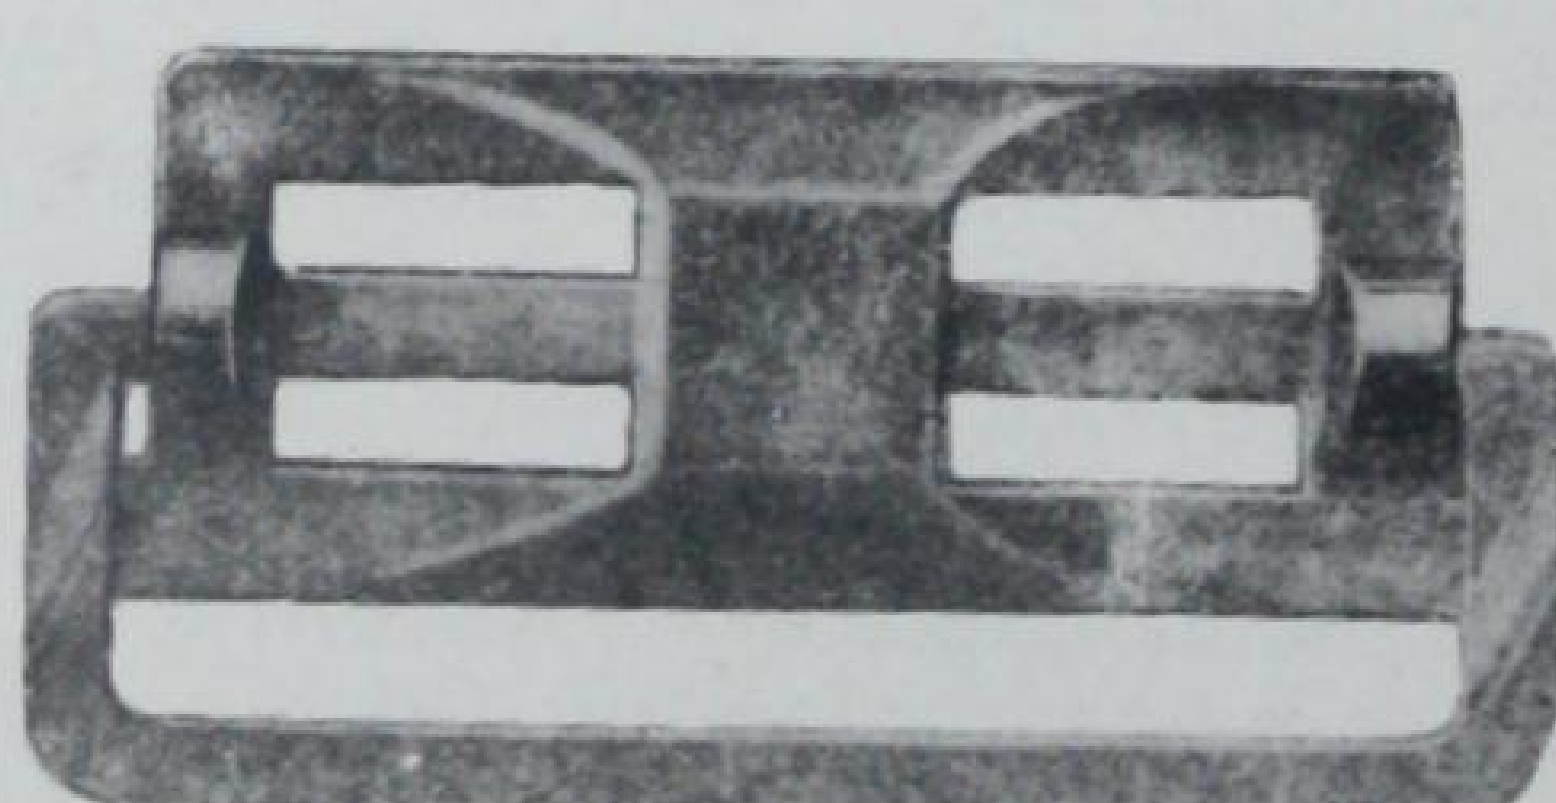

365
3½ x 1¾

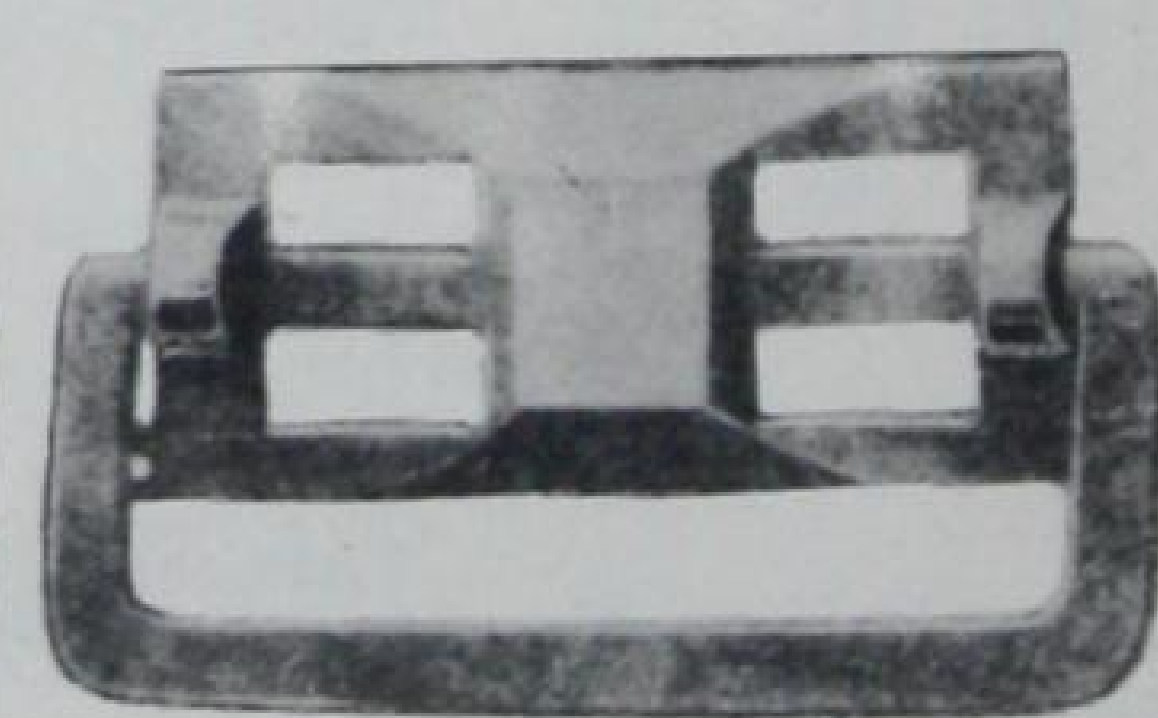

366
2½ x 1½

156
1 x 2⅜

DRAWER PULLS

No. 136F, Cast Brass.......................Doz. $9.90
No. 137F, Cast Brass.......................Doz. $7.70

CABINET DOOR PULLS

No. 138F, Cast Brass.......................Doz. $8.50
No. 40SF4, Cast Brass.....................Doz. $8.00
No. 343SF4, Cast Brass...................Doz. $5.70

138
⅞ x 3¾

40
¾ x 3¾

136
1½ x 3¼

137
1⅜ x 2½

302
1⅝ x 1



301
1½ x 1⅝

316
4⅛ x 2¼

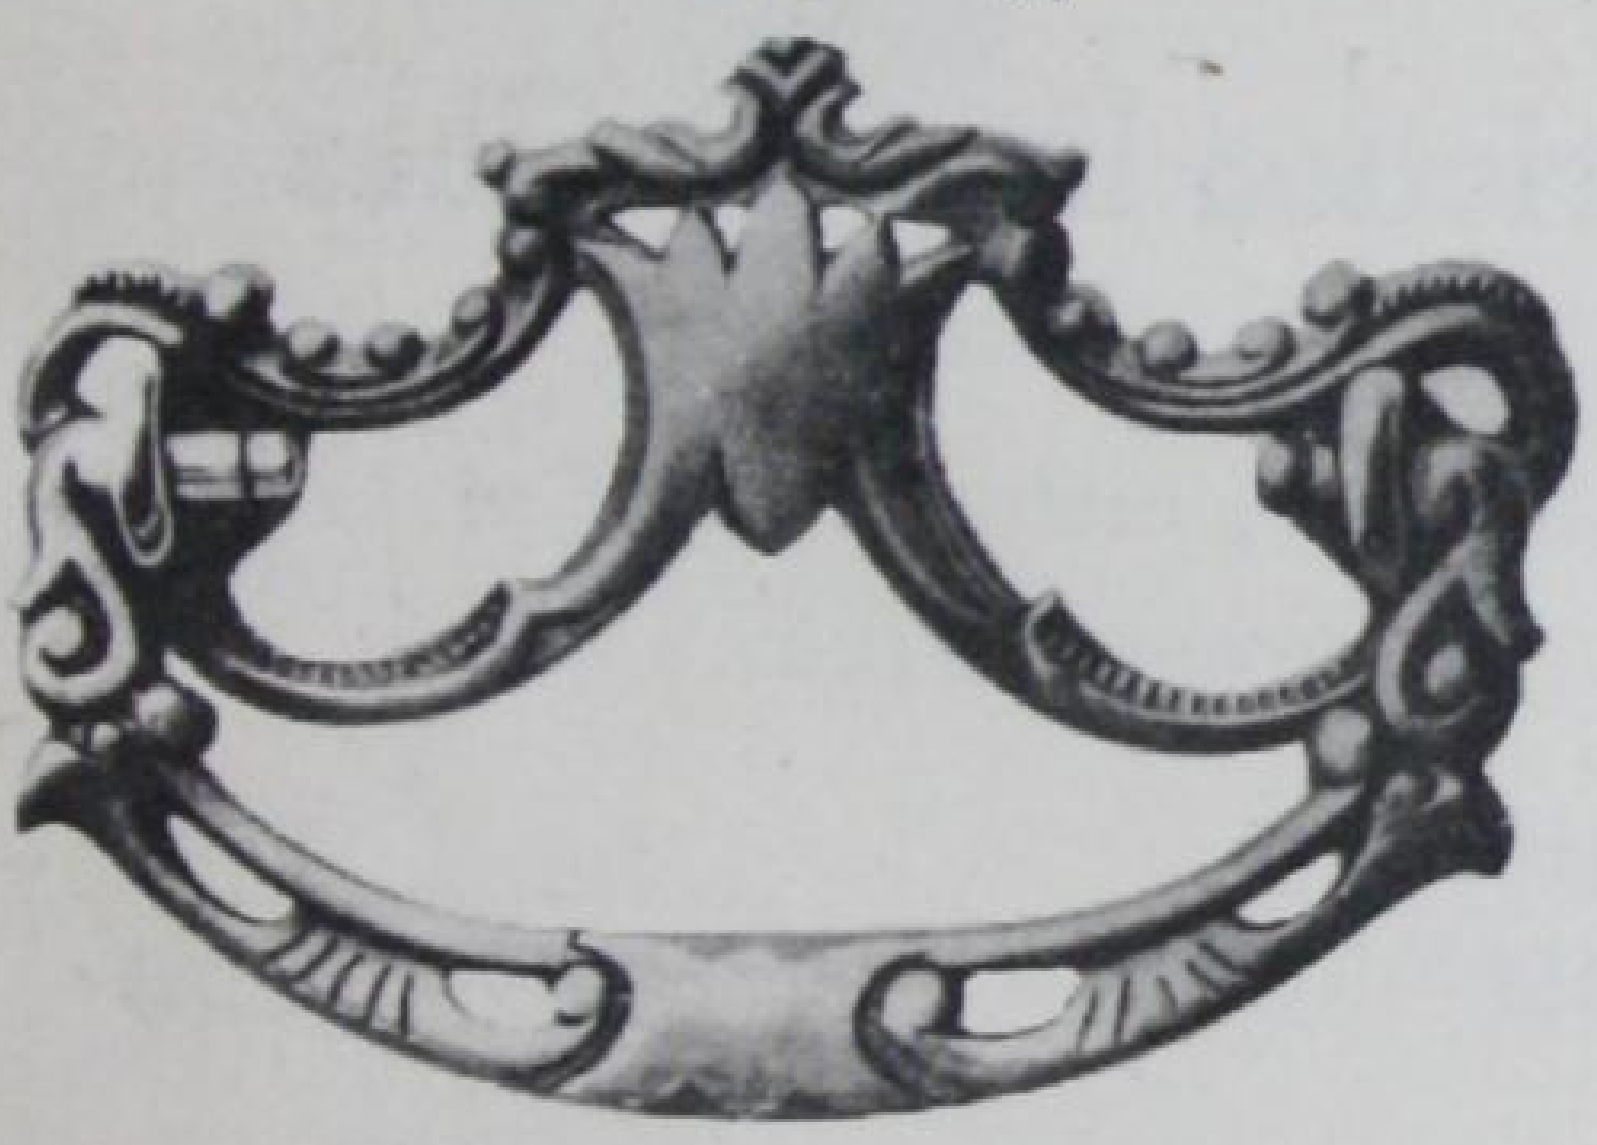

56
4 x 2¾

100
4 x 2⅜

343
¾ x 3¼

342
1¾ x 2¼

CABINET DOOR PULLS

No. 300SF4, Cast Brass. . . . Doz. $4.50

DRAWER PULLS

No. 301 SF4, Cast Brass, Doz. $5.00

DRAWER PULLS

No. 299SF4, Cast Brass. . . . Doz. $7.50

No. 145F, Cast Brass. . . . . . Doz. $11.60

No. 316SF4, Cast Brass. . . . Doz. $8.30

CABINET DRAWER ESCUTCHEONS

No. 302SF4, Wrought Brass Doz. .86

DRAWER PULL

No. 199F, Cast Brass. . . . . Doz. $2.10
Six Doz. in Box
No. 56F, Cast Brass. . . . . Doz. $2.70
Six Doz. in Box
No. 100F, Stamped Brass. . . . Doz. $1.10
Six Doz. in Box

TRAY HANDLES

No. 282F, Cast Brass. . . . . Doz. $8.00
One Doz. in Box
No. 160F, Cast Brass. . . . . Doz. $5.90
One Doz. in Box

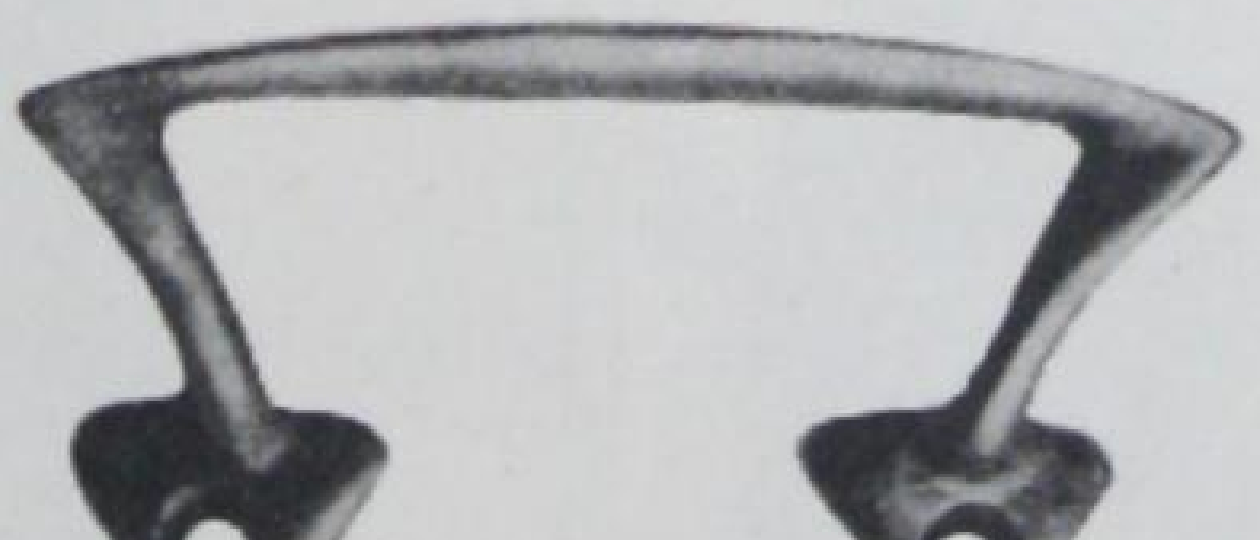

282
3 x 1½

DRAWER PULLS

No. 342SF4, Cast Brass. . . . . Doz. $5.70

CABINET DOOR ESCUTCHEONS

No. 247F, Cast Brass. Doz. .90
No. 7F, Cast Brass. . . . . Doz. $1.10

CABINET DRAWER ESCUTCHEONS

No. 246F, Cast Brass. Doz. .90

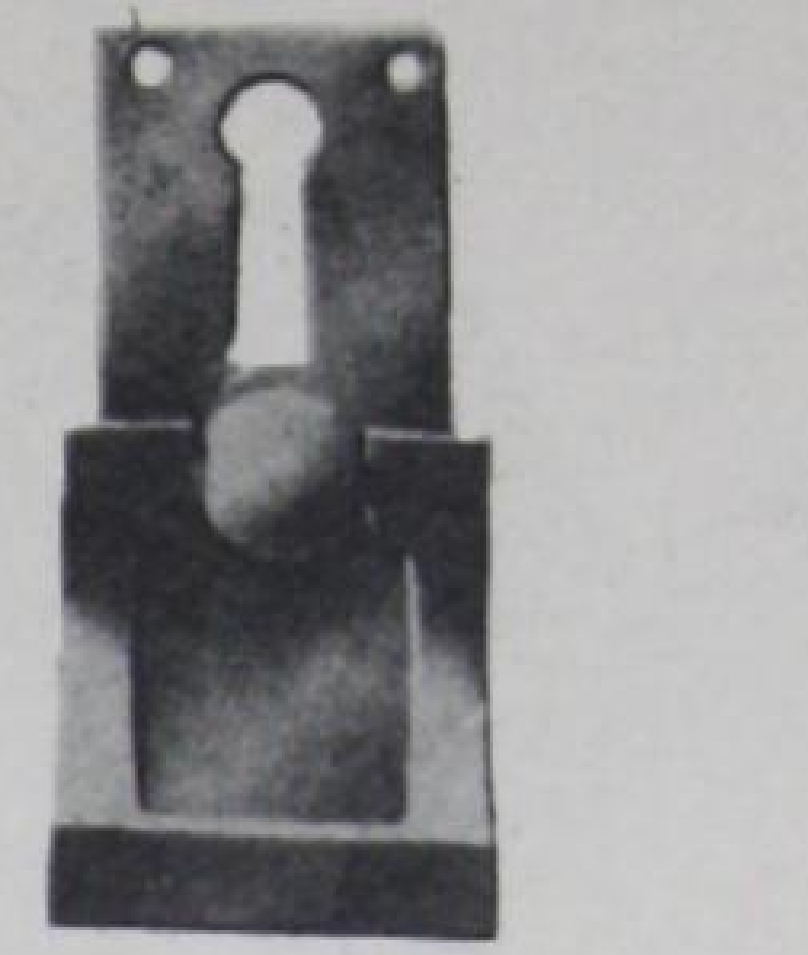

300
1⅛ x 2¼

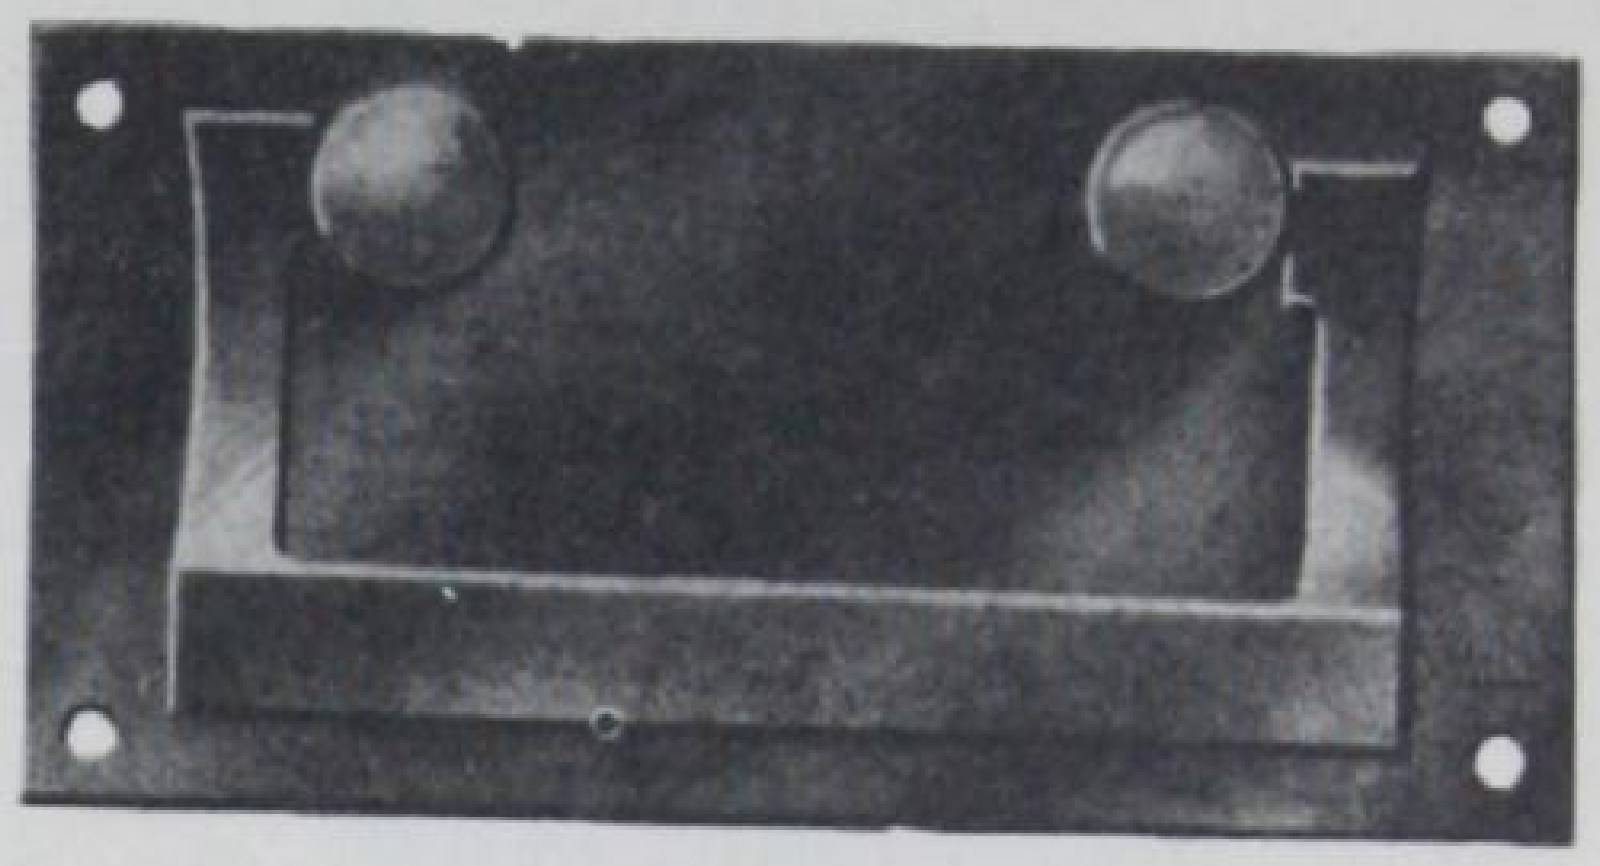

299
4 x 2

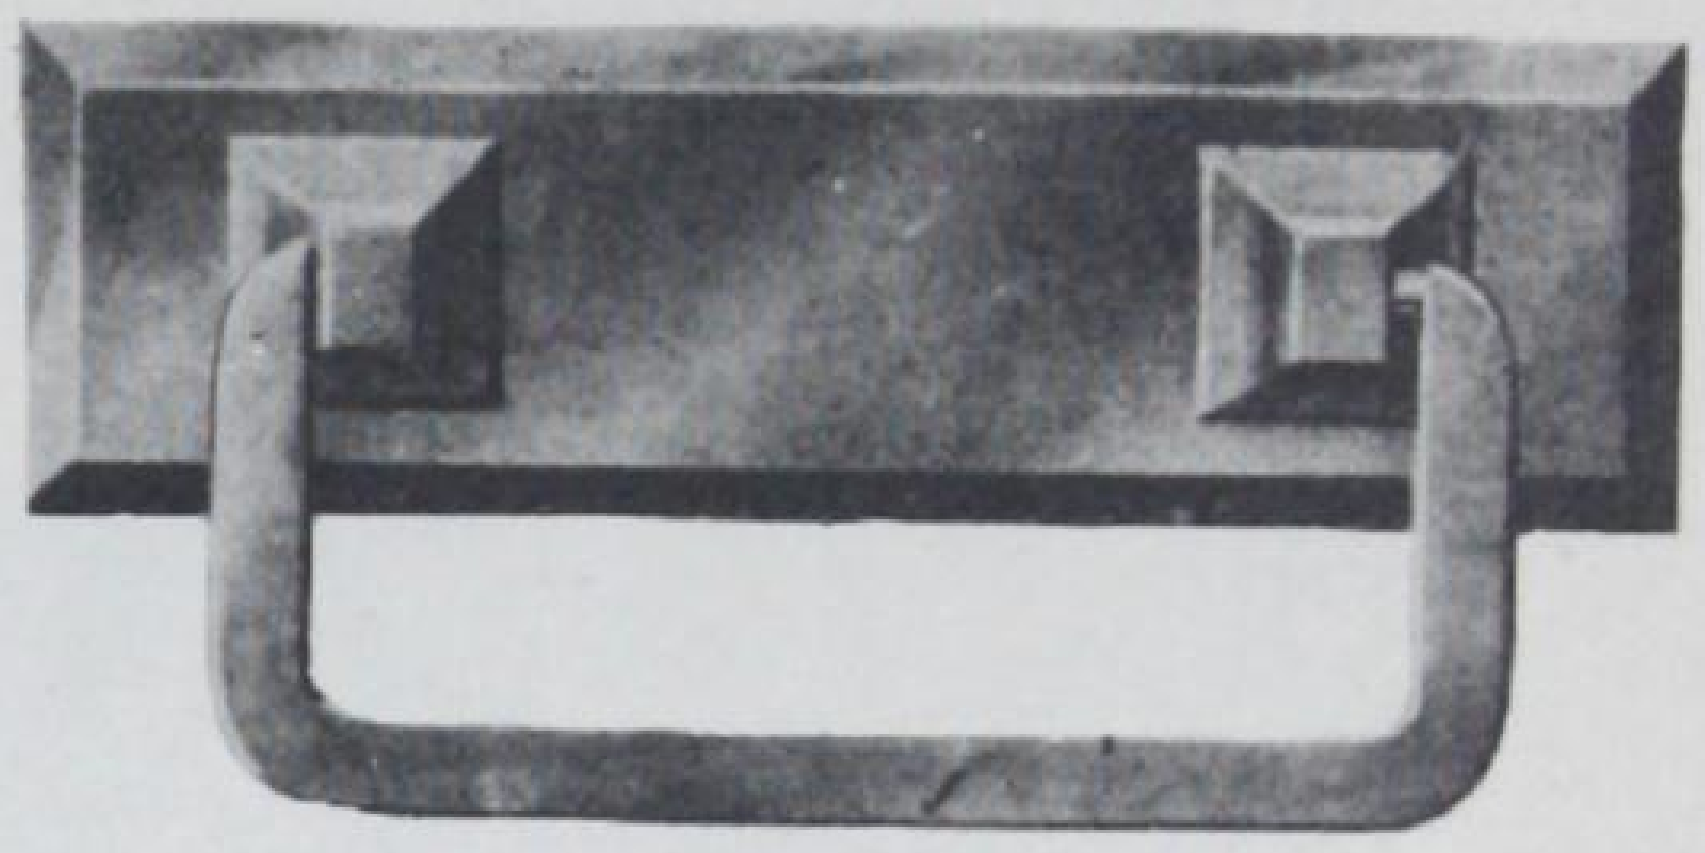

145
4¼ x 2

199
3⅞ x 2¼

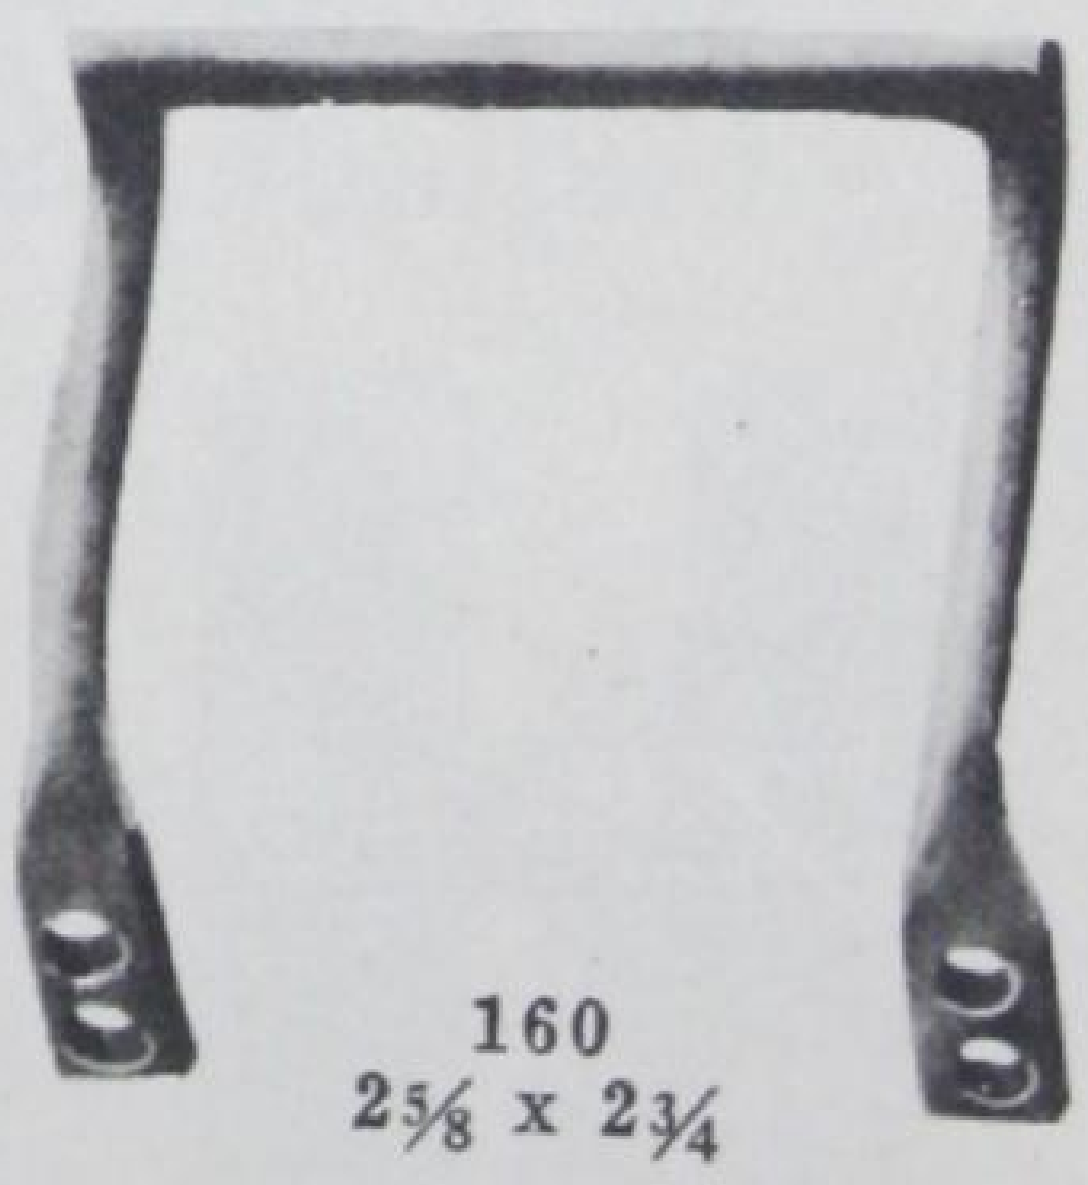

160
2⅝ x 2¾

7
¾ x 1

247
1 x 1⅜

246
1½ x 1

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

ELBOW CATCHES

104

No. 104, Japanned Cast Iron ..... Doz. 1.50
No. 104F, Cast Iron ..... Doz. 1.80

COMMODE TURNS

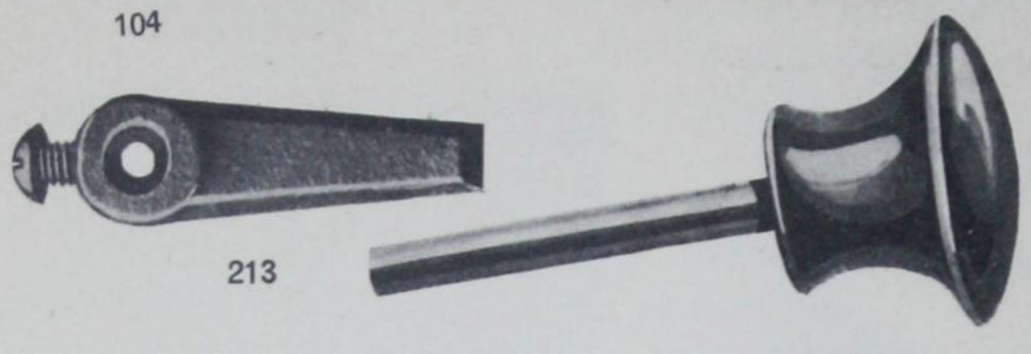

213

No. 213F, Wrought Brass ..... Doz. 1.50
No. 213D2, Wrought Brass ..... Doz. 1.50
No. 213N, Wrought Brass ..... Doz. 1.70
$1\frac{1}{16}$ in. Diameter

CUPBOARD CATCHES

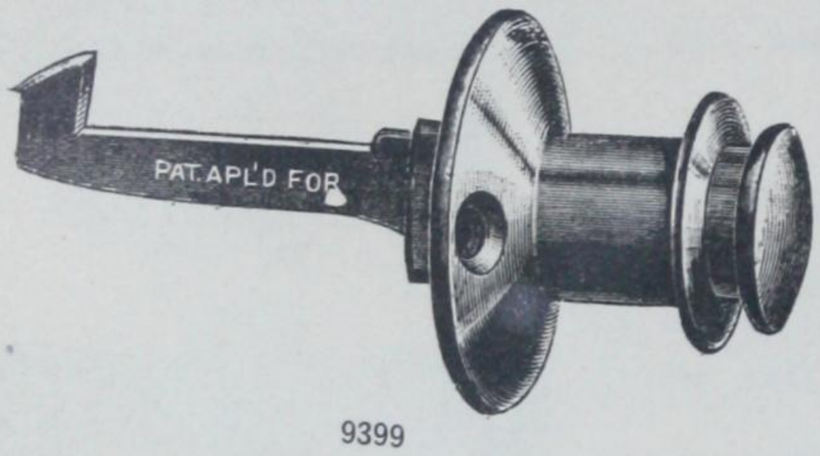

9399

No. 9399F, Wrought Steel ..... Doz. 12.00
No. 9399 N Wrought Steel ..... Doz. 13.00
Size: $1\frac{1}{2}$ in. Diameter Base
For Doors up to $1\frac{3}{8}$ in. Thick
Unlocks by Pressure on Knob

Cast Brass Kitchen Cabinet Latches

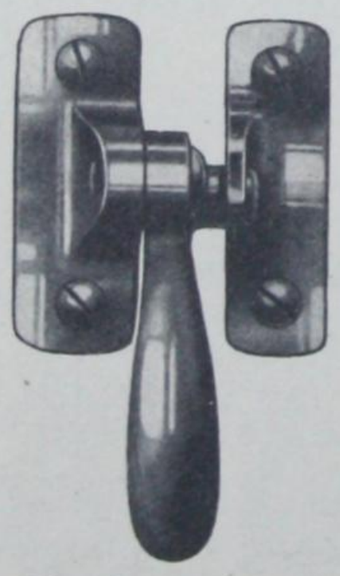

No. 1292 Two-thirds full size

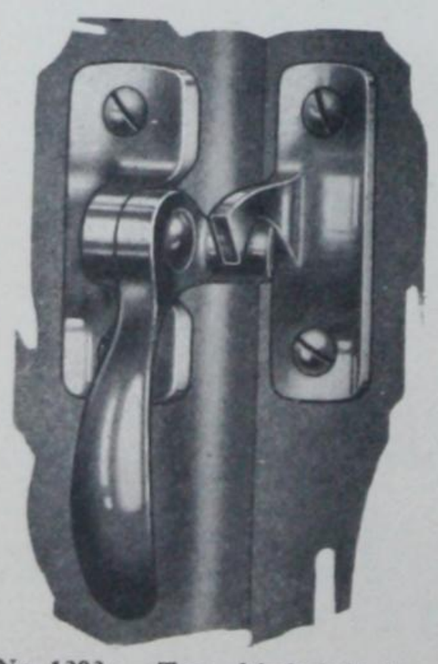

No. 1293 Two-thirds full size

Polished and Highly Finished

No. 1292 is made for flush construction.
No. 1293 is furnished with $\frac{3}{8}$" offset strike for lipped or overlapping doors.

1292 Doz. 16.10
1293 Doz. 16.10

BALL SPRING FRICTION CATCHES

No. 11A, Brass Plated ..... Doz. 1.50
No. 11A x 4, Nickel Plated ..... Doz. 1.80



Size: $\frac{5}{16}$ in. Diameter x $\frac{5}{8}$ in. Long
Strike $\frac{7}{8}$ x $\frac{1}{2}$ in. Brass Shell and Bolt
Ball can be Extended



Suitable for Small Cabinet Doors, Window Screens and Show Case Doors.

No. 11, Brass Plated ..... Doz. 2.00
Size: $\frac{3}{8}$ in. Diameter x $\frac{3}{4}$ in. Long
Strike $\frac{7}{8}$ x $\frac{1}{2}$ in.
One Doz. in Box
Balance same as 11A, see above

No. 12, Brass Plated ..... Doz. 2.50
Size: $\frac{1}{2}$ in. Diameter x $\frac{7}{8}$ in. Long
Strike $1\frac{3}{4}$ x $\frac{3}{4}$ in.
One Dozen in Box
Balance same as 11A, see above

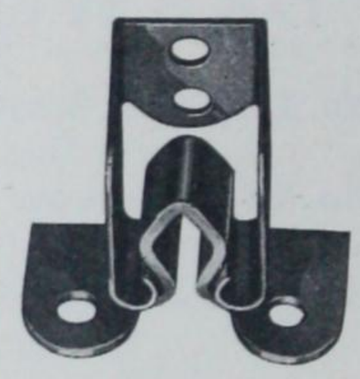

Catch No. 40

Friction Door Catches

All steel, either nickel or brass plated.

40 F Doz. 1.70
40 N Doz. 1.80

Spring Door Catches

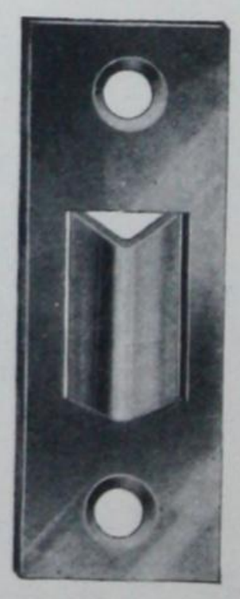

No. 175 Spring Catch (Steel)

Strike Plate

It is used on Wall Show Cases, China Closets, Kitchen Cupboards or any other light doors of a similar character.

175 F Doz. 2.50
175 N Doz. 2.70

All Prices Subject to Change Without Notice

The Winnipeg Paint & Glass Co. Limited
Regina - WINNIPEG - Saskatoon

SPECIALTIES

TIPPIT DOOR HOLDERS

No. 521

Will reach 1¼ inches from door to floor.

Weight per doz. 8 lbs.
Height 5½ inches.

A spring tension holds the TIPPIT, cannot fall down when not in use.

Dozen **$26.40**

SUPERIOR DOOR HOLDERS

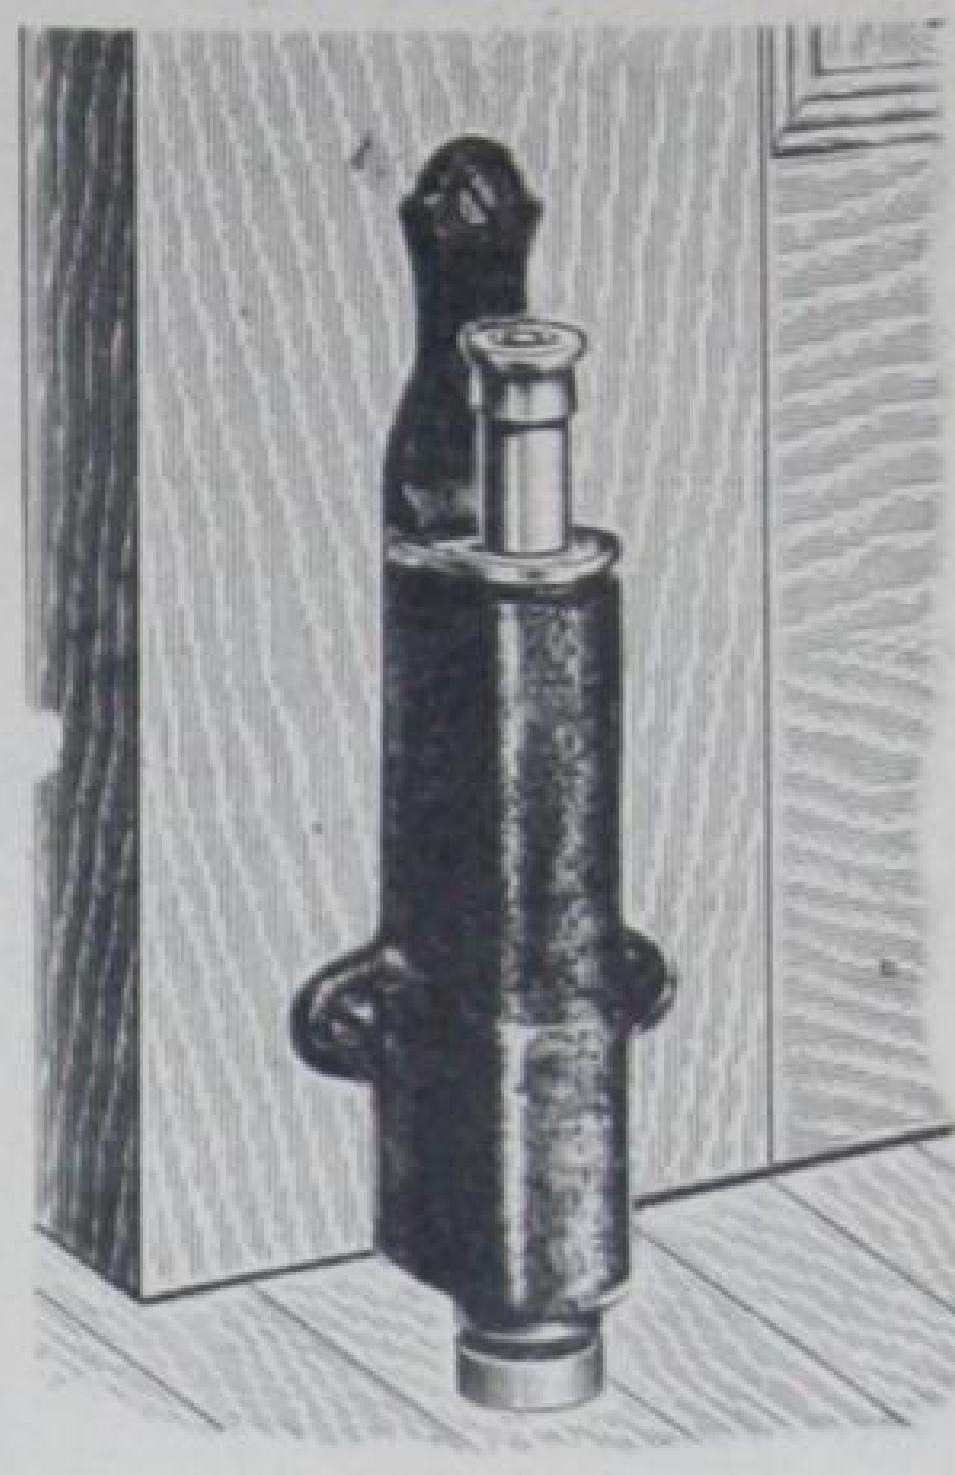

Iron Polished
Lemon Brass Plated

Doz. **$28.80**

Screen Door Latches

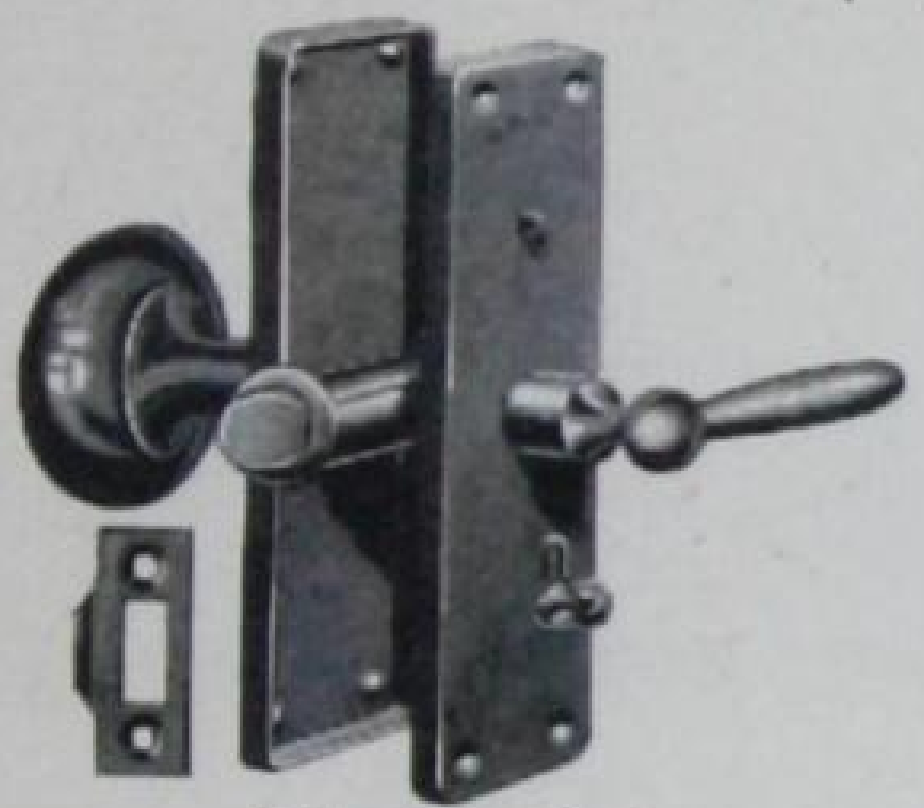

Patent Pending

No. 2202—Plated Steel.

Bore a 9/16″ hole in the door's edge, and a 3/4″ hole through the door in an indicated position.

Mount It Easily

No. 202—Solid Brass all the way through—entirely rust-proof.

Each **$2.50**

NAIL HAMMERS

ONE HUNDRED PLUS

"The Hammer with the Perfect Balance"

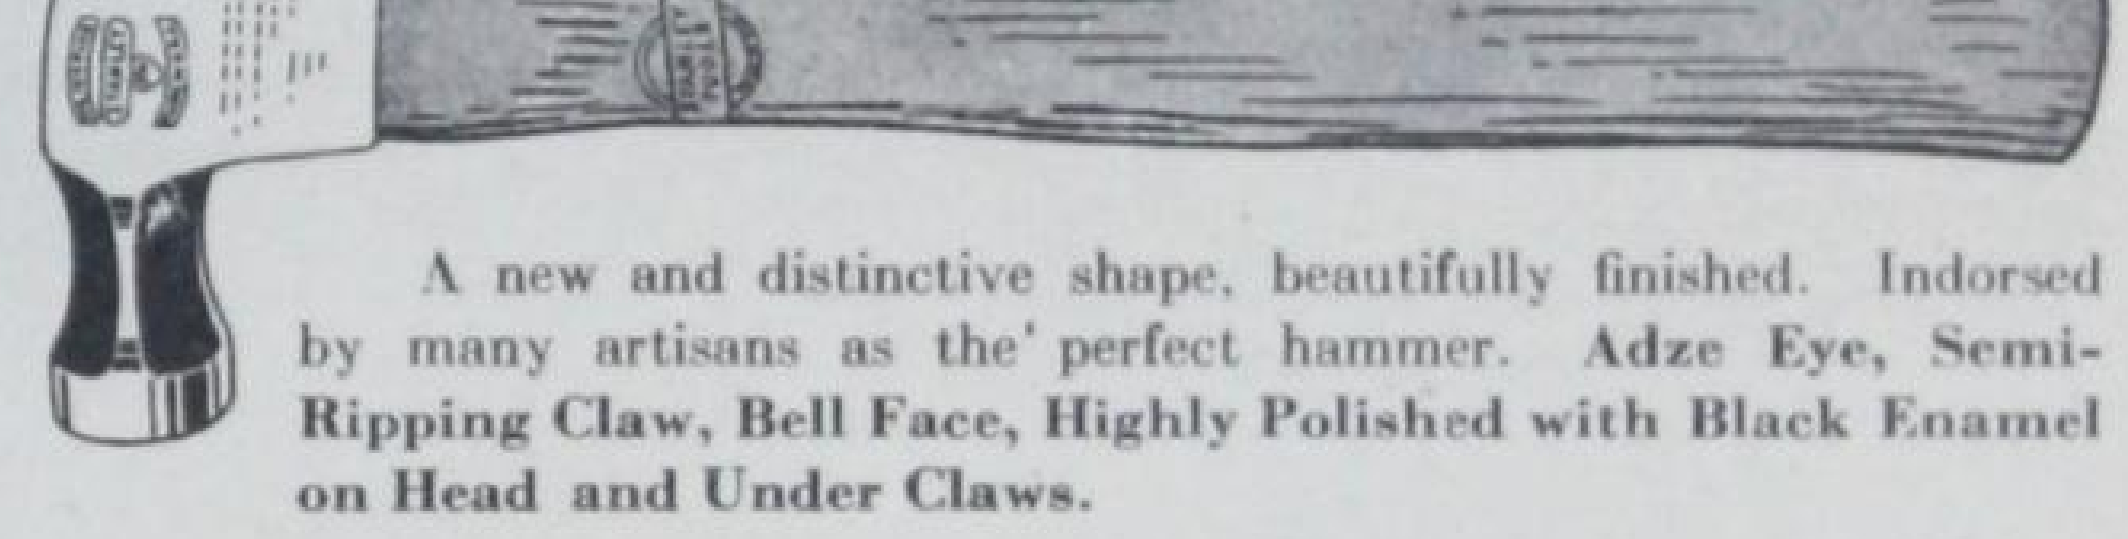

A new and distinctive shape, beautifully finished. Indorsed by many artisans as the perfect hammer. **Adze Eye, Semi-Ripping Claw, Bell Face, Highly Polished with Black Enamel on Head and Under Claws.**



The Eye is tapered and corrugated making a secure fastening for the head to the handle

No.	Length Overall (Inches)	Weight Each (Lbs.)	Price Each
100 Plus	13	1¾	$2.00

Doz. **$48.00**

Adze Eye, Bell Face, Curved Claw, Polished on Face, Poll and top of Claw.

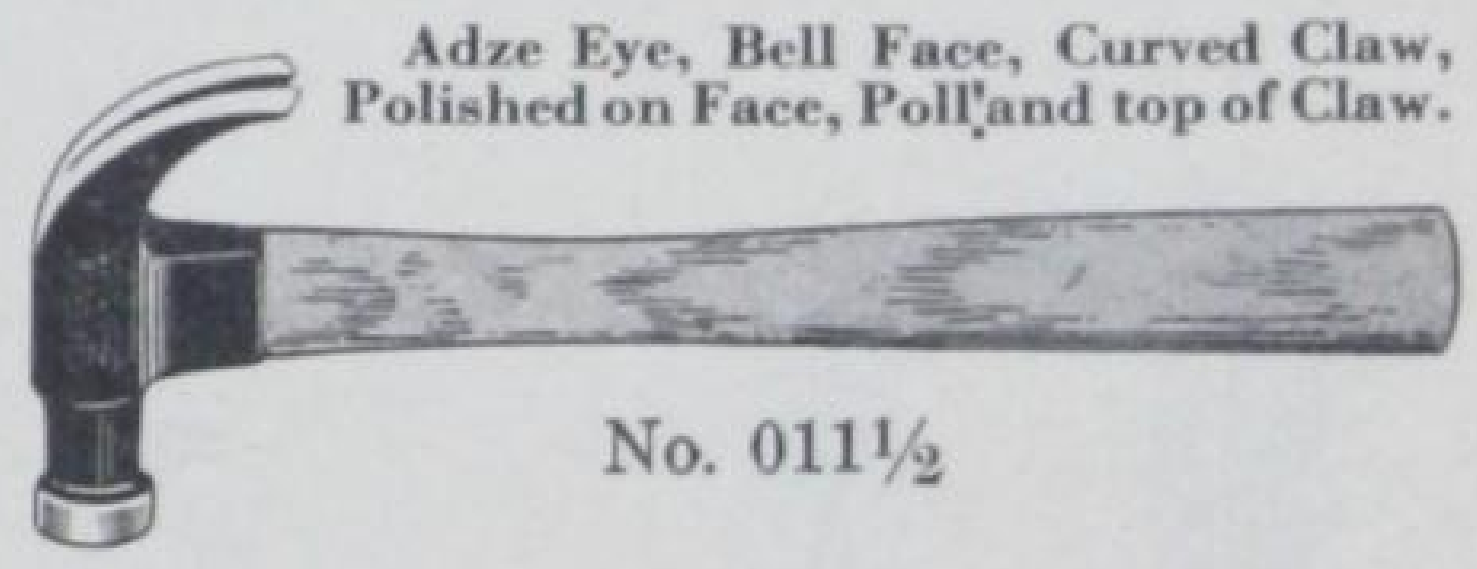

No. 011½

No.	Wgt. (Ozs.)	Size	Overall (In.)	Weight ½ Doz. (Lbs.)	Price Each
011½	16	1½	13	9	.90

Doz. **$18.00**

MORTISE SCREEN DOOR LATCH SETS

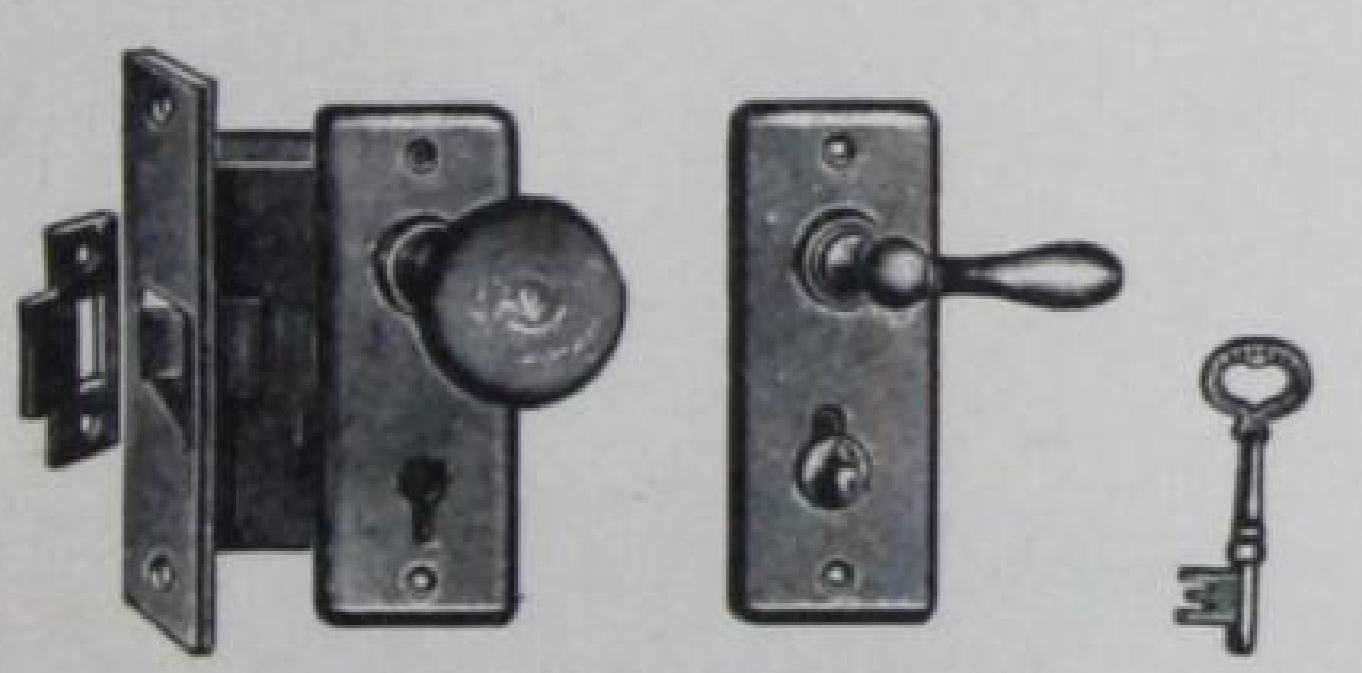

Nos. 3606-3616

Case—Cast Iron	2¾x2⅛x½ in.
Backset	1½ in.
Spacing	1¾ in.
Escutcheons—Wrought	3¼x1⅝ in.
Knob	1¾ in.
Lever—Cast	2 in.

OPERATION

Latch bolt by knob outside and by lever handle inside, except where both knob and lever are set by slide bolt on inside escutcheon, then key from outside operates.

Set No.		
3606x46	Iron	Each **$3.60**
3616x9	Brass	Each **$5.20**

Combination Door Sets

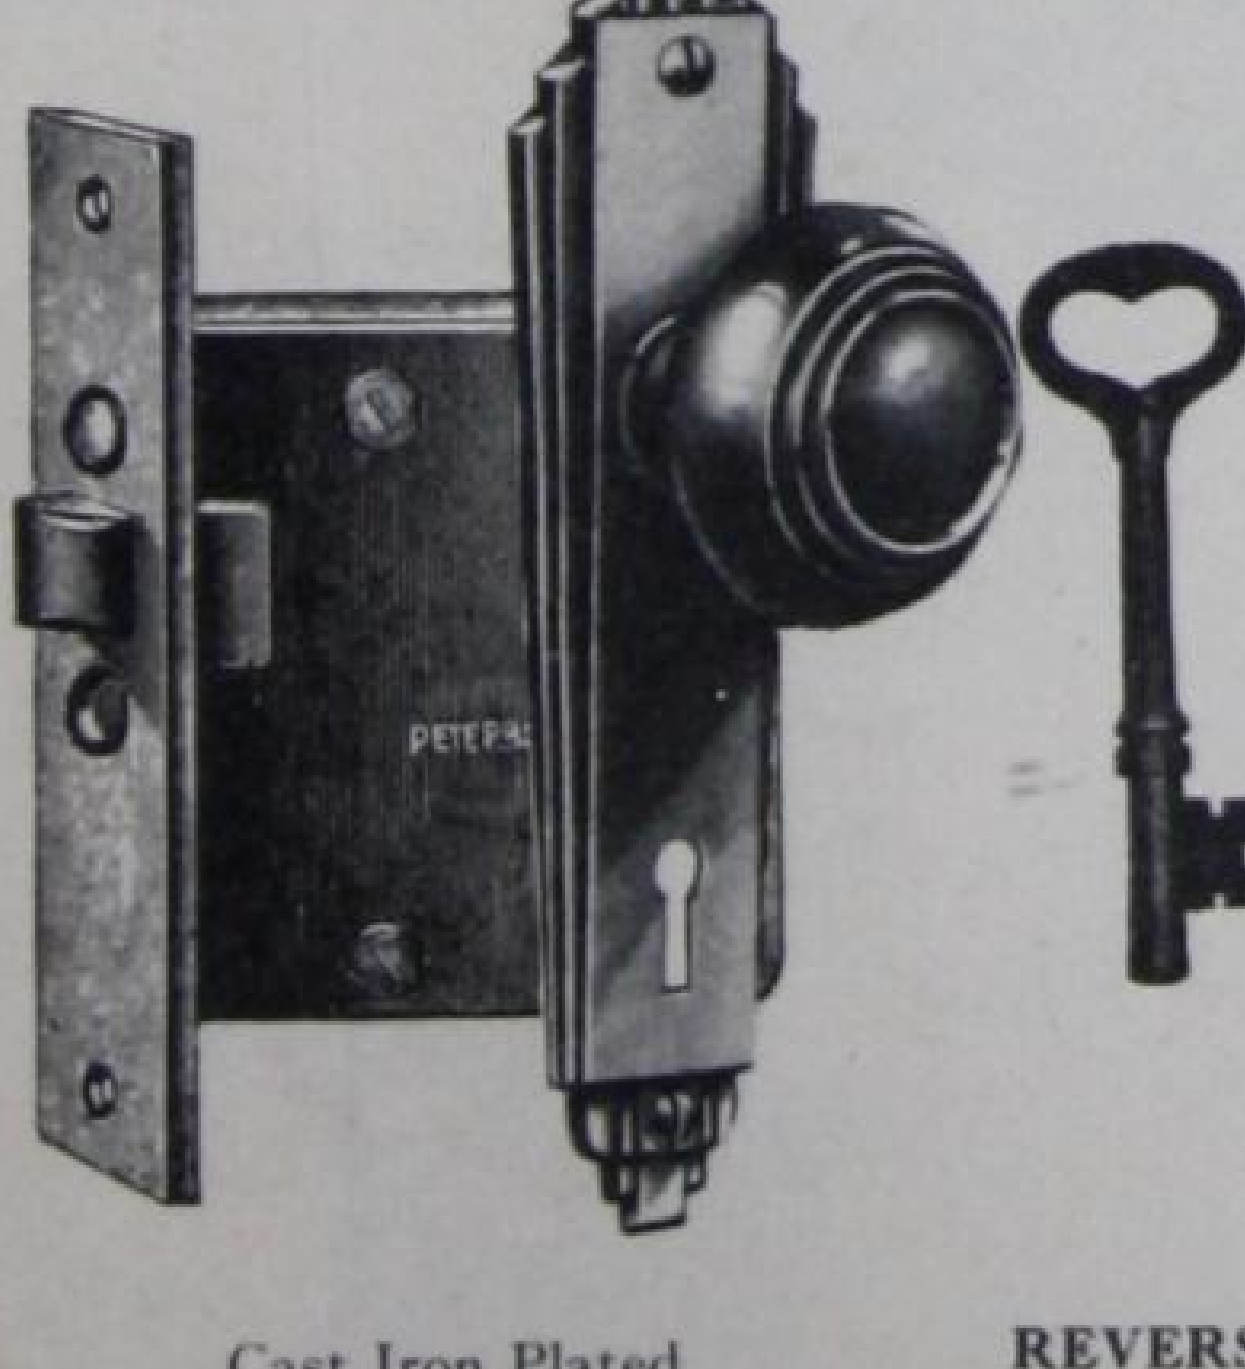

Cast Iron Plated

JAPANNED IRON CASE

4⅝ x 3⅝ x ⅝ in.

Front	6¾x1 in.
Backset	2⅝ in.
Spacing	2⅝ in.
Iron Hub for spindle	⅝ in.
Keys	Solid Steel, Nickel Plated

Operation

By knob from either side except when outside knob is locked by stop in face of lock, then by key from outside. Inside knob operative at all times.

REVERSIBLE EASY SPRING LATCH BOLT

Front and Bolts

71348x46 Each **$4.80**

Changes

25

EVEREADY SILENT DOOR CLOSER

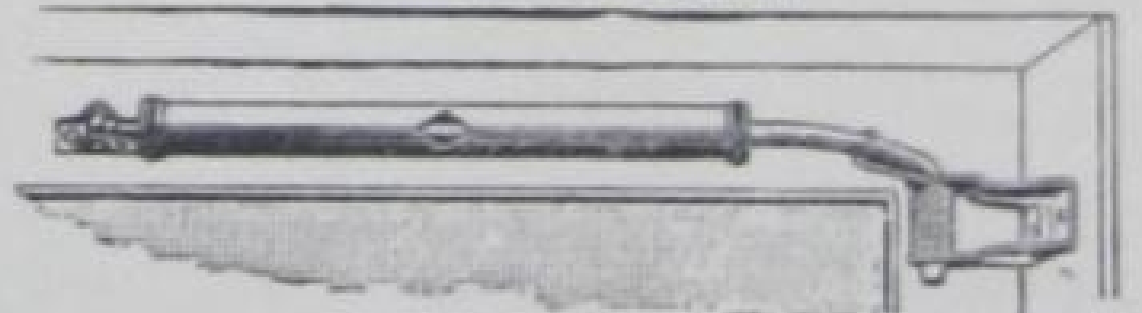

Pneumatic

This Pneumatic Door Closer is attractive, simple in design and extremely powerful. Closes screen and other light doors quickly and quietly.

Easy to attach—only tool needed is a screwdriver. Fits either right or left hand doors.

Valve is adjusted to regulate speed of closing by simply turning cylinder. Permits door to open wider than any other screen or light door closer on the market.

Packed in attractive individual display cartons in three colors. Free Mount for demonstration purposes supplied on orders of one dozen by sending requisition enclosed with the shipment direct to manufacturers.

Eveready Silent Door Closer—
\- - - - each **$2.00**
Extra Springs— - each **.30**
One in a Carton With Screws, Weight Each 1¼ lbs.

SPECIALTIES

HOG RINGS

Open — Closed

No.	Wt. per Box, lbs.	Per doz. boxes
	For Pig	
1	½	$2.40
	For Shoat	
2	½	2.40
	For Hog	
3	½	2.40

SAW SETS

FOR CROSS CUT SAWS

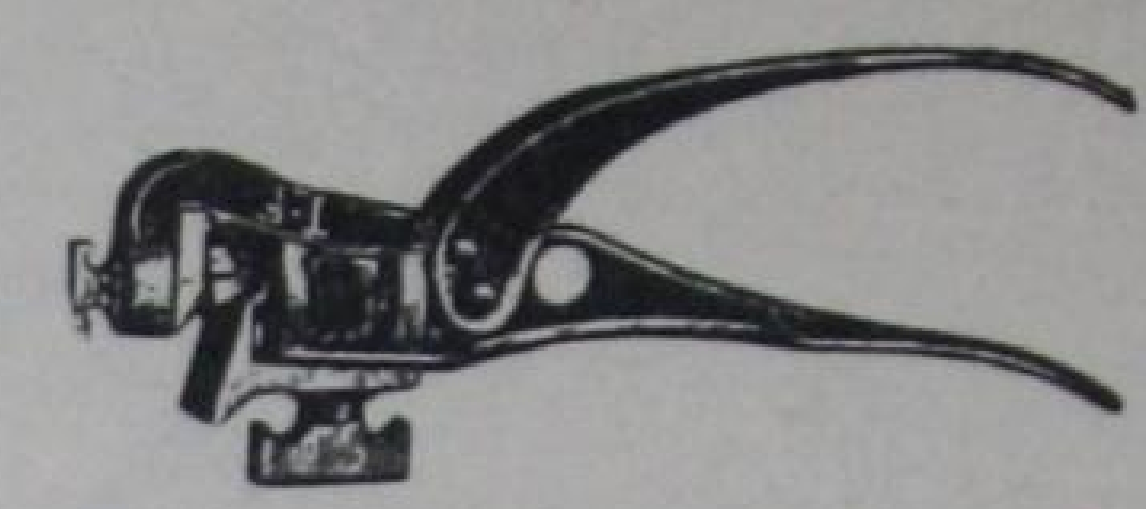

A large heavy type of malleable iron and steel construction. Strong, efficient and durable.

No. 3—For cross cut saws, length over all 10 inches, weight per doz. 15 lbs. - - per dozen **$30.00**

BENCH SCREWS

Iron

Moveable collar, double thread, wrought iron screw, wood handle.

Inches	1⅛
Entire lengths, ins.	16
Wgt. per doz., lbs.	70
Per dozen	26.50

HOG RINGERS

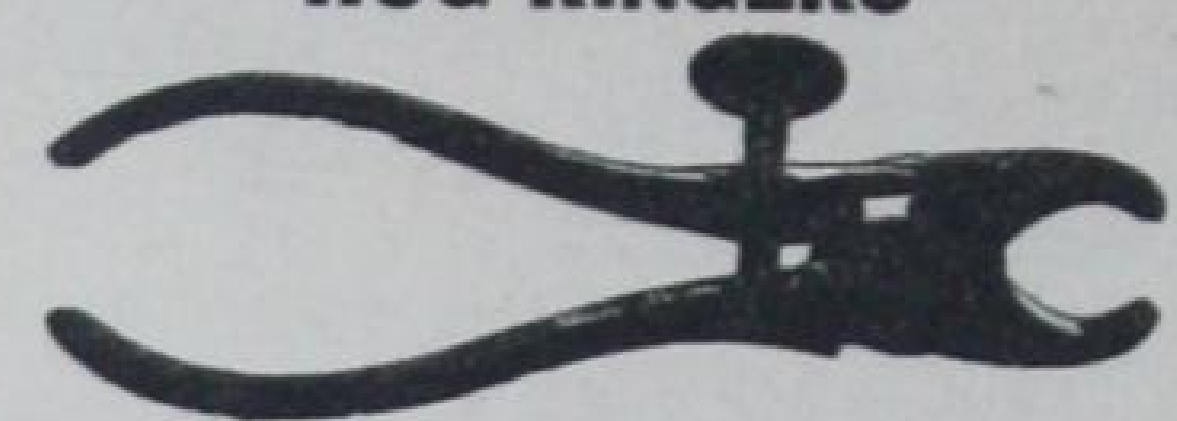

Cast, Japanned Finish
6⅛ inches long

No.	Wt. per Doz., lbs.	Per Doz.
1	5½	$3.20

COMBINATION

Anvil Vise

A heavy cast iron body moulded with anvil and horn in one piece Strong sliding jaw, iron tightening screw, wide positive threads.

No. 2—Size of Face 6¼"x3", Jaws 3", opens 5½ ins. Japanned body, polished face. Weight each, 28 lbs. - - - - each **$7.40**

Extra Jaws for No. 2 - each **1.90**

SAW VISES

per dozen **$22.00**

No. 103—Japanned adjustable, 9½ inch jaws, malleable screw clamp, weight per dozen 72 lbs., per dozen **$32.70**

SAW SETS

For Hand and Tenon Saws

Length over all, 7 inches; malleable frames and slides, steel handles, pins and washers, polished finish; weight per dozen, 7½ lbs.

No. 1— - per dozen **$16.80**

One in a Carton

WELL WHEELS

Japanned Steel, Swivel Hook

Diam. of wheel, in.,	10	12
Weight per doz., lbs.,	54	75
Per dozen,	**$21.50**	**26.50**

Clamps

Quilting Frame and Cabinet

Made of best Cast Grey Iron
Swivels of Malleable Iron

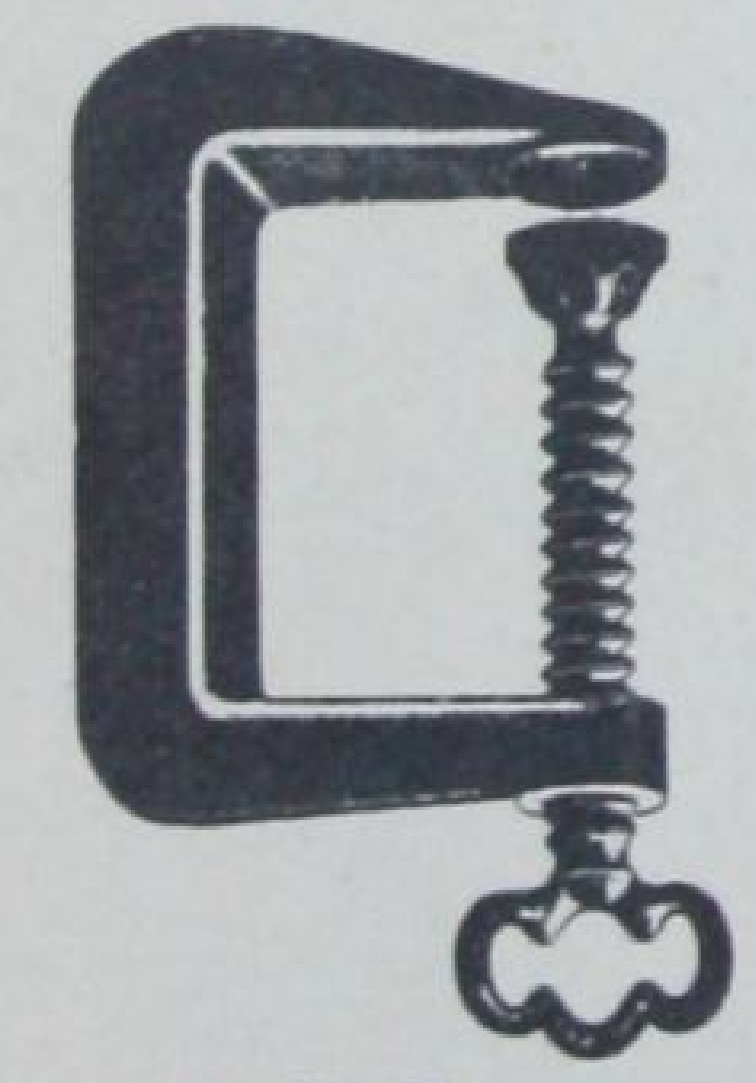

No. 2

Doz.

Carpenters' Clamps

Size or Number	Opens Inches	Size of Screw	Depth from centre of screw to inside of frame	Weight per dozen, lbs.	Doz.
13	3	⅞	1⅝	6¾	$ 7.80
14	4	½	2	8½	$10.62
15	5	9/16	2⅛	11	$13.56
16	6	⅝	2⅜	14	$17.10
18	8	⅝	3½	18	$27.60
20	10	¾	3¾	30	$36.00

Malleable Frame, Swivel and Thumb Nut. Machined Steel Screw—Square Threads—making a dependable device for any work shop.

Plain Finish

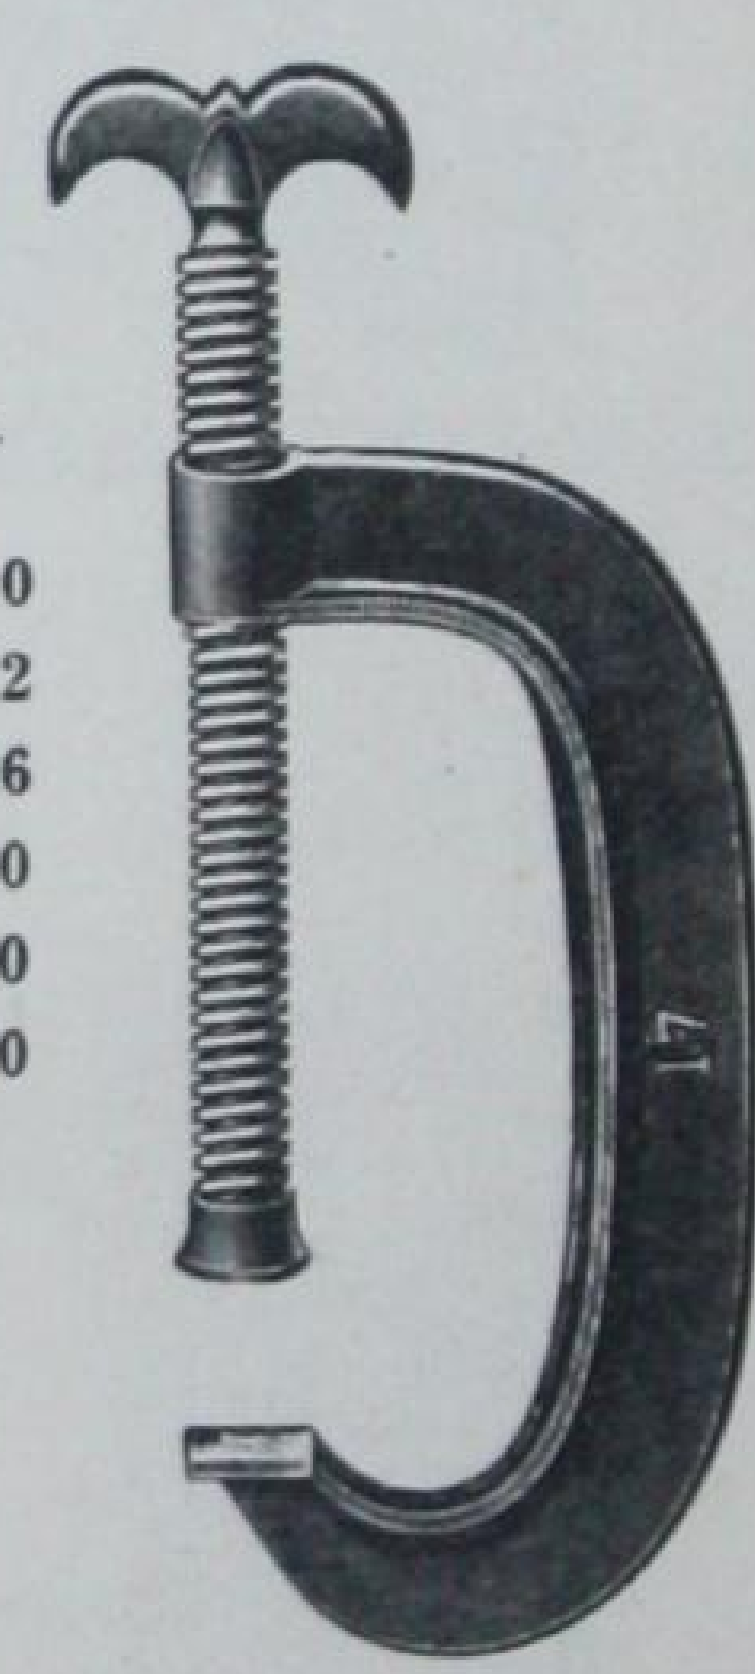

Nos. **13** to **20**

UNION COUNTER

Single brass beam and ring bottom scoop. 240 lb. capacity from ½ oz.

	Each
No. 9	$27.50

Government Stamping 75c Net.

HOUSEHOLD

Brass beam is marked to 3 lb. in ½ oz. notches.

Extra weights supplied—Two 8 lb., one 4 lb., and one 2 lb., making total capacity of scale 25 lbs.

No.	Capacity	Each
214	½ oz. to 25 lb	$12.50

Government Stamping 50c Net.

Perfection Steel Bar Clamp

Heavy Tire Steel Bar—1½ x 5/16 inch.

Machine Steel Screw—⅝ inch Square Threads.

Malleable Iron Frames—Handles—Sliding links and Tips or Swivels.

Finish—Bar, Plain, other parts Japanned.

No pin riveted through handle to shear off when under pressure. The end of the screw is oval and is riveted through the oval slot in the handle.

Nicks in bar every 2 inches hold link in position for clamping. Stop pin at end of bar prevents link slipping off and getting lost. Malleable heads are riveted through bar in two places. Sliding link has Spring Trip holder, which controls position.

Capacity	2 Ft.	3 Ft.	4 Ft.	5 Ft.
Weight, per pair	14	16	18	22
Each	$4.20	$4.50	$5.10	$5.70

AXE WEDGES

No. 3—For Axes, malleable iron, 2½ in. top, 1⅛ in. bit; weight per doz. 1½ lbs. - - per dozen **$0.80**

Digitized by:

INTERNATIONAL
ASSOCIATION
FOR
PRESERVATION
TECHNOLOGY,
INTERNATIONAL

BUILDING
TECHNOLOGY
HERITAGE
LIBRARY

www.apti.org

From the collection of:
Canadian
Centre for
Architecture

BLANK PAGE